





1. DISCHARGE FORMS — VIEWED FROM DRIVE SIDE

R = Clockwise (right-hand) rotation L = Anti-clockwise (left-hand) rotation Arrow = air discharge

RIGHT-HAND (CLOCKWISE)

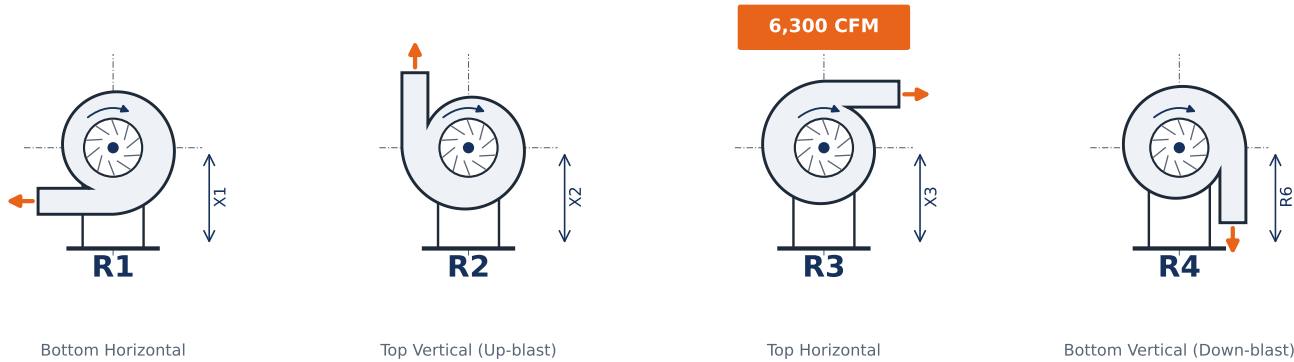

LEFT-HAND (ANTI-CLOCKWISE)

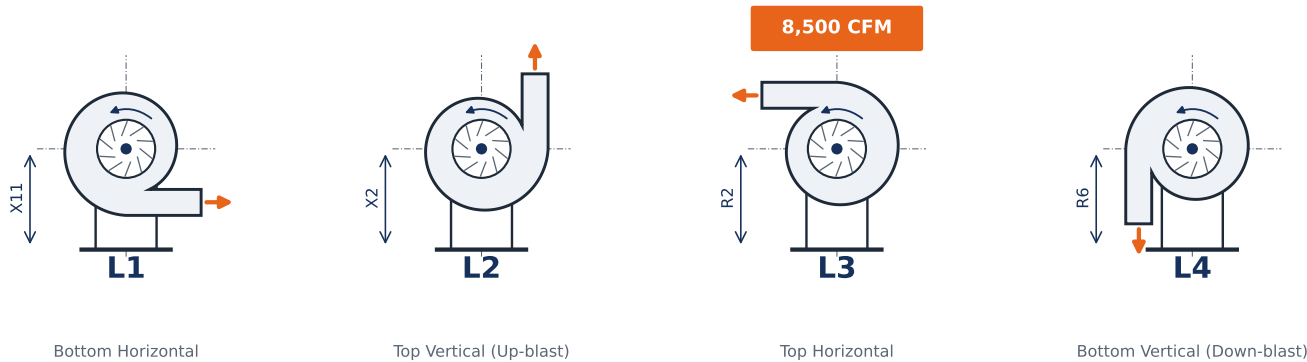

2. FORM CODE SUMMARY

Code	Outlet position	Clockwise	Anti-clockwise	Centre ht.
BH	Bottom Horizontal	R1	L1	X1 / X11
UB	Top Vertical (Up-blast)	R2	L2	X2 / X2
TH	Top Horizontal	R3	L3	X3 / R2
DB	Bottom Vertical (Down-blast)	R4	L4	R6 / R6


3. DUTY POINTS MARKED ON THIS SHEET

R3 – Top Horizontal, clockwise	6,300 CFM	≈ 10,700 m³/h
L3 – Top Horizontal, anti-clockwise	8,500 CFM	≈ 14,440 m³/h

Rotation hand and discharge position are always read from the DRIVE (motor / pulley) side. Housings can be supplied in any form; intermediate angles (45°, 135°, 225°, 315°) available on request.



4. GENERAL ARRANGEMENT DIMENSIONS

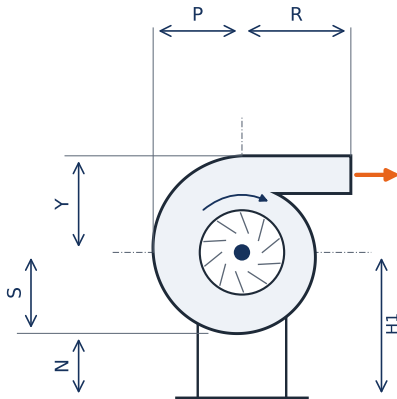

FRONT VIEW

Form R3 shown

5. DIMENSION KEY

P	Shaft centre to housing back face
R	Shaft centre to outlet flange face
Y	Shaft centre to outlet top
H1 / X / R6	Shaft centre height above base (per form)
N / S	Base to housing bottom / housing bottom to shaft centre
B	Housing width
ØD	Inlet diameter (inlet flange)
Ød	Drive shaft diameter (Arr-B)
U1 / U2	Overall length, Arr-A / Arr-B

7. DRIVE ARRANGEMENTS


Arr-A

Impeller mounted directly on motor shaft. Compact, low maintenance; speed fixed by motor (or VFD).


Arr-B

Impeller on separate shaft in bearing housings, driven by belt or coupling. For higher temp, larger size, speed trim.

ARR-A Direct drive

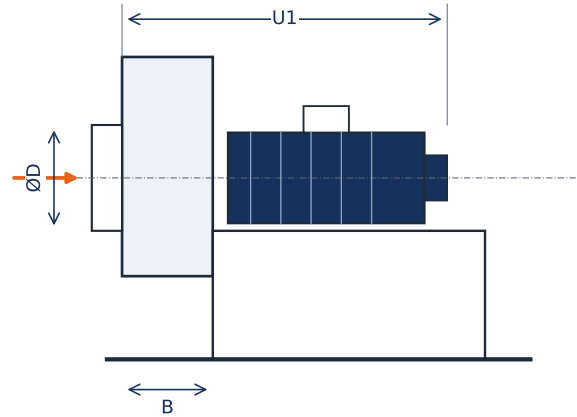

ARR-B Belt / coupling drive

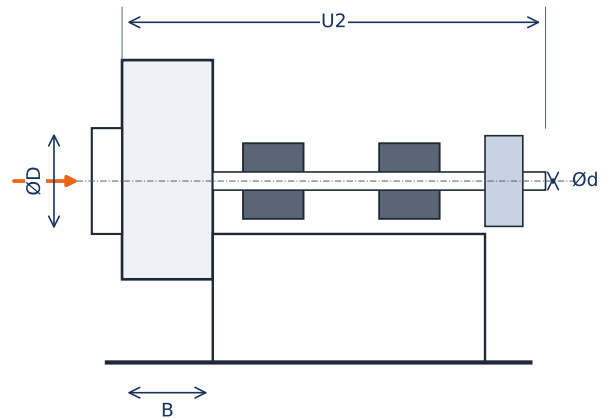

6. DATA REQUIRED TO SELECT

- ☐ Airflow (CFM or m³/h)
- ☐ Static pressure (mmWC / Pa)
- ☐ Air temperature & medium (dust, fumes, grease)
- ☐ Discharge form (R1-R4 / L1-L4)
- ☐ Drive arrangement (Arr-A / Arr-B)
- ☐ Motor kW, RPM, voltage, IE class
- ☐ Material: MS painted / GI / SS304
- ☐ Accessories: damper, VFD, AVM, guard

Conversion: 1 CFM = 1.699 m³/h 1 mmWC = 9.81 Pa Air power (kW) = $Q(m³/s) \times \Delta P(Pa) / 1000$

Motor kW $\approx$ Air power ÷ (fan η × drive η) + 15-20% margin