




Tether 48V Decoupling Caps

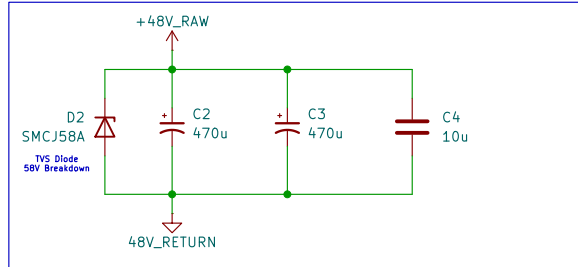


CAN Transceiver

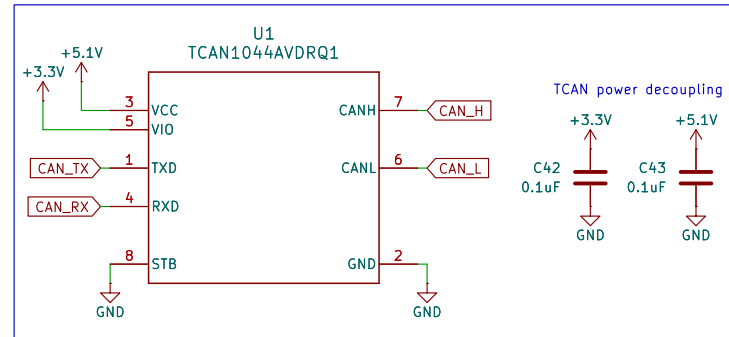


Temp Sensor

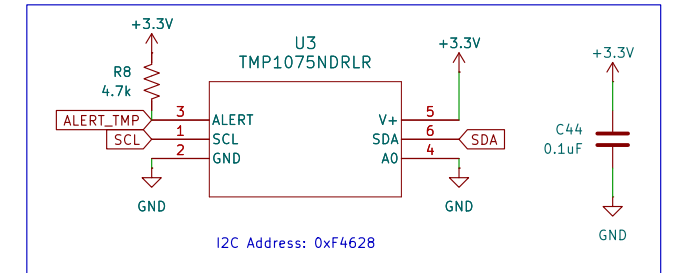

Tether Wall Connector



Board Output Connector (To Control Board)

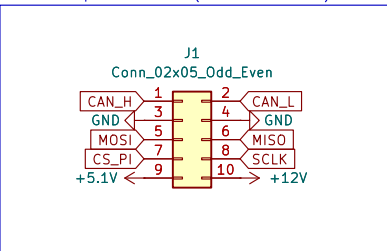

Power



File: power.kicad\_sch

MCU



File: STM32MCU.kicad\_sch

Power Monitoring



File: pm.kicad\_sch


[WARNING]!

48V with 30A fuse gives 1440W.  
4x360W bricks takes 1440W potentially  
That on top of 50W brick means at max  
load the fuse will blow. Unlikely but  
keep in mind.


[WARNING]!

ALWAYS PLUG TETHER IN FIRST  
BEFORE POWERING ON  
No inrush / precharge is implemented


XT60 ESC Power

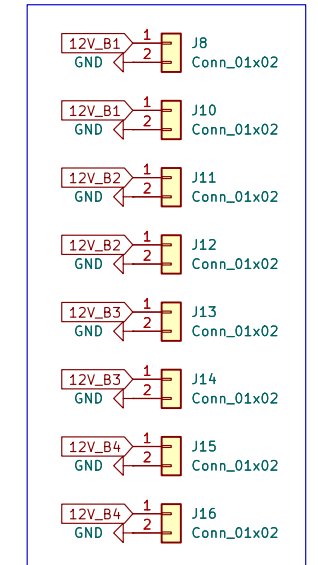


Voltage LEDs

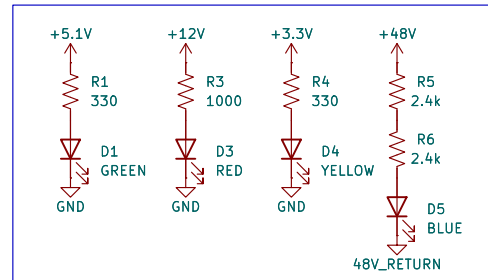

Debugging Pins

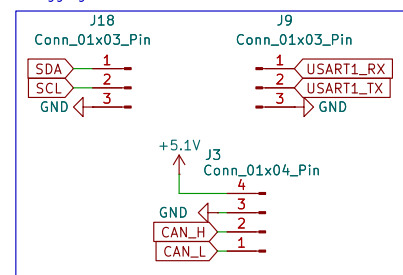

Test Points

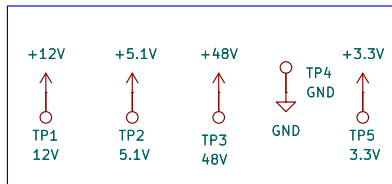

Purdue ROV

Sheet: /

File: X19-Power-Slab-Board.kicad\_sch

Title: Purdue ROV Subsystem Board


Size: A4

Date:


KiCad E.D.A. 10.0.5-unknown

Rev:


Id: 1/4

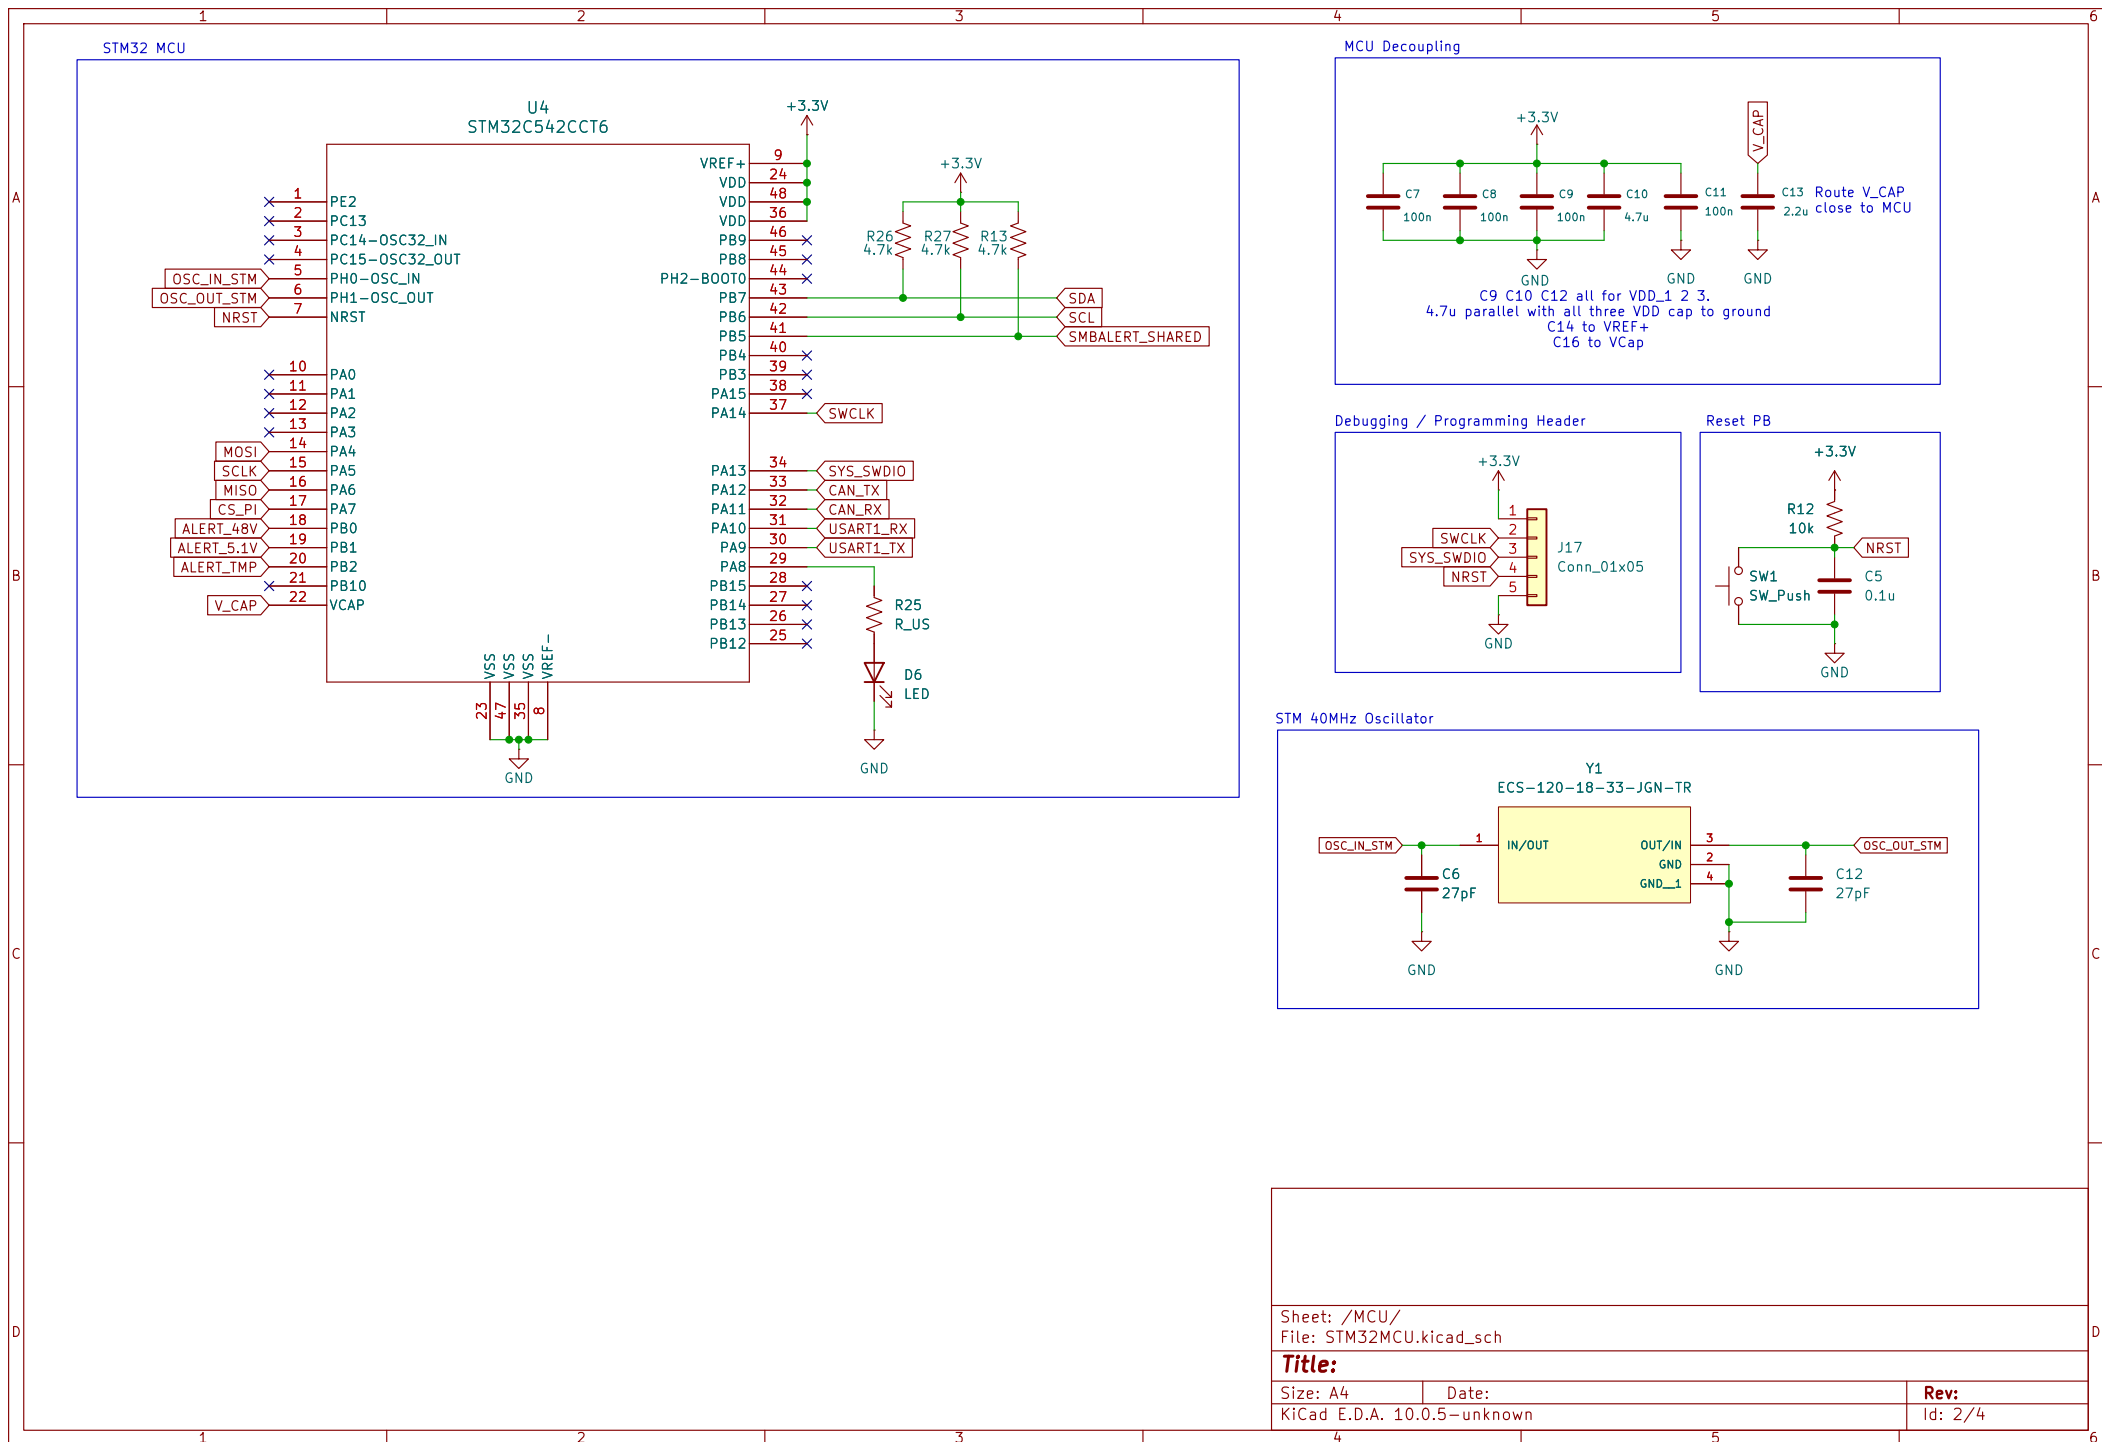

### 3.3V LDO

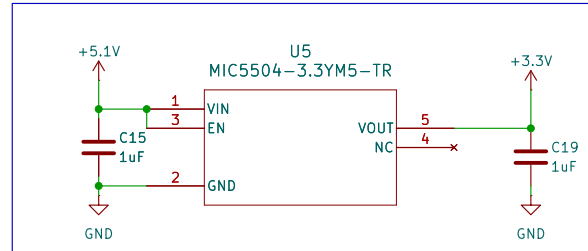


### 50W Brick 48V - 5.2V

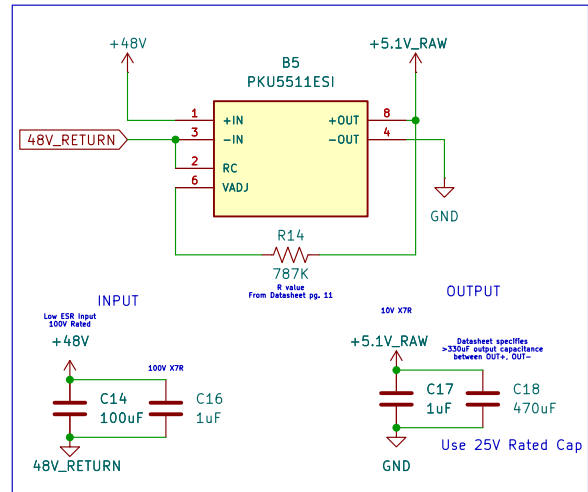


### Brick Passives


#### INPUT

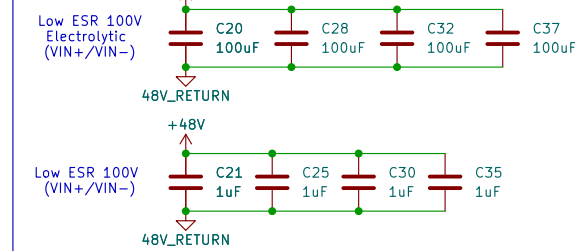

#### OUTPUT

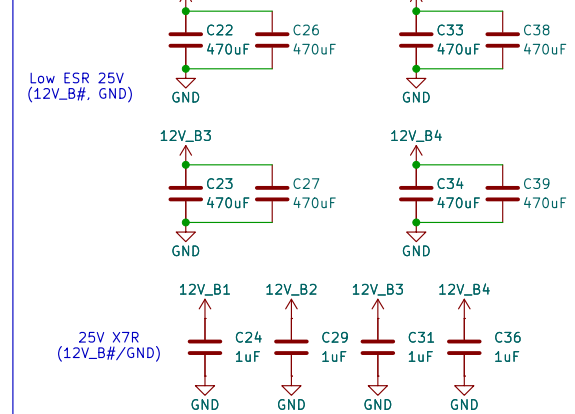

### 360W Bricks 48V - 12V (4x)

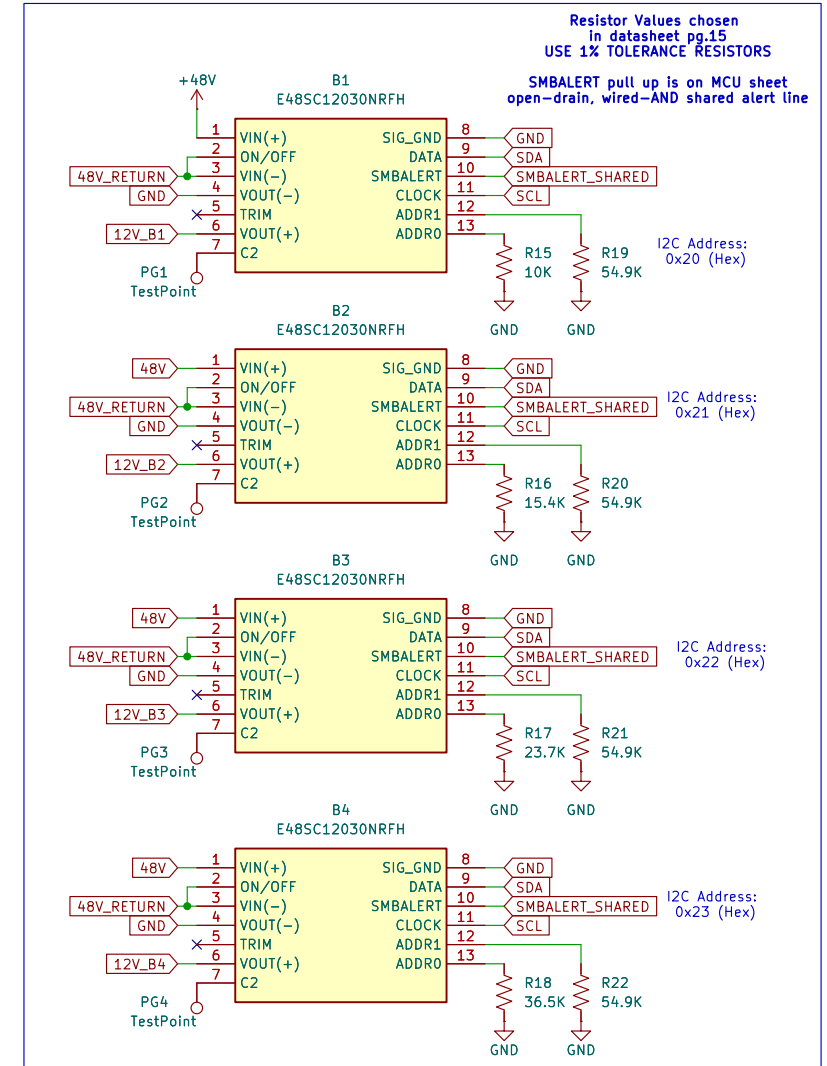

Sheet: /Power/  
File: power.kicad\_sch

#### Title:



Size: A4

Date:

KiCad E.D.A. 10.0.5-unknown

Rev:

Id: 3/4

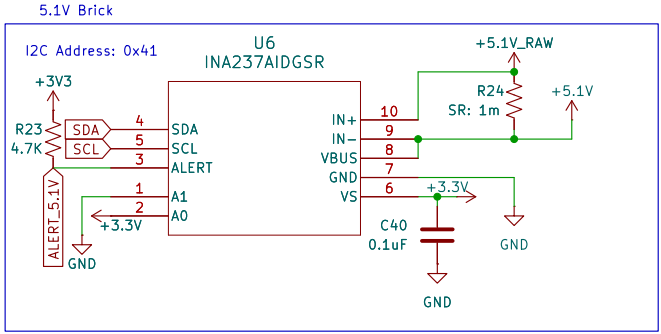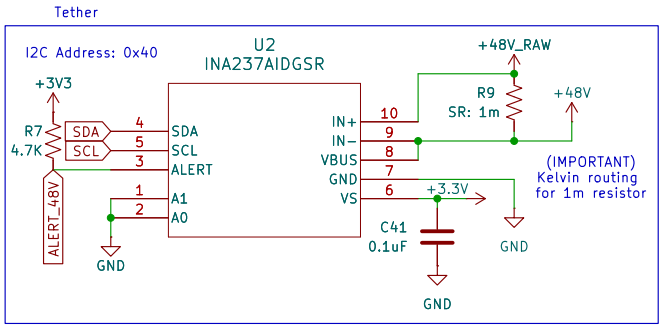

Sheet: /Power Monitoring/  
File: pm.kicad\_sch

**Title:**

Size: A4

Date:

KiCad E.D.A. 10.0.5-unknown

**Rev:**

Id: 4/4