



Decoupling Caps

TODO: change power to the arrow symbol

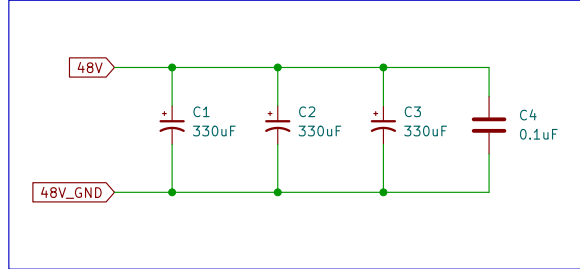


CAN Transceiver


TODO: change power to the arrow symbol

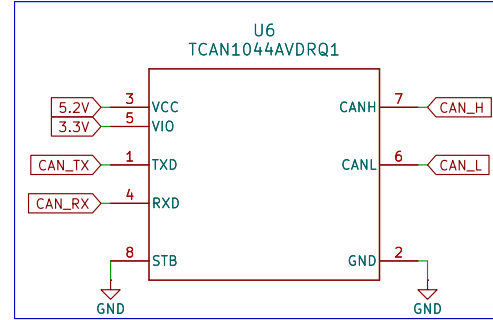

Temp Sensor

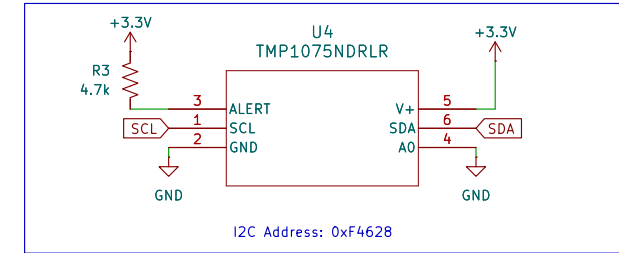


I2C Pull ups




Place Near STM

Voltage LEDs

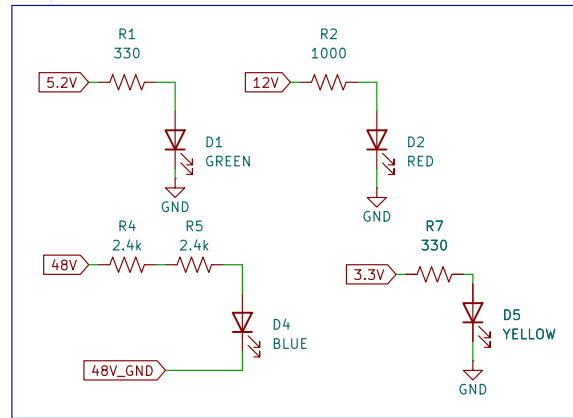


TODO: change power to the arrow symbol

Tether Wall Connector

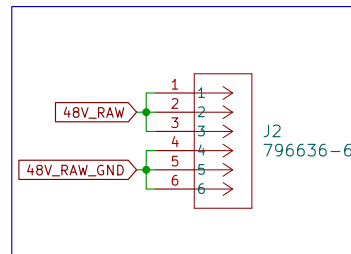


TODO: change power to the arrow symbol

Reverse Polarity Protection

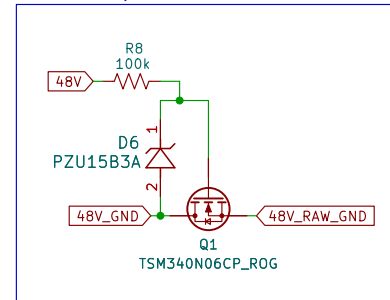


TODO: change power to the arrow symbol

3.3V LDO

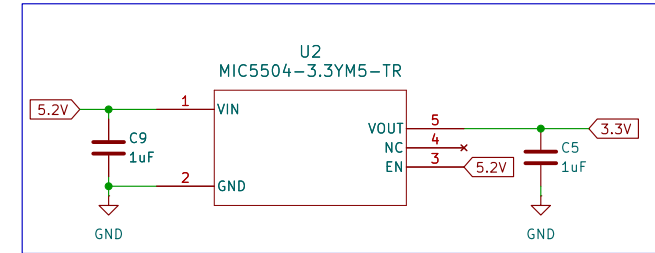


TODO: change power to the arrow symbol

Debugging Pins

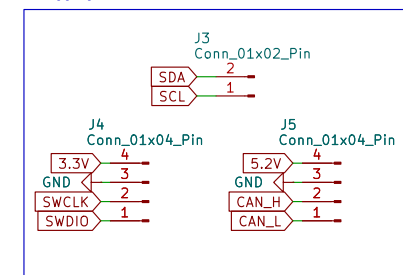


TODO: change power to the arrow symbol

MCU




File: STM32MCU.kicad_sch

Power




File: power.kicad_sch

Power Monitor IC

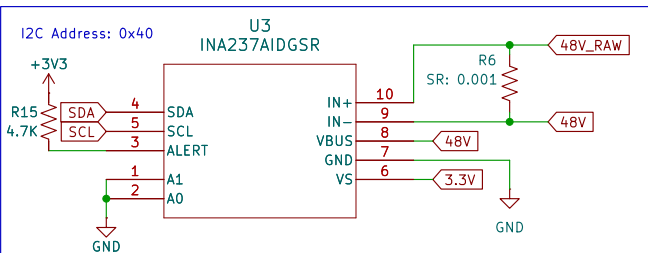

Test Points

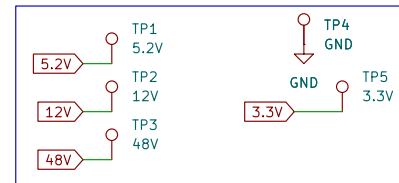

Purdue ROV


Sheet: /
File: X19-Power-Slab-Board.kicad_sch

Title: Purdue ROV Subsystem Board

Size: A4
KiCad E.D.A. 10.0.5-unknown

Date:
Rev:
Id: 1/3

STM32 MCU Pinout

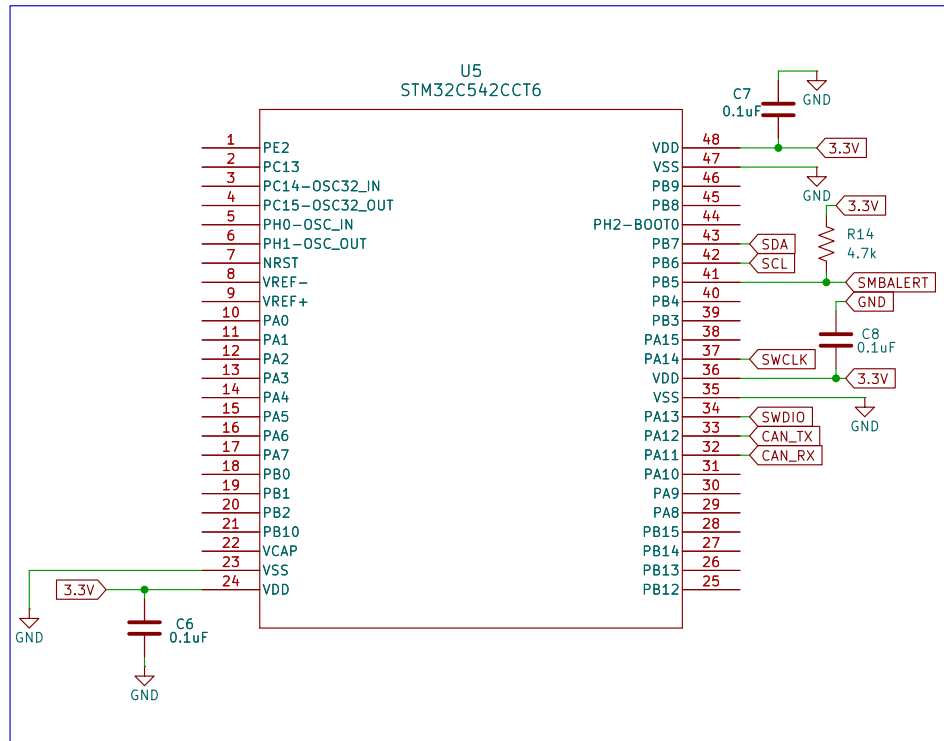

Sheet: /MCU/
File: STM32MCU.kicad_sch

Title:

Size: A4
KiCad E.D.A. 10.0.5-unknown

Date:


Rev:

Id: 2/3


Brick Passives

INPUT

Low ESR 100V
Electrolytic
(VIN+/VIN-)


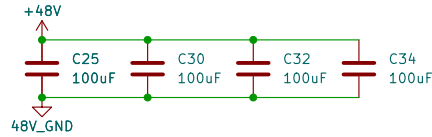


Low ESR 100V
(VIN+/VIN-)

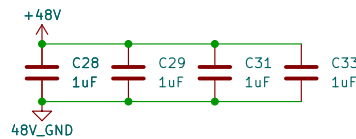


OUTPUT


Low ESR 25V
(12V_B#, GND)

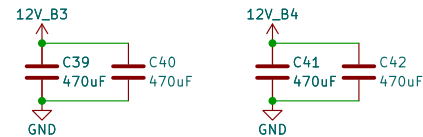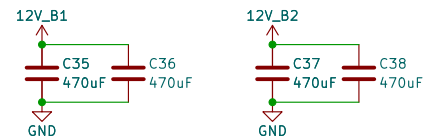


100V or 25V???
(12V_B#/GND)

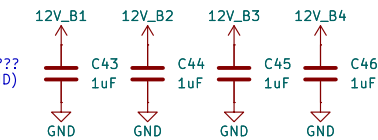

50W Brick 48V - 5.2V

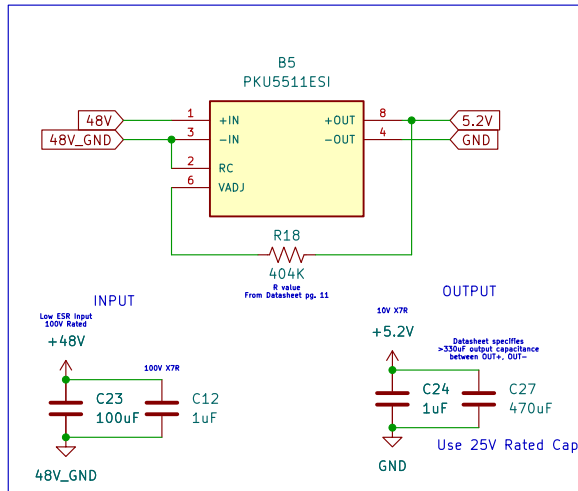

360W Bricks 48V - 12V (4x)

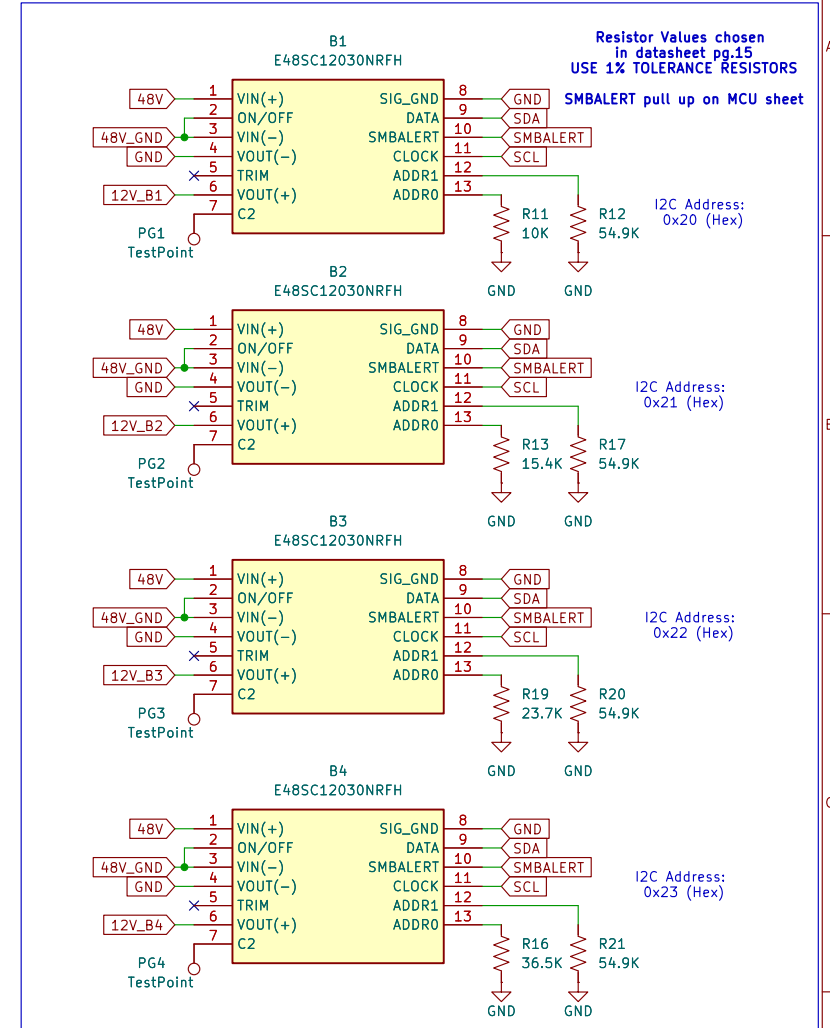

Sheet: /Power/
File: power.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 10.0.5-unknown

Rev:

Id: 3/3