




Decoupling Caps

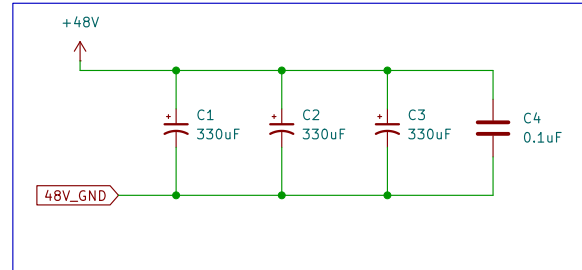


CAN Transceiver

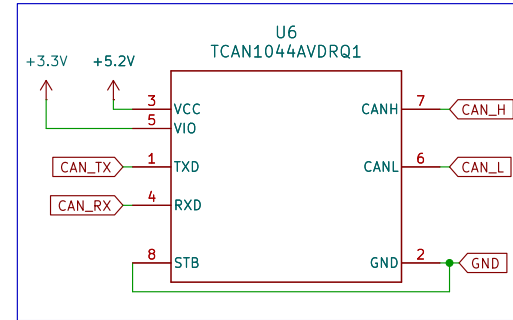


Temp Sensor

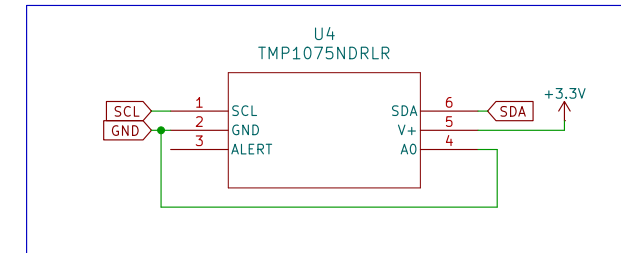


I2C




Tether Wall Connector




3.3V LDO

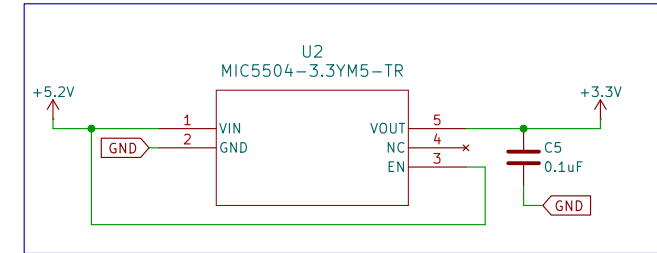


Voltage LEDs

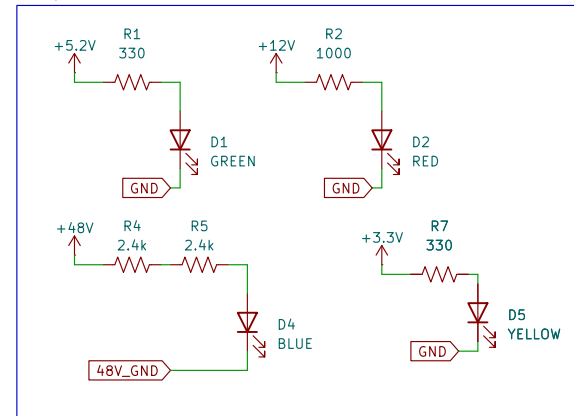


Reverse Polarity Protection

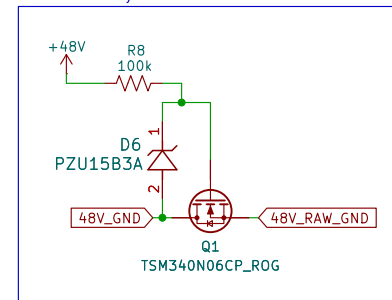


Debugging Pins

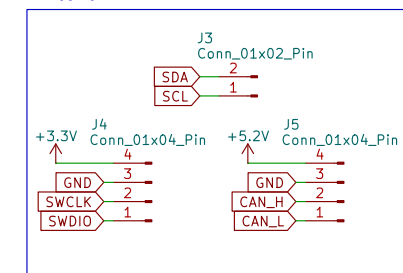


STM32 MCU and Power Bricks



Power Monitor IC

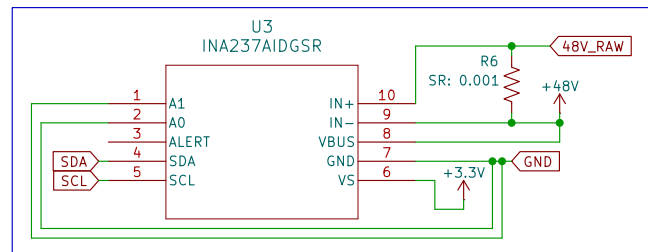

Test Points

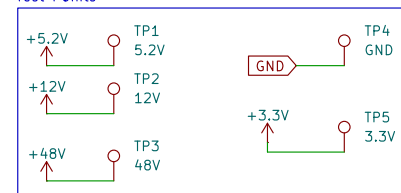

## Purdue ROV

Sheet: /  
File: X19-Power-Slab-Board.kicad\_sch

## Title: Purdue ROV Subsystem Board


Size: A4  
KiCad E.D.A. 10.0.5-unknown

Date:


Rev:

Id: 1/2


# STM32 MCU Pinout

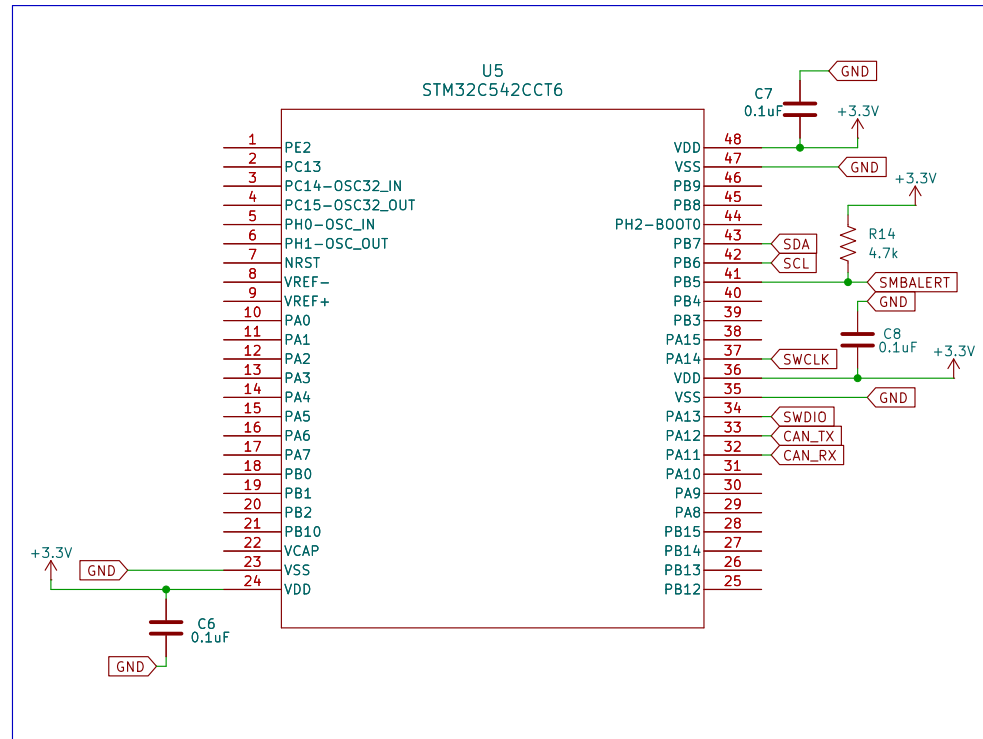

## 50W Brick 48V – 5.2V

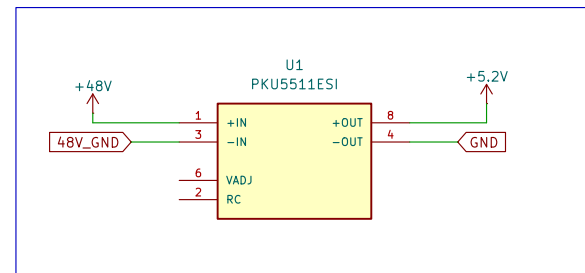

## 360W Bricks 48V – 12V (4x)

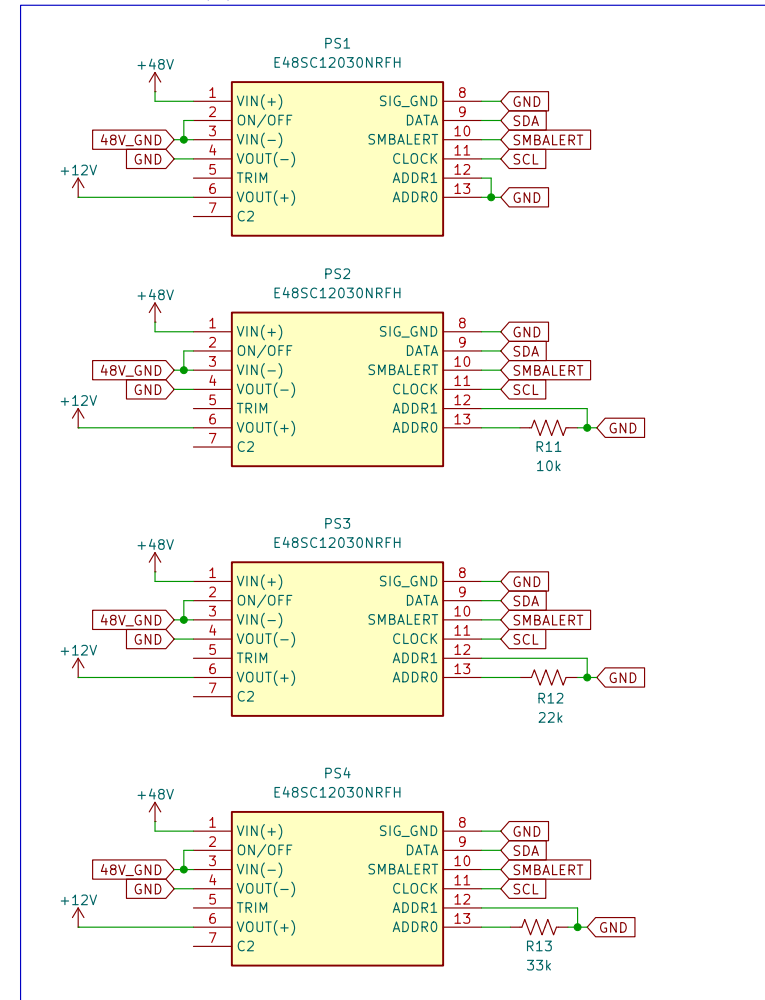

Sheet: /STM32 MCU and Power Bricks/  
File: STM32MCU.kicad\_sch

### Title:

Size: A4

Date:

KiCad E.D.A. 10.0.5-unknown

Rev:

Id: 2/2