

WAAREE®

MADE IN INDIA

www.waaree.com

An ISO 9001:2015 Certified Company


WS-335

Certified With



IEC 61215
IEC 61730 - 1
IEC 61730 - 2
Safety Class II

IS 14286
IS/IEC 61730 - 1
IS/IEC 61730 - 2



R-72002030



Maximum Power (Pmax)	335.0 W
Open Circuit Voltage (Voc)	46.80 V
Short Circuit Current (Isc)	9.30 A
Maximum Power Voltage (Vmp)	38.10 V
Maximum Power Current (Imp)	8.80 A
Maximum System Voltage	1500 V DC
Weight	22.50 Kg
Dimension	1960*990mm
Application Class	A
Maximum Series Fuse Rating	15 A

All Values measured at STC : 25°C Cell temp, 1000 W/m², AM 1.5



The Unit Produces Electricity When Exposed To Light.
Cover The Glass With An Opaque Material, Before Opening Terminal Box.
Don't Disconnect The Plugs Under Load.


WAAREE ENERGIES LIMITED

Plot No. 231-236; Surat Special Economic Zone,
Diamond Park, Sachin, Surat-394230,
Gujarat, INDIA.

Contact Details

customercare@waaree.com
Toll Free - 1600 212 1321

SOLAR MODULES: 535-540 Wp

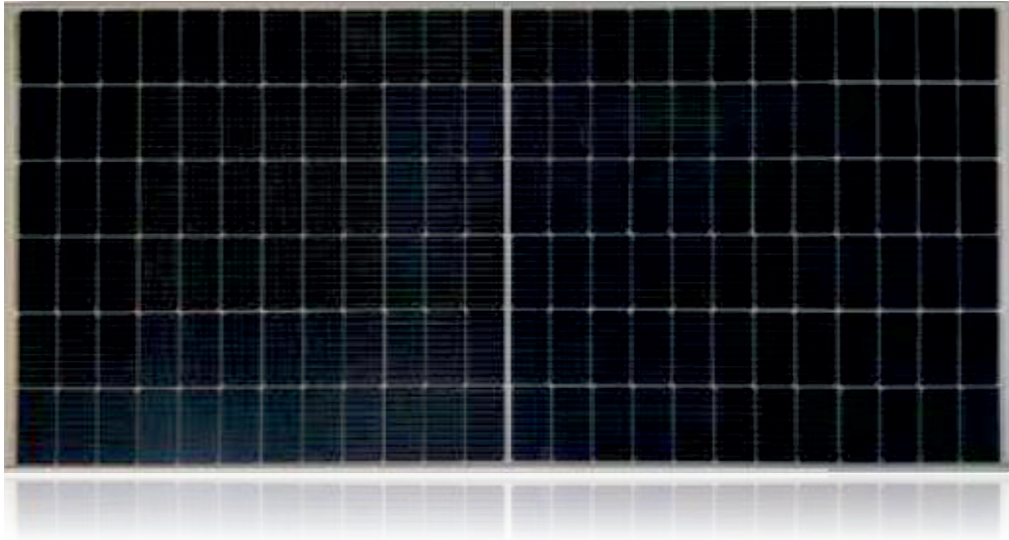

Product Features

- Less Power Loss by Minimizing Shading ect
- Ideal Choice for Utility and commercial scale projects by reduced BOS
- Higher Power output with lower risk of Hot spot
- Lower LCOE & lower resistive Loss
- Excellent Performance at low Light condition
- 12 years of Limited Product Warranty
- 25 Years of Linear Power Guarantee

Quality And Safety:

- Highly ective and extremely improved modules with 182 mm 10BB
- Silicon cell with half cut technology
- No. of cell 144(6X24)
- Multi layer composite Film and Ultra Fast Curve EVA
- Reinforced anodized Aluminum Frame
- Pre-drilled frame for easy mounting
- IP 68 rated Split Junction Box
- Solar MC4 Compatible Connector

Application

- On Grid System
- BIPV
- Solar Farms
- Standalone (Ongrid) Systems
- Battery Charging
- Solar Water Pumping



Constructional Characteristics

- Glass
- EVA
- Cells
- EVA
- Black Sheet
- Frame

KIRLOSKAR SOLAR MODULES

Specifications	KS 144 Series	
Electrical Characteristics		
Model No.	SS535144HCMP (KS144MP535)	SS540HCMP (KS144MP540)
Cell Type	Mono PERC Half Cut solar cell	Mono PERC Half Cut solar cell
Pmax* (W)	535	540
VOC (V)	49.47	49.62
Isc (A)	13.81	13.87
Vmax (V)	41.43	41.67
Imp (A)	12.92	12.96
Module Efficiency (%)	20.74	20.93
Power Tolerance	Positive Tolerance	
Fill Factor	78%	
Operating conditions	-40 °C +85°C at 85 % RH	
Maximum System Voltage	1500 VDC	
Temp. Co cient (α, β, γ) %	0.015% / -0.260% / -0.318%	
NOCT (Average)	50.20°C	
Module Dimensions	2277x1133x35 + 1mm	
Module Weight(kg)	27.75	
Mounting Hole (Oblong)	8X10 + 0.5mm	
Mounting Hole CTC distance - vertical	1256 + 1mm, 1856 + 1mm	
Mounting Hole from Corner	210.5 + 1mm, 510.5 + 1mm	
Mounting Hole CTC distance- Horizontal	1085 + 1mm	

Mechanical Drawing of Solar Panel

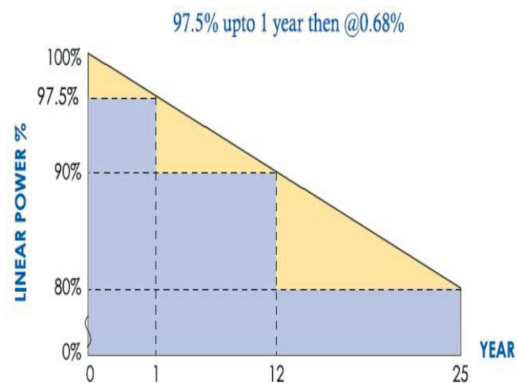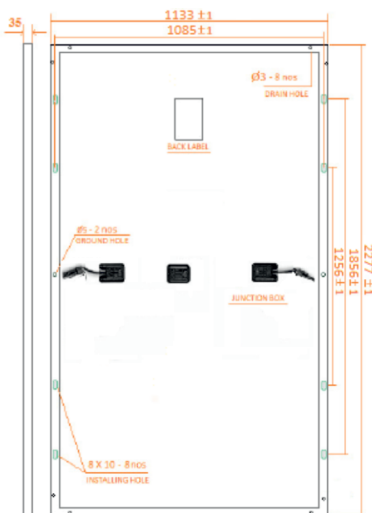

*Value at Standard Testing Conditions (STC) :Temp 25 Degrees C,Irradiance 1000W/m², AM 1.5

*Please confirm mounting dimensions and ratings with our sales team before ordering
Performance warranty

** Linear power Guarantee for 25 years with 2.5% for 1st year , 1st year degradation and 0.75% from year 2 to year 25 , IEC 61215, IEC 61730-1&2*

Kirloskar Solar Technologies Pvt. Ltd. A Kirloskar Group Company

Training Centre Facility, Laxmanrao Kirloskar Road, Khadki, Pune – 411 003 (India).

Call: 83088 00595, 88382 91322 (South India)

Email: solarenergy@kirloskar.com, sales1@kirloskar.com

Website: www.kirloskarsolar.com

"The Mark 'Kirloskar' used in any form as prefix or suffix and are owned by Kirloskar Proprietary Limited and Kirloskar Solar Technologies Pvt Ltd is the permitted user"