


Pinout Diagram

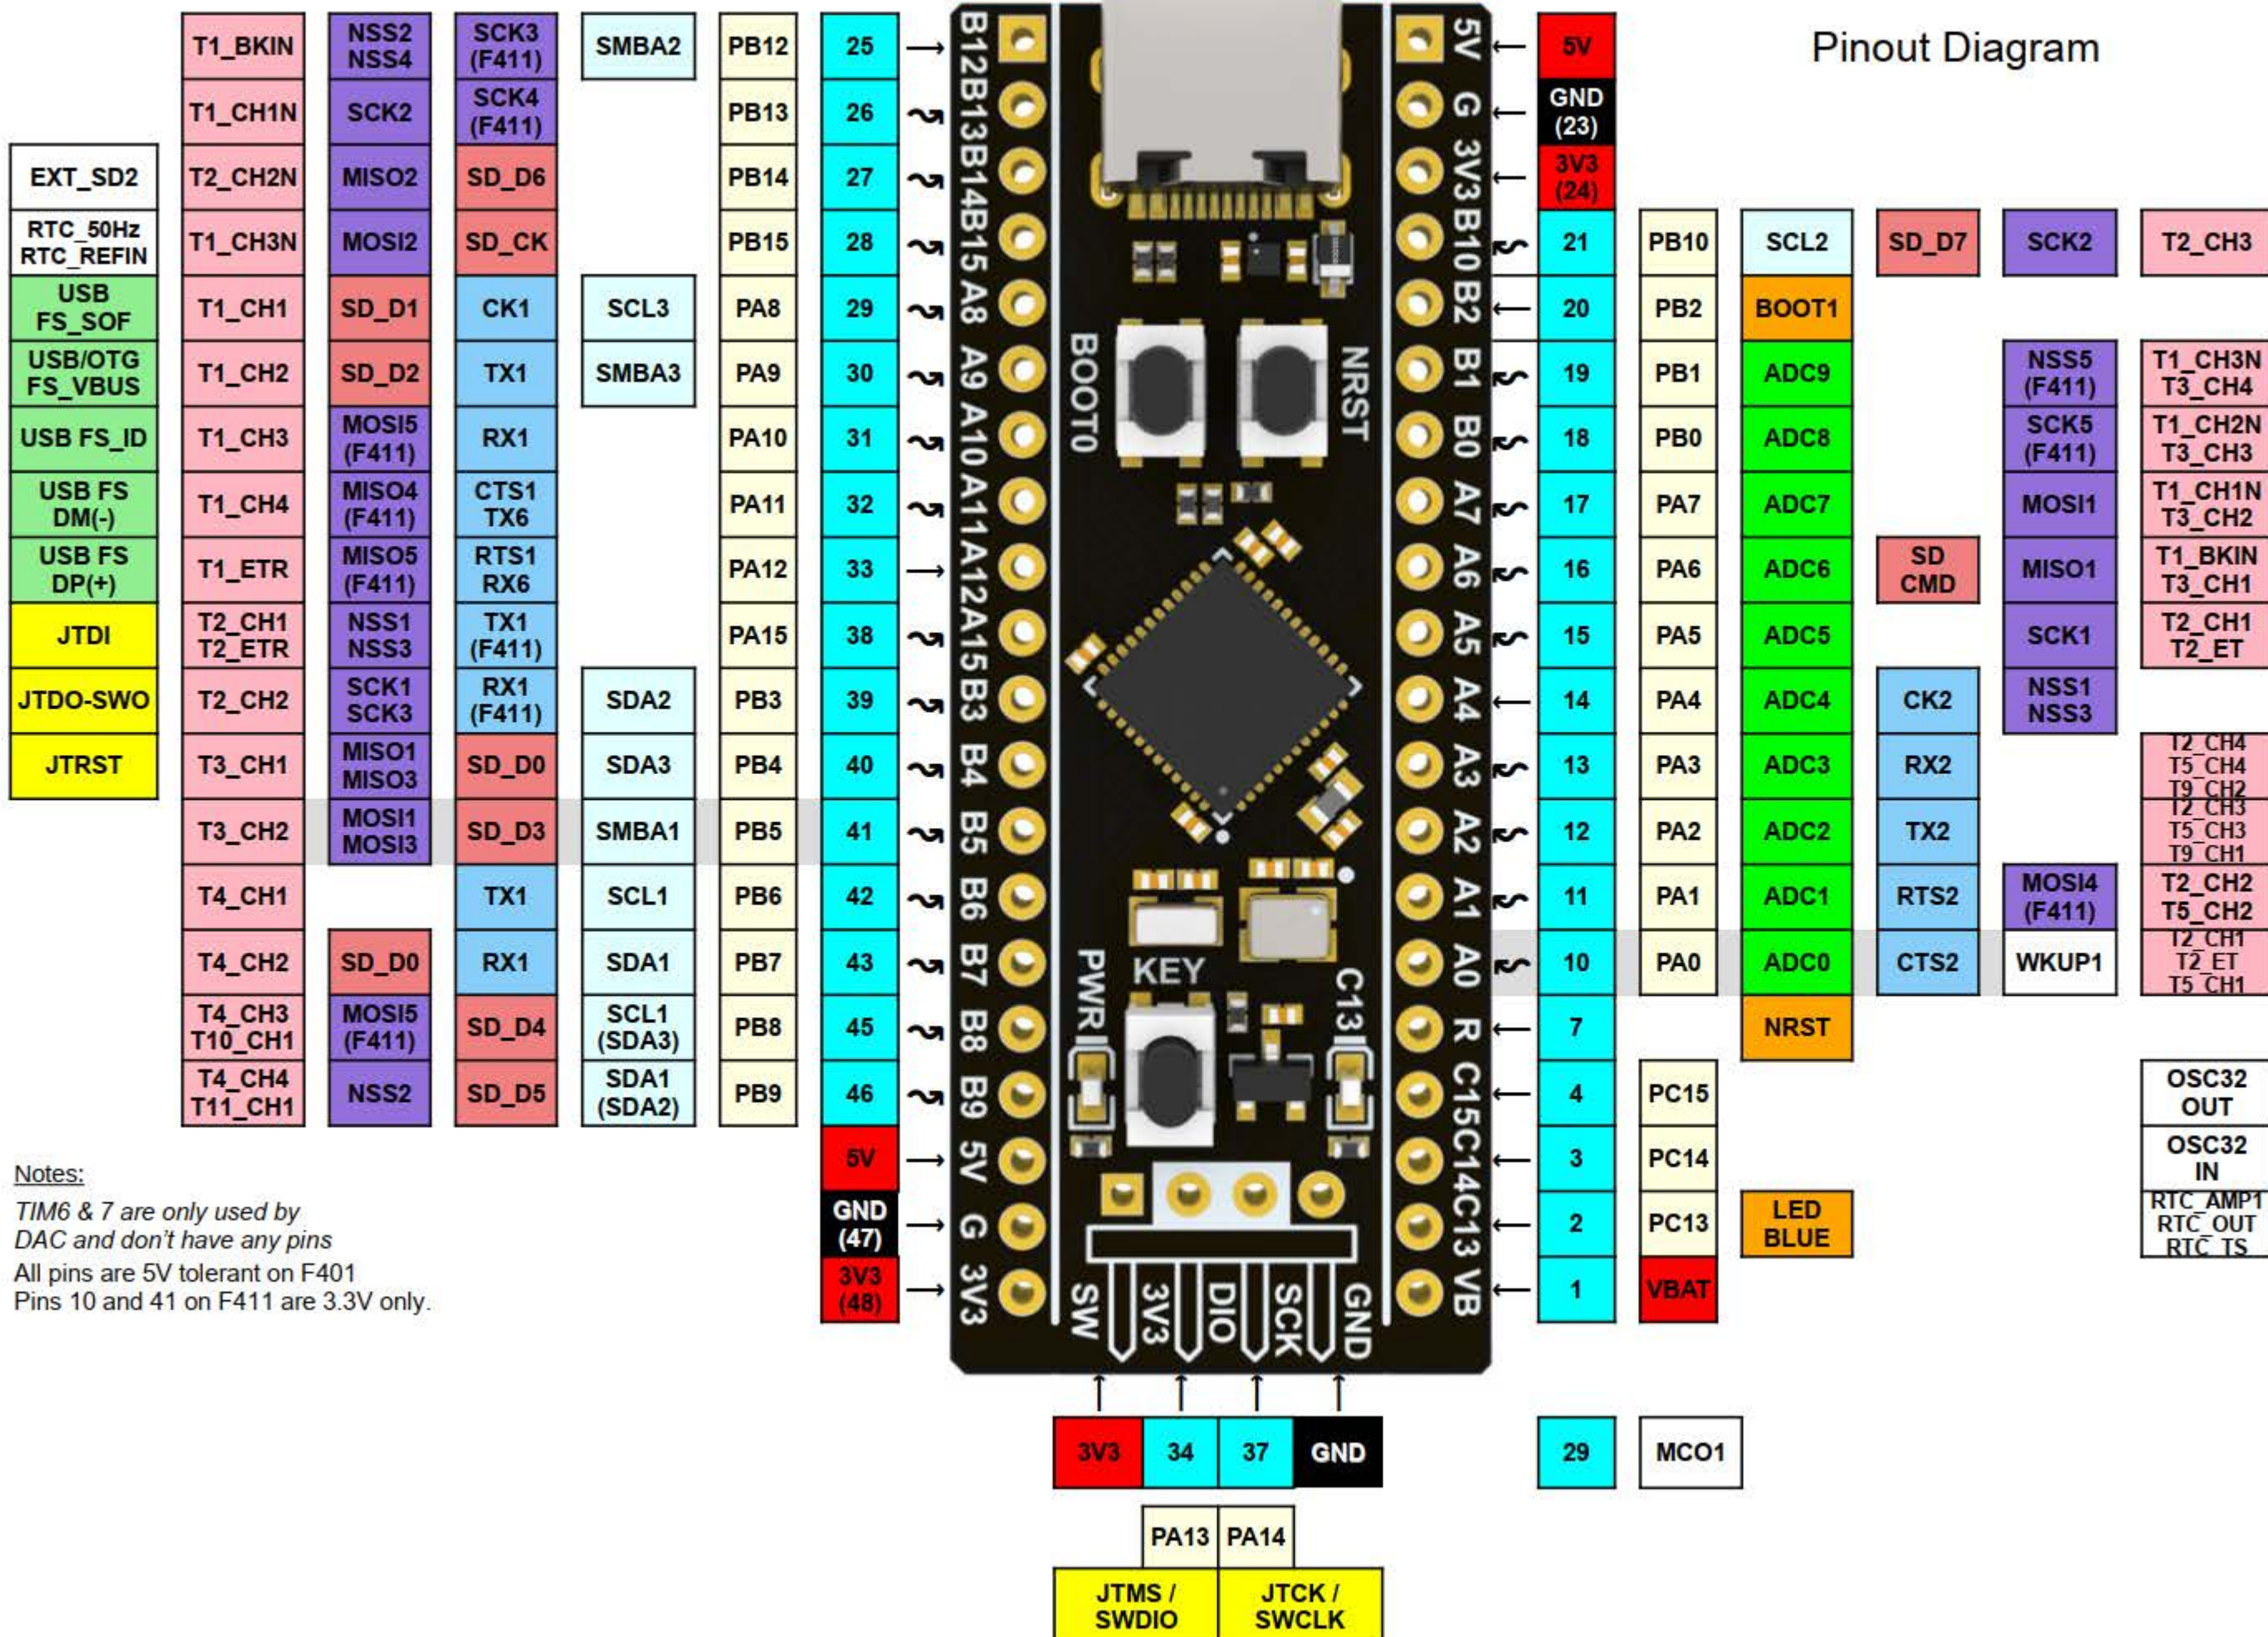

Legend

POWER
GROUND
CPU PIN
PIN NAME
CONTROL
ANALOG
TIMER & CHANNEL
USART
SPI / I2S
SDIO (F411 Only)
I2C
CAN BUS
USB
MISC
BOARD HARDWARE
← 5V → Tolerant
← 3.3V → (F411)
~ PWM ~ Pin

Notes:

TIM6 & 7 are only used by DAC and don't have any pins
 All pins are 5V tolerant on F401
 Pins 10 and 41 on F411 are 3.3V only.