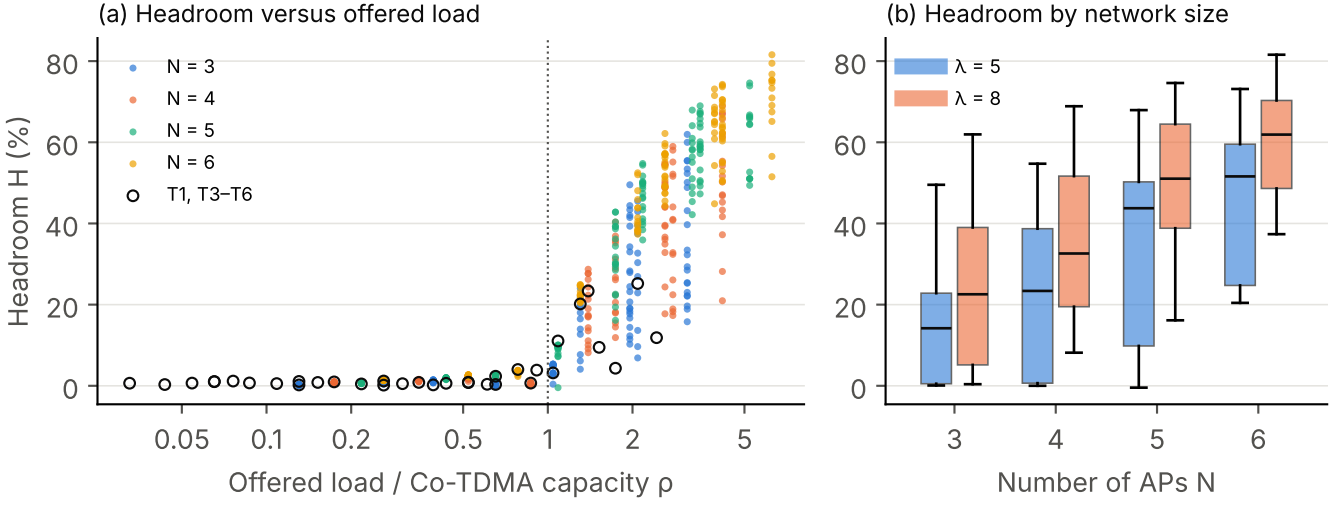
(a) Headroom versus offered load
Headroom H (%)
0
20
40
60
80
N = 3
N = 4
N = 5
N = 6
T1, T3–T6
0.05
0.1
0.2
0.5
1
2
5
Offered load / Co-TDMA capacity ρ
(b) Headroom by network size
λ = 5
λ = 8
3
4
5
6
Number of APs N