



PHY6230

Bluetooth Low Energy (BLE)/Private 2.4GHz System on Chip

Key Features

- 32-bit Processor (Max 64MHz) with SWD
- Memory
 - 64KB ROM
 - 8KB Retention SRAM
 - 16KB OTP
 - EEPROM (optional)
- 19/11/3 General Purpose I/O Pins
 - Configurable as serial interface and programmable IO MUX function mapping
 - All pins can be configured for wake-up
 - All pins for triggering interrupt
 - 3 Quadrature Decoder (QDEC)
 - 6-channel PWM
 - 1-channel I2C
 - 1-channel SPI Master
 - UART
 - SWD
 - USB 2.0
- 10-channel 12-bit ADC
- 4-channel 32-bit Timer, 1 Watchdog Timer
- Real Timer Counter (RTC)
- Power, Clock, Reset Controller
- Flexible Power management
 - Operating voltage range 1.8V to 5.0V
 - Support lithium battery charging
 - Embedded LDOs
 - Battery monitor: support low battery detection
- Power Consumption
 - 0.7uA@OFF Mode (IO wake up only)
 - 2uA@Sleep Mode with 32KHz RTC
 - Receive Mode: 10mA@3.3V Power Supply
 - Transmit Mode: 10mA (0dBm output power) @3.3V Power Supply
- RC Oscillator Hardware Calibrations
 - 32KHz RC osc for RTC with +/-200ppm accuracy
 - 32MHz RC osc for HCLK with 3% accuracy
- BLE
 - Bluetooth SIG 5.4
 - Support Master & Slave
- 2.4 GHz Transceiver
 - Support BLE 5.4 RF PHY 1Mbps/2Mbps
 - Proprietary 500K Protocol Stack
 - FSK with configurable Gaussian filter (configurable modulation index)
 - Sensitivity:
 - 96dBm@BLE 1Mbps data rate
 - 93dBm@BLE 2Mbps data rate
 - TX power -20 to +10dBm in 3dB steps
 - Single-pin antenna: no RF matching or RX/TX switching required
 - RSSI (1dB resolution)
- AES-128 Encryption Hardware
- Operating Temperature: -40°C ~+125°C
- RoHS Package: QFN24/ SSOP24/SOP16/TSSOP8 /SOP8/ MSOP10



Liability Disclaimer

Phyplus Technologies (Shanghai) Co., Ltd Limited reserves the right to make changes without further notice to the product to improve reliability, function or design. Phyplus Technologies (Shanghai) Co., Ltd Limited does not assume any liability arising out of the application or use of any product or circuits described herein.

Life Support Applications

Phyplus Technologies (Shanghai) Co., Ltd Limited's products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Phyplus Technologies (Shanghai) Co., Ltd Limited customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Phyplus Technologies (Shanghai) Co., Ltd Limited for any damages resulting from such improper use or sale.

Contact Details

For your nearest dealer, please see www.phyplusinc.com.

Information regarding product updates, downloads, and technical support can be accessed through our homepage.

Main Office

Shanghai

3F&4F, Building 23, Lane 676, Wuxing Road, Pudong, Shanghai

Phone: +86 21 5899 0018

Email: info@phyplusinc.com

Shenzhen

Room 1205, No.10 Li Shan Road, Shenzhen China



Revision History

Date	Version	Description
2022.6	1.0	First Edition
2023.2	1.0	The following content has been updated or corrected: <ul style="list-style-type: none">● 2.2.1.2 Pin Functions on page 4;● 2.2.2.2 Pin Functions on page 5.
2023.3	1.1	Information of PHY6230QH QFN24 has been added.
2023.10	1.2	Information of PHY6230 MSOP10 has been added.



Table of Contents

1 Introduction	1
2 Product Overview	2
2.1 Block Diagram	2
2.2 Pin Assignments and Functions	3
2.2.1 PHY6230 (SSOP24)	3
2.2.1.1 Pin Assignment	3
2.2.1.2 Pin Functions	3
2.2.2 PHY6230 (SOP16)	4
2.2.2.1 Pin Assignment	4
2.2.2.2 Pin Functions	4
2.2.3 PHY6230 (TSSOP8/ SOP8)	5
2.2.3.1 Pin Assignment	5
2.2.3.2 Pin Functions	5
2.2.4 PHY6230 (MSOP10)	5
2.2.4.1 Pin Assignment	5
2.2.4.2 Pin Functions	6
2.2.5 PHY6230QH (QFN24)	6
2.2.5.1 Pin Assignment	6
2.2.5.2 Pin Functions	7
3 System Block	9
3.1 CPU	9
3.2 Memory	9
3.2.1 ROM	10
3.2.2 SRAM	11
3.2.3 OTP	11
3.2.4 Memory Address Mapping	11
3.3 Boot and Execution Modes	12
3.4 Power, Clock and Reset (PCR)	12
3.5 Power Management (POWER)	12
3.6 Low Power Features	13
3.6.1 Operation and Sleep States	13
3.6.1.1 Normal State	13



3.6.1.2 Clock Gate State	14
3.6.1.3 System Sleep State	14
3.6.1.4 System Off State	14
3.6.1.5 UVLO	14
3.6.2 State Transition	14
3.6.2.1 Entering Clock Gate State and Wake-up	14
3.6.2.2 Entering Sleep/off States and Wake-up	15
3.7 Interrupts	15
3.8 Clock Management	16
3.9 IOMUX	17
3.10 GPIO	19
3.10.1 DC Characteristics	19
4 Peripheral Blocks	20
4.1 2.4GHz Radio	20
4.2 Timer/Counters (TIMER)	20
4.3 Real Time Counter (RTC)	20
4.4 AES-ECB Encryption (ECB)	20
4.5 Watchdog Timer (WDT)	20
4.6 SPI	21
4.7 I2C	21
4.8 UART	21
4.9 Pulse Width Modulation (PWM)	21
4.10 USB Controller	22
4.11 Analog to Digital Converter (ADC)	22
4.11.1 ADC Channel <3:0> Connectivity	23
5 Absolute Maximum Ratings	25
6 Operating Conditions	26
7 Radio Transceiver	27
7.1 Radio Current Consumption	27
7.2 Transmitter Specification	27
7.3 Receiver Specification	27
7.3.1 RX BLE 1Mbps GFSK	27
7.3.2 RX BLE 2Mbps GFSK	28
7.4 RSSI Specifications	28



8 Glossary	29
9 Ordering information	30
9.1 Chip Marking Example	30
9.2 Chip Marking Rule	30
9.3 Order Code	31
10 Package Dimensions	32
10.1 SSOP24	32
10.2 SOP16	32
10.3 TSSOP8	33
10.4 SOP8	33
10.5 MSOP10	34
10.6 PHY6230QH QFN24	34
11 Sample Application and Layout Guide	34
11.1 Sample Application	35
11.1.1 SSOP24	35
11.1.2 SOP16	36
11.1.3 TSSOP8/SOP8	36
11.1.4 MSOP10	36
11.2 Sample Application (PHY6230QH QFN24)	37
11.3 Layout Guide	37
11.3.1 Placement	37
11.3.2 Bypass Capacitor	38
11.3.3 Layer Definition	38
11.3.4 Reference clock and trace	38
11.3.5 Power line or plane	38
11.3.6 Ground Via	38



1 Introduction

PHY6230 is a System on Chip (SoC) for Bluetooth® low energy and proprietary 2.4G applications. It has high-performance low-power 32-bit processor with 8KB retention SRAM, 64KB ROM, 16KB OTP, and an ultra-low power, high performance, multi-mode radio. Also, PHY6230 can support BLE with security and application. Serial peripheral IO and integrated application IP enables customer product to be built with minimum bill-of-material (BOM) cost.

2 Product Overview

2.1 Block Diagram

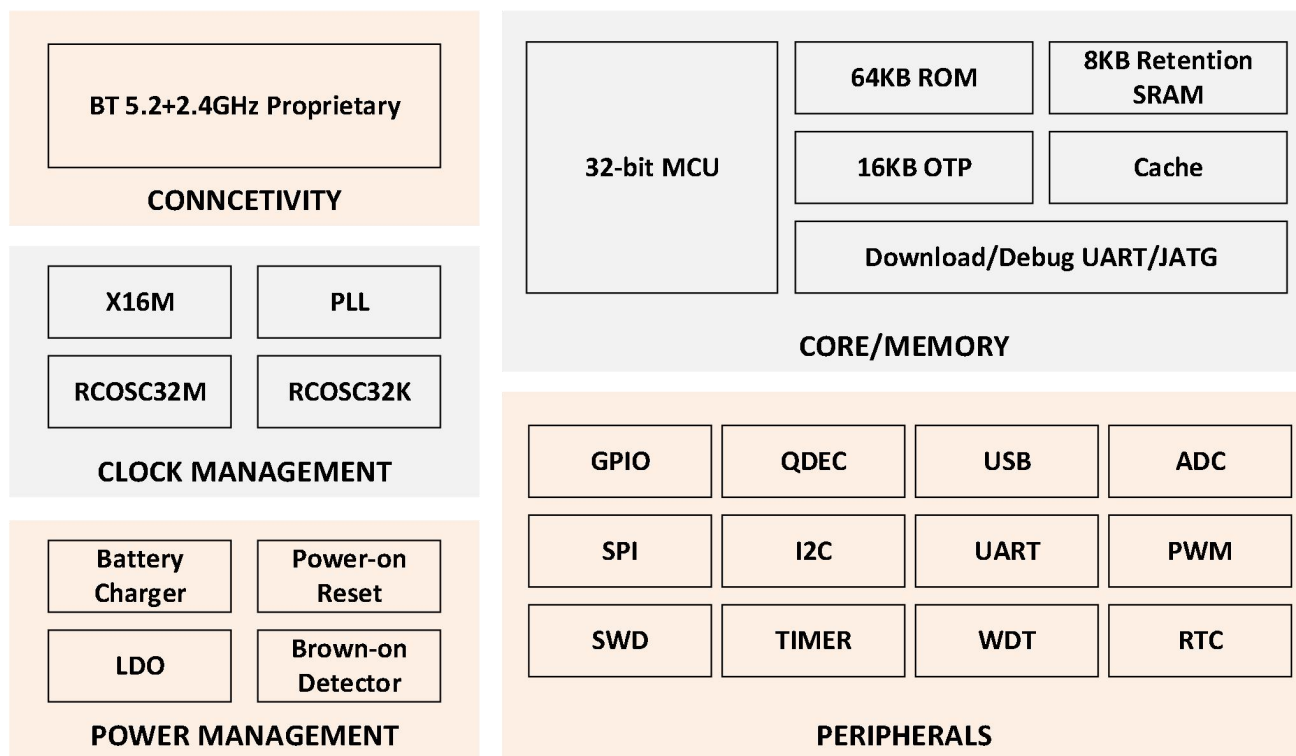


Figure 1: PHY6230 Block Diagram

2.2 Pin Assignments and Functions

This section describes the pin assignment and the pin functions for the package types of SSOP24, SOP16 and TSSOP8.

2.2.1 PHY6230 (SSOP24)

2.2.1.1 Pin Assignment

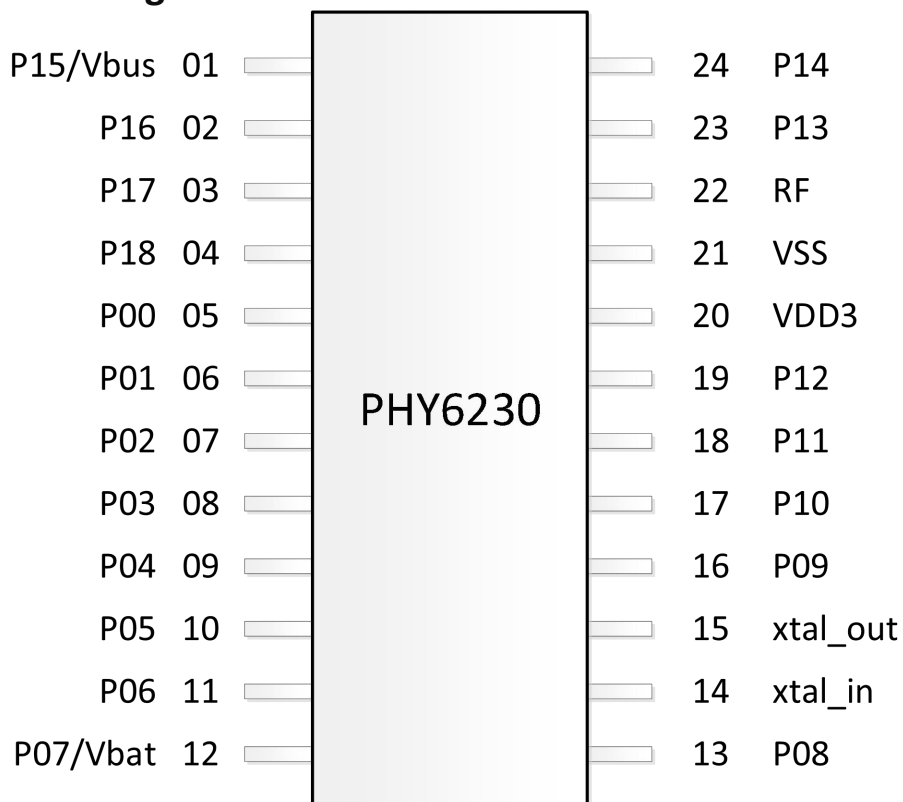


Figure 2: Pin assignment – PHY6230 SSOP24 package

2.2.1.2 Pin Functions

Pin	Pin name	Description
1	P15/Vbus	GPIO 15/spi_tx/ PWM5/ iic_sda/ Vbus
2	P16	GPIO 16/ uart_tx/ rf_tx_en/ spi_sck
3	P17	GPIO 17/ uart_rx/ rf_rx_en/ spi_tx
4	P18	GPIO 18/ pwm0/ iic_scl/ spi_rx
5	P00	GPIO 00/USBDP/ pwm0/ uart_tx
6	P01	GPIO 01/USBDM/ pwm1/ uart_rx
7	P02/SWD_IO	GPIO 02/SWD debug data inout/ spi_rx/ pwm0/ uart_tx
8	P03/SWD_CLK	GPIO 03/SWD debug clock/ spi_ssn/ pwm1/ uart_rx
9	P04	GPIO 04/iic_scl/spi_sck/ ADC input 0/ uart_tx
10	P05	GPIO 05/iic_sda/ uart_tx/ ADC input 1/ uart_rx
11	P06	GPIO 06/PWM2/ ADC input 2/USBDP
12	P07/Vbat	GPIO 07/ PWM3/ Vbat/ USBDM

Pin	Pin name	Description
13	P08	GPIO 08/ PWM4/ rf_rx_en
14	xtal_in	16MHz crystal input
15	xtal_out	16MHz crystal output
16	P09	GPIO 09/ iic_scl/ analog_io[3]/UART_Tx
17	P10	GPIO 10/UART_Rx/ iic_sda/ analog_io[4]
18	P11	GPIO 11/analog_io[5]/ pwm5/ rf_tx_en
19	P12	GPIO 12/ spi_rx/ PWM2/ dbg_mux[0]/pclk_l_div4/ analog_io[6]
20	VDD3	3.3V power supply
21	VSS	GND
22	RF	RF antenna
23	P13	GPIO 13/ spi_ssn/ PWM3/ dbg_mux[1]/clk_rc32k/ analog_io[7]
24	P14	GPIO 14/ spi_sck/ PWM4/ iic_scl

Table 1: Pin functions of PHY6230 SSOP24 package

2.2.2 PHY6230 (SOP16)

2.2.2.1 Pin Assignment

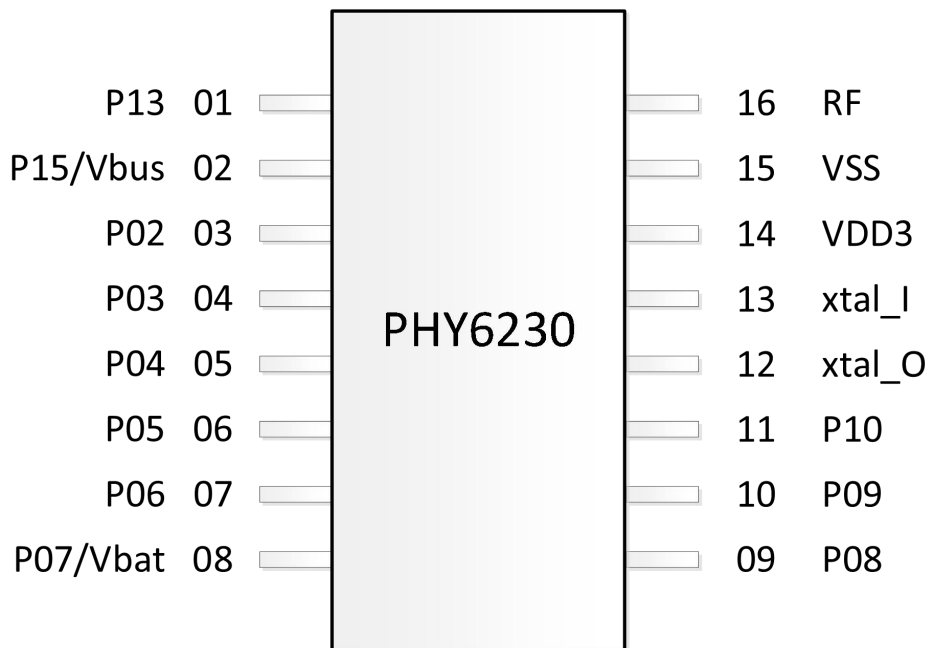


Figure 3: Pin assignment – PHY6230 SOP16 package

2.2.2.2 Pin Functions

Pin	Pin name	Description
1	P13	GPIO 13/ spi_ssn/ PWM3/ dbg_mux[1]/clk_rc32k/ analog_io[7]
2	P15/Vbus	GPIO 15/spi_tx/ PWM5/ iic_sda/ Vbus
3	P02/SWD_IO	GPIO 02/SWD debug data inout/ spi_rx/ pwm0/ uart_tx
4	P03/SWD_CLK	GPIO 03/SWD debug clock/ spi_ssn/ pwm1/ uart_rx
5	P04	GPIO 04/iic_scl/spi_sck/ ADC input 0/ uart_tx
6	P05	GPIO 05/iic_sda/ uart_tx/ ADC input 1/ uart_rx

Pin	Pin name	Description
7	P06	GPIO 06/PWM2/ ADC input 2/USBDP
8	P07/Vbat	GPIO 07/ PWM3/ Vbat/USBDM
9	P08	GPIO 08/ PWM4/ rf_rx_en/
10	P09	GPIO 09/ iic_scl/UART_Tx/ analog_io[3]
11	P10	GPIO 10/UART_Rx/ iic_sda/ analog_io[4]
12	xtal_out	16MHz crystal output
13	xtal_in	16MHz crystal input
14	VDD3	3.3V power supply
15	VSS	GND
16	RF	RF antenna

Table 2: Pin functions of PHY6230 SOP16 package

2.2.3 PHY6230 (TSSOP8/ SOP8)

2.2.3.1 Pin Assignment

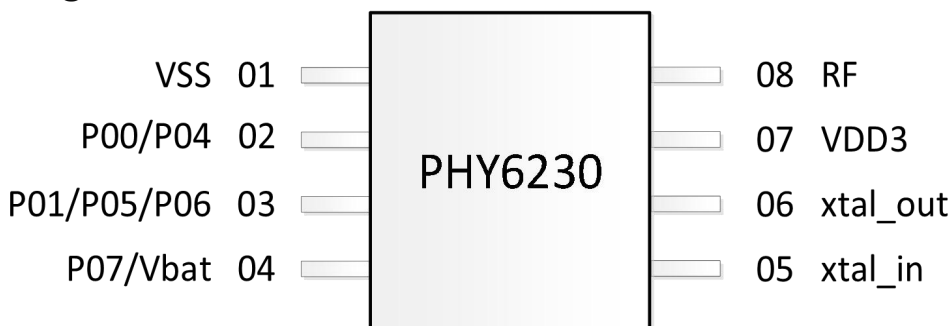


Figure 4: Pin assignment – PHY6230 TSSOP8/SOP8 package

2.2.3.2 Pin Functions

Pin	Pin name	Description
1	VSS	GND
2	P00/ P04	GPIO 00/USBDP/ pwm0/ uart_tx/ GPIO 04/iic_scl/spi_sck/ ADC input 0/ uart_tx
3	P01/P05/P06	GPIO 01/USBDM/ pwm1/ uart_rx/ GPIO 05/iic_sda/ uart_tx/ ADC input 1/ uart_rx/ GPIO 06
4	P07/Vbat	GPIO 07/ PWM3/ Vbat/ USBDM
5	xtal_in	16MHz crystal input
6	xtal_out	16MHz crystal output
7	VDD3	3.3V power supply
8	RF	RF antenna

Table 3: Pin functions of PHY6230 TSSOP8/SOP8 package

2.2.4 PHY6230 (MSOP10)

2.2.4.1 Pin Assignment

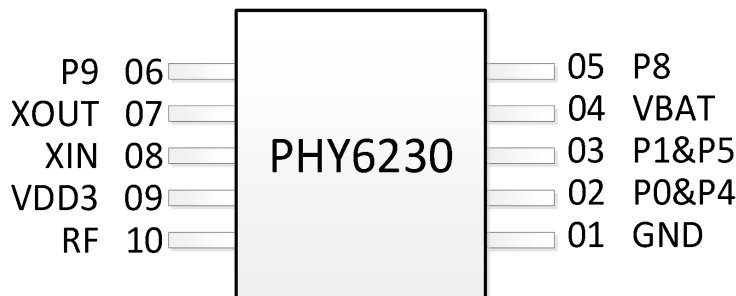


Figure 5: Pin assignment – PHY6230 MSOP10 package

2.2.4.2 Pin Functions

Pin	Pin name	Description
1	P01	GND
2	P00/ P04	GPIO 00/USBDP/ pwm0/ uart_tx/ GPIO 04/iic_scl/spi_sck/ ADC input 0/ uart_tx
3	P01/P05	GPIO 01/USBDM/ pwm1/ uart_rx/ GPIO 05/iic_sda/ uart_tx/ ADC input 1/ uart_rx
4	P07/Vbat	GPIO 07/ PWM3/ Vbat/ USBDM/ ADC input 3
5	P8	GPIO 08/ PWM4/ Vbat/rf_rx_en/ ADC input 4
6	P9	GPIO 09/ iic_scl/ ADC input 5/ uart_tx
7	XOUT	16MHz crystal output
8	XIN	16MHz crystal input
9	VDD3	3.3V power supply
10	RF	RF antenna

Table 4: Pin functions of PHY6230 MSOP10 package

2.2.5 PHY6230QH (QFN24)

2.2.5.1 Pin Assignment

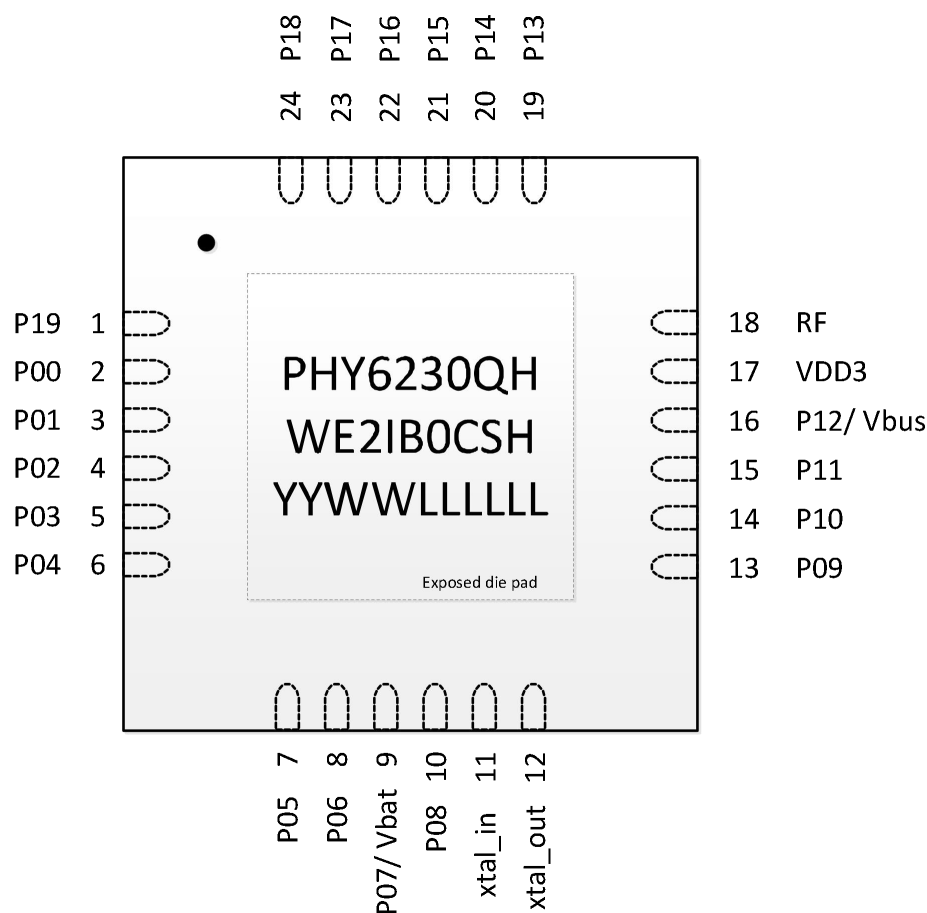


Figure 6: Pin assignment – PHY6230QH QFN24 package

2.2.5.2 Pin Functions

Pin	Pin name	Description
1	P19	GPIO 19/ pwm1/ iic_sda/ spi_ssn
2	P00	GPIO 00/USBDP/ pwm0/ uart_tx
3	P01	GPIO 01/USBDM/ pwm1/ uart_rx
4	P02	GPIO 02/SWD debug data inout/ spi_rx/ pwm0/ uart_tx
5	P03	GPIO 03/SWD debug clock/ spi_ssn/ pwm1/ uart_rx
6	P04	GPIO 04/iic_scl/spi_sck/ ADC input 0/ uart_tx
7	P05	GPIO 05/iic_sda/ uart_tx/ ADC input 1/ uart_rx
8	P06	GPIO 06/PWM2/ ADC input 2/USBDP
9	P07/ Vbat	GPIO 07/ PWM3/ Vbat/ USBDM
10	P08	GPIO 08/ PWM4/ rf_rx_en
11	xtal_in	16MHz crystal input
12	xtal_out	16MHz crystal output
13	P09	GPIO 09/ iic_scl/ analog_io[3]/UART_Tx

14	P10	GPIO 10/UART_Rx/ iic_sda/ analog_io[4]
15	P11	GPIO 11/analog_io[5]/ pwm5/ rf_tx_en
16	P12/ Vbus	GPIO 12/ spi_rx/ PWM2/ dbg_mux[0]/pclk_l_div4/ analog_io[6]/ Vbus
17	VDD3	3.3V power supply
18	RF	RF antenna
19	P13	GPIO 13/ spi_ssn/ PWM3/ dbg_mux[1]/clk_rc32k/ analog_io[7]
20	P14	GPIO 14/ spi_sck/ PWM4/ iic_scl
21	P15	GPIO 15/spi_tx/ PWM5/ iic_sda/ Vbus
22	P16	GPIO 16/ uart_tx/ rf_tx_en/ spi_sck
23	P17	GPIO 17/ uart_rx/ rf_rx_en/ spi_tx
24	P18	GPIO 18/ pwm0/ iic_scl/ spi_rx

*Note: All gpio support 1M/150kΩ pull up, 150kΩ pull down.

Table 5: Pin functions of PHY6230QH QFN24 package



3 System Block

The system block diagram of PHY6230 is shown in **Figure 1**.

3.1 CPU

The PHY6230 has a high-performance low-power 32-bit CPU and 512-byte Cache. The CPU, memories, and all peripherals are connected by AMBA bus matrix.

The CPU will play controller role in BLE modem and run all user applications.

3.2 Memory

PHY6230 has total 64KB ROM, 8KB SRAM and 16KB OTP. The physical address space of these memories is shown in **Figure 7**.

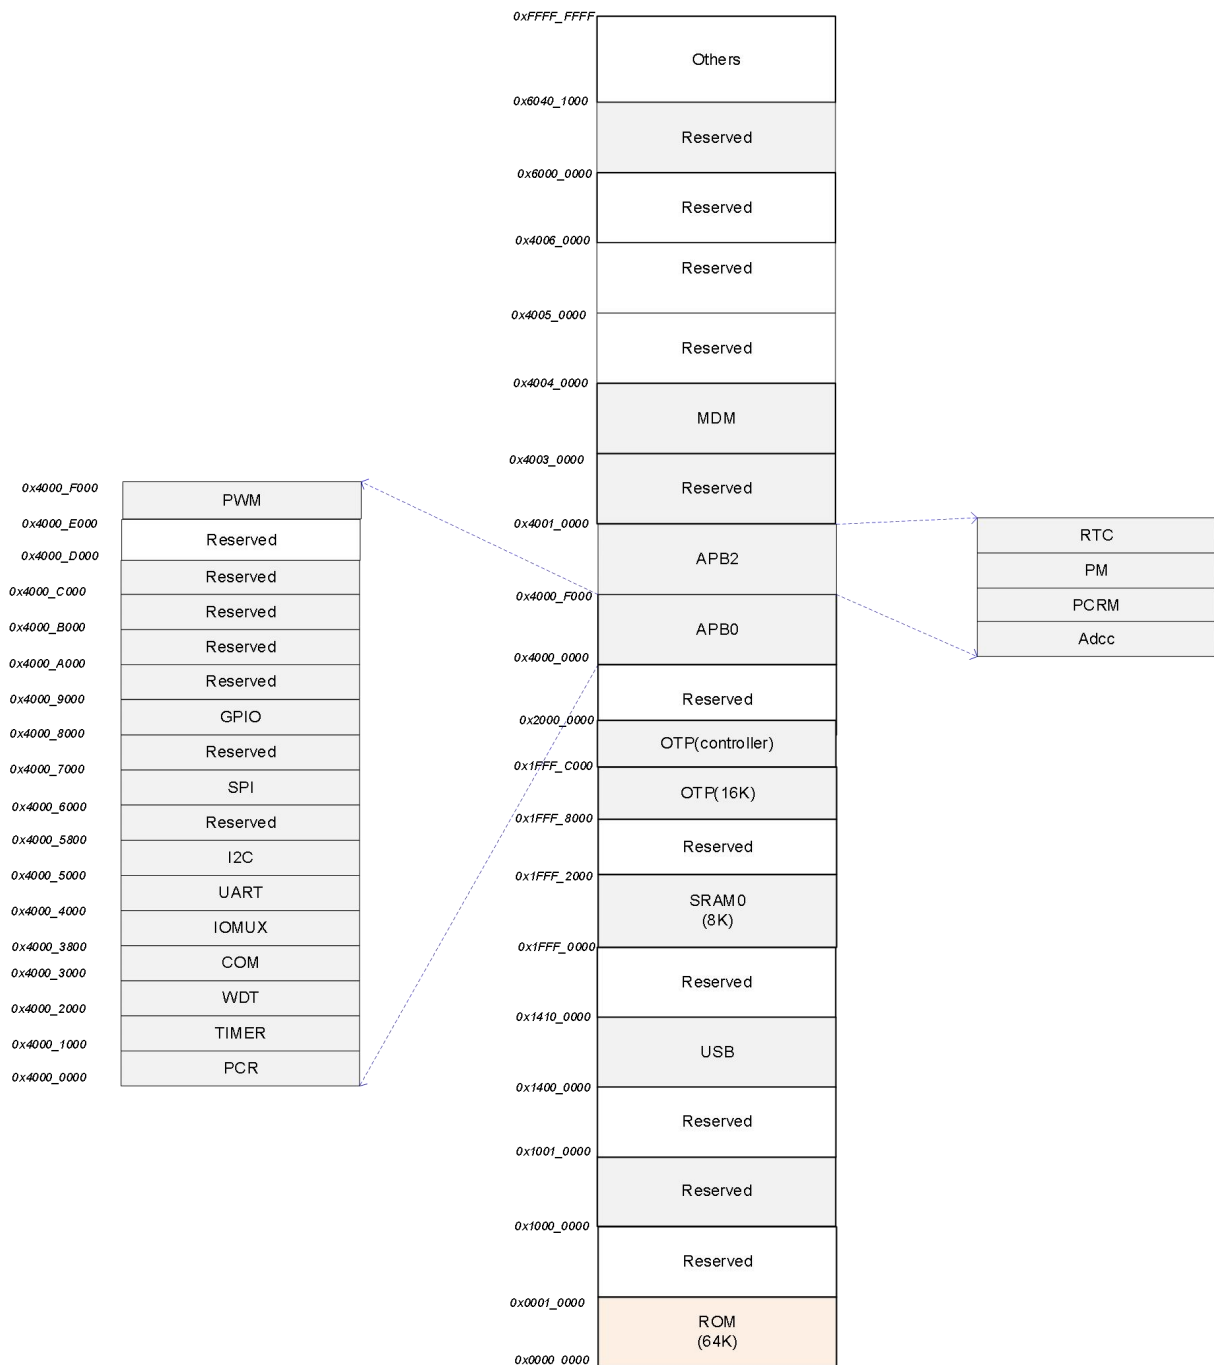


Figure 7: PHY6230 Memory Space

3.2.1 ROM

PHY6230 has 1 ROM.

	SIZE	CONTENT
ROM	64KB	Boot ROM. Protocol stack. Common peripheral drivers. ATE AT command.

Table 6: List of ROM

3.2.2 SRAM

PHY6230 has 1 SRAM blocks. The SRAM block have retention capability, which can be configured individually. Normal operating voltage is 1.2V, and the voltage is adjustable at retention. The SRAM block can be used to store program or data.

	SIZE	CONTENT
SRAM0	8KB	

Table 7: List of SRAM

3.2.3 OTP

The OTP is an antifuse based technology, which is capable for security code storage. This IP programming voltage is generated from an internal charge pump. The main memory is organized as 4,096 by 32 bits. The OTP cell design will provide a low cost logic process OTP approach compared with alternative approaches. The OTP is programmed by 1.2V, 3.3V power supply.

3.2.4 Memory Address Mapping

Name	Size (KB)	Master	Physical Address
ROM	64K	MCU	0000_0000~0000_FFFF
SRAM	8K	MCU	1FFF_0000~1FFF_1FFF
OTP	16K	MCU	1FFF_8000~1FFF_BFFF
RAM_BB	1K	MCU	

Table 8: Memory address mapping

3.3 Boot and Execution Modes

Only in CP Chip form, the chip enters CP boot mode after power on. ROM1 is then aliased to the 0x0 address and the chip program starts from ROM1.

CP boot

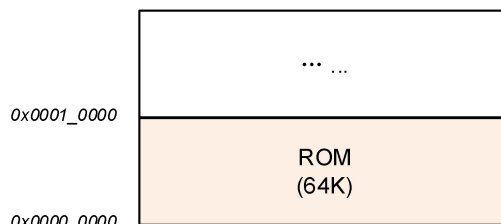


Figure 8: PHY6230 boot mode

3.4 Power, Clock and Reset (PCR)

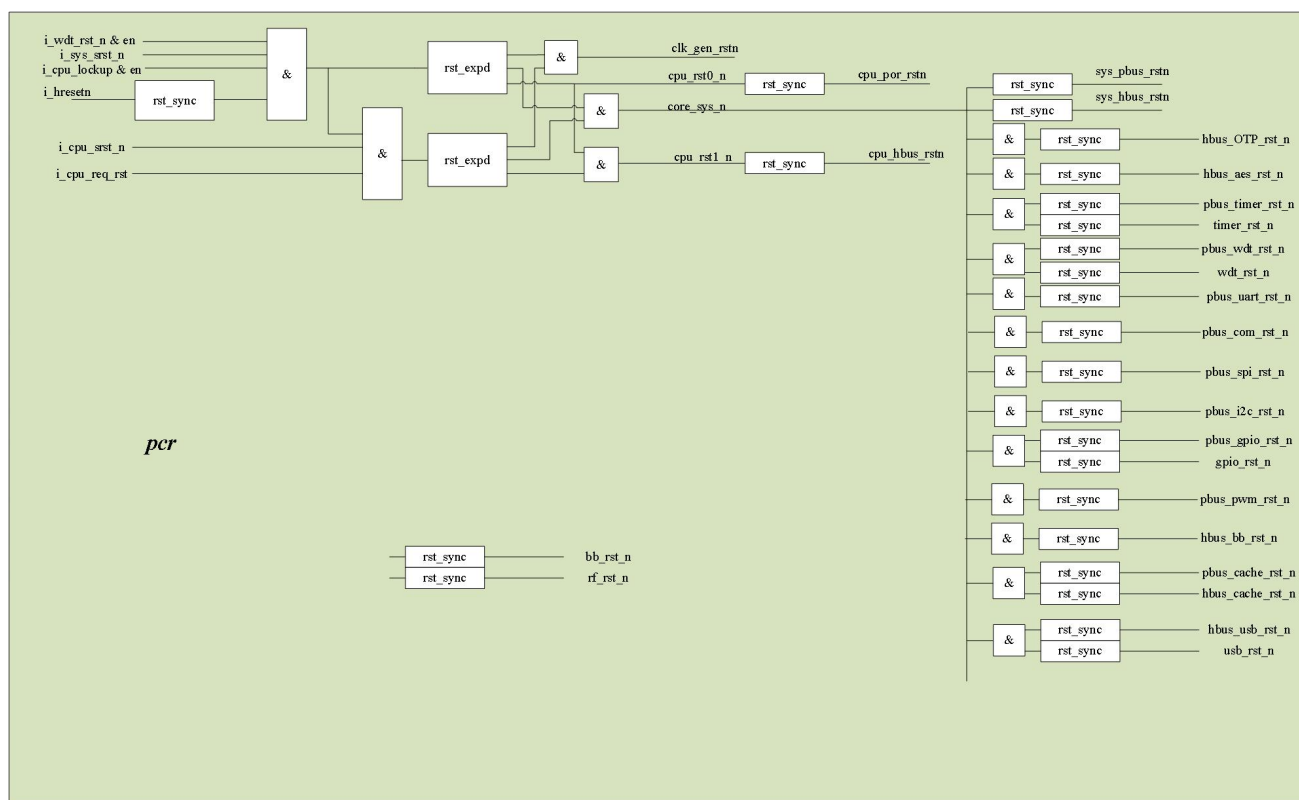


Figure 9: PHY6230 power, clock and reset

3.5 Power Management (POWER)

The power management system is highly flexible with functional blocks such as the CPU, radio transceiver, and peripherals saving separate power state control in addition to the System Sleep mode and OFF modes. When in System Normal mode, all functional blocks will independently be turned on depending on needed application functionality.

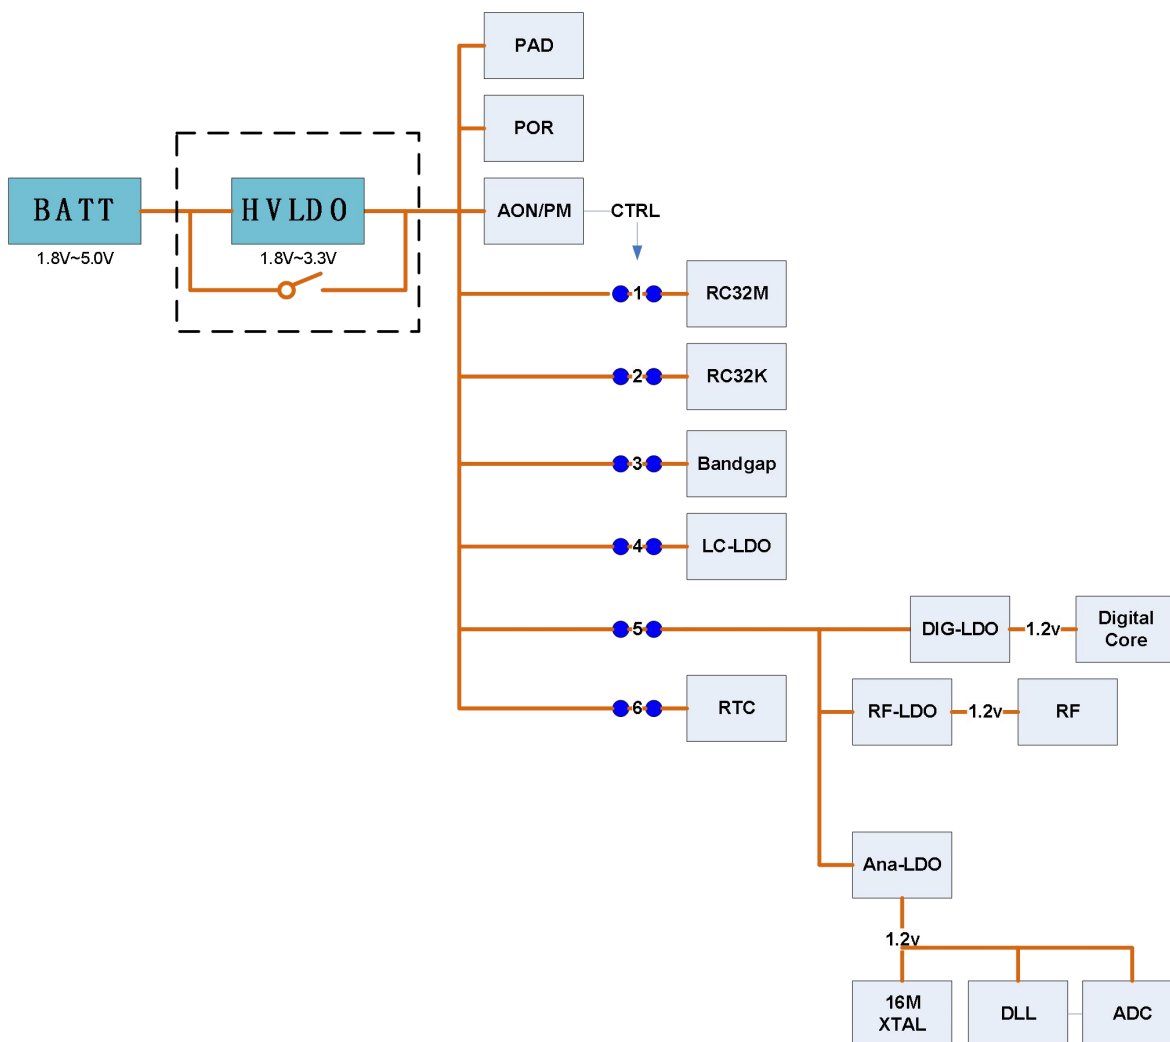


Figure 10: Power system

The following diagram is Normal, Sleep and Off mode. Switches are optional depending on user's request.

#	Switch	Normal	Sleep	Off
1	RC32M	On	Off	Off
2	RC32K	On	Optional	Off
3	bandgap	On	Off	Off
4	LC-LDO	On	on	Off
5	DIG-LDO	On	Off	Off
6	RTC	On	Optional	Off

Table 9: Switches of different power modes

3.6 Low Power Features

3.6.1 Operation and Sleep States

3.6.1.1 Normal State

3.6.1.2 Clock Gate State

The CPU executes WFI/WFE to enter clock gate state. After wake-up from clock-gate state, the CPU continues to execute the program from where it stopped. The wake-up sources includes interrupts and events. The wake-up sources are configured by the software according to applications.

3.6.1.3 System Sleep State

The wake-up sources include:

- IO
- RTC
- RESET
- UVLO reset

3.6.1.4 System Off State

The wake-up sources include:

- IOs
- RESET
- UVLO reset

3.6.1.5 UVLO

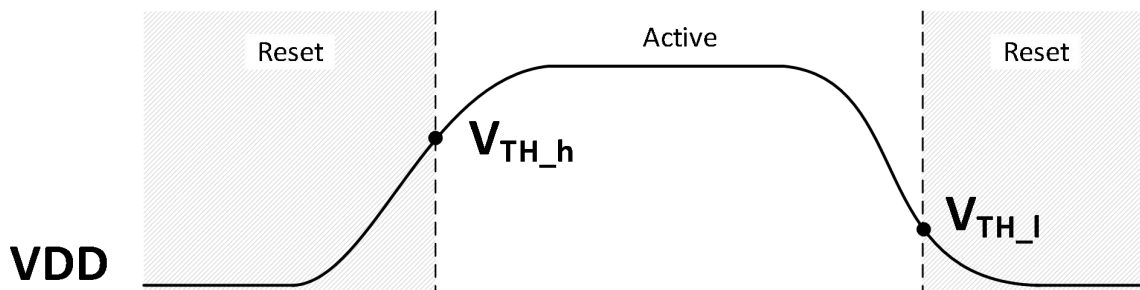


Figure 11: UVLO reset

$VDD > V_{TH_h}$, release reset; $VDD < V_{TH_l}$, enter reset.

VDD	Min.	TYP	Max.	Unit
V_{TH_h}	1.7	1.74	1.78	V
V_{TH_l}	1.63	1.66	1.69	V

Table 10: UVLO

If power supply VDD rises more than 0.6V within 100us, power monitor will trigger a whole chip reset event.

3.6.2 State Transition

3.6.2.1 Entering Clock Gate State and Wake-up

CPU executes WFI/WFE.

3.6.2.2 Entering Sleep/off States and Wake-up

The PM registers identify whether the CPU is in mirror mode or FLASH mode before sleep or off, and record the remap and vectors. The CPU configures the corresponding PM registers to put the chip into sleep mode. After wake-up, the chip enters boot mode to execute boot code in the ROM. The ROM code checks the mode before sleep/off and the remap information, perform corresponding configurations, and starts to execute the program.

3.7 Interrupts

Interrupt Name	MCU Interrupt Number
	0
	1
	2
otp_irq	3
bb_irq	4
	5
	6
	7
	8
	9
wdt_irq	10
uart_irq	11
i2c_irq	12
	13
spi_irq	14
	15
gpio_irq	16
Xtal_irq	17
Dll_irq	18
	19
timer_irq[1]	20
timer_irq[2]	21
timer_irq[3]	22
timer_irq[4]	23
	24
	25
otgtop_irq	26
otgtop_rf_irq	27
aes_irq	28
adcc_irq	29
	30
Hclk_mux_done	31

Table 11: Interrupts

3.8 Clock Management

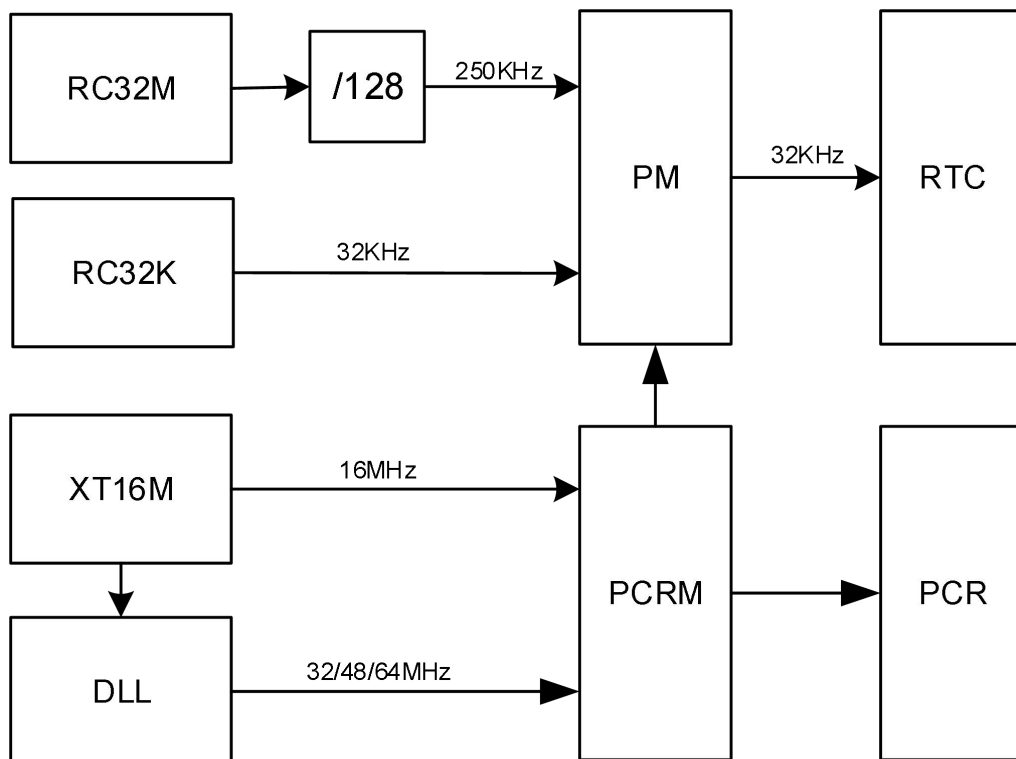


Figure 12: Clock management

There is only one crystal clock sources: 16MHz crystal oscillator (XT16M). There are also two on chip RC oscillators: 32MHz RC oscillator (RC32M) and 32kHz RC oscillator (RC32k), both of which can be calibrated with respect to 16MHz crystal oscillator. At initial power up or wake up before XT16M oscillator starts up, RC32M is used as the main clock. An on-chip DLL generates higher frequency clocks such as 32/48/64MHz.

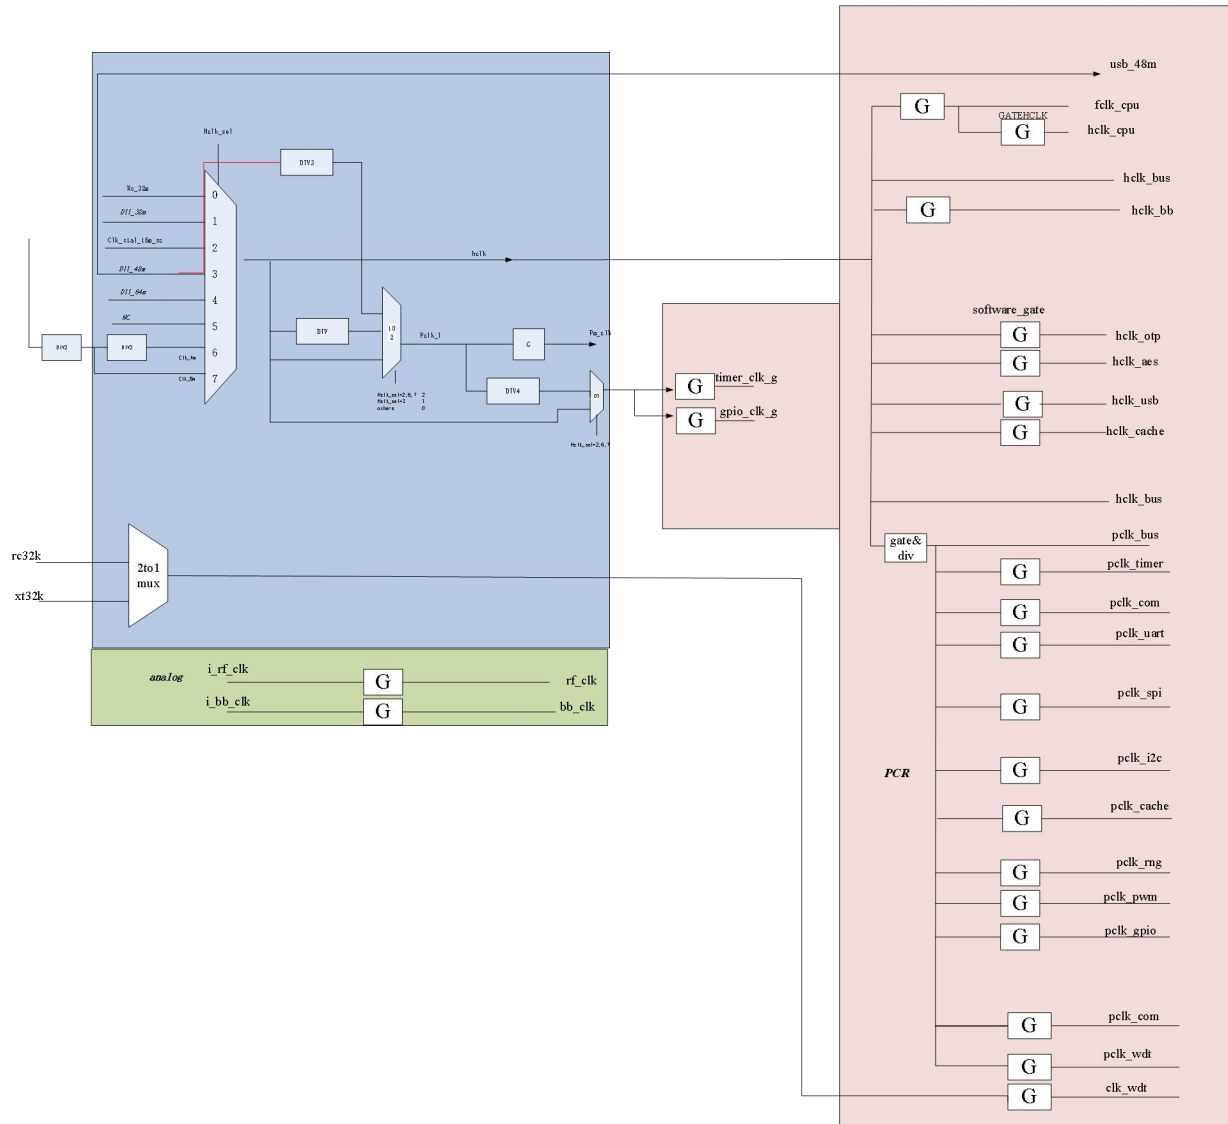


Figure 13: Clock Structure Diagram

3.9 IOMUX

The IOMUX provides a flexible I/O configuration, as the ports of most of the peripherals can be configured and mapped to specific physical I/O pads (I/O at die boundary). These peripheral modules include I2C, UART, USB, PWM 0-5, SPI, etc. However, for other specific purpose peripherals, their I/O mappings are fixed when they are enabled. These specific purpose peripherals include SWD, analog_ios and GPIOs.

Figure 13 below shows the IOMUX functional diagram.

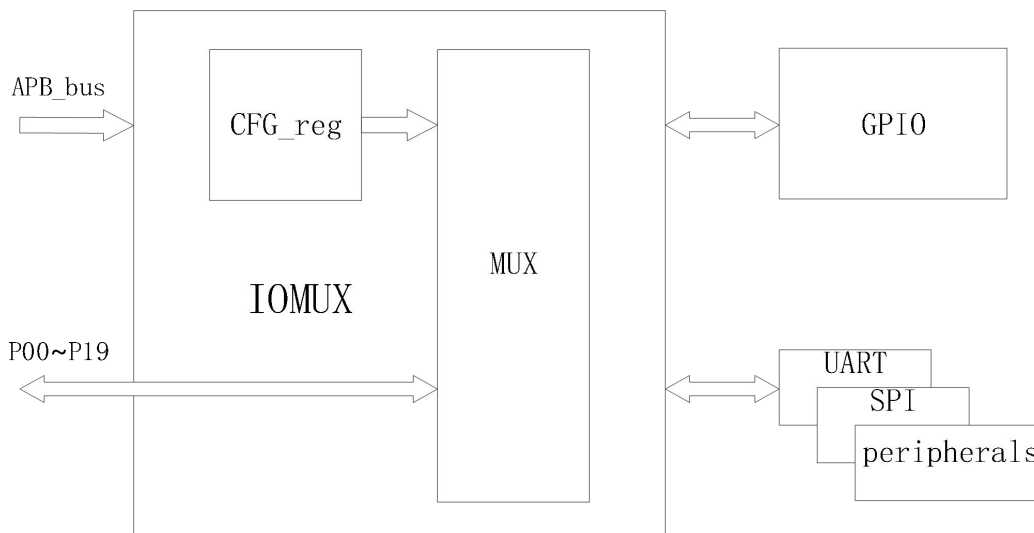


Figure 14: IOMUX structure diagram

There are 20 configurable pads. The table below shows the mapping of the peripheral IOs that can be mapped through IOMUX. These include I2C, UART, PWM 0-5 and SPI.

On the other hand, there are also special purpose peripherals, whose IOs are fixed to certain physical pads, when these peripheral functions are enabled. These special purpose peripherals include: SWD, analog I/Os (ADC inputs) and GPIO. When they are enabled, their IOs are mapped to physical pads according to the following table.

#	PHY6230	Normal Mode (p8=0@reset active)				
0	GPIO_P00	GPIO	USBDP	pwm0	uart_tx	
1	GPIO_P01	GPIO	USBDM	pwm1	uart_rx	
2	GPIO_P02	SWD_IO	GPIO	spi_rx	pwm0	uart_tx
3	GPIO_P03	SWD_CLK	GPIO	spi_ssn	pwm1	uart_rx
4	GPIO_P04	GPIO	iic_scl	spi_sck	analog_io[0]	uart_tx
5	GPIO_P05	GPIO	iic_sda	uart_tx	analog_io[1]	uart_rx
6	GPIO_P06	GPIO	pwm2	USBDP	analog_io[2]	
7	GPIO_P07	GPIO	pwm3	USBDM		
8	GPIO_P08	GPIO	pwm4	rf_rx_en		
9	GPIO_P09	GPIO	uart_tx	iic_scl	analog_io[3]	
10	GPIO_P10	GPIO	uart_rx	iic_sda	analog_io[4]	
11	GPIO_P11	GPIO	pwm5	rf_tx_en	analog_io[5]	
12	GPIO_P12	GPIO	spi_rx	pwm2	dbg_mux[0]/pclk_l_div4	analog_io[6]
13	GPIO_P13	GPIO	spi_ssn	pwm3	dbg_mux[1]/clk_rc32k	analog_io[7]
14	GPIO_P14	GPIO	spi_sck	pwm4	iic_scl	
15	GPIO_P15	GPIO	spi_tx	pwm5	iic_sda	
16	GPIO_P16	GPIO	uart_tx	rf_tx_en	spi_sck	
17	GPIO_P17	GPIO	uart_rx	rf_rx_en	spi_tx	
18	GPIO_P18	GPIO	pwm0	iic_scl	spi_rx	
19	GPIO_P19	GPIO	pwm1	iic_sda	spi_ssn	

Table 12: Peripheral IO mapped through IOMUX (special purpose)

3.10 GPIO

The General Purpose I/Os are a type of peripheral that can be mapped to physical I/O pads and programmed by software. The flexible GPIO are organized as PORT A. PortA has bi-direction 20 bit lines, e.g., GPIO_PORT A [19:0]. With default setting, physical pads: P00-P19 are connected to PortA. When all GPIOs are enabled, as described in the IOMUX table in IOMUX section.

All PortA pins can be configured as bi-directional serial interface, by selecting as input or output direction, and their corresponding data can be either read from or written to registers. All PortA and pins support wake-up and debounce function, and all pins support interrupt.

Each GPIO pins can be pulled up to VDD3 or pulled down to ground by adding pull up or pull down resistors to have default functions/states.

For more detailed info, please refer to “PHY623x GPIO Application Notes”, in software SDK document folder.

#	PHY6230	Default Mode		Default IN_OUT		Pull up/dn		IRQ	Wakeup
		Burning	Boot	Burning	Boot	Burning	Boot		
0	GPIO_P00	GPIO	GPIO	IN	IN	Floating	Floating	√	√
1	GPIO_P01	GPIO	GPIO	IN	IN	Floating	Floating	√	√
2	GPIO_P02	SWDIO	SWDIO	IN	IN	Floating	Floating	√	√
3	GPIO_P03	SWDCLK	SWDCLK	IN	IN	Pull dn	Pull dn	√	√
4	GPIO_P04	UART_Tx	GPIO	OUT	IN	Pull up	Floating	√	√
5	GPIO_P05	UART_Rx	UART_Rx	IN	IN	Floating	Floating	√	√
6	GPIO_P06	GPIO	GPIO	IN	IN	Floating	Floating	√	√
7	GPIO_P07	GPIO	GPIO	IN	IN	Pull dn	Pull dn	√	√
8	GPIO_P08	GPIO	GPIO	IN	IN	Floating	Floating	√	√
9	GPIO_P09	GPIO	GPIO	IN	IN	Floating	Floating	√	√
10	GPIO_P10	GPIO	GPIO	IN	IN	Floating	Floating	√	√
11	GPIO_P11	GPIO	GPIO	IN	IN	Floating	Floating	√	√
12	GPIO_P12	GPIO	GPIO	IN	IN	Floating	Floating	√	√

Table 13: PHY6230 GPIO Application Notes

3.10.1 DC Characteristics

TA=25°C, VDD=3 V

PARAMETER	TEST CONDITIONS	Min.	TYP	Max.	Unit
Logic-0 input voltage				0.5	V
Logic-1 input voltage		2.4			V
Logic-0 input current	Input equals 0 V	-50		50	nA
Logic-1 input current	Input equals VDD	-50		50	nA
Logic-0 output voltage, 10-mA pins	Output load 10 mA			0.5	V
Logic-1 output voltage, 10-mA pins	Output load 10 mA	2.5			V

Table 14: DC Characteristics



4 Peripheral Blocks

4.1 2.4GHz Radio

The 2.4 GHz RF transceiver is designed to operate in the worldwide ISM frequency band at 2.4 to 2.4835 GHz. Radio modulation modes and configurable packet structure make the transceiver interoperable with *Bluetooth*® low energy (BLE) protocol implementations.

- General modulation format
 - FSK (configurable modulation index) with configurable Gaussian Filter Shaping
 - On-air data rates
 - 1Mbps/2Mbps
- Transmitter with programmable output power of -20dBm to +10dBm, in 3dB steps
- RSSI function (1 dB resolution, ± 2 dB accuracy)
- Receiver sensitivity
 - -96dBm@1Mbps BLE
 - -93dBm@2Mbps BLE
- Embedded RF balun
- Integrated frac-N synthesizer with phase modulation

4.2 Timer/Counters (TIMER)

The implementation can include a 32-bit SysTick system timer, that extends the functionality of both the processor and the NVIC. When present, the NVIC part of the extension provides:

- A 32-bit system timer (SysTick)
- Additional configurable priority SysTick interrupt.

General purpose timers are included in the design. With the input clock running at 4Mhz.

4.3 Real Time Counter (RTC)

The Real Time Counter (RTC) module provides a generic, low power timer on the low-frequency clock source (LFCLK). The RTC features a 24-bit COUNTER, capture/compare registers, and a tick event generator for low power, tickless RTOS implementation.

4.4 AES-ECB Encryption (ECB)

The ECB encryption block supports 128-bit AES encryption. It can be used for a range of cryptographic functions like hash generation, digital signatures, and keystream generation for data encryption/decryption.

4.5 Watchdog Timer (WDT)

A count down watchdog timer using the low-frequency clock source (LFCLK) offers configurable and

robust protection against application lock-up. The watchdog can be paused during long CPU sleep periods for low power applications and when the debugger has halted the CPU.

4.6 SPI

The SPI interface supports 3 serial synchronous protocols which are SPI, SSP and Microwire serial protocols. The SPI is master only.

4.7 I2C

This I2C block support 100Khz, and 400Khz modes. It also supports 7-bit address and 10-bit address. It has built-in configurable spike suppression function for both lines.

4.8 UART

The Universal Asynchronous Receiver/Transmitter offers fast, full-duplex, asynchronous serial communication with up to 1Mbps baud. Parity checking and generation for the 9th data bit are supported.

4.9 Pulse Width Modulation (PWM)

PHY6230 supports 6 channels of Pulse Width Modulation (PWM) outputs. PWM outputs generate waveforms with variable duty cycle or pulse width programmed by registers. And each of the 6 PWM outputs can be individually programmed. Their duty cycles are controlled by programming individual counters associated with each channel.

The master clock is 16MHz. For each PWM outputs, first there is a prescaler (pre-divider) with division ratio of 2 to 128 (only 2^N division ratios are supported), followed by another 16bit counter with programmable max count, denoted as `top_count`. When the 16bit counter counts from 0 to `top_count`, it resets back to 0. So the frequency of the PWM is given by:

$$\text{Freq_PWM} = 16\text{MHz} / (\text{N_prescaler} * \text{N_top_count});$$

A threshold counter number can be programmed, when the 16bit counter reaches the threshold, PWM output toggles. So the duty cycle is:

$$\text{Duty_cycle_PWM} = \text{N_threshold} / \text{N_top_count};$$

The polarity of the PWM can also be programmed, which indicates output 1 or 0 when counter is below/above the threshold. A PWM waveform vs counter values are illustrated in the following **Figure 15**, where the polarity is positive. Also in this case the counter ramps up and then resets, we call it “up mode”.

There is also a “up and down mode”, where the counter ramps up to `count_top` and then ramps down, instead of reset.

As discussed above, the key register bits for one PWM channel are: 16bit `top_count`, 16bit threshold count, 3bit prescaler count, PWM polarity, PWM mode (up or up/down), PWM enable, and PWM load enable (load new settings). All 6 PWM channels can be individually programmed by registers with addresses from `0x4000_E004` to `0x4000_E044`. In addition, one should enable registers `0x4000_E000<0><4>` to allow all PWM channels can be programmed. For details please refer to documents of PHY623x register tables.

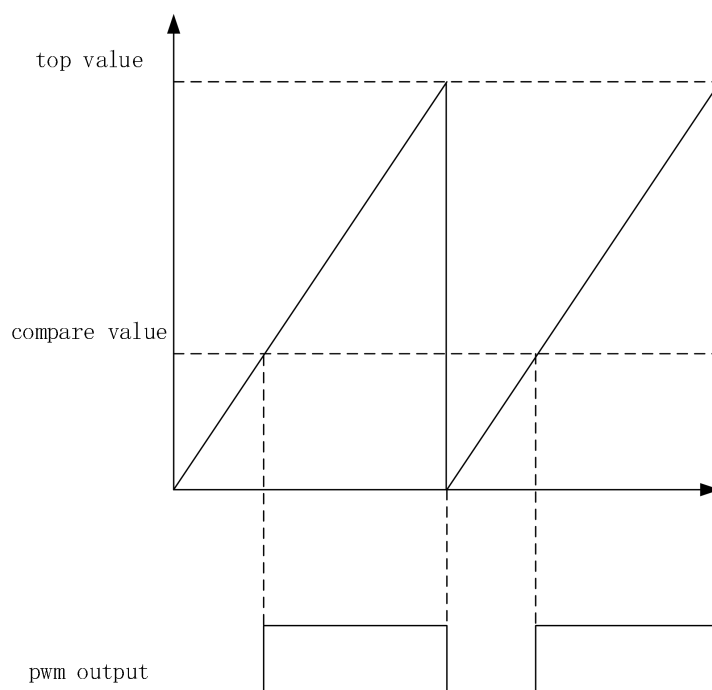


Figure 15: PWM operation

4.10 USB Controller

The USB controller is compatible with the full speed(FS) and low speed(LS) USB specification. It provides 8 endpoints: EP0 IN/OUT supports input and output control data transfer; EP1~EP7 IN/OUT support input and output interrupt data transfer; In addition, EP7 supports input isochronous data transfer.

4.11 Analog to Digital Converter (ADC)

The 12bit SAR ADC has total 10 inputs. Among them, there are two for VDD3 and VBAT detection, and 8 channel for external IO input, which can be programmed to 4 pairs of differential input or six single-ended inputs. There is a manual mode with which the ADC can be configured to convert a specific input in single-ended or differential and with max 320KHz ADC sampling rate.

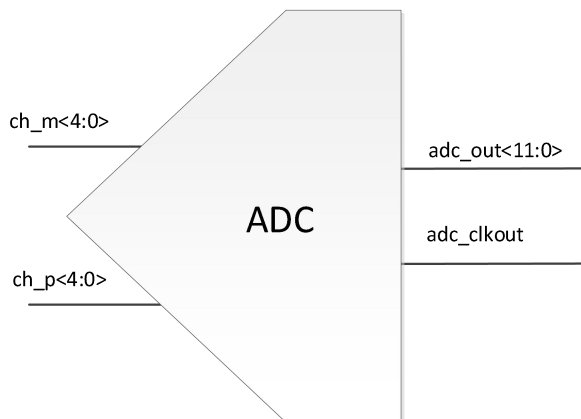


Figure 16: ADC

4.11.1 ADC Channel <3:0> Connectivity

ADC	Hardwired	Single	differential	note
aio<0>	gpio<4>	Chsel1:N		
aio<1>	gpio<5>	Chsel1:P		
aio<2>	gpio<6>	Chsel2:N		
aio<3>	gpio<9>	Chsel2:P		
aio<4>	gpio<10>	Chsel3:N		
aio<5>	gpio<11>	Chsel3:P		
aio<6>	gpio<12>	Chsel4:N		
aio<7>	gpio<13>	Chsel4:P		
aio<8>	Vdd3/4	Chsel0:N	-	
aio<9>	Vbat/5	Chsel0:P	-	

Table 15: ADC channel connectivity

Aio<9:7,4:0> can be selected through an analog Mux by programming aio_pass<7:0> and aio_attn<7:0>. For example, register 0x4000_F020<8><0> set to 01, then Aio<0> is connected to ADC input B negative.

0x4000_F020		Register Description
[15 : 8]	Attenuation ctrl	attn[7:0]. analogIO control for {aio<9>, aio<8>, aio<7>, aio<4>, aio<3>, aio<2>, aio<1>, aio<0>}. {attn[x], pass[x]}:
		00 switch off
		01 pass through
		10 attenuate to 1/4
		11 NC
[7 : 0]	pass ctrl	pass[7:0]. analogIO control for {aio<9>, aio<8>, aio<7>, aio<4>, aio<3>, aio<2>, aio<1>, aio<0>}. {attn[x], pass[x]}:
		00 switch off
		01 pass through
		10 attenuate to 1/4

11	NC
note: analog IO sharing	
gpio<4>/aio<0>	
gpio<5>/aio<1>	
gpio<6>/aio<2>	
gpio<9>/aio<3>	
gpio<10>/aio<4>	
gpio<11>/aio<5>	
gpio<12>/aio<6>	
gpio<13>/aio<7>	
VDD3/4/aio<8>	
VBAT/5/aio<9>	

Table 16: analog Mux

5 Absolute Maximum Ratings

Maximum ratings are the extreme limits to which PHY6230 can be exposed without permanently damaging it. Exposure to absolute maximum ratings for prolonged periods of time may affect the reliability of the PHY6230. **Table 16** specifies the absolute maximum ratings for PHY6230.

Symbol	Parameter	Min.	Max.	Unit
Supply voltages				
VDD3		-0.3	+3.6	V
Vbus		-0.3	+5.5	V
Vbat		-0.3	+5.5	V
DEC			1.32	V
VSS			0	V
I/O pin voltage				
VIO		-0.3	VDD + 0.3	V
Environmental				
Storage temperature		-40	+125	°C
MSL	Moisture Sensitivity Level		3	
ESD HBM	Human Body Model Class 2		2	kV
ESD CDMQF	Charged Device Model (SSOP24, SOP16 and TSSOP8 package)		500	V
Flash memory				
Endurance			100 000	write/erase cycles
Retention			10 years at 40 °C	
Number of times an address can be written between erase cycles			2	times

Table 17: Absolute maximum ratings



6 Operating Conditions

The operating conditions are the physical Parameters that PHY6230 can operate within as defined in **Table 17**.

Symbol	Parameter	Min.	Typ.	Max.	Units
VDD3	Supply voltage, normal mode	1.8	3	3.6	V
Vbus	Supply voltage	4.5	5	5.5	V
Vbat	Supply voltage	3.0	3.7	5.5	V
tr_VDD	Supply rise time (0 V to 1.8 V)			100	ms
TA	Operating temperature	-40	27	125	°C

Table 18: Operating conditions

7 Radio Transceiver

7.1 Radio Current Consumption

Parameter	Description	MIN	TYP	MAX	UNIT
Tx only at 0dBm	@3V		10		mA
Rx Only	@3V		10		mA

Table 19: Radio current consumption

7.2 Transmitter Specification

Parameter	Description	MIN	TYP	MAX	UNIT
RF Max Output Power			10		dBm
RF Min Output Power			-20		dBm
OBW for BLE 1Mbps	20dB occupy-bandwidth for BLE modulation 1Mbps		1100		KHz
OBW for BLE 2Mbps	20dB occupy-bandwidth for BLE modulation 2Mbps		2300		KHz
FDEV for BLE 1Mbps	Frequency deviation for GFSK modulation 1Mbps	160		250	KHz
FDEV for BLE 2Mbps	Frequency deviation for GFSK modulation 2Mbps	320		500	KHz

Table 20: Transmitter specification

7.3 Receiver Specification

7.3.1 RX BLE 1Mbps GFSK

Parameter	Description	MIN	TYP	MAX	UNIT
Rx Sensitivity	Sensitivity test 1Mbps BLE ideal transmitter, 37 Byte BER=1E-3		-96		dBm
co-channel rejection	modulated interferer in channel, 37 Byte BER=1E-3		-6		I/C dB
Selectivity +/-1MHz	Wanted signal at -67dBm, modulated interferer at +/- 1MHz, 37 Byte BER=1E-3		7		I/C dB
Selectivity +/-2MHz	Wanted signal at -67dBm, modulated interferer at +/- 2MHz, 37 Byte BER=1E-3		45		I/C dB
Selectivity +/-3MHz	Wanted signal at -67dBm, modulated interferer at +/- 3MHz, 37 Byte BER=1E-3		50		I/C dB
Selectivity +/-4MHz	Wanted signal at -67dBm, modulated interferer at +/- 4MHz, 37 Byte BER=1E-3		50		I/C dB
Selectivity +/-5MHz or More	Wanted signal at -67dBm, modulated interferer at >= +/- 5MHz, 37 Byte BER=1E-3		55		I/C dB
Selectivity Imag frequency	Wanted signal at -67dBm, modulated interferer at imagefrequency, 37 Byte BER=1E-3		22		I/C dB

Parameter	Description	MIN	TYP	MAX	UNIT
Intermodulation	Wanted signal at 2402MHz, -64dBm, Two interferers at 2405 and 2408 MHz respectively, at the given power level, 37 Byte BER=1E-3		-20		dBm
Carrier Frequency Offset Tolerance			+/- 350		KHz
Sample Clock Offset Tolerance			+/- 120		ppm

Table 21: RX BLE 1Mbps GFSK

7.3.2 RX BLE 2Mbps GFSK

Parameter	Description	MIN	TYP	MAX	UNIT
Rx Sensitivity	Sensitivity test 2Mbps BLE ideal transmitter, 37 Byte BER=1E-3		-93		dBm
co-channel rejection	modulated interferer in channel, 37 Byte BER=1E-3		-6		I/C dB
Selectivity +/-1MHz	Wanted signal at -67dBm, modulated interferer at +/- 1MHz, 37 Byte BER=1E-3		-5		I/C dB
Selectivity +/-2MHz	Wanted signal at -67dBm, modulated interferer at +/- 2MHz, 37 Byte BER=1E-3		9		I/C dB
Selectivity +/-3MHz	Wanted signal at -67dBm, modulated interferer at +/- 3MHz, 37 Byte BER=1E-3		30		I/C dB
Selectivity +/-4MHz	Wanted signal at -67dBm, modulated interferer at +/- 4MHz, 37 Byte BER=1E-3		40		I/C dB
Selectivity +/-5MHz or More	Wanted signal at -67dBm, modulated interferer at >= +/- 5MHz, 37 Byte BER=1E-3		55		I/C dB
Selectivity Imag frequency	Wanted signal at -67dBm, modulated interferer at imagefrequency, 37 Byte BER=1E-3		22		I/C dB
Intermodulation	Wanted signal at 2402MHz, -64dBm, Two interferers at 2405 and 2408 MHz respectively, at the given power level, 37 Byte BER=1E-3		-20		dBm
Carrier Frequency Offset Tolerance			+/- 350		KHz
Sample Clock Offset Tolerance			+/- 120		ppm

Table 22: RX BLE 2Mbps GFSK

7.4 RSSI Specifications

Parameter	Description	MIN	TYP	MAX	UNIT
RSSI Dynamic Range			70		dB
RSSI Accuracy	RSSI Accuracy Valid in range -100 to -30dBm		+/-2		dB
RSSI Resolution	Totally 7bit, from 0 to 127		1		dB
RSSI Period			8		us

Table 23: RSSI specifications



8 Glossary

Term	Description
AHB	Advanced High-performance Bus
AHB-AP	DAP AHB Port for debug component access thru AHB bus
AMBA	Advanced Microcontroller Bus Architecture
AON	Always-on power domain
APB	Advanced Peripheral Bus
APB-AP	DAP APB Port for debug component access thru APB bus
BROM	Boot ROM
DAP	Debug Access Port
ETM	Embedded trace module
FPU	Floating Point Unit
I2C	Inter-Integrated Circuit
I2S	Inter-IC Sound, Integrated Interchip Sound
ITM	Instrumentation Trace Macrocell Unit
JTAG	Joint Test Access Group (IEEE standard)
JTAG-AP	DAP's JTAG Access Port to access debug components
JTAG-DP	DAP's JTAG Debug Port used by external debugger
J&M	Jun and Marty LLC
MPU	Memory Protection Unit
NVIC	Nested vector Interrupt Controller
PCR	Power Clock Reset controller
POR	Power on reset, it is active low in this document
RFIF	APB peripheral to interface RF block
SoC	System on chip
SPI	Serial Peripheral Interface
SRAM	Static Random Access memory
TWI	Two-Wire Interface
UART	Universal Asynchronous Receiver and Transmitter
WDT	Watchdog Timer

Table 24: Glossary

9 Ordering information

9.1 Chip Marking Example

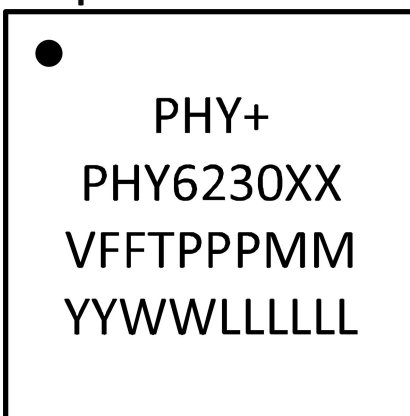


Figure 17: Chip Marking Example

9.2 Chip Marking Rule

<PHY+>
<PHY6230><XX>
<V><FF><T><PPP><MM>
<YY><WW><LLLLLL>

Figure 18: Chip Marking Rule

Abbreviation	Definition and Implemented Codes
<PHY+>	PHYPLUS MICROELECTRONIC
<PHY6230>	PHY6230 Product
<XX>	Package Type
<V>	Supply Voltage
<FF>	Flash/ EEPROM Size
<T>	Operating Temperature
<PPP>	Product Information
<MM>	Manufacturer Information
<YY>	2-digital Year Code
<WW>	2-digital Week Code
<LLLLLL>	6-digital Wafer Lot Code

Table 25: Chip Marking Rule



9.3 Order Code

Part No.	Package	Supply Voltage	Operating Temp. (°C)	EEPROM	Packing	Quantity			
						ea /tube	tube /inner	inner /case	ea /case
PHY6230SD-W00C	SSOP24	1.8~5.5V	-40~125	NA	Tube	50	100	10	50000
PHY6230SC-W00C	SOP16	1.8~5.5V	-40~125	NA	Tube	50	100	10	50000
PHY6230SF-W00C	TSSOP8	1.8~5.5V	-40~125	NA	Tube	100	120	6	72000
PHY6230SG-W00C	SOP8	1.8~5.5V	-40~125	NA	Tube	100	120	6	72000
PHY6230QH-WE2I	QFN24	1.8~5.5V	-40~125	2kb	Reel	NA	NA	NA	5000/ Reel
PHY6230SC-WE2I	SOP16	1.8~5.5V	-40~125	2kb	Tube	50	100	10	50000
PHY6230SD-WE2I	SSOP24	1.8~5.5V	-40~125	2kb	Tube	50	100	10	50000
PHY6230SJ-WE2I	MSOP10	1.8~5.5V	-40~125	2kb	Tube	50	100	10	50000

Table 26: Order Code

10 Package Dimensions

Note: dimensions are in mm, angels are in degree.

10.1 SSOP24

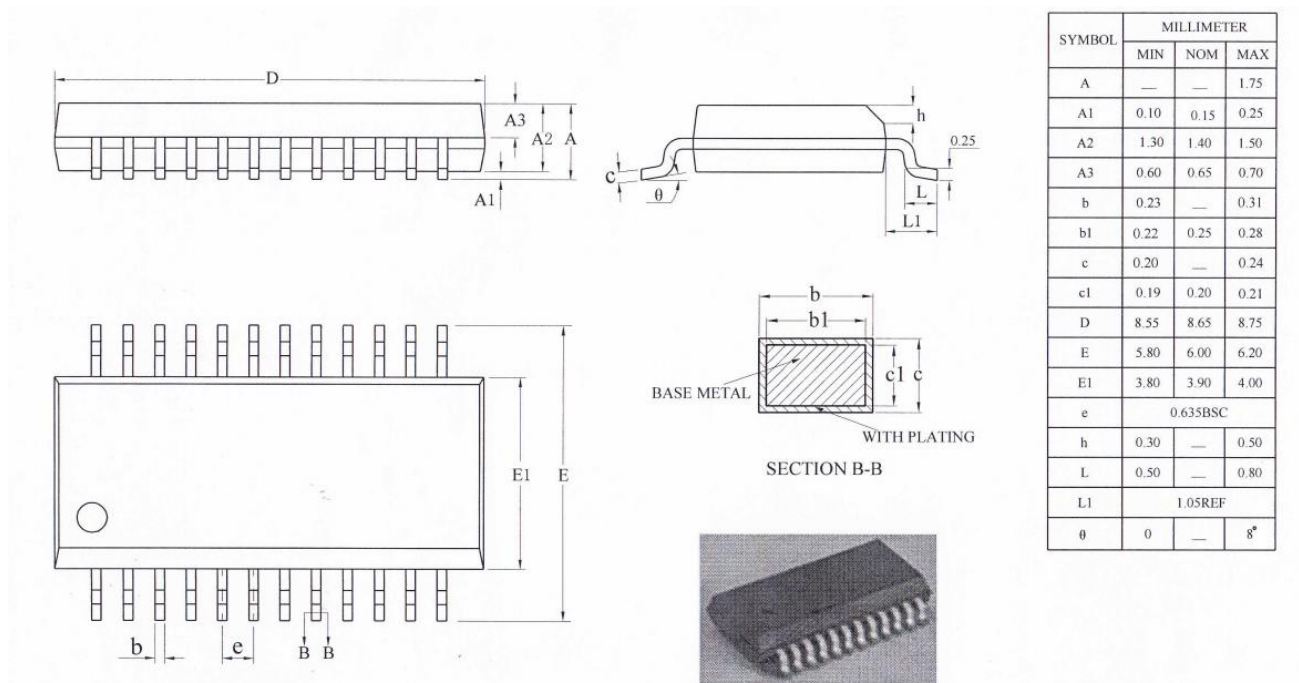


Figure 19: SSOP24 Package Dimensions

10.2 SOP16

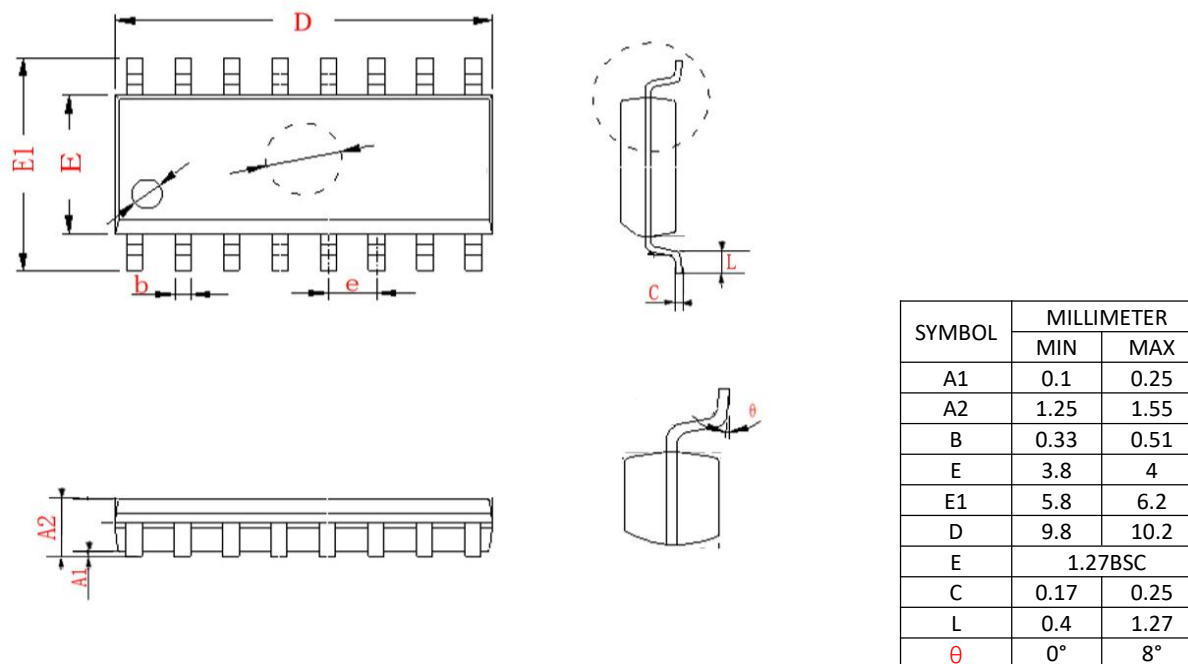


Figure 20: SOP16 Package Dimensions

10.3 TSSOP8

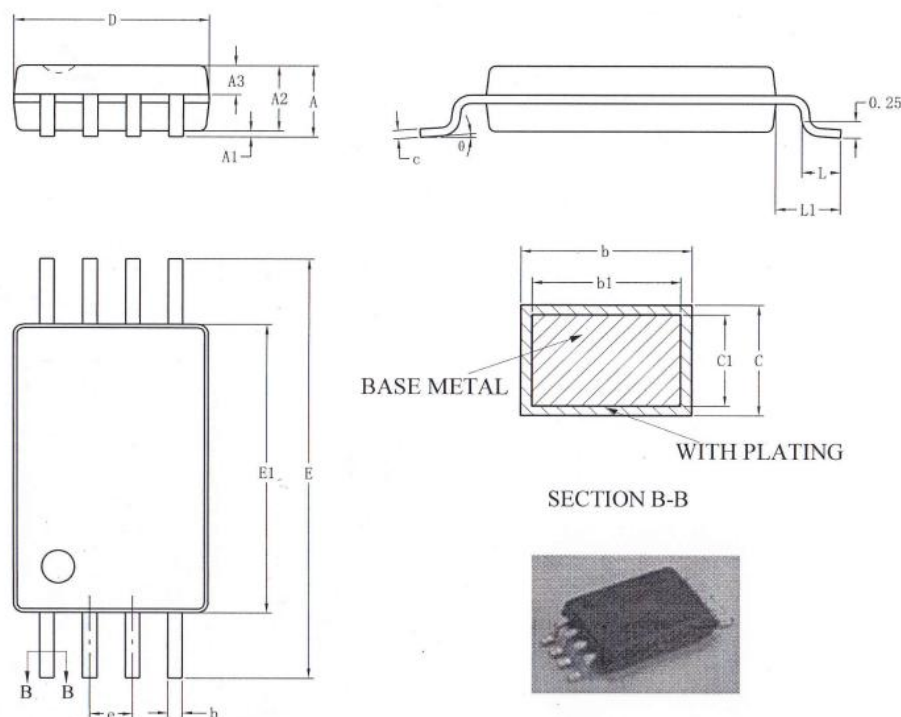


Figure 21: TSSOP8 Package Dimensions

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	—	—	1.20
A1	0.05	—	0.15
A2	0.90	1.00	1.05
A3	0.39	0.44	0.49
b	0.20	—	0.28
b1	0.19	0.22	0.25
c	0.13	—	0.17
c1	0.12	0.13	0.14
D	2.90	3.00	3.10
E1	4.30	4.40	4.50
E	6.20	6.40	6.60
e	0.65BSC		
L	0.45	—	0.75
L1	1.00REF		
θ	0	—	8°

10.4 SOP8





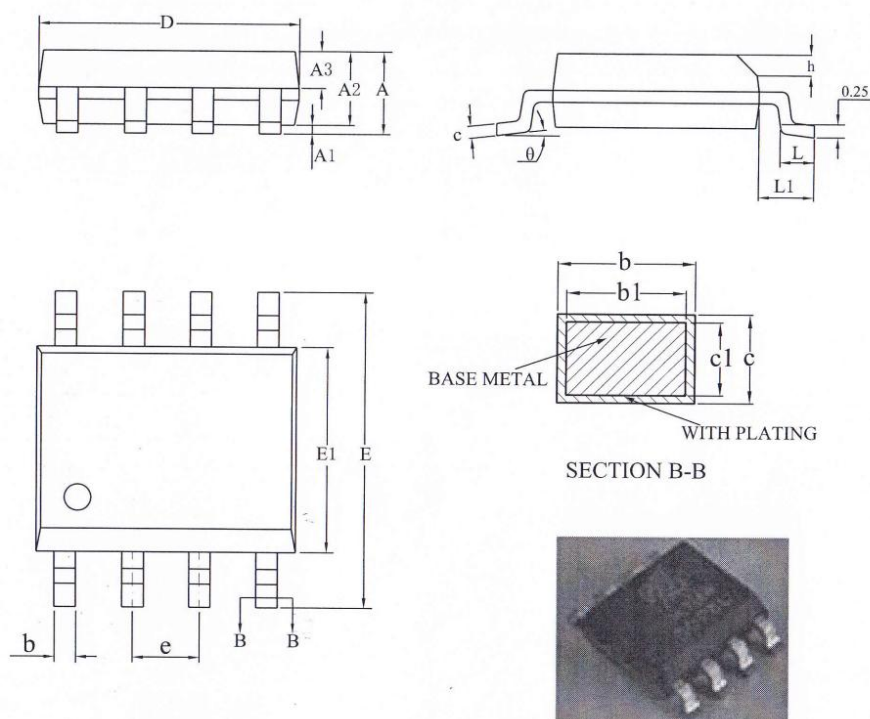


Figure 22: SOP8 Package Dimensions

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	—	—	1.75
A1	0.10	—	0.225
A2	1.30	1.40	1.50
A3	0.60	0.65	0.70
b	0.39	—	0.47
b1	0.38	0.41	0.44
c	0.20	—	0.24
c1	0.19	0.20	0.21
D	4.80	4.90	5.00
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.27BSC		
h	0.25	—	0.50
L	0.50	—	0.80
L1	1.05REF		
θ	0	—	8°


10.5 MSOP10

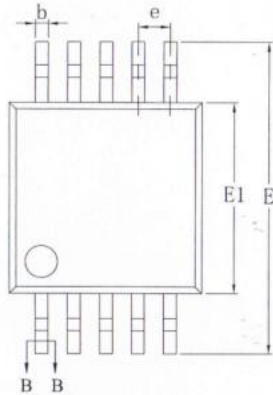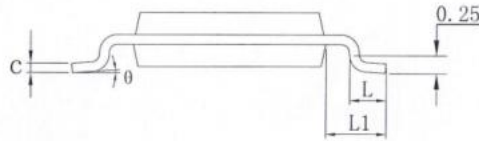


SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	—	—	1.10
A1	0.05	—	0.15
A2	0.75	0.85	0.95
A3	0.30	0.35	0.40
b	0.18	—	0.26
b1	0.17	0.20	0.23
c	0.15	—	0.19
c1	0.14	0.15	0.16
D	2.90	3.00	3.10
E	4.70	4.90	5.10
E1	2.90	3.00	3.10
e	0.50BSC		
L	0.40	—	0.70
L1	0.95REF		
θ	0	—	8°

Figure 23: MSOP10 Package Dimensions


10.6 PHY6230QH QFN24

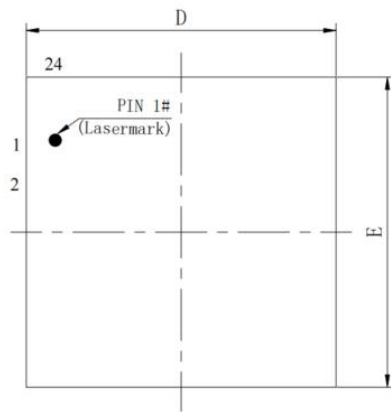

TOP VIEW

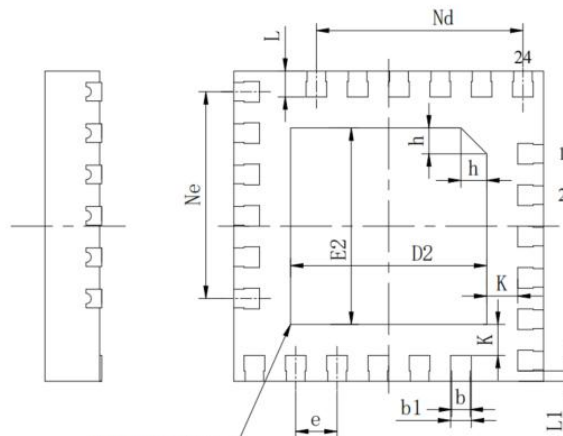

BOTTOM VIEW

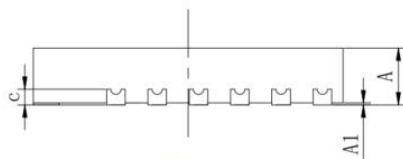

SIDE VIEW

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.50	0.55	0.60
	0.80	0.85	0.90
A1	0	0.02	0.05
b	0.15	0.20	0.25
b1	0.18REF		
c	0.152REF		
D	2.90	3.00	3.10
D2	1.80	1.90	2.00
e	0.40BSC		
Ne	2.00BSC		
Nd	2.00BSC		
E	2.90	3.00	3.10
E2	1.80	1.90	2.00
L	0.20	0.25	0.30
L1	0.10REF		
h	0.20	0.25	0.30
K	0.30REF		



特殊设计：引脚根部缩小0.18REF

Figure 24: SOP8 Package Dimensions

11 Sample Application and Layout Guide

11.1 Sample Application

11.1.1 SSOP24

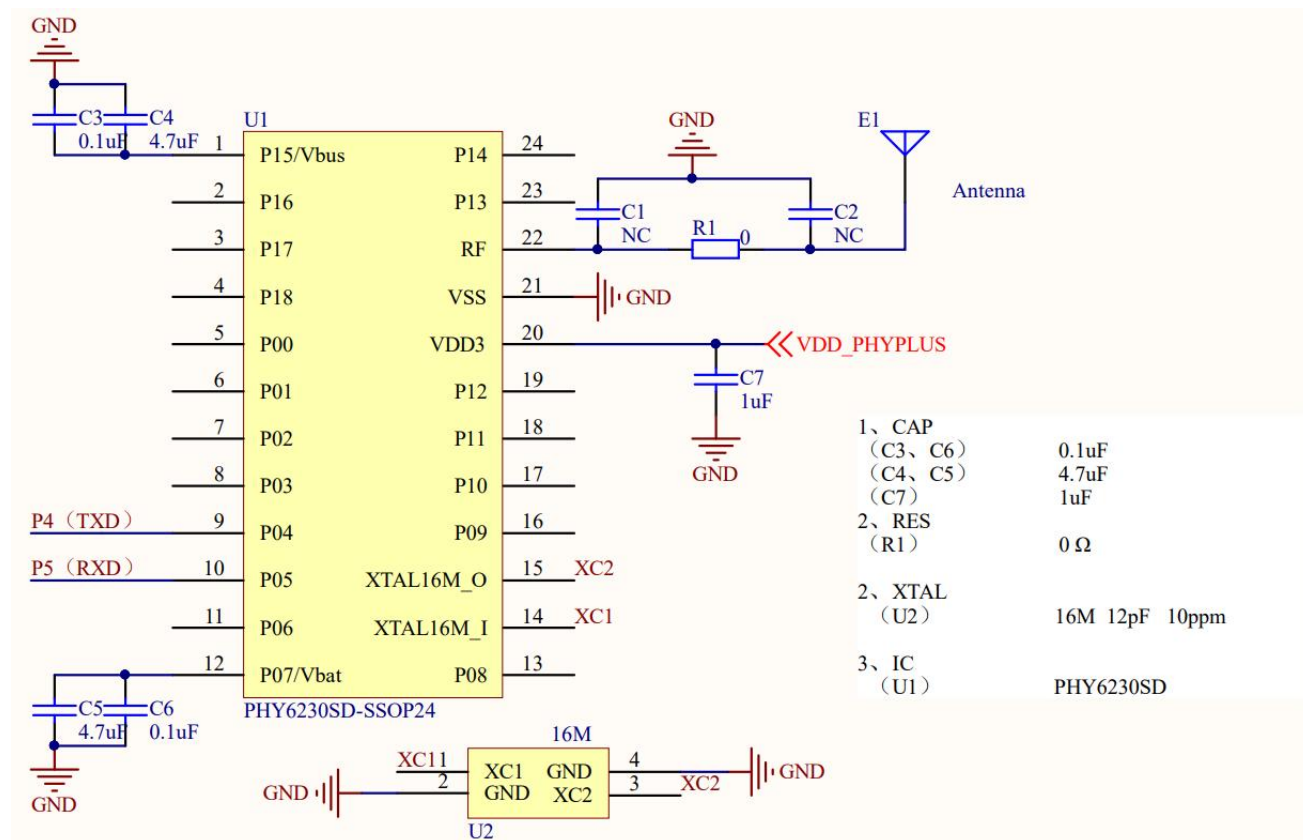


Figure 25: Sample Application of SSOP24

11.1.2 SOP16

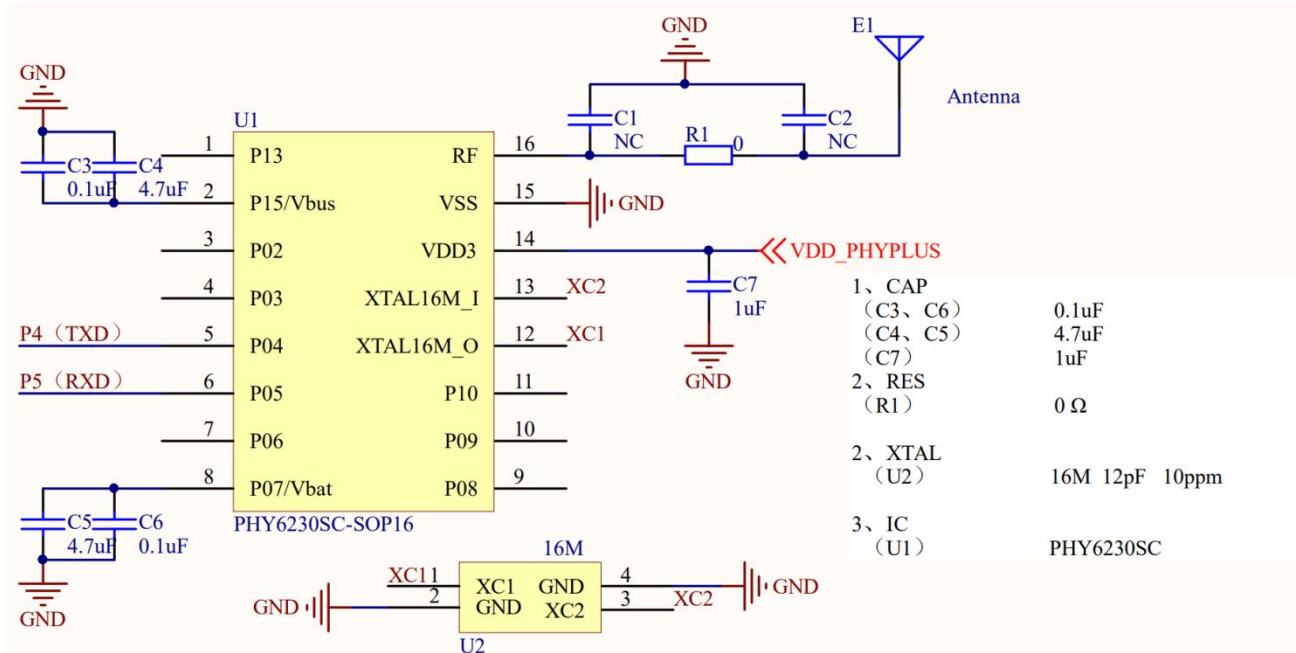


Figure 26: Sample Application of SOP16

11.1.3 TSSOP8/SOP8

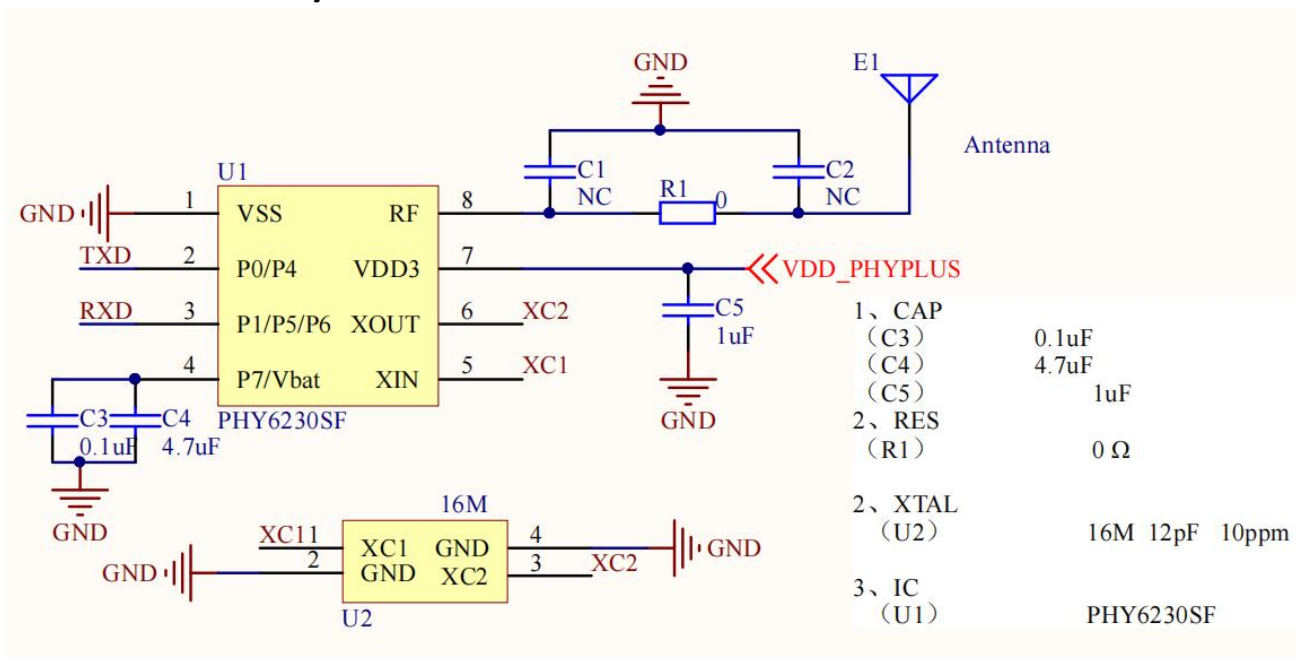


Figure 27: Sample Application of TSSOP8/SOP8

11.1.4 MSOP10

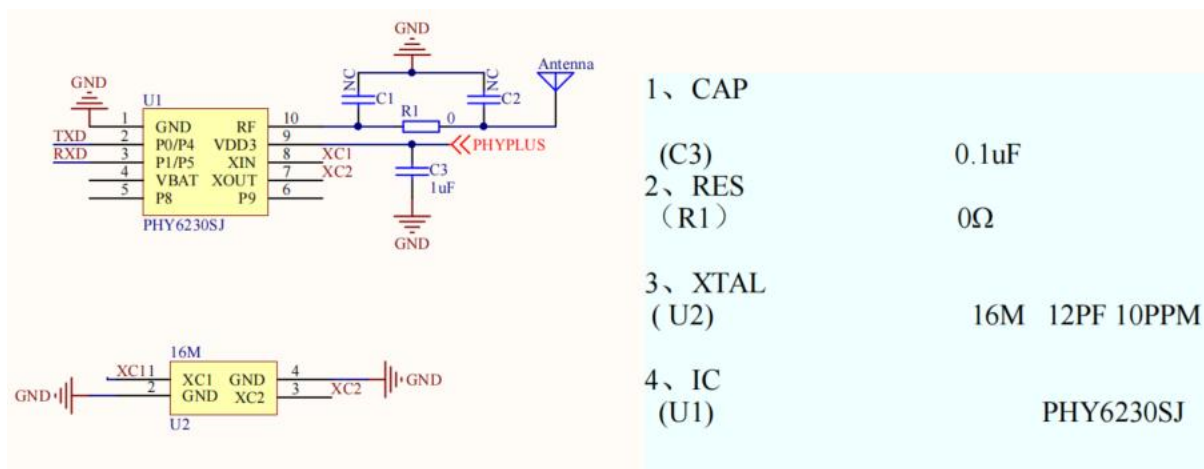


Figure 28: Sample Application of MSOP10

11.2 Sample Application (PHY6230QH QFN24)

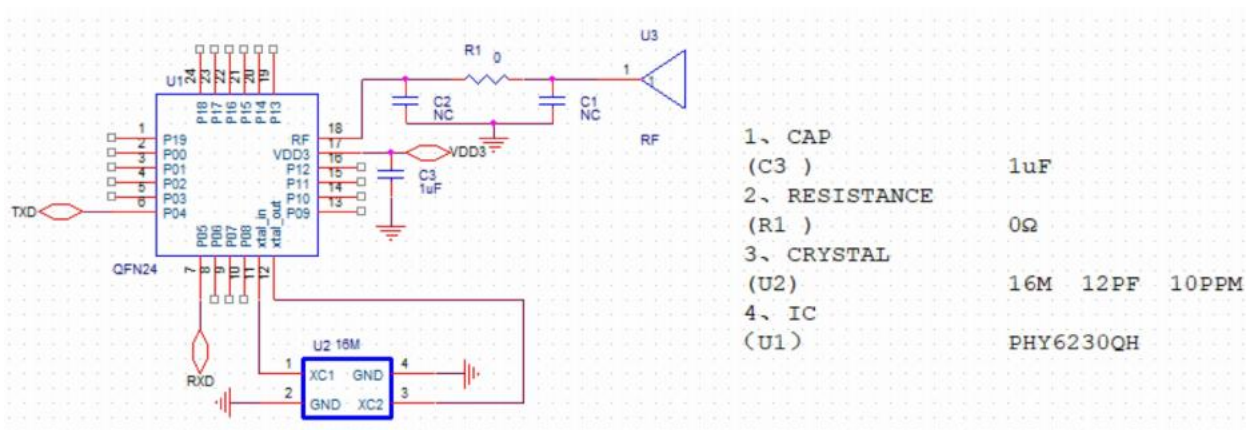


Figure 29: Sample application of PHY6230QH QFN24

11.3 Layout Guide

11.3.1 Placement

1. RF matching/Loop filter leading to antenna should be isolated from any other AC/DC signal as much as possible;
2. Xtal/OSC clock is a noise source to other circuits, keep clock trace as short as possible and away from any important area;
3. LDO's are sensitive and could be easily contaminated, care should be taken for the environment;
4. Antenna is the main RF radiation point, other important blocks should be shielded or away from this area.

RF traces

1. Define RF line width with given dielectric thickness (thickness of PCB dielectric layer to ground plain) to achieve 50ohm impedance; this is mainly for the RF line connecting to matching/loop filter and antenna.
2. Differential traces should be kept in the same length and component should be placed



symmetrically;

3. Certain length of RF trace should be treated as part of RF matching.

11.3.2 Bypass Capacitor

1. Each VDD pin needs a bypass capacitor to release chip internal noise and block noise from power supply.
2. For power traces, bypass capacitors should be placed as close as possible to VDD pins.
3. Use one large and one small capacitor when the pin needs two capacitors. Typically the capacitance of the larger capacitor is about 100 times of that of the smaller one. The smaller capacitor usually has better quality factor than the larger one. Place the larger capacitor closer to the pin.
4. The capacitors of Loop filter need to have larger clearance to prevent EMC/EMI issue.
5. Ground via should be close to the Capacitor GND side, and away from strong signals.

11.3.3 Layer Definition

1. Normally 4 layer PCB is recommended.
2. RF trace must be on the surface layer, i.e. top layer or bottom.
3. The second layer of RF PCB must be "Ground" layer, for both signal ground and RF reference ground, DO NOT put any other trace or plane on second layer, otherwise "antenna effect" will complicate debug process.
4. Power plane generally is on the 3rd layer.
5. Bottom layer is for "signal" layer.
6. If two layer PCB is used, quality will degrade in general. More care needs to be taken. Try to maximize ground plane, avoid crossing of signal trace with other noise lines or VDD, shield critical signal line with ground plane, maximize bypass capacitor and number of ground vias.

11.3.4 Reference clock and trace

1. Oscillator signal trace is recommended to be on the 1st layer;
2. DO NOT have any trace around or across the reference clock (oscillator) trace.
3. Isolate the reference clock trace and oscillator by having more GND via around.
4. DO NOT have any other traces under the Oscillator.

11.3.5 Power line or plane

1. Whether to use power plain or power line depend on the required current, noise and layout condition. For RF chip, we generally suggest to use power line to bring power into IC pin. Line has parasitic inductance, which forms a low pass filter to reduce the noise traveling around PCB.
2. Add more conductive via on the current source, it will increase max current limit and reduce inductance of via.
3. Add some capacitor alone the power trace when power line travels a long distance.
4. DO NOT place power line or any plane under RF trace or oscillator and its clock trace, the strong clock or RF signal would travel with power line.

11.3.6 Ground Via

1. Ground Via must be as close to the ground pad of bypass capacitor as possible, too much distance between via and ground pad will reduce the effect of bypass capacitor.
2. Having as many ground via as possible.
3. Place ground via around RF trace, the RF trace should be shielded with via trail.