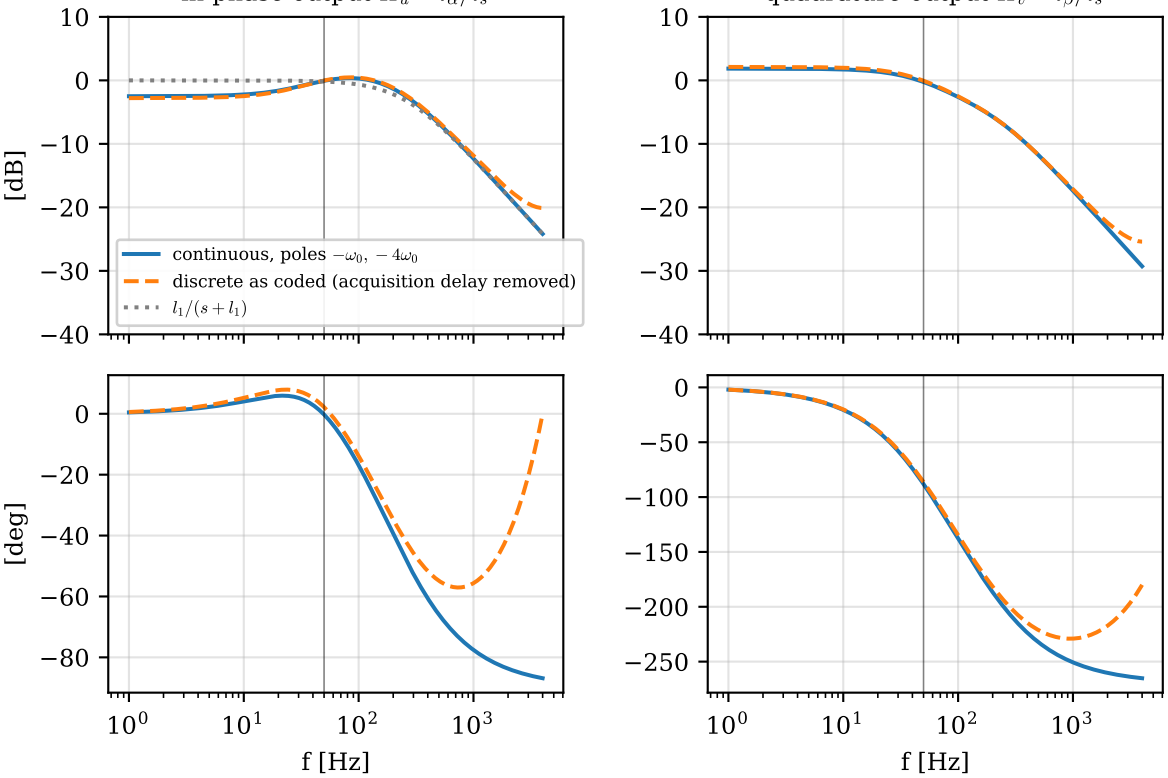
in-phase output $H_u = \hat{i}_\alpha / i_s$
quadrature output $H_v = \hat{i}_\beta / i_s$
[dB]
[deg]
continuous, poles $-\omega_0, -4\omega_0$
discrete as coded (acquisition delay removed)
$l_1/(s+l_1)$
f [Hz]
f [Hz]