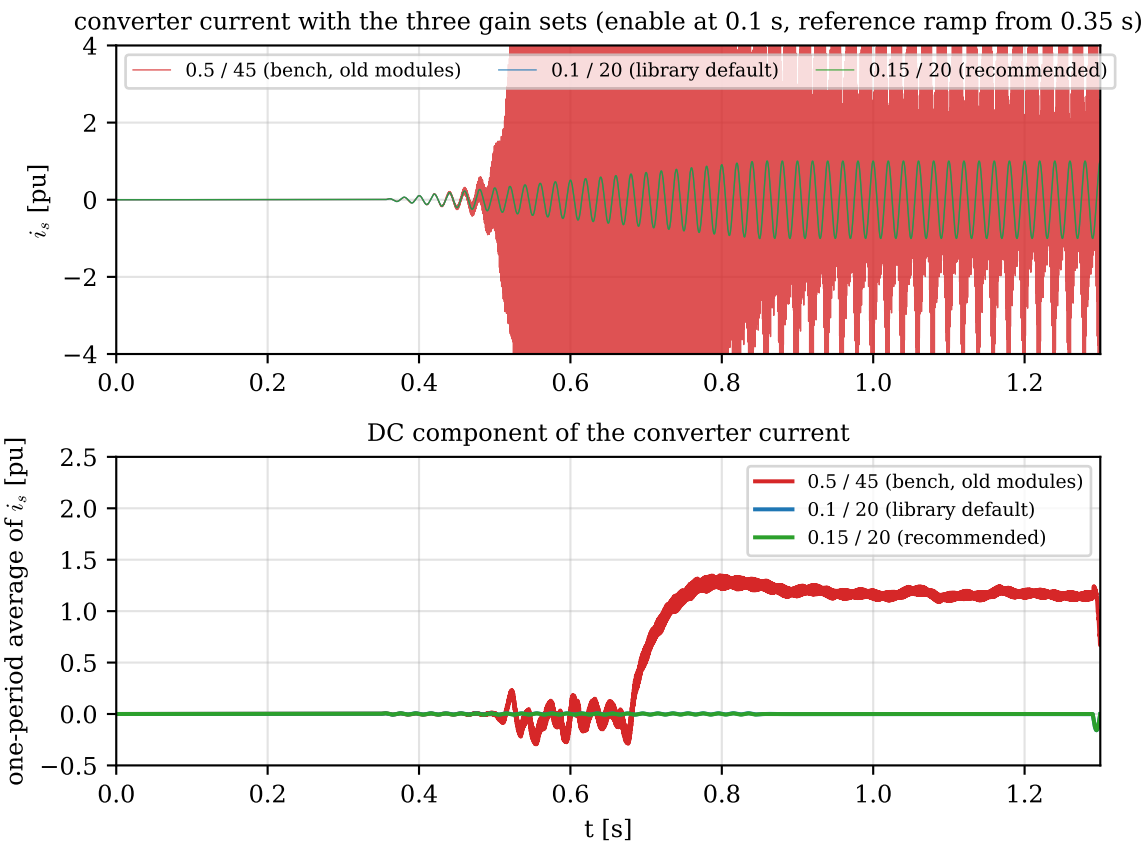

converter current with the three gain sets (enable at 0.1 s, reference ramp from 0.35 s)
0.5 / 45 (bench, old modules)
0.1 / 20 (library default)
0.15 / 20 (recommended)
i_s [pu]
4
2
0
−2
−4
0.0
0.2
0.4
0.6
0.8
1.0
1.2
DC component of the converter current
one-period average of i_s [pu]
2.5
2.0
1.5
1.0
0.5
0.0
−0.5
t [s]