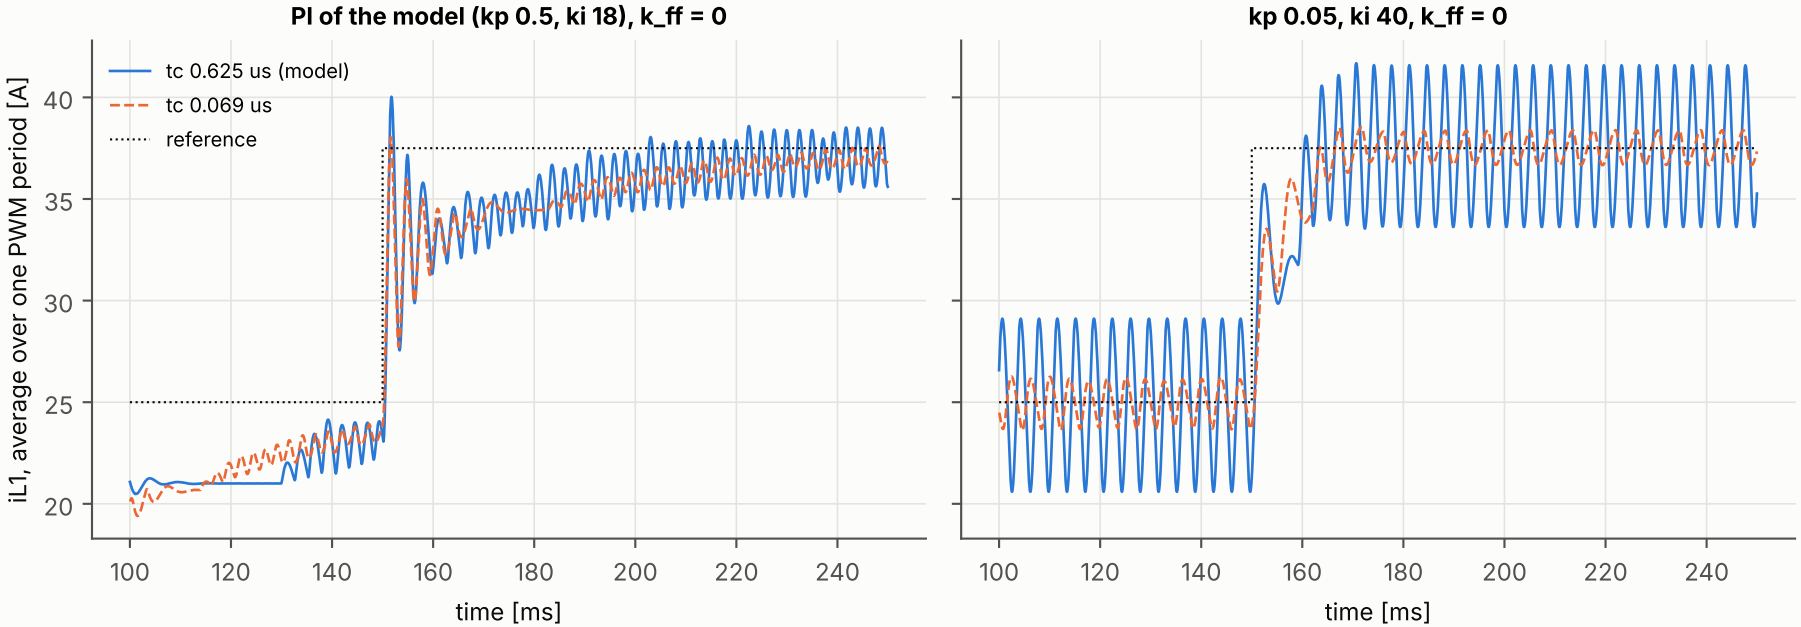Light load, reference 0.10 → 0.15 pu at 150 ms (no filter): the phase steps of the solver (0.9 deg at 0.625 us, 0.3 deg at 0.069 us)