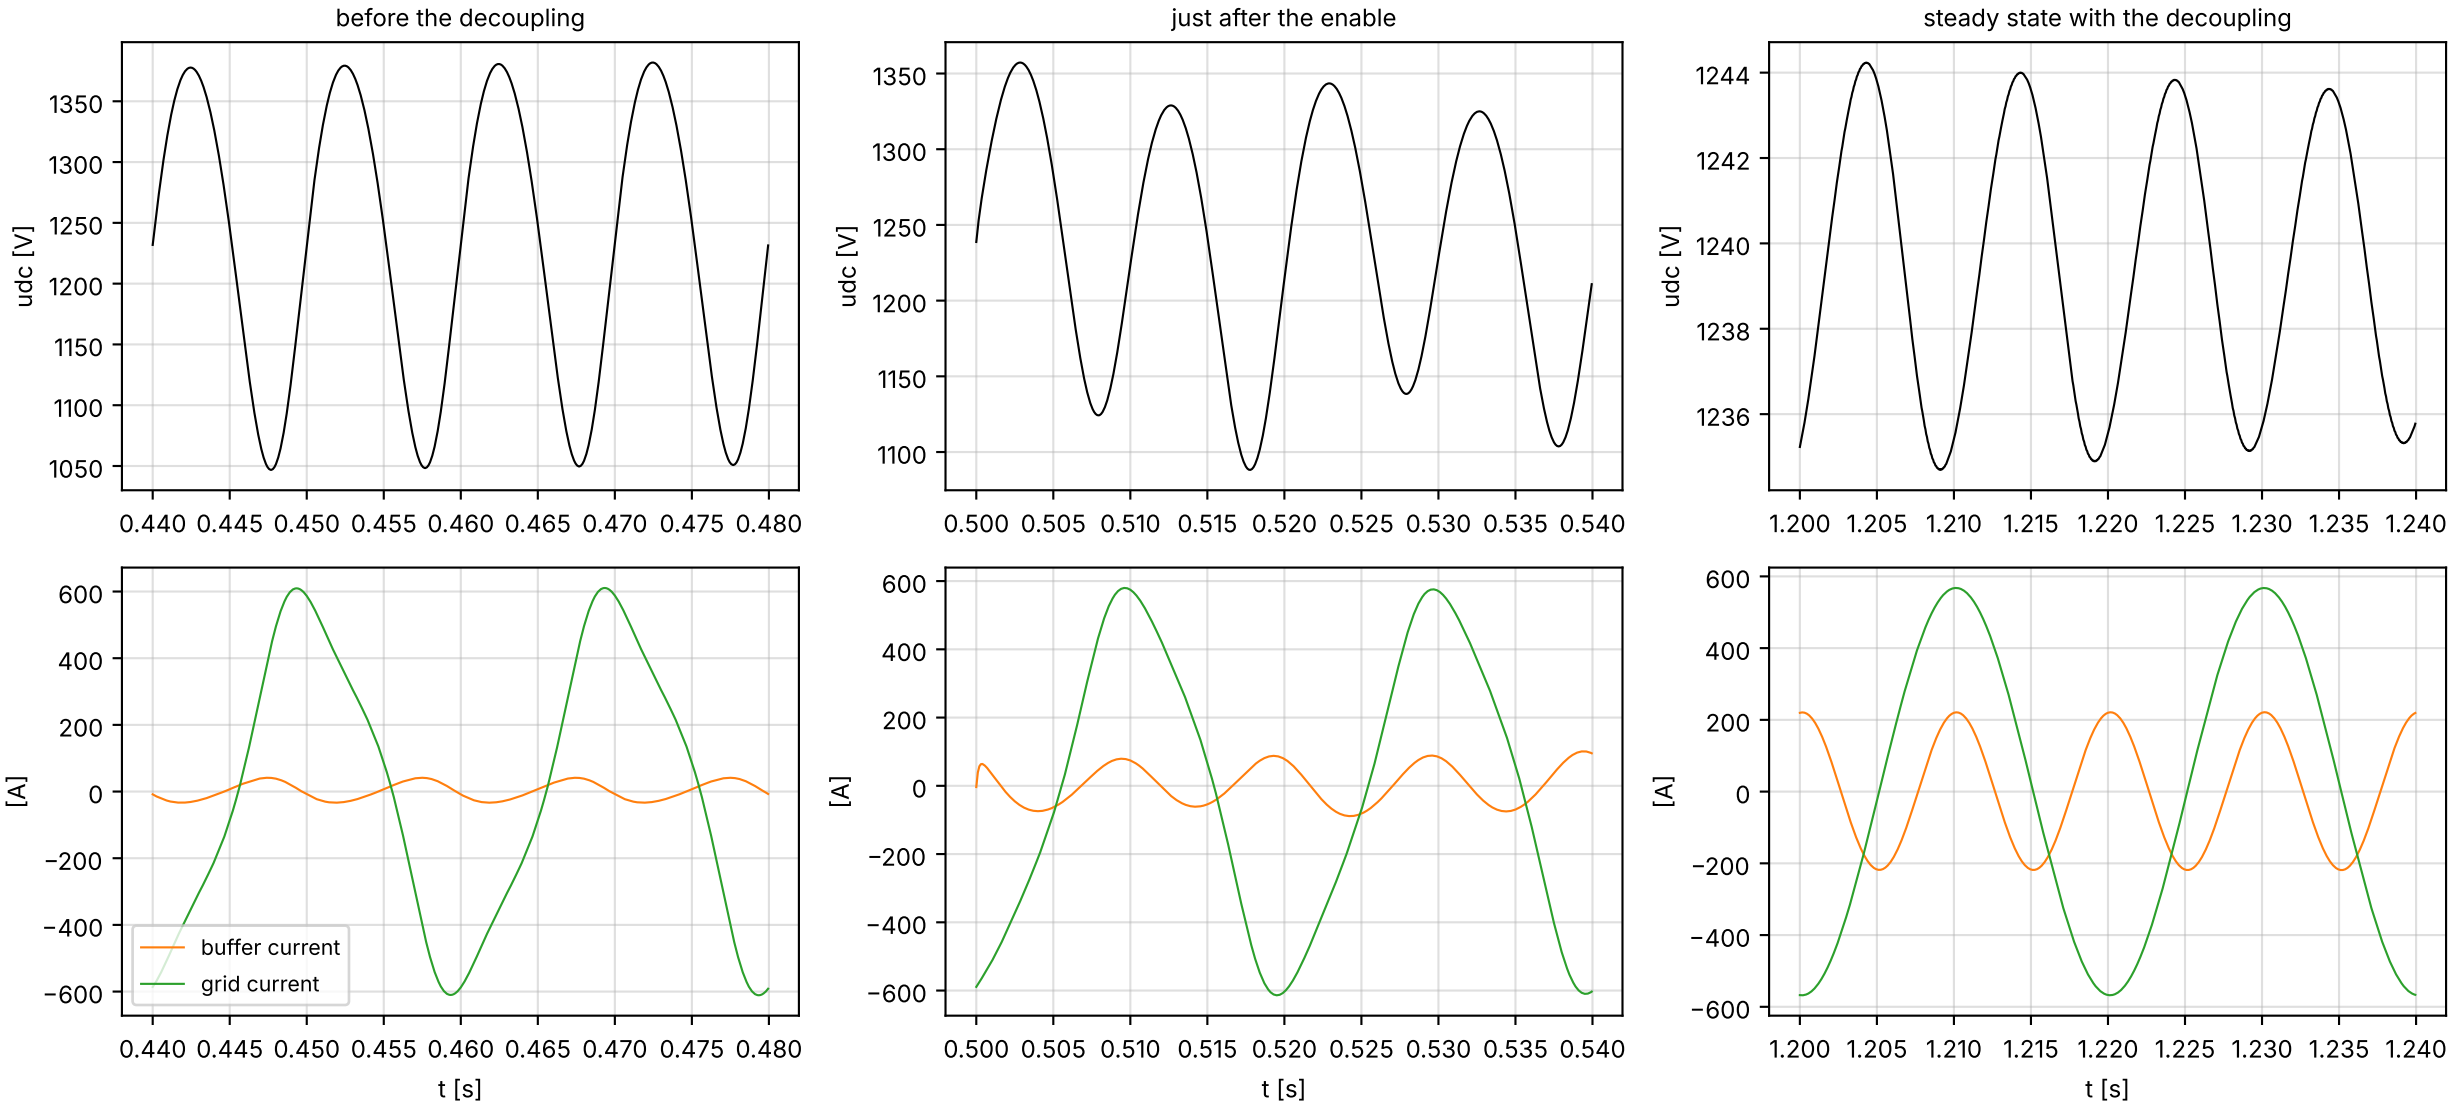
before the decoupling
just after the enable
steady state with the decoupling
udc [V]
[A]
t [s]
buffer current
grid current