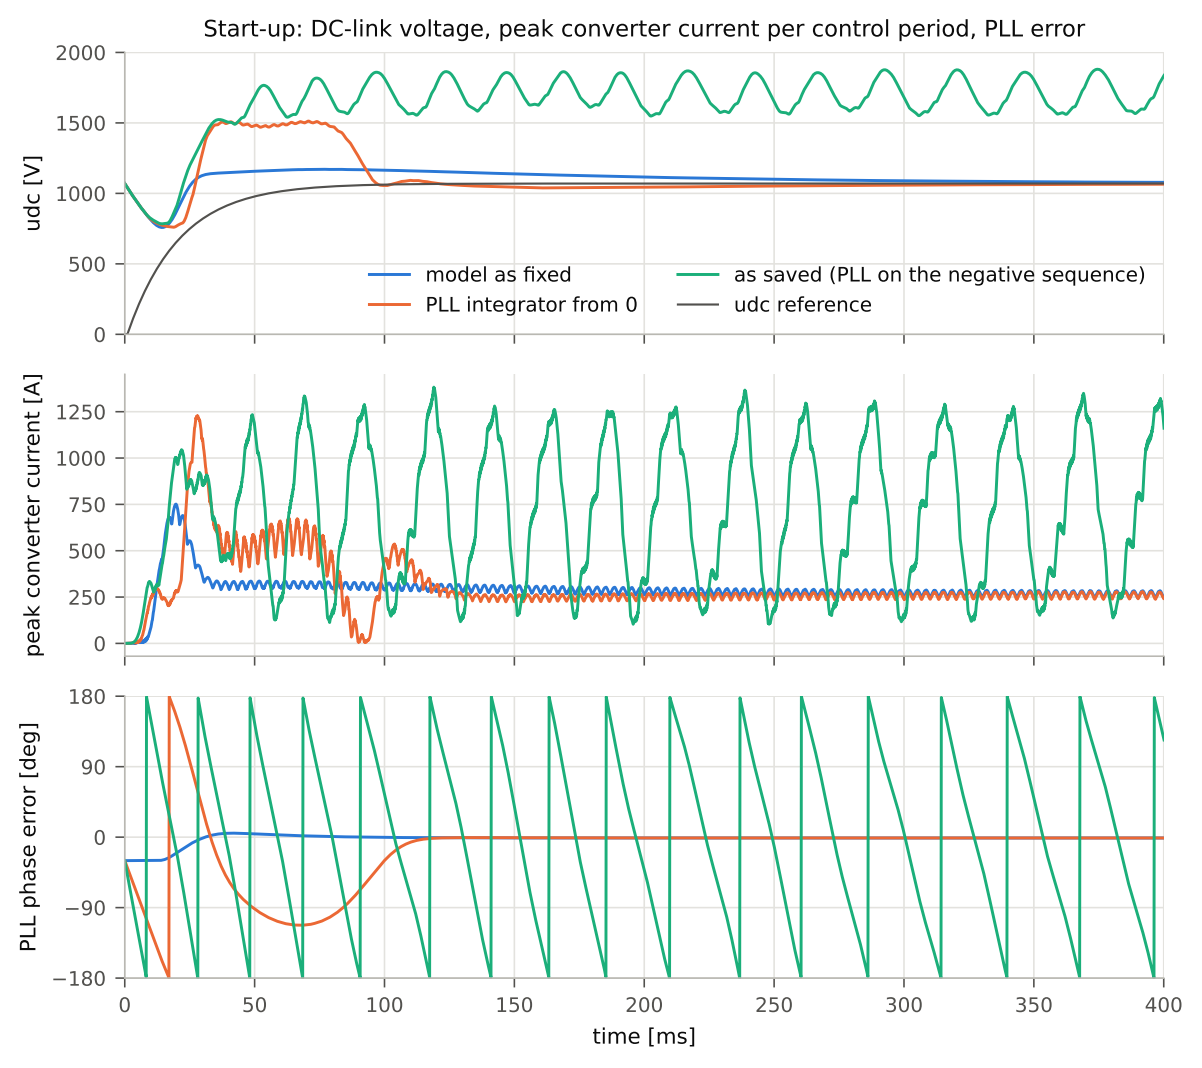

Start-up: DC-link voltage, peak converter current per control period, PLL error
udc [V]
peak converter current [A]
PLL phase error [deg]
time [ms]
model as fixed
PLL integrator from 0
as saved (PLL on the negative sequence)
udc reference