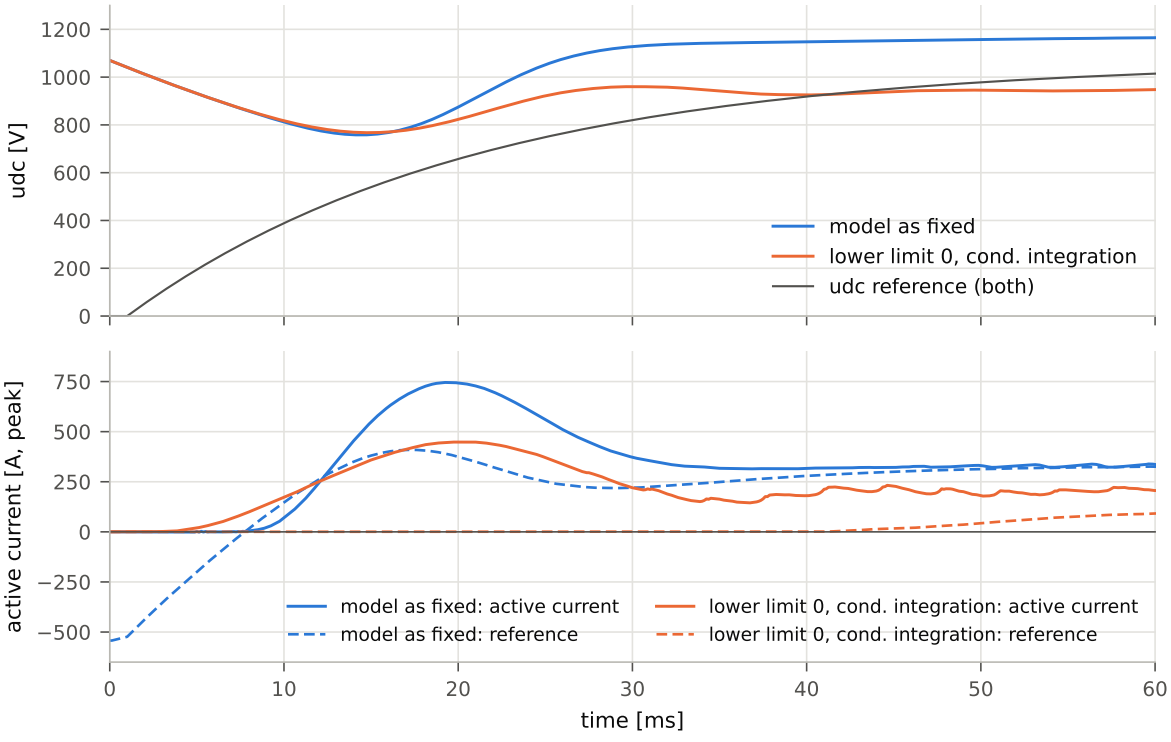
Start-up: DC voltage, output of the DC-voltage PI and active current (switched model)
udc [V]
1200
1000
800
600
400
200
0
model as fixed
lower limit 0, cond. integration
udc reference (both)
active current [A, peak]
750
500
250
0
−250
−500
model as fixed: active current
model as fixed: reference
lower limit 0, cond. integration: active current
lower limit 0, cond. integration: reference
0
10
20
30
40
50
60
time [ms]