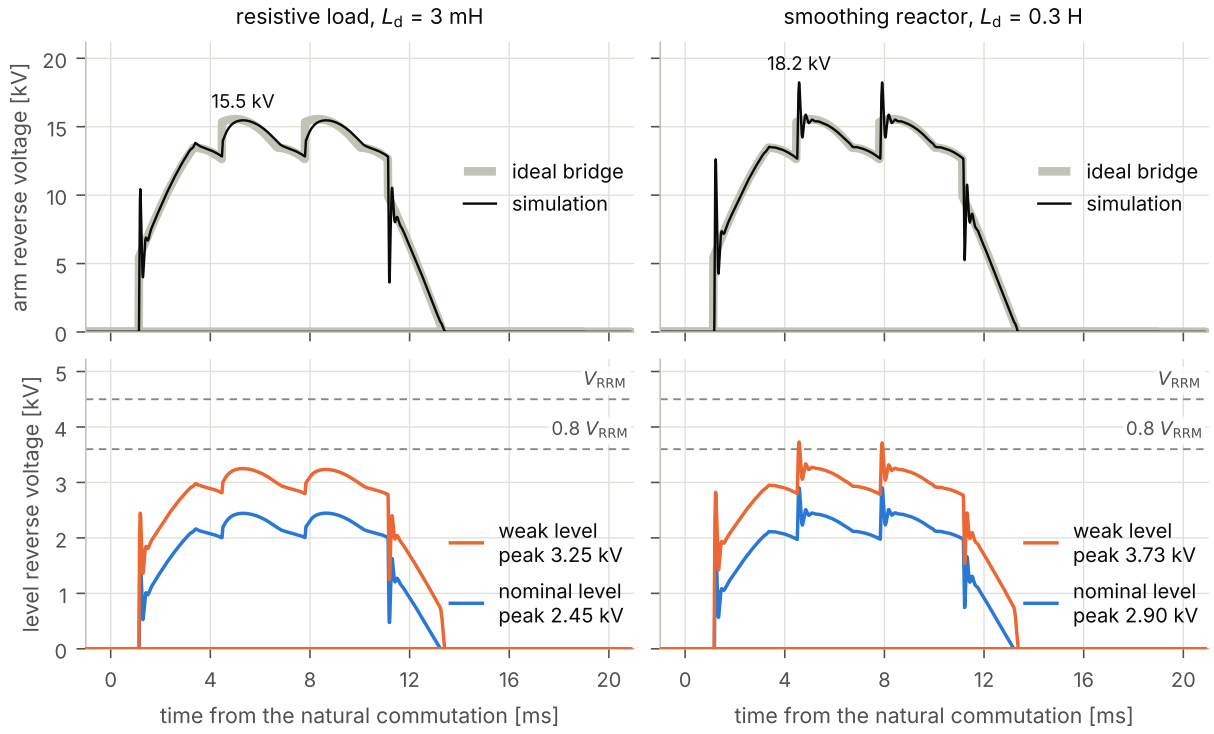
resistive load, $L_d$ = 3 mH
smoothing reactor, $L_d$ = 0.3 H
arm reverse voltage [kV]
15.5 kV
18.2 kV
ideal bridge
simulation
level reverse voltage [kV]
$V_{RRM}$
0.8 $V_{RRM}$
weak level
peak 3.25 kV
nominal level
peak 2.45 kV
weak level
peak 3.73 kV
nominal level
peak 2.90 kV
time from the natural commutation [ms]