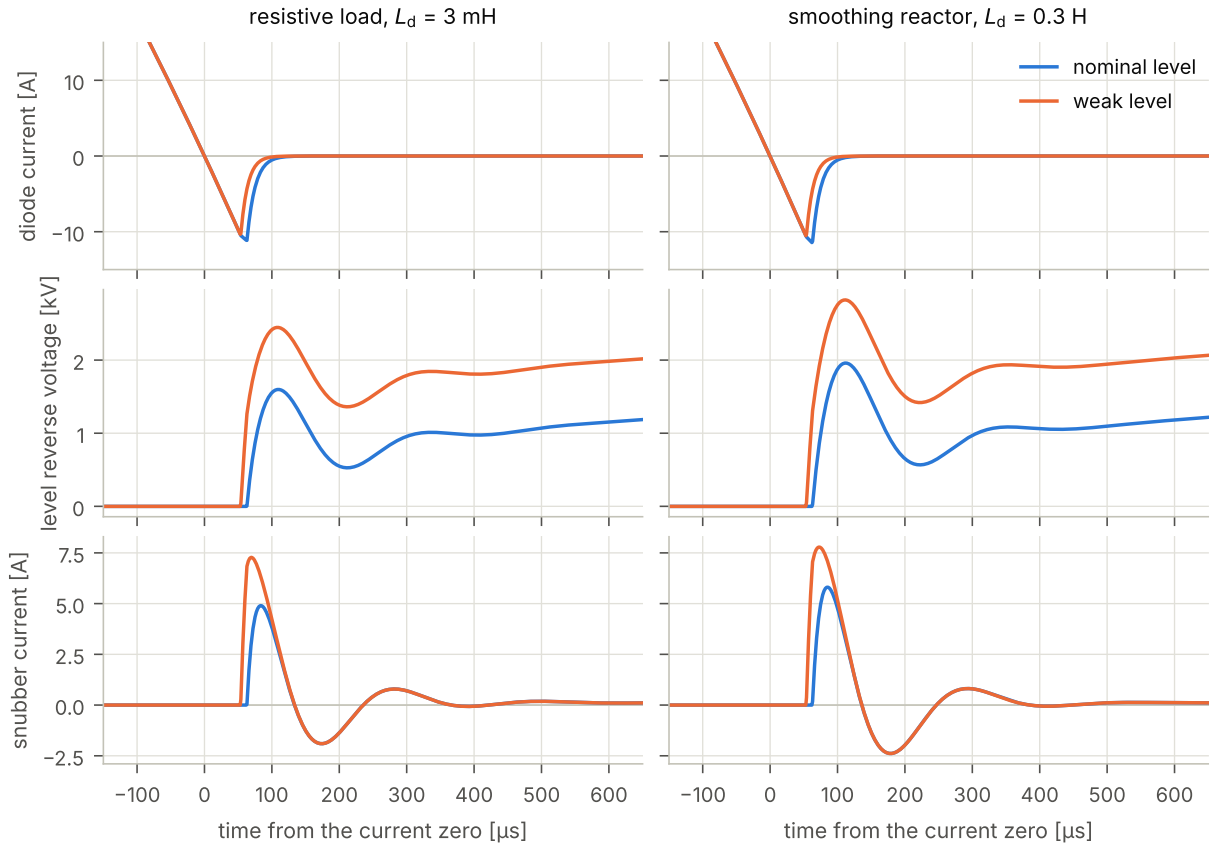
resistive load, L_d = 3 mH
smoothing reactor, L_d = 0.3 H
nominal level
weak level
diode current [A]
level reverse voltage [kV]
snubber current [A]
time from the current zero [µs]
time from the current zero [µs]