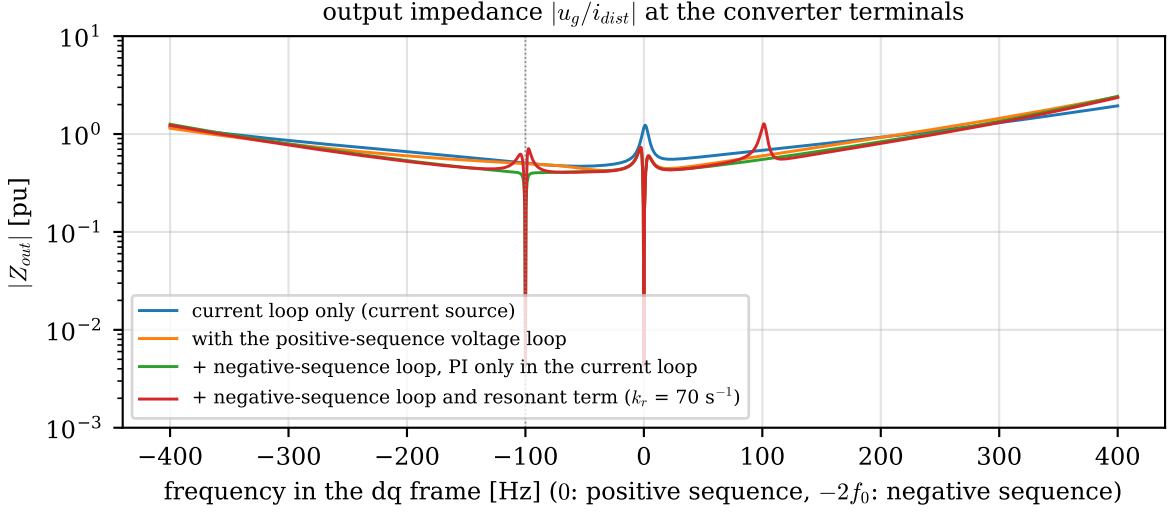
output impedance $|u_g/i_{dist}|$ at the converter terminals
$|Z_{out}|$ [pu]
10^{1}
10^{0}
10^{-1}
10^{-2}
10^{-3}
current loop only (current source)
with the positive-sequence voltage loop
+ negative-sequence loop, PI only in the current loop
+ negative-sequence loop and resonant term (k_r = 70 s^{-1})
−400
−300
−200
−100
0
100
200
300
400
frequency in the dq frame [Hz] (0: positive sequence, $-2f_0$: negative sequence)