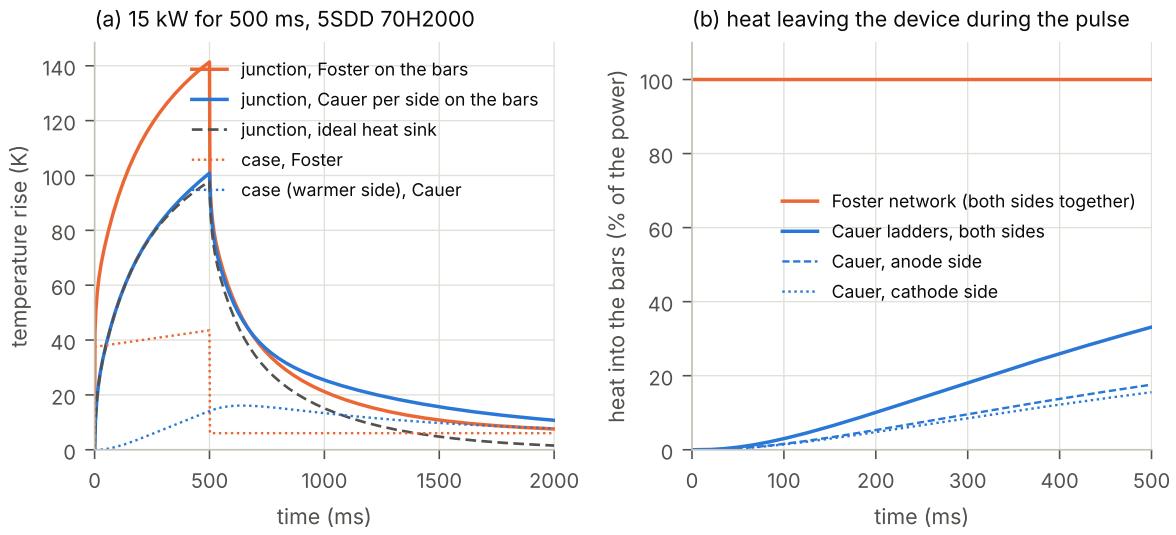
(a) 15 kW for 500 ms, 5SDD 70H2000
temperature rise (K)
time (ms)
junction, Foster on the bars
junction, Cauer per side on the bars
junction, ideal heat sink
case, Foster
case (warmer side), Cauer
(b) heat leaving the device during the pulse
heat into the bars (% of the power)
time (ms)
Foster network (both sides together)
Cauer ladders, both sides
Cauer, anode side
Cauer, cathode side