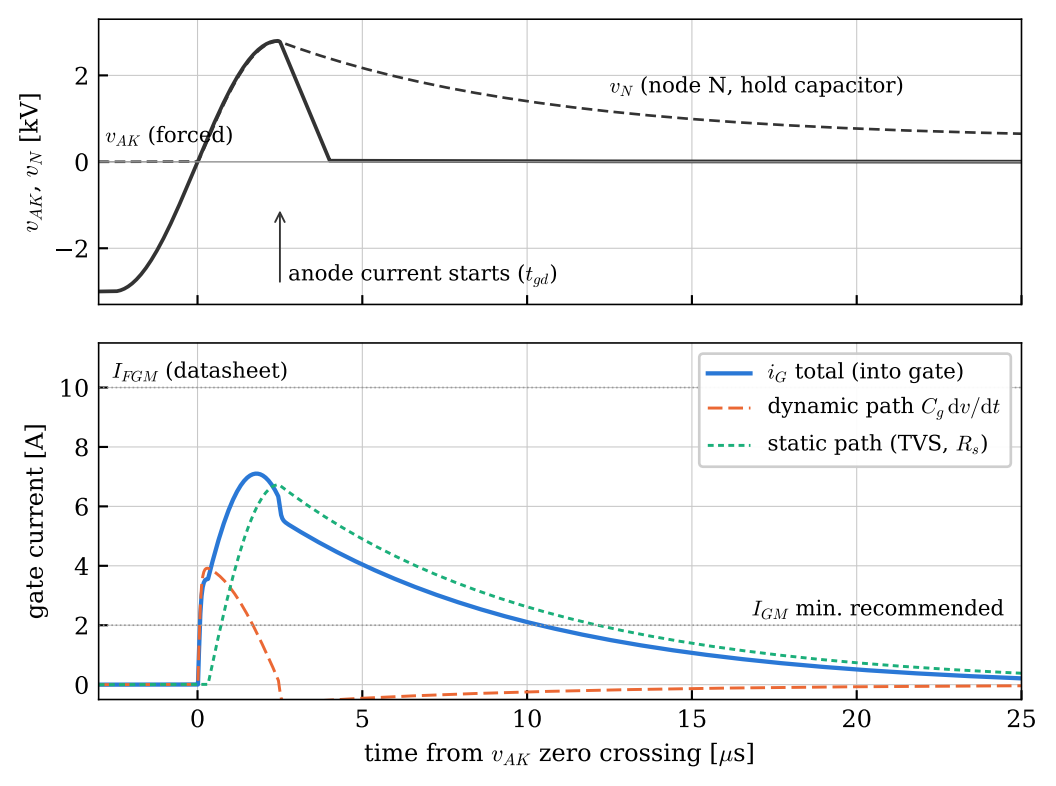
v_{AK}, v_N [kV]
2
0
−2
v_N (node N, hold capacitor)
v_{AK} (forced)
anode current starts (t_{gd})
gate current [A]
10
8
6
4
2
0
I_{FGM} (datasheet)
i_G total (into gate)
dynamic path $C_g\,\mathrm{d}v/\mathrm{d}t$
static path (TVS, R_s)
I_{GM} min. recommended
0
5
10
15
20
25
time from v_{AK} zero crossing [μs]