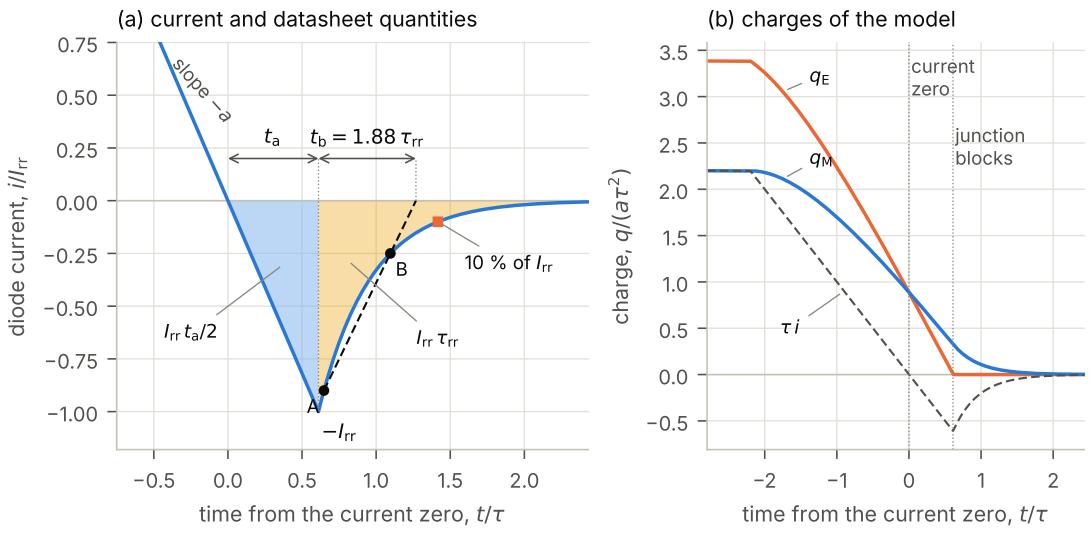

(a) current and datasheet quantities
slope −a
t_a
$t_b = 1.88\,\tau_{rr}$
B
10 % of I_{rr}
$I_{rr}\,t_a/2$
$I_{rr}\,\tau_{rr}$
A
$-I_{rr}$
diode current, i/I_{rr}
time from the current zero, t/τ
(b) charges of the model
current zero
junction blocks
q_E
q_M
$\tau\,i$
charge, $q/(a\tau^2)$
time from the current zero, t/τ