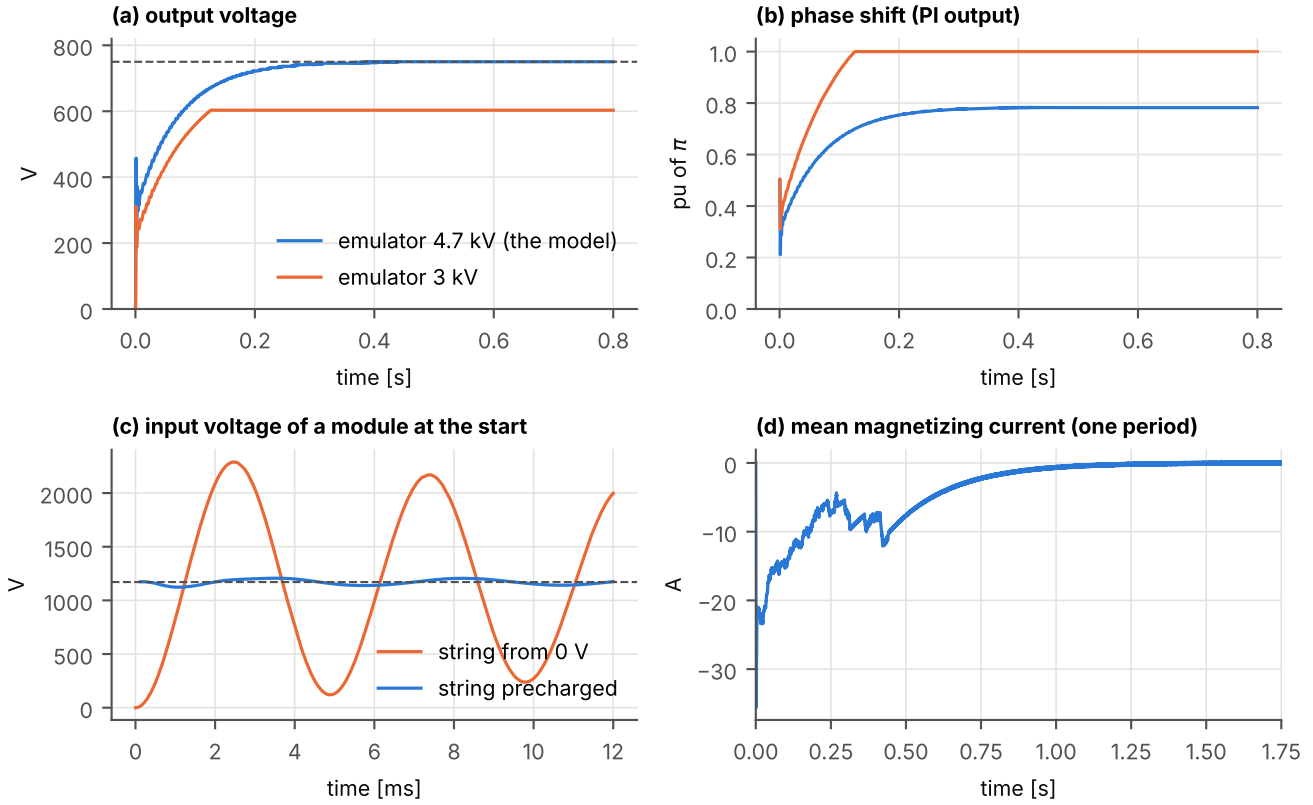

(a) output voltage
V
time [s]
emulator 4.7 kV (the model)
emulator 3 kV
(b) phase shift (PI output)
pu of π
time [s]
(c) input voltage of a module at the start
V
time [ms]
string from 0 V
string precharged
(d) mean magnetizing current (one period)
A
time [s]