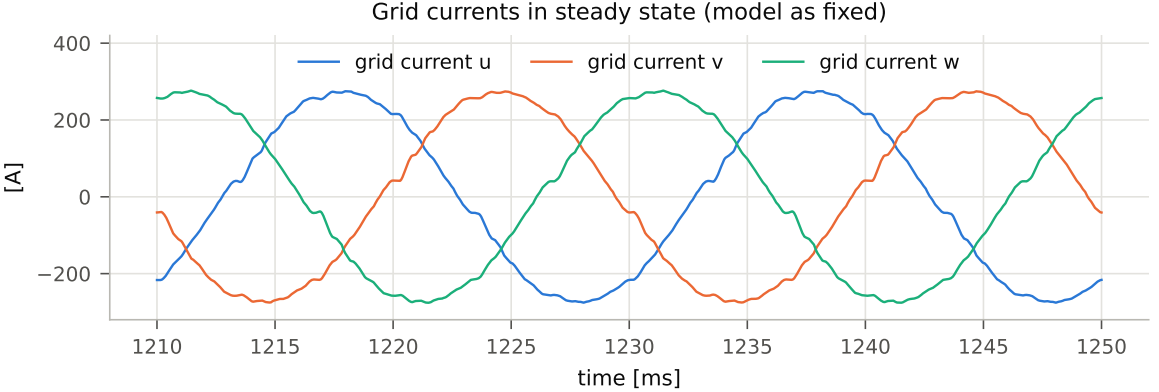
Grid currents in steady state (model as fixed)
grid current u
grid current v
grid current w
400
200
0
−200
[A]
1210
1215
1220
1225
1230
1235
1240
1245
1250
time [ms]

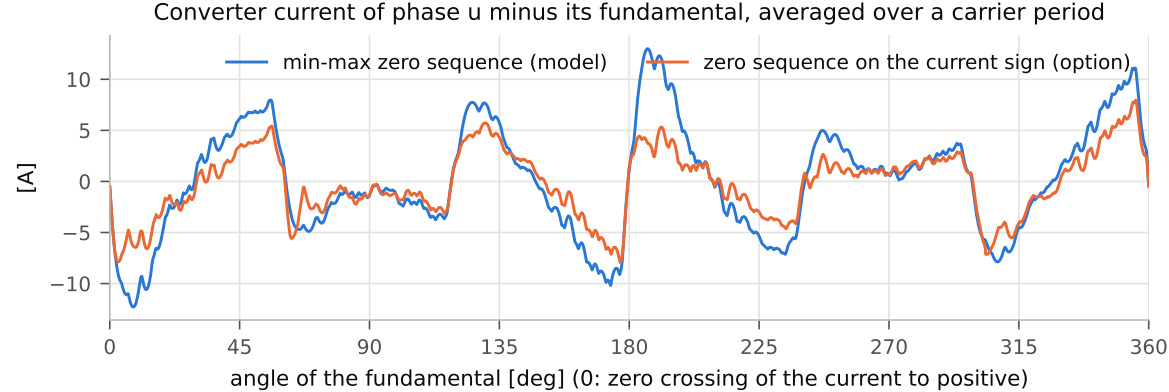
Converter current of phase u minus its fundamental, averaged over a carrier period
min-max zero sequence (model)
zero sequence on the current sign (option)
10
5
0
−5
−10
[A]
0
45
90
135
180
225
270
315
360
angle of the fundamental [deg] (0: zero crossing of the current to positive)