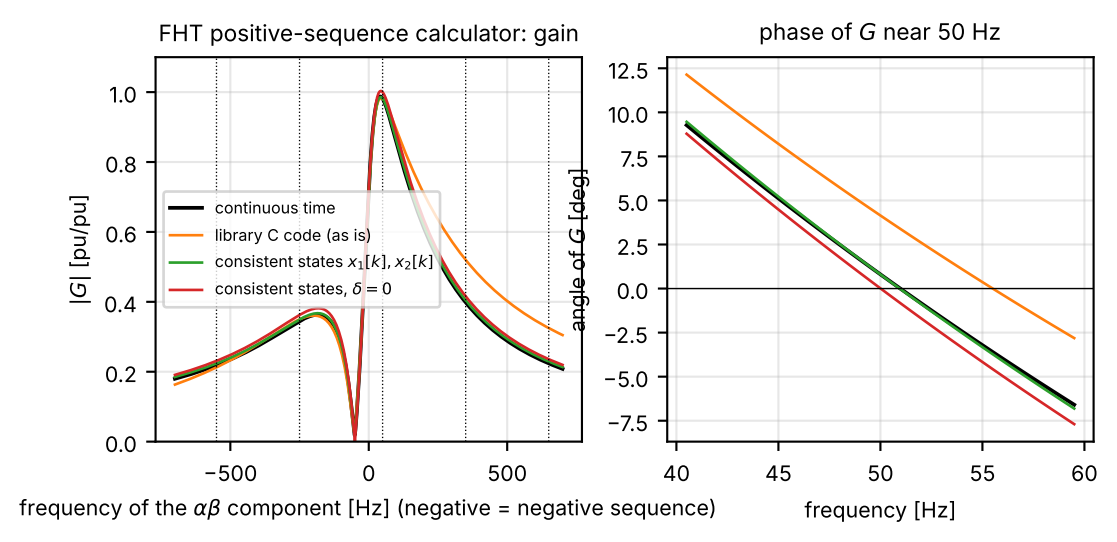
FHT positive-sequence calculator: gain
|G| [pu/pu]
1.0
0.8
0.6
0.4
0.2
0.0
−500
0
500
frequency of the αβ component [Hz] (negative = negative sequence)
continuous time
library C code (as is)
consistent states $x_1[k]$, $x_2[k]$
consistent states, $\delta = 0$
phase of G near 50 Hz
angle of G [deg]
12.5
10.0
7.5
5.0
2.5
0.0
−2.5
−5.0
−7.5
40
45
50
55
60
frequency [Hz]