

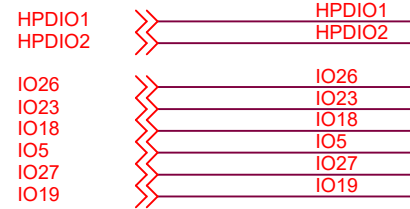


sd card slot

IoRaWAN

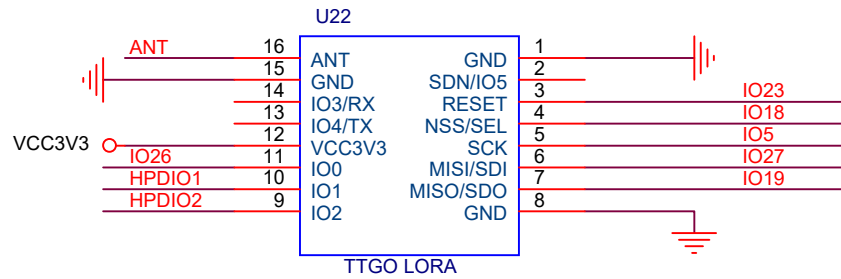


IO23=RESET
IO18=NSS/SEL
IO5=SCK
IO27=MOSI/SDI
IO19=MISO/SDO
IO26=DI0/IO0

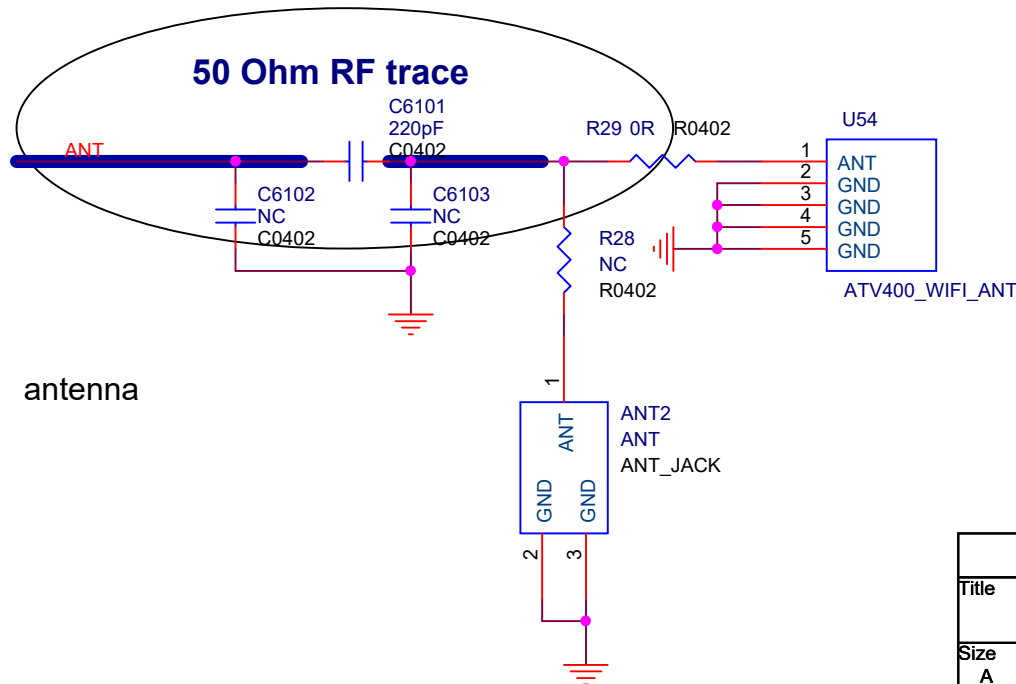

Title		
T3_V1.6		
Size	Document Number	Rev
A	TTGO LORA	V1.6
Date:	Wednesday, January 16, 2019	Sheet 2 of 4

接口配置方法：
 四线SPI接口焊接：R3,R4
 三线SPI接口焊接：R2,R3
 IIC接口焊接：R1,R4,R6,R7,R8
 R8 可不焊接，官方手册要求焊接


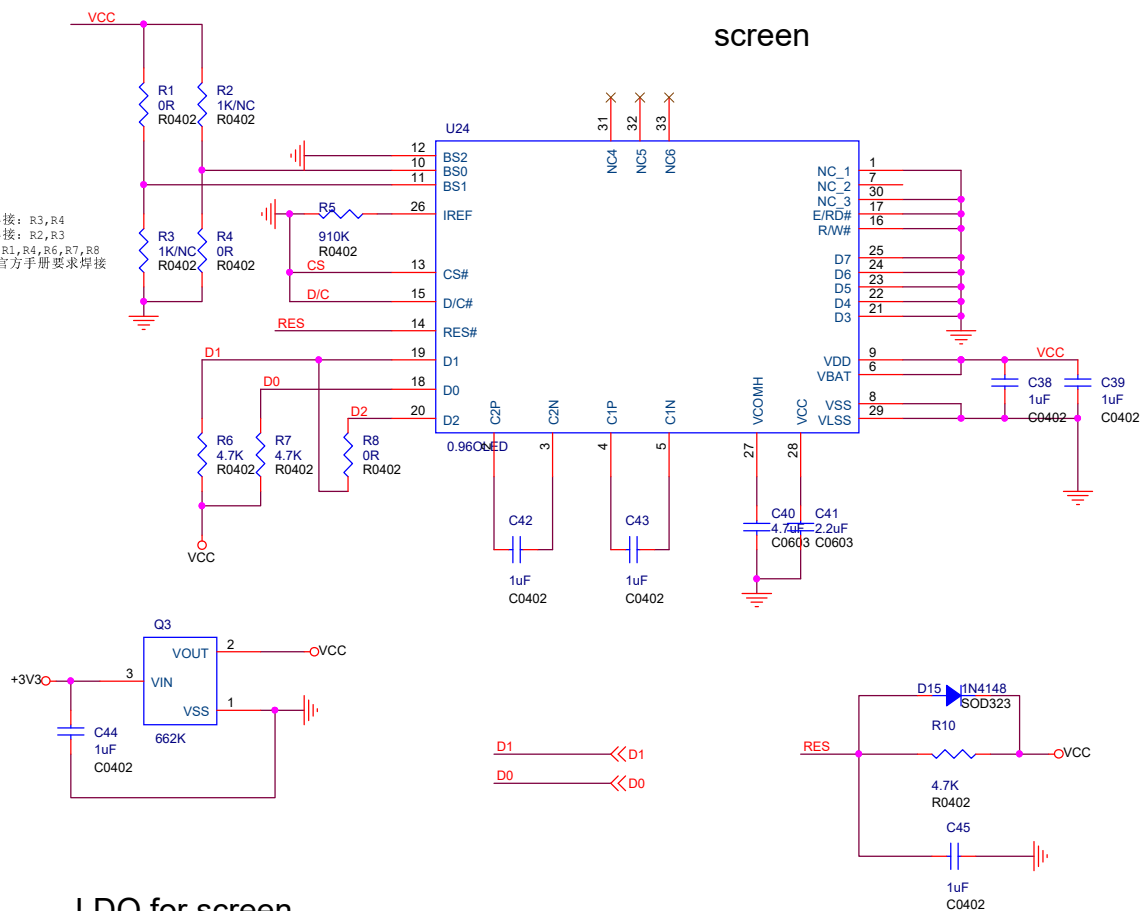


required part for screen


Title			T3_V1.6	
Size	Document Number			Rev
B	OLED			V1.6
Date:	Wednesday, January 16, 2019	Sheet	3	of 4



usb to serial port

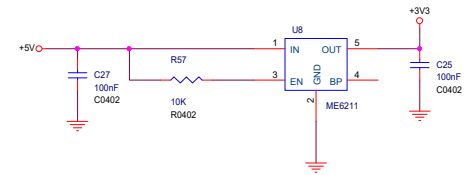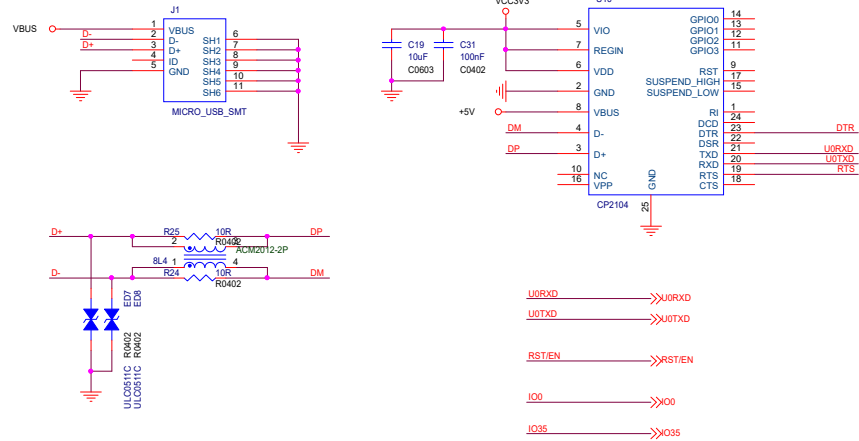

LDOs

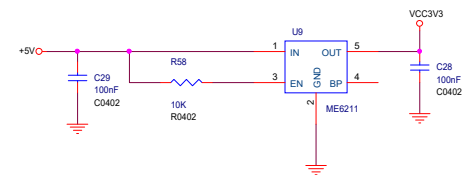

measures battery

