PyBOP: A Python package for battery model optimisation and parameterisation

Brady Planden [1], Nicola E. Courtier [1,2], Martin Robinson [3], Agriya Khetarpal [4], Ferran Brosa Planella [2,5], and David A. Howey [1,2]¶

[1] *Department of Engineering Science, University of Oxford, Oxford, UK*
[2] *The Faraday Institution, Harwell Campus, Didcot, UK*
[3] *Research Software Engineering Group, University of Oxford, Oxford, UK*
[4] *Quansight Labs*
[5] *Mathematics Institute, University of Warwick, Coventry, UK*
¶*Corresponding author:*

04 December 2024

Summary

The Python Battery Optimisation and Parameterisation (`PyBOP`) package provides methods for estimating and optimising battery model parameters, offering both deterministic and stochastic approaches with example workflows to assist users. `PyBOP` enables parameter identification from data for various battery models, including the electrochemical and equivalent circuit models provided by the popular open-source `PyBaMM` package (Sulzer et al., 2021). Using the same approaches, `PyBOP` can also be used for design optimisation under user-defined operating conditions across a variety of model structures and design goals. `PyBOP` facilitates optimisation with a range of methods, with diagnostics for examining optimiser performance and convergence of the cost and corresponding parameters. Identified parameters can be used for prediction, on-line estimation and control, and design optimisation, accelerating battery research and development.

Statement of need

`PyBOP` is a Python package providing a user-friendly, object-oriented interface for optimising battery model parameters. `PyBOP` leverages the open-source

`PyBaMM` package ([Sulzer et al., 2021](#)) to formulate and solve battery models. Together, these tools serve a broad audience including students, engineers, and researchers in academia and industry, enabling the use of advanced models where previously this was not possible without specialised knowledge of battery modelling, parameter inference, and software development. `PyBOP` emphasises clear and informative diagnostics and workflows to support users with varying levels of domain expertise, and provides access to a wide range of optimisation and sampling algorithms. These are enabled through interfaces to `PINTS` ([Clerx et al., 2019](#)), `SciPy` ([Virtanen et al., 2020](#)), and `PyBOP`'s own implementations of algorithms such as adaptive moment estimation with weight decay (AdamW) (**?**), gradient descent (**?**), and cuckoo search (**?**).

`PyBOP` supports the battery parameter exchange (BPX) standard ([Korotkin et al., 2023](#)) for sharing parameter sets. These are typically costly to obtain due to the specialised equipment and time required for characterisation experiments, the need for domain knowledge, and the computational cost of estimation. `PyBOP` reduces the requirements for the latter two by providing fast parameter estimation methods, standardised workflows, and parameter set interoperability (via BPX).

`PyBOP` complements other lithium-ion battery modelling packages built around `PyBaMM`, such as `liionpack` for battery pack simulation ([Tranter et al., 2022](#)) and `pybamm-eis` for fast numerical computation of the electrochemical impedance of any battery model. Identified `PyBOP` parameters are easily exportable to other packages.

Architecture

`PyBOP` has a layered structure enabling the necessary functionality to compute forward predictions, process results, and run optimisation and sampling algorithms. The forward model is solved using the battery modelling software `PyBaMM`, with construction, parameterisation, and discretisation managed by `PyBOP`'s model interface to `PyBaMM`. This provides a robust object construction process with a consistent interface between forward models and optimisers. Furthermore, identifiability metrics are provided along with the estimated parameters (through Hessian approximation of the cost functions around the optimum point in frequentist workflows, and posterior distributions in Bayesian workflows).

`PyBOP` formulates the inference process into four key classes: model, problem, cost (or likelihood), and optimiser (or sampler), as shown in [Figure 2](#). Each of these objects represents a base class with child classes constructing specialised functionality for different workflows. The model class constructs a `PyBaMM` forward model with a specified set of equations, initial conditions, spatial discretisation, and numerical solver. By composing `PyBaMM` directly into `PyBOP`, specialised models can be constructed alongside the standard models that can also be modified for different inference tasks. One such example is spatial re-discretisation, which is required when one or more geometric parameters are being optimised. In
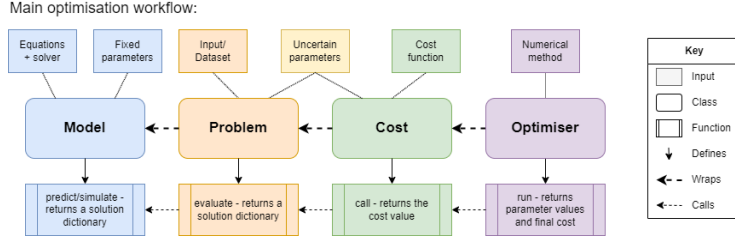
Figure 1: The core `PyBOP` architecture with base class interfaces. Each class provides a direct mapping to a step in the optimisation workflow.

this situation, `PyBOP` rebuilds the `PyBaMM` model only when necessary, reducing the total number of rebuilds, providing improved performance. Alongside construction of the forward model, `PyBOP`'s model class provides methods for obtaining sensitivities from the prediction, enabling gradient-based optimisation. A forward prediction, along with its corresponding sensitivities, is provided to the problem class for processing and exception control. A standardised data structure is then provided to the cost classes, which then computes a distance, design, or likelihood-based metric for optimisation. For point-based optimisation, the optimisers minimise the cost function or the negative log-likelihood if a likelihood class is provided. Bayesian inference is provided by sampler classes, which accept the `LogPosterior` class and sample from it using `PINTS`-based Monte Carlo algorithms at the time of submission. In the typical workflow, the classes in Figure 2 are constructed in sequence, from left to right in the figure.

In addition to the core architecture, `PyBOP` provides several specialised inference and optimisation features. One example is parameter inference from electrochemical impedance spectroscopy (EIS) simulations, where PyBOP discretises and linearises the EIS forward model into a sparse mass matrix form with accompanying auto-differentiated Jacobian. This is then translated into the frequency domain, giving a direct solution to compute the input-output impedance. In this situation, the forward models are constructed within the spatial re-discretisation workflow, allowing for geometric parameter inference from EIS simulations and data.

A second specialised feature is that `PyBOP` builds on the `JAX` (Bradbury et al., 2018) numerical solvers used by `PyBaMM` by providing `JAX`-based cost functions for automatic forward model differentiation with respect to the parameters. This functionality provides a performance improvement and allows users to harness many other JAX-based inference packages to optimise cost functions, such as `Numpyro` (Phan et al., 2019), `BlackJAX` (Cabezas et al., 2024), and `Optax` (DeepMind et al., 2020).

The currently implemented subclasses for the model, problem, and cost classes are listed in Table 1. The model and optimiser classes can be selected in combination with any problem-cost pair.

3

Table 1: List of available model, problem and cost (or likelihood) classes.

Battery Models	Problem Types	Cost / Likelihood Functions
Single-particle model (SPM)	Fitting problem	Sum-squared error
SPM with electrolyte (SPMe)	Design problem	Root-mean-squared error
Doyle-Fuller-Newman (DFN)	Observer	Minkowski
Many-particle model (MPM)		Sum-of-power
Multi-species multi-reaction (MSMR)		Gaussian log likelihood
Weppner Huggins		Maximum a posteriori
Equivalent circuit model (ECM)		Volumetric energy density
		Gravimetric energy density

Similarly, the current algorithms available for optimisation are presented in Table 2. It should be noted that SciPy minimize includes several gradient and non-gradient methods. From here on, the point-based parameterisation and design-optimisation tasks will simply be referred to as optimisation tasks. This simplification can be justified by comparing Equation 5 and Equation 7; deterministic parameterisation is just an optimisation task to minimise a distance-based cost between model output and measured values.

Table 2: Currently supported optimisers classified by candidate solution type, including gradient information.

Gradient-based	Evolutionary	(Meta)heuristic
Weight decayed adaptive moment estimation (AdamW)	Covariance matrix adaptation (CMA-ES)	Particle swarm (PSO)
Improved resilient backpropagation (iRProp-)	Exponential natural (xNES)	Nelder-Mead
Gradient descent	Separable natural (sNES)	Cuckoo search
SciPy minimize	SciPy differential evolution	

In addition to deterministic optimisers Table 1, `PyBOP` also provides Monte Carlo sampling routines to estimate distributions of parameters within a Bayesian framework. These methods construct a posterior parameter distribution that can be used to assess uncertainty and practical identifiability. The individual

4

sampler classes are currently composed within `PyBOP` from the `PINTS` library, with a base sampler class implemented for interoperability and direct integration with `PyBOP`'s model, problem, and likelihood classes. The currently supported samplers are listed in Table 3.

Table 3: Sampling methods supported by `PyBOP`, classified according to the proposed method.

Gradient-based	Adaptive	Slicing	Evolutionary	Other
Monomial gamma	Delayed rejection adaptive	Rank shrinking	Differential evolution	Metropolis random walk
No-U-turn Hamiltonian	Haario Bardenet Haario	Doubling Stepout		Emcee hammer Metropolis adjusted Langevin
Relativistic	Rao Blackwell			

Background

Battery models

In general, battery models (after spatial discretisation) can be written in the form of a differential-algebraic system of equations,

$$\frac{\mathrm{d}\mathbf{x}}{\mathrm{d}t} = f(t, \mathbf{x}, \theta), \tag{1}$$

$$0 = g(t, \mathbf{x}, \theta), \tag{2}$$

$$\mathbf{y}(t) = h(t, \mathbf{x}, \theta), \tag{3}$$

with initial conditions

$$\mathbf{x}(0) = \mathbf{x}_0(\theta). \tag{4}$$

Here, t is time, $\mathbf{x}(t)$ are the (spatially discretised) states, $\mathbf{y}(t)$ are the outputs (e.g. the terminal voltage) and θ are the unknown parameters.

Common battery models include various types of equivalent circuit models (e.g. the Thévenin model), the Doyle–Fuller–Newman (DFN) model (Doyle et al., 1993; Fuller et al., 1994) based on porous electrode theory, and its reduced-order variants including the single particle model (SPM) (Brosa Planella et al., 2022) and the multi-species multi-reaction (MSMR) model (Verbrugge et al., 2017). Simplified models that retain acceptable predictive accuracy at lower computational cost are widely used, for example in battery management systems, while physics-based models are required to understand the impact of physical

parameters on performance. This separation of complexity traditionally results in multiple parameterisations for a single battery type, depending on the model structure.

Examples

Parameterisation

The parameterisation of battery models is challenging due to the large number of parameters that need to be identified compared to the number of measurable outputs (Andersson et al., 2022; Miguel et al., 2021; Wang et al., 2022). A complete parameterisation often requires stepwise identification of smaller sets of parameters from a variety of excitations and different data sets (Chen et al., 2020; Chu et al., 2019; Kirk et al., 2023; Lu et al., 2021). Furthermore, parameter identifiability can be poor for a given set of excitations and data sets, requiring improved experimental design in addition to uncertainty capable identification methods (**?**).

A generic data-fitting optimisation problem may be formulated as:

$$\min_{\theta} \ \mathcal{L}_{(\hat{\mathbf{y}}_i)}(\theta) \quad \text{subject to equations (1)-(4)} \tag{5}$$

where $\mathcal{L} : \theta \mapsto [0, \infty)$ is a cost function that quantifies the agreement between the model output $\mathbf{y}(t)$ and a sequence of observations $(\hat{\mathbf{y}}_i)$ measured at times t_i. Within the PyBOP framework, the FittingProblem class packages the model output along with the measured observations, both of which are then passed to the cost classes for the computation of the specific cost function. For gradient-based optimisers, the Jacobian of the cost function with respect to unknown parameters, $\partial \mathcal{L}/\partial \theta$, is computed for step-size and directional information.

Next, we demonstrate the fitting of synthetic data where the model parameters are known. Throughout this section, as an example, we use PyBaMM's implementation of the single particle model with an added contact resistance submodel. We assume that the model is already fully parameterised apart from two dynamic parameters, namely, the lithium diffusivity of the negative electrode active material particles (denoted "negative particle diffusivity") and the contact resistance with corresponding true values of [3.3e-14 m^2/s, 10 mOhm]. We generate synthetic data with a one-hour discharge from 100% to 0% state of charge, denoted as 1C rate, followed by 30 minutes of relaxation. This dataset is then corrupted with zero-mean Gaussian noise of amplitude 2 mV, with the resulting signal shown by the blue dots in Figure 3 (left). The initial states are assumed known, although this assumption is not generally necessary. The PyBOP repository contains several other example notebooks that follow a similar inference process. The underlying cost landscape to be explored by the optimiser is shown in Figure 3 (right), with the initial position denoted alongside the known true system parameters for this synthetic inference task. In general, the true parameters are not known.
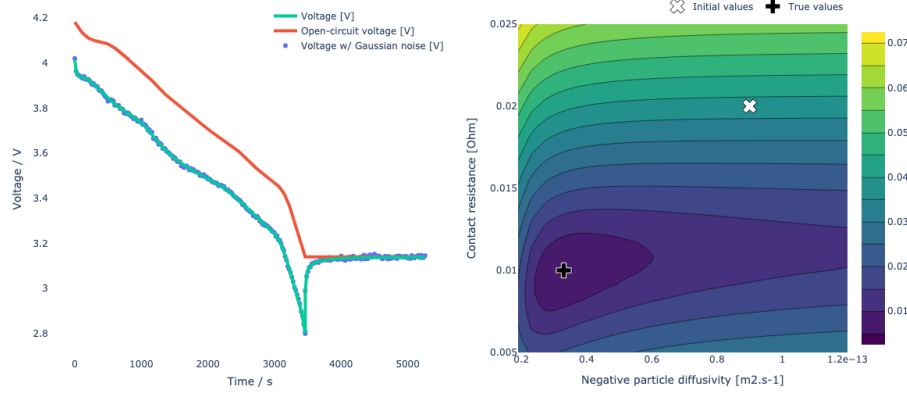
Figure 2: The fitted synthetic dataset (left) and cost landscape (right) for an example time-series battery model parameterisation using a root-mean-squared error cost function.

Using the same model and parameters, we now showcase `PyBOP`'s capability to fit electrochemical impedance data using methods within `pybamm-eis` that enable fast impedance computation of battery models (Dhoot et al., 2024). Figure 4 shows the numerical impedance prediction available in `PyBOP` alongside the cost landscape constructed for the inference task. At the time of publication, gradient-based optimisation and sampling methods are not available when using an impedance workflow.

To avoid confusion in the remainder of this section, we will continue with identification of the example model in the time-domain. In general, however, time- and frequency-domain models and data may be combined for improved parameterisation. As gradient information is available for our time-domain example, the choice of distance-based cost function and optimiser is not constrained. Due to the difference in magnitude between the two parameters, we apply the logarithmic parameter transformation offered by `PyBOP`. This transforms the search space of the optimiser to allow for a common step size between the parameters, improving convergence in this particular case. As a demonstration of the parameterisation capabilities of `PyBOP`, Figure 5 (left) shows the rate of convergence for each of the distance-minimising cost functions, while Figure 5 (right) shows analogous results for maximising a likelihood. The optimisation is performed with SciPy Minimize using the gradient-based L-BFGS-B method.

We now show example optimiser convergence of various algorithms against the same model and two parameters, across several categories: gradient-based methods in **??** (left), evolutionary strategies in **??** (middle) and (meta)heuristics in **??** (right) using a mean-squared-error cost function. We also show cost functions and
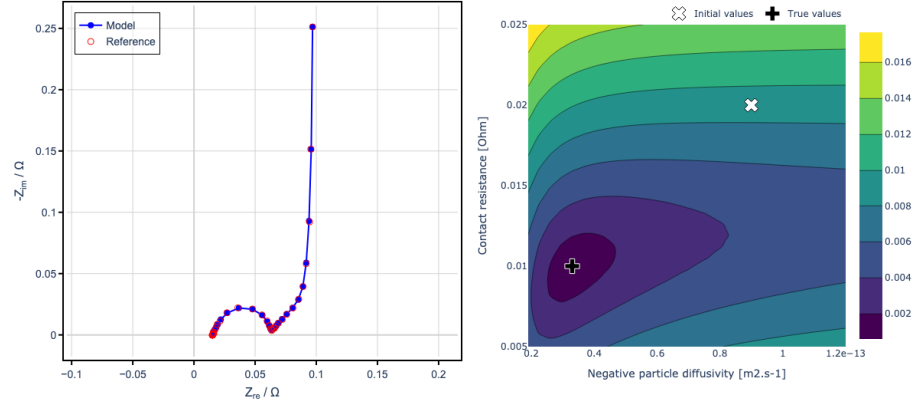
Figure 3: The data and model fit (left) and cost landscape (right) for a frequency-domain impedance parameterisation with a root-mean-squared error cost function, at 5% SOC.
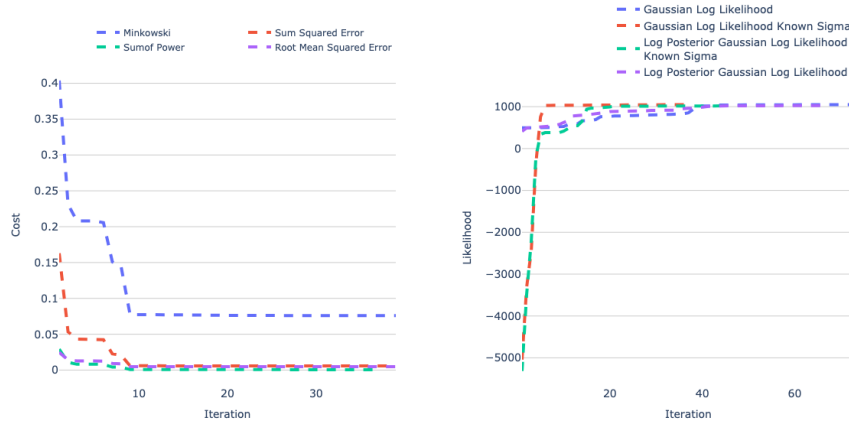

Figure 4: Optimiser convergence using various cost (left) and likelihood (right) functions and the L-BFGS-B algorithm.

solution iterations in **??**, with the three rows showing the gradient-based optimisers (top), evolution strategies (middle), and (meta)heuristics (bottom). Note that the performance of the optimiser depends on the cost environment, initial guess or prior, and corresponding hyperparameters for each specific problem.
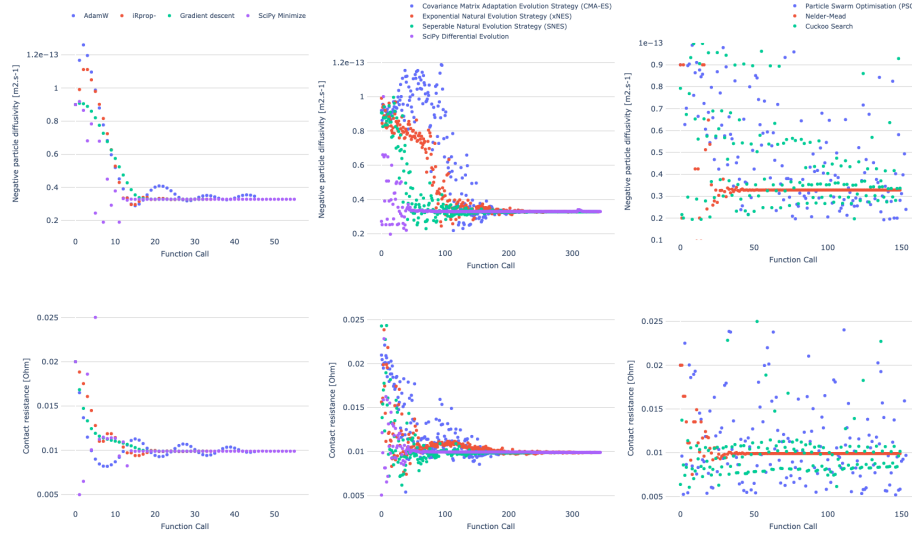

Figure 5: Convergence in parameter values for several optimisation algorithms provided by `PyBOP`.

This example parameterisation task can also be approached from a Bayesian perspective, solved using `PyBOP`'s sampler methods. First, we introduce Bayes' rule,

$$P(\theta|D) = \frac{P(D|\theta)P(\theta)}{P(D)}, \tag{6}$$

where $P(\theta|D)$ is the posterior parameter distribution, $P(D|\theta)$ is the likelihood function, $P(\theta)$ is the prior parameter distribution, and $P(D)$ is the model evidence, or marginal likelihood, which acts as a normalising constant. In the case of maximum likelihood estimation or maximum a posteriori estimation, one wishes to maximise $P(D|\theta)$ or $P(\theta|D)$, respectively, and this may be formulated as an optimisation problem as per Equation 5.

To estimate the full posterior parameter distribution, however, one must use sampling or other inference methods to reconstruct the function $P(\theta|D)$. The posterior distribution provides information about the uncertainty of the identified parameters, e.g., by calculating the variance or other moments. Monte Carlo methods are used here to sample from the posterior. The selection of Monte Carlo methods available in `PyBOP` includes gradient-based methods such as
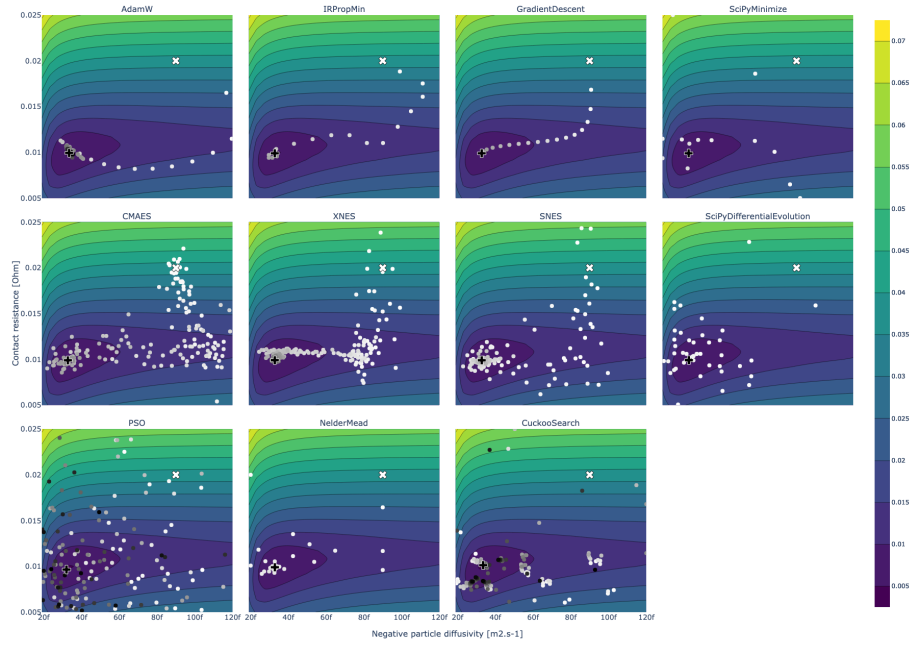
Figure 6: Cost landscape contour plot with corresponding optimisation traces, for several optimisers.

no-u-turn (Hoffman & Gelman, 2011) and Hamiltonian (Brooks et al., 2011), as well as heuristic methods such as differential evolution (Braak, 2006), and also conventional methods based on random sampling with rejection criteria (Metropolis et al., 1953). `PyBOP` offers a sampler class that provides the interface to samplers, the latter being provided by the probabilistic inference on noisy time-series (`PINTS`) package. Figure 8 shows the sampled posteriors for the synthetic model described previously, using an adaptive covariance-based sampler called Haario Bardenet (Haario et al., 2001).
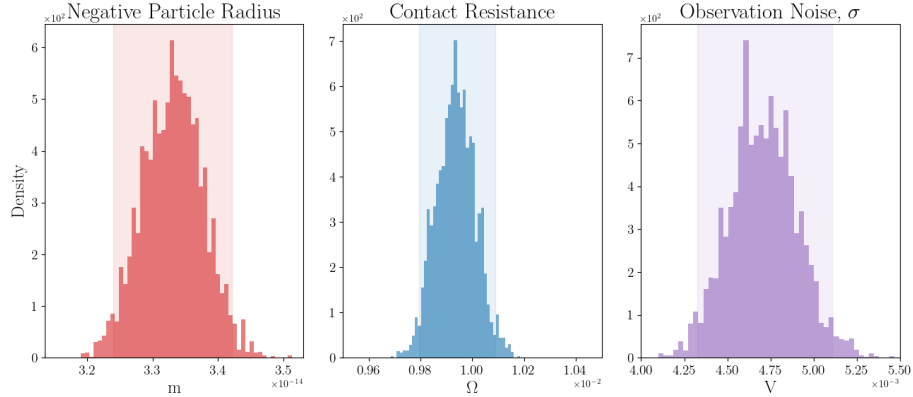

Figure 7: Posterior distributions of model parameters alongside identified noise on the observations. Shaded area denotes the 95th percentile credible interval for each parameter.

Design optimisation

Design optimisation is supported in `PyBOP` to guide device design development by identifying parameter sensitivities that can unlock improvements in performance. This problem can be viewed in a similar way to the parameterisation workflows described previously, but with the aim of maximising a design-objective cost function rather than minimising a distance cost function. `PyBOP` performs maximisation by minimising the negative of the cost function. In design problems, the cost metric is no longer a distance between two time series, but a metric evaluated on a model prediction. For example, to maximise the gravimetric energy (or power) density, the cost is the integral of the discharge energy (or power) normalised by the cell mass. Such metrics are typically quantified for operating conditions such as a 1C discharge, at a given temperature.

In general, design optimisation can be written as a constrained optimisation problem,

$$\min_{\theta \in \Omega} \mathcal{L}(\theta) \quad \text{subject to equations (1)-(4),} \tag{7}$$

where $\mathcal{L} : \theta \mapsto [0, \infty)$ is a cost function that quantifies the desirability of the

design and Ω is the set of allowable parameter values.

As an example, we consider the challenge of maximising the gravimetric energy density, subject to constraints on two of the geometric electrode parameters (Couto et al., 2023). In this case we use the `PyBaMM` implementation of the single particle model with electrolyte (SPMe) to investigate the impact of the positive electrode thickness and the active material volume fraction on the energy density. Since the active material volume fraction and electrode porosity sum to unity, the porosity for each optimisation iteration is defined in relation to the volume fraction. In this problem, we estimate the 1C rate from the theoretical capacity for each iteration of the design and use the particle swarm optimisation algorithm.
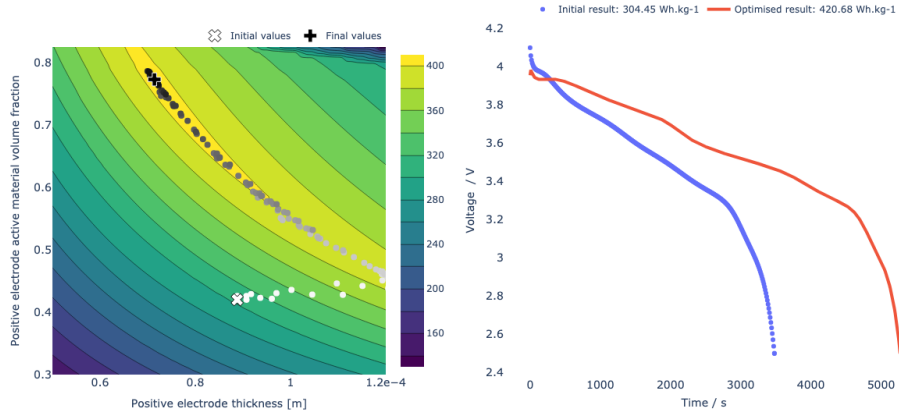

Figure 8: Gravimetric energy density cost landscape alongside the initial and optimised voltage profiles, for a fixed 1C discharge set from the initial design.

Figure 9 (left) shows the Nelder-Mead search over the parameter space and (right) the predicted improvement in the discharge profile between the initial and optimised parameter values, simulated at their respective 1C rates.

Acknowledgements

References

Aitio, A., Marquis, S. G., Ascencio, P., & Howey, D. (2020). Bayesian parameter estimation applied to the li-ion battery single particle model with electrolyte dynamicsa∗this work was carried out with funding received from the faraday institution (faraday.ac.uk; EP/S003053/1, ref. FIRG003). Scott marquis was supported by the EPSRC centre for doctoral training in industrially focused mathematical modelling (EP/L015803/1) in collaboration with siemens corporate technology. *IFAC-PapersOnLine*, *53*(2), 12497–12504. https://doi.org/https://doi.org/10.1016/j.ifacol.2020.12.1770

Andersson, M., Streb, M., Ko, J. Y., Löfqvist Klass, V., Klett, M., Ekström, H., Johansson, M., & Lindbergh, G. (2022). Parametrization of physics-based battery models from input-output data: A review of methodology and current research. *Journal of Power Sources*, *521*(November 2021), 230859. https://doi.org/10.1016/j.jpowsour.2021.230859

Braak, C. J. F. T. (2006). A Markov Chain Monte Carlo version of the genetic algorithm Differential Evolution: Easy Bayesian computing for real parameter spaces. *Statistics and Computing*, *16*(3), 239–249. https://doi.org/10.1007/s11222-006-8769-1

Bradbury, J., Frostig, R., Hawkins, P., Johnson, M. J., Leary, C., Maclaurin, D., Necula, G., Paszke, A., VanderPlas, J., Wanderman-Milne, S., & Zhang, Q. (2018). *JAX: Composable transformations of Python+NumPy programs* (Version 0.3.13). http://github.com/jax-ml/jax

Brooks, S., Gelman, A., Jones, G., & Meng, X.-L. (2011). *Handbook of markov chain monte carlo.* Chapman; Hall/CRC. https://doi.org/10.1201/b10905

Brosa Planella, F., Ai, W., Boyce, A. M., Ghosh, A., Korotkin, I., Sahu, S., Sulzer, V., Timms, R., Tranter, T. G., Zyskin, M., Cooper, S. J., Edge, J. S., Foster, J. M., Marinescu, M., Wu, B., & Richardson, G. (2022). A Continuum of Physics-Based Lithium-Ion Battery Models Reviewed. *Progress in Energy*, *4*(4), 042003. https://doi.org/10.1088/2516-1083/ac7d31

Cabezas, A., Corenflos, A., Lao, J., & Louf, R. (2024). *BlackJAX: Composable Bayesian inference in JAX.* https://arxiv.org/abs/2402.10797

Cauchy, A., & others. (1847). Méthode générale pour la résolution des systemes d'équations simultanées. *Comp. Rend. Sci. Paris*, *25*(1847), 536–538.

Chen, C.-H., Brosa Planella, F., O'Regan, K., Gastol, D., Widanage, W. D., & Kendrick, E. (2020). Development of experimental techniques for parameterization of multi-scale lithium-ion battery models. *Journal of The Electrochemical Society*, *167*(8), 080534. https://doi.org/10.1149/1945-7111/ab9050

Chu, Z., Plett, G. L., Trimboli, M. S., & Ouyang, M. (2019). A control-oriented electrochemical model for lithium-ion battery, Part I: Lumped-parameter reduced-order model with constant phase element. *Journal of Energy Storage*, *25*(August), 100828. https://doi.org/10.1016/j.est.2019.100828

Clerx, M., Robinson, M., Lambert, B., Lei, C. L., Ghosh, S., Mirams, G. R., & Gavaghan, D. J. (2019). Probabilistic inference on noisy time series (PINTS). *Journal of Open Research Software*, *7*(1), 23. https://doi.org/10.5334/jors.252

Couto, L. D., Charkhgard, M., Karaman, B., Job, N., & Kinnaert, M. (2023). Lithium-ion battery design optimization based on a dimensionless reduced-order electrochemical model. *Energy*, *263*(PE), 125966. https://doi.org/10.1016/j.energy.2022.125966

DeepMind, Babuschkin, I., Baumli, K., Bell, A., Bhupatiraju, S., Bruce, J., Buchlovsky, P., Budden, D., Cai, T., Clark, A., Danihelka, I., Dedieu, A., Fantacci, C., Godwin, J., Jones, C., Hemsley, R., Hennigan, T., Hessel, M., Hou, S., . . . Viola, F. (2020). *The DeepMind JAX Ecosystem*. http://github.com/google-deepmind

Dhoot, R., Timms, R., & Please, C. (2024). *PyBaMM EIS: Efficient linear algebra methods to determine li-ion battery behaviour* (Version 0.1.4). https://www.github.com/pybamm-team/pybamm-eis

Doyle, M., Fuller, T. F., & Newman, J. (1993). Modeling of Galvanostatic Charge and Discharge of the Lithium/Polymer/Insertion Cell. *Journal of The Electrochemical Society*, *140*(6), 1526–1533. https://doi.org/10.1149/1.2221597

Fuller, T. F., Doyle, M., & Newman, J. (1994). Simulation and optimization of the dual lithium ion insertion cell. *Journal of The Electrochemical Society*, *141*(1), 1. https://doi.org/10.1149/1.2054684

Haario, H., Saksman, E., & Tamminen, J. (2001). An Adaptive Metropolis Algorithm. *Bernoulli*, *7*(2), 223. https://doi.org/10.2307/3318737

Hoffman, M. D., & Gelman, A. (2011). *The no-u-turn sampler: Adaptively setting path lengths in hamiltonian monte carlo*. https://arxiv.org/abs/1111.4246

Kirk, T. L., Lewis-Douglas, A., Howey, D., Please, C. P., & Jon Chapman, S. (2023). Nonlinear electrochemical impedance spectroscopy for lithium-ion battery model parameterization. *Journal of The Electrochemical Society*, *170*(1), 010514. https://doi.org/10.1149/1945-7111/acada7

Korotkin, I., Timms, R., Foster, J. F., Dickinson, E., & Robinson, M. (2023). Battery parameter eXchange. In *GitHub repository*. The Faraday Institution. https://github.com/FaradayInstitution/BPX

Loshchilov, I., & Hutter, F. (2017). *Decoupled Weight Decay Regularization*. arXiv. https://doi.org/10.48550/ARXIV.1711.05101

Lu, D., Scott Trimboli, M., Fan, G., Zhang, R., & Plett, G. L. (2021). Implementation of a physics-based model for half-cell open-circuit potential and full-cell open-circuit voltage estimates: Part II. Processing full-cell data. *Journal of The Electrochemical Society*, *168*(7), 070533. https://doi.org/10.1149/1945-7111/ac11a5

Metropolis, N., Rosenbluth, A. W., Rosenbluth, M. N., Teller, A. H., & Teller, E. (1953). Equation of State Calculations by Fast Computing Machines. *The Journal of Chemical Physics*, *21*(6), 1087–1092. https://doi.org/10.1063/1.1699114

Miguel, E., Plett, G. L., Trimboli, M. S., Oca, L., Iraola, U., & Bekaert, E. (2021). Review of computational parameter estimation methods for electrochemical models. *Journal of Energy Storage*, *44*(PB), 103388. https://doi.org/10.1016/j.est.2021.103388

Phan, D., Pradhan, N., & Jankowiak, M. (2019). Composable effects for flexible

and accelerated probabilistic programming in NumPyro. *arXiv Preprint arXiv:1912.11554*.

Sulzer, V., Marquis, S. G., Timms, R., Robinson, M., & Chapman, S. J. (2021). Python Battery Mathematical Modelling (PyBaMM). *Journal of Open Research Software*, *9*(1), 14. https://doi.org/10.5334/jors.309

Tranter, T. G., Timms, R., Sulzer, V., Planella, F. B., Wiggins, G. M., Karra, S. V., Agarwal, P., Chopra, S., Allu, S., Shearing, P. R., & Brett, D. J. l. (2022). Liionpack: A python package for simulating packs of batteries with PyBaMM. *Journal of Open Source Software*, *7*(70), 4051. https://doi.org/10.21105/joss.04051

Verbrugge, M., Baker, D., Koch, B., Xiao, X., & Gu, W. (2017). Thermodynamic model for substitutional materials: Application to lithiated graphite, spinel manganese oxide, iron phosphate, and layered nickel-manganese-cobalt oxide. *Journal of The Electrochemical Society*, *164*(11), E3243. https://doi.org/10.1149/2.0341708jes

Virtanen, P., Gommers, R., Oliphant, T. E., Haberland, M., Reddy, T., Cournapeau, D., Burovski, E., Peterson, P., Weckesser, W., Bright, J., van der Walt, S. J., Brett, M., Wilson, J., Millman, K. J., Mayorov, N., Nelson, A. R. J., Jones, E., Kern, R., Larson, E., . . . SciPy 1.0 Contributors. (2020). SciPy 1.0: Fundamental Algorithms for Scientific Computing in Python. *Nature Methods*, *17*, 261–272. https://doi.org/10.1038/s41592-019-0686-2

Wang, A. A., O'Kane, S. E. J., Brosa Planella, F., Houx, J. L., O'Regan, K., Zyskin, M., Edge, J., Monroe, C. W., Cooper, S. J., Howey, D. A., Kendrick, E., & Foster, J. M. (2022). Review of parameterisation and a novel database (LiionDB) for continuum Li-ion battery models. *Progress in Energy*, *4*(3), 032004. https://doi.org/10.1088/2516-1083/ac692c

Yang, X.-S., & Suash Deb. (2009). Cuckoo Search via levy flights. *2009 World Congress on Nature & Biologically Inspired Computing (NaBIC)*, 210–214. https://doi.org/10.1109/NABIC.2009.5393690