

# 66QL6-BDV

630-670 Watt

85±5% Bifaciality

BIFACIAL MODULE




## Higher Power on Front Side

Leading power class based on the enhanced N-type TOPCon platform, through cutting-edge technology and an optimized layout that captures more sunlight.



## Better Generation on Rear Side

Enabling industry-leading bifaciality in TOPCon cells through an improved structure that enhances light absorption and trapping.

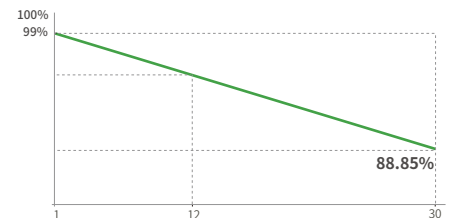

## Optimized Heat Resistance

Optimized temperature coefficient via advanced graphical patterning, busbar and multi-cells technology.



## Proven Low Light Performance

Enhanced cell structure ensures superior module performance under low-light conditions.

**12 Year** Product Warranty | **30 Year** Linear Power Warranty | **1%** First-year Degradation | **0.35%** Annual Degradation Over 30 Years

\*Warranty valid under Standard Test Conditions (STC) only.

- IEC61215:2021 / IEC61730:2023
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



POSITIVE QUALITY™  
Continuous Quality Assurance

**JKM630-670N-66QL6-BDV-F1C2-OC**

## Mechanical Load Enhanced

Certified to withstand:  
5400 Pa front side max static test load  
2400 Pa rear side max static test load

# JKMxxxN-66QL6-BDV (xxx=630-670, in steps of 5)

## Mechanical Characteristics

|                                        |                                                                                                                  |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------|
| Cell Type                              | N- type Mono-crystalline                                                                                         |
| No. of Cells                           | 264 (66×4)                                                                                                       |
| Dimensions                             | 2382×1134×30 mm                                                                                                  |
| Weight                                 | 32.5 kg                                                                                                          |
| Front Glass                            | 2.0 mm, Anti-reflection Coating                                                                                  |
| Back Glass                             | 2.0 mm, Heat Strengthened Glass                                                                                  |
| Frame                                  | Anodized Aluminium Alloy                                                                                         |
| Junction Box                           | IP68 Rated                                                                                                       |
| Protection Class                       | Class II                                                                                                         |
| IEC Fire Type                          | Class C                                                                                                          |
| Connector Type                         | PV-JK03M/xy, PV-JK03M2/xy, PV-JC001/xy,<br>PV-JC006/xyz (JinKO);<br>PV-KST4-EVO2A/xy, PV-KBT4-EVO2A/xy (Staubli) |
| Output Cables<br>(Including Connector) | 4.0 mm <sup>2</sup><br>(+): 600 mm , (-): 400 mm or Customized Length                                            |

## Packaging Configuration

|                                             |                                                          |
|---------------------------------------------|----------------------------------------------------------|
| Pallet Dimensions                           | 2396×1110×1251 mm                                        |
| Packing Detail<br>(Two pallets = One stack) | 36 pcs/pallet, 72 pcs/stack,<br>720 pcs/ 40'HQ Container |

## Specifications (STC)

|                                        |                                               |       |       |       |       |       |       |       |       |
|----------------------------------------|-----------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Maximum Power - Pmax [Wp]              | 630                                           | 635   | 640   | 645   | 650   | 655   | 660   | 665   | 670   |
| Maximum Power Voltage - Vmp [V]        | 42.03                                         | 42.17 | 42.31 | 42.44 | 42.57 | 42.70 | 42.83 | 42.96 | 43.09 |
| Maximum Power Current - Imp [A]        | 14.99                                         | 15.06 | 15.13 | 15.20 | 15.27 | 15.34 | 15.41 | 15.48 | 15.55 |
| Open-circuit Voltage - Voc [V]         | 49.52                                         | 49.71 | 49.90 | 50.08 | 50.26 | 50.44 | 50.62 | 50.80 | 50.98 |
| Short-circuit Current - Isc [A]        | 15.74                                         | 15.80 | 15.86 | 15.92 | 15.98 | 16.04 | 16.10 | 16.16 | 16.22 |
| Module Efficiency STC [%]              | 23.32                                         | 23.51 | 23.69 | 23.88 | 24.06 | 24.25 | 24.43 | 24.62 | 24.80 |
| Short-circuit Current - Isc [A] at BSI | 19.72                                         | 19.80 | 19.88 | 19.94 | 20.02 | 20.11 | 20.19 | 20.25 | 20.33 |
| Bifacial Factor                        | 85 ± 5%                                       |       |       |       |       |       |       |       |       |
| Measurement Tolerance                  | STC: Pmax ±3%, Voc ±5%, Isc ±5%; BSI: Isc ±5% |       |       |       |       |       |       |       |       |
| Power Sorting                          | 0 ~ +3 %                                      |       |       |       |       |       |       |       |       |
| Temperature Coefficient of Pmax        | -0.26 %/°C                                    |       |       |       |       |       |       |       |       |
| Temperature Coefficient of Voc         | -0.24 %/°C                                    |       |       |       |       |       |       |       |       |
| Temperature Coefficient of Isc         | 0.046 %/°C                                    |       |       |       |       |       |       |       |       |

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, AM=1.5    BSI: Irradiance: Front 1000W/m<sup>2</sup>, Rear 300W/m<sup>2</sup>

## Specifications (BNPI)

|                                 |       |       |       |       |       |       |       |       |       |
|---------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Maximum Power - Pmax [Wp]       | 702   | 707   | 713   | 718   | 724   | 729   | 735   | 741   | 746   |
| Maximum Power Voltage - Vmp [V] | 41.84 | 42.01 | 42.18 | 42.35 | 42.52 | 42.69 | 42.86 | 43.03 | 43.20 |
| Maximum Power Current - Imp [A] | 16.78 | 16.84 | 16.91 | 16.97 | 17.04 | 17.10 | 17.17 | 17.23 | 17.30 |
| Open-circuit Voltage - Voc [V]  | 49.66 | 49.84 | 50.02 | 50.20 | 50.38 | 50.56 | 50.74 | 50.92 | 51.10 |
| Short-circuit Current - Isc [A] | 17.53 | 17.60 | 17.67 | 17.73 | 17.80 | 17.87 | 17.94 | 18.00 | 18.07 |

BNPI: Irradiance: Front 1000W/m<sup>2</sup>, Rear 135W/m<sup>2</sup>, Cell Temperature 25°C, AM=1.5

Measurement tolerance: Pmax ±3%, Voc ±5%, Isc ±5%


## Bifacial Output-Rearside Power Gain

|                                 |     |     |     |     |     |     |     |     |     |
|---------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| [15%] Maximum Power - Pmax [Wp] | 725 | 730 | 736 | 742 | 748 | 753 | 759 | 765 | 771 |
|---------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|

## Application Conditions

|                            |                                           |
|----------------------------|-------------------------------------------|
| Operating Temperature      | -40 °C ~ +70 °C                           |
| Module [T98]max            | 70 °C                                     |
| Maximum System Voltage     | 1500 VDC (IEC)                            |
| Maximum Series Fuse Rating | 35 A                                      |
| Bifaciality Coefficients   | φVoc: 98±5 %, φIsc: 85±5 %, φPmax: 85±5 % |


## Engineering Drawings

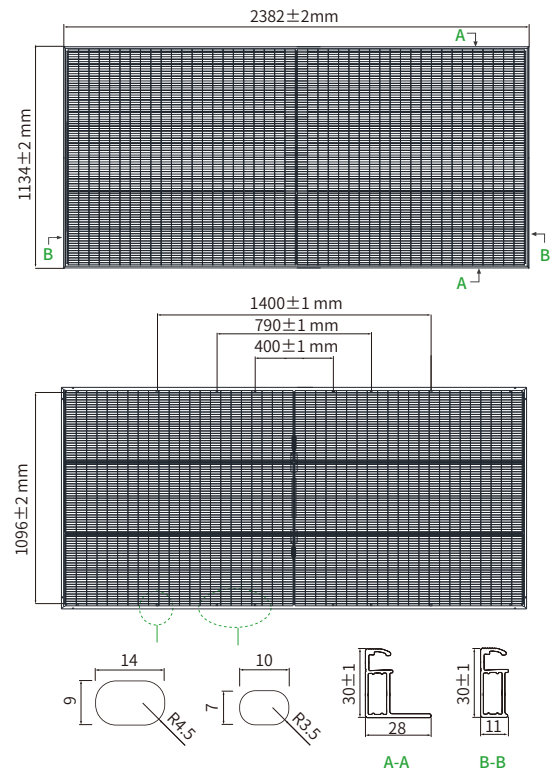


Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

## Electrical Performance

### Power-Voltage Curves (66QL6-BDV 660W)

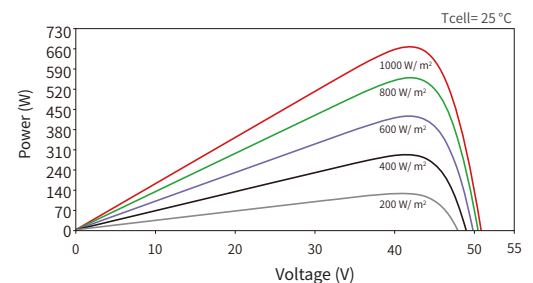

### Current-Voltage Curves (66QL6-BDV 660W)

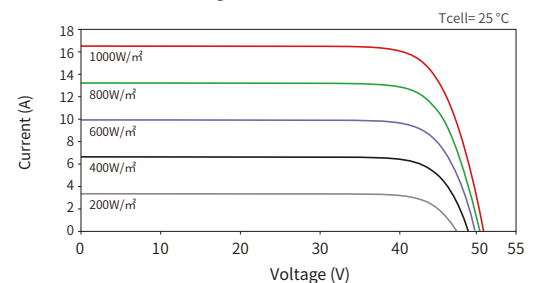

**Jinko Solar**  
**Made in China**

© 2025 Jinko Solar Co., Ltd. All rights reserved.

**Note:** Please read the safety and installation manual before using the product. We reserve the right of final interpretation. The specifications in this datasheet are subject to change without notice.

**JKM630-670N-66QL6-BDV-F1C2-OC**

www.jinkosolar.com  
www.jinkosolar.com.au