




Faculté des Sciences de Technologies

Rapport td 6 Réseau 1

Nom : Pierre

Prénom : Yann Lelay

Niveau : L3 - Sciences Informatiques

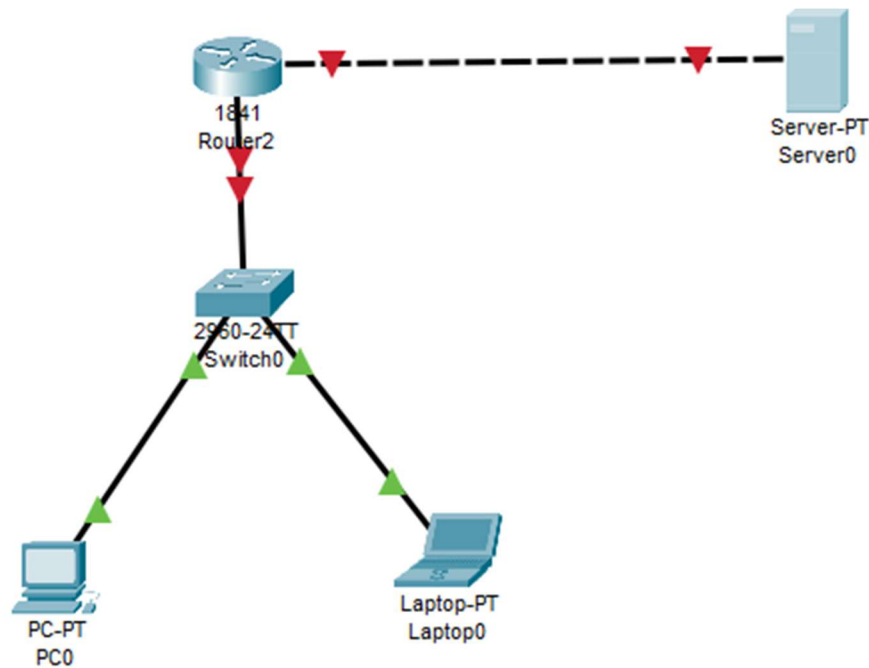

1- Configurer les protocoles SMTP, IMAP et POP3 afin d'assurer l'envoi, la réception et la gestion efficace des courriels

Physical Config **Services** Desktop Programming Attributes

SERVICES

- HTTP
- DHCP
- DHCPv6
- TFTP
- DNS
- SYSLOG
- AAA
- NTP
- EMAIL**
- FTP
- IoT
- VM Management
- Radius EAP

EMAIL

SMTP Service ☒ ON ☐ OFF

POP3 Service ☒ ON ☐ OFF

Domain Name:

User Setup

User Password

user1
user2
user3

Cisco Packet Tracer - C:\Users\PC\Downloads\Documents_Yann\IUS\reseau\td-6\td-6.pkt

PC0

Physical Config Desktop Programming Attributes

Configure Mail

User Information

Your Name:

Email Address:

Server Information

Incoming Mail Server:

Outgoing Mail Server:

Logon Information

User Name:

Password:

Save Remove Clear Reset

Laptop

Physical Config **Desktop** Programming Attributes

Configure Mail

User Information

Your Name: user2

Email Address: user2@example.com

Server Information

Incoming Mail Server: 192.168.2.10



Outgoing Mail Server: 192.168.2.10

Logon Information

User Name: user2

Password: •••••

Save Remove Clear Reset

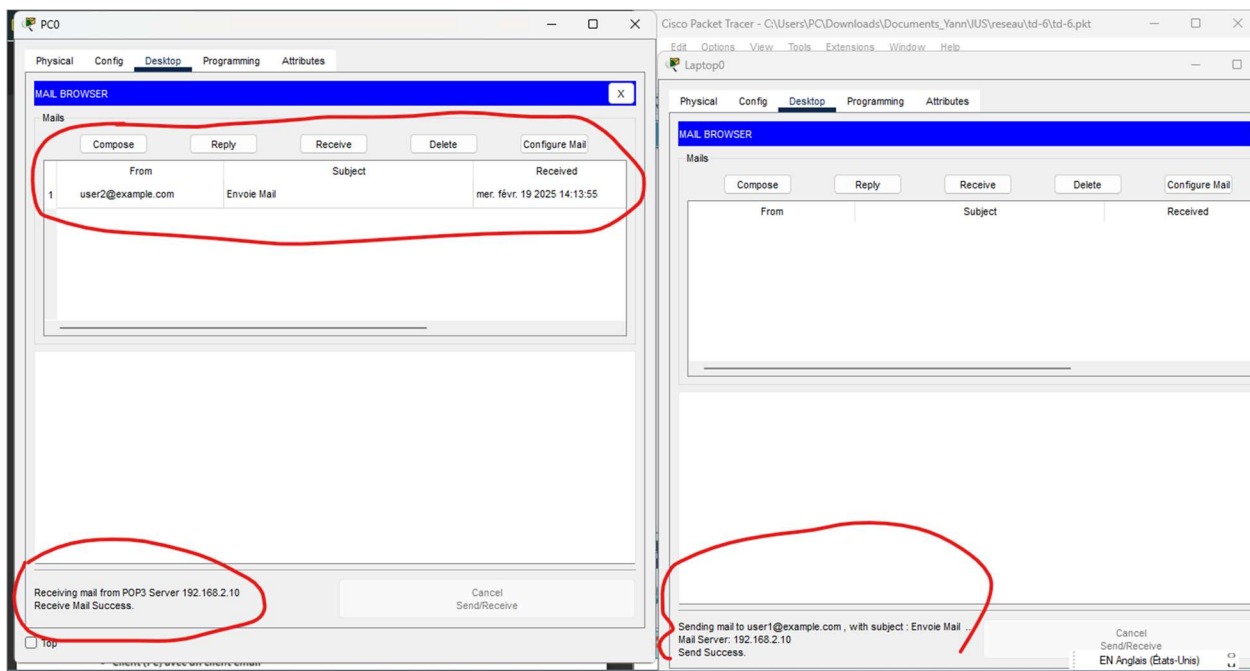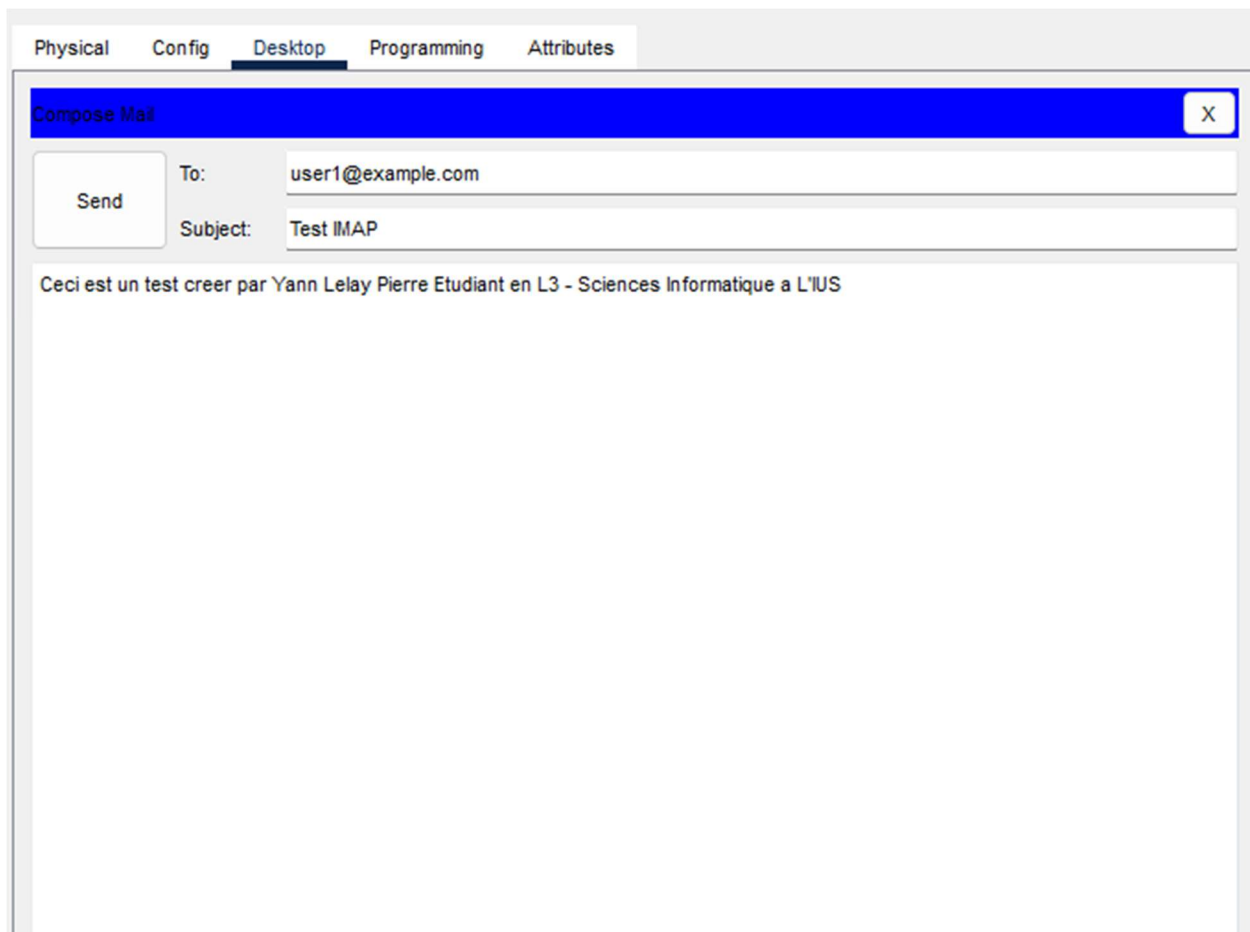

Sntp

```
R1>enable
R1#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#interface FastEthernet0/0
R1(config-if)#ip address 192.168.1.1 255.255.255.0
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#interface FastEthernet0/1
R1(config-if)#ip address 192.168.2.1 255.255.255.0
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#access-list 110 permit tcp any any eq smtp
R1(config)#line vty 0 4
R1(config-line)#password cisco
R1(config-line)#login
R1(config-line)#enable secret cisco
R1(config)#write memory
^
% Invalid input detected at '^' marker.

R1(config)#exit
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#write memory
Building configuration...
[OK]
R1#
```

```
C:\>telnet 192.168.1.100 25
Trying 192.168.1.100 ...
% Connection timed out; remote host not responding
C:\>
```

2- Configurer les protocoles ICMP et IGMP sur les équipements réseau afin d'assurer le diagnostic, le contrôle des communications et la gestion efficace des flux multicast.

ICMP :

```
R1>enable
Password:
Password:
R1#enable
R1#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)## Bloquer ICMP pour un rseau spcifique
      ^
% Invalid input detected at '^' marker.

R1(config)#access-list 100 deny icmp any any
R1(config)#access-list 100 permit ip any any
R1(config)## Appliquer l'ACL sur une interface
      ^
% Invalid input detected at '^' marker.

R1(config)#interface GigabitEthernet0/0
%Invalid interface type and number
R1(config)#ip access-group 100 in
      ^
% Invalid input detected at '^' marker.

R1(config)#exit
R1#write memory
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
R1#
```

```
Trying 192.168.2.10 ...Open
C:\>ping 8.8.8.8

Pinging 8.8.8.8 with 32 bytes of data:

Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.
Reply from 192.168.1.1: Destination host unreachable.

Ping statistics for 8.8.8.8:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

IGMP :

```
R1>enable
Password:
Password:
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#interface FastEthernet0/0
R1(config-if)# ip address 192.168.1.254 255.255.255.0
R1(config-if)# ip pim sparse-dense-mode
      ^
% Invalid input detected at '^' marker.

R1(config-if)# ip igmp version 3
      ^
% Invalid input detected at '^' marker.

R1(config-if)#exit
R1(config)#
R1(config)#ip pim rp-address 192.168.1.1
      ^
% Invalid input detected at '^' marker.

R1(config)#
R1(config)#interface FastEthernet0/1
R1(config-if)# ip address 192.168.2.254 255.255.255.0
R1(config-if)# ip pim sparse-dense-mode
      ^
% Invalid input detected at '^' marker.

R1(config-if)# ip igmp version 3
      ^
% Invalid input detected at '^' marker.

R1(config-if)#exit

R1(config)#interface GigabitEthernet0/0
%Invalid interface type and number
R1(config)#ip igmp join-group 239.1.1.1
      ^
% Invalid input detected at '^' marker.

R1(config)#exit
R1#
%SYS-5-CONFIG_I: Configured from console by console
|
R1#show ip igmp groups
      ^
% Invalid input detected at '^' marker.

R1#
```

```
C:\>ping 239.1.1.1

Pinging 239.1.1.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 239.1.1.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>|
```

```
R1#access-list 10 permit 239.1.1.1
      ^
% Invalid input detected at '^' marker.

R1#interface GigabitEthernet0/0
      ^
% Invalid input detected at '^' marker.

R1#ip igmp access-group 10
      ^
% Invalid input detected at '^' marker.

R1#
```

Conclusion :

Grace à ce TD qui revêt une importance capitale , il me permet d'acquérir une compréhension pratique et approfondie des protocoles réseau et de messagerie essentiels. En configurant et testant des protocoles comme SMTP, IMAP, POP3 et ICMP, je développe des compétences techniques cruciales pour la gestion des réseaux modernes.