


Air source heat pump (Heating, monoblock, R410A)

1. Working air temperature range: -10°C to 45°C

2. Control object:

Hot water tank temperature , Setting range: $30^{\circ}\text{C} \sim 55^{\circ}\text{C}$


3. Max outlet water temperature: 60°C


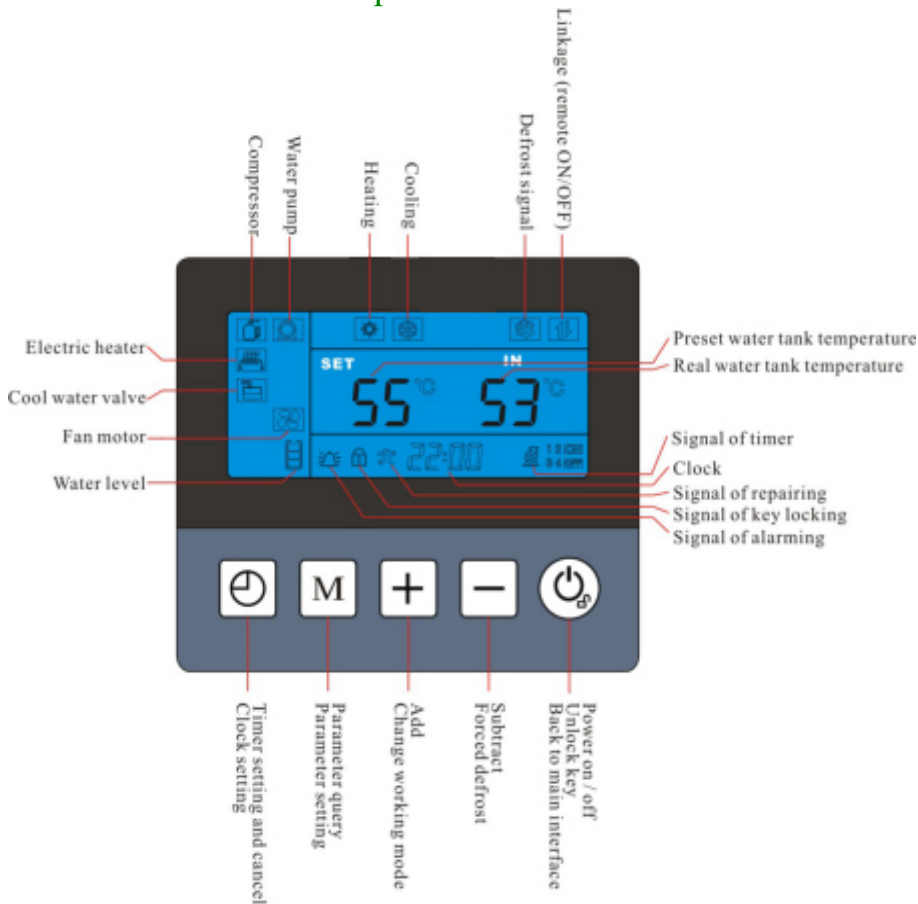


Add: No.6 Hongyuan Road, East Section of Economic and Technical Development Zone , Guangzhou, 510760, China

Guangzhou Sprsun New Energy Technology Development Co.,Ltd

Installation diagram

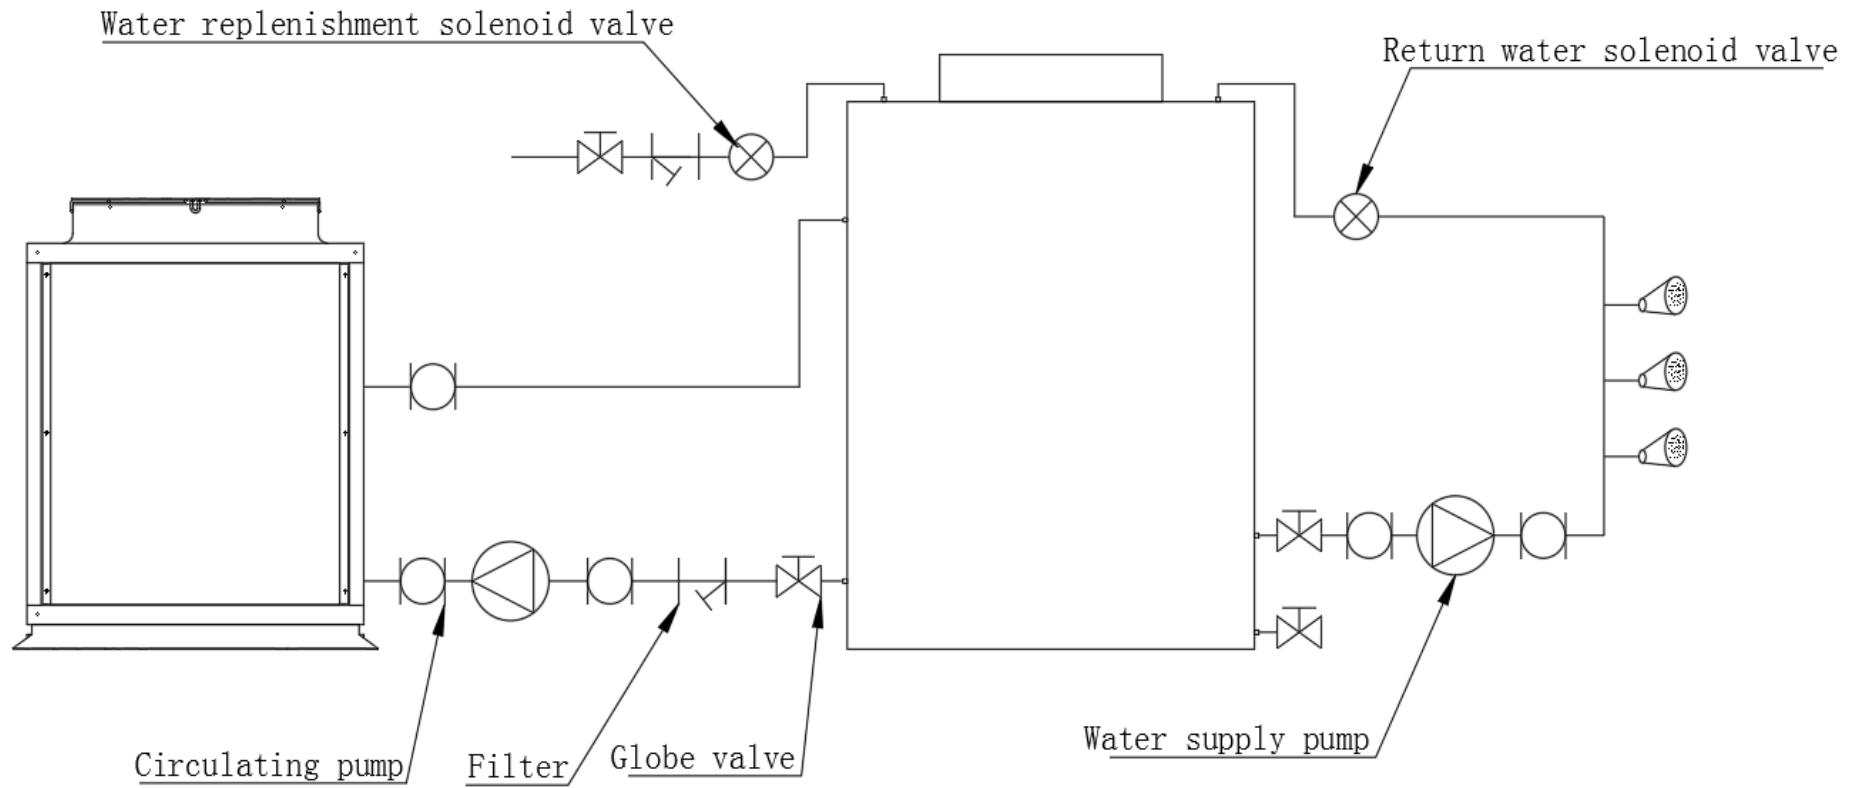

Standard Material								
Name	discription	picture	Name	discription	picture	Name	discription	picture
Condenser (copper)	Tube in shell heat exchanger		Evaporator	Hydropilic Aluminium foil and internal thread copper pipe heat exchanger		High pressure switch	3.6/4.4Mpa	
Compressor	Copeland scroll compressor/INVOTEC H		Expansion valve	SANHUA/FUJIKOKI/Danfoss		Low pressure switch	0.05/0.15MPa	
4-way valve	SANHUA		AC contactor and thermal relay	Schneider/Chint		Package	plywood case	
Controller	SPRSUN multiple function controller							

Specs and price

Model		CGK/D-52-A
Power supply	V	380V~415V/50Hz/3ph
Heating capacity	KW	52
Input power	KW	12.53
COP		4.15
Rated current	A	23.8
Max current	A	32.1
Max input power	KW	16.9
Fan motor power	W	550
Fan motor quantity	Piece	2
Water flow	L/h	9936
Water rate	L/h	1118
Water pressure drop	Kpa	≤70
Net weight	kg	300
Gross weight	kg	320
Noise	db	68
Condenser		Tube in shell heat exchanger/Double-pipe
Refrigerant		R410A
Classification of waterproof		IPX4
Electric shock proof grade		I
Pipe size (internal thread)	mm	DN40
Dimension	mm	1500×800×1150
Packing dimension	mm	1580*880*1300
Compressor model/quantity		ZW83KWP-TFD*2

●Rated working condition: dry-bulb temp: 20℃, wet-bulb temp: 15℃, cool water temp: 15℃, hot water temp:55℃.

Heating capacity at different condition

Model	CGK/D-52-A 380V
Air temp °C	Heating capacity (KW)
A -7	24. 89
A 0	34. 57
A 2	36. 39
A 5	39. 13
A 7	41. 19
A 12	46. 28
A 20	52. 00
Hot water temp °C	15-55