


DC Inverter Air Source Heat Pumps (Monoblock Type)

1. Working source temperature range: -25°C to 45°C
2. Control Object: water tank temperature
(Setting range: Heating: $30^{\circ}\text{C} \sim 70^{\circ}\text{C}$; Cooling: $32^{\circ}\text{C} \sim 12^{\circ}\text{C}$)
3. Control Way: wire controller
4. Water Pump: start/stop according to water tank temp
5. Working Modes: hot water/heating/cooling/hot water+cooling/hot water+heating

SPRSUN

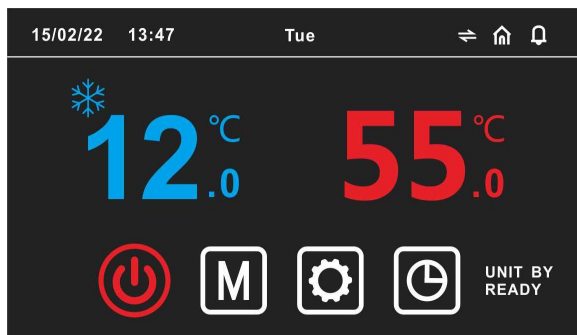

CGK-151V4-B



CGK-300V4-B




Guangzhou Sprsun New Energy Technology Development Co., Ltd.

Installation Diagram


Symbol	Name
	3-way valve
	2-way valve
	Ball valve
	Non-return valve
	Filter
	Water pump
	Temp sensor
	Release valve
	Expansion tank

Notice:

1. Pls select the right modes according to your demand then install it according to the installation diagram. If only hot water function required, pls select heating+hot water mode , and then put the hot water sensor into the hot water tank.
2. Two-way valve and BV valve are optional for installation. Only If you need to control the temperature by different zone, then pls install both.
3. Fan coil can be controlled by linkage with the secondary circulation pump . Meanwhile, a passive linkage thermostat shall be installed.

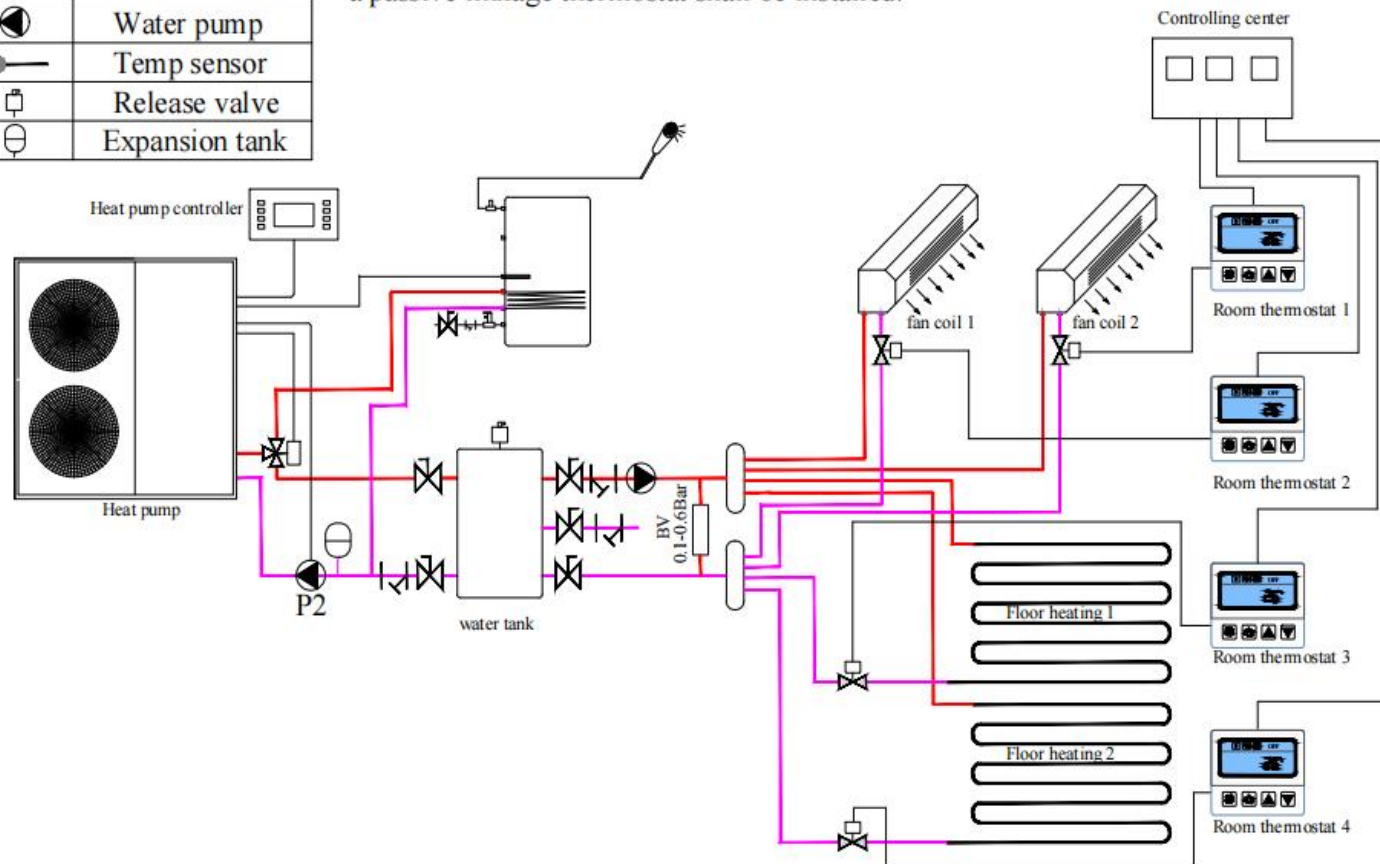

DC inverter air source heat pump

Standard Materials								
Name	Description	Picture	Name	Description	Picture	Name	Description	Picture
Condenser	Plate Heat Exchanger		Evaporator	Hydropilic Aluminium foil and internal thread copper pipe heat exchanger		High Pressure Sensor	SENSATA 0-4.6MPa	
Compressor	frequency convertible scroll compressor		Expansion Valve	FUJIKOKI Electronic expansion valve		Low Pressure Sensor	SENSATA 0-2.0MPa	
4-way valve	SANHUA		DC Fan	LEKVA/Match-weill		Package	plywood case	
Controller	CHICO Touch screen Controller 4.3"							

Model		CGK-151V4-B			CGK-300V4-B			
Power Supply		V/Hz/Ph			380-420/50/3			
Max. Heating Capacity (A7℃/W35℃)		kW			50			
C.O.P (A7℃/W35℃)		W/W			3.80			
Heating Capacity Min./Max.(A7℃/W35℃)		kW			14.90 / 50.00			
Heating Power Input Min./Max.(A7℃/W35℃)		W			2992 / 13158			
C.O.P Min./Max.(A7℃/W35℃)		W/W			3.8 / 4.98			
Max. Heating Capacity(A7℃/W45℃)		kW			47.24			
C.O.P (A7℃/W45℃)		W/W			3.35			
Heating Capacity Min./Max.(A7℃/W45℃)		kW			14.23 / 47.24			
Heating power input Min./Max.(A7℃/W45℃)		W			3621 / 14101			
C.O.P Min./Max.(A7℃/W45℃)		W/W			3.35 / 3.93			
Max. Cooling Capacity(A35℃/W18℃)		kW			38.50			
E.E.R (A35℃/W18℃)		W/W			3.26			
Cooling Capacity Min./Max.(A35℃/W18℃)		kW			12.36 / 38.50			
Cooling Power Input Min./Max.(A35℃/W18℃)		W			3314 / 11810			
E.E.R Min./Max.(A35℃/W18℃)		W/W			3.26 / 3.73			
Max. Cooling Capacity(A35℃/W7℃)		kW			31.40			
E.E.R(A35℃/W7℃)		W/W			2.64			
Cooling Capacity Min./Max.(A35℃/W7℃)		kW			10.18 / 31.40			
Cooling Power Input Min./Max.(A35℃/W7℃)		W			2925 / 11894			
E.E.R Min./Max.(A35℃/W7℃)		W/W			2.64 / 3.48			
Max Power Input		kW			20.50			
Max Current		A			31.40			
Wire diameter		mm²			10.0			
Fuse or circuitbreakerer		A			40A			
Compressor		Brand			HITACHI			
Refrigerant / Suggested Input		Kg			R290/4.5			
Fan	Type	/			DC			
	Quantity	/			1			
	Airflow	m3/h			23000			
	Rated Fan Speed	RPM			850			
	Rated power	W			1700			
Water Side Heat Exchanger	Type	/			Plate Heat Exchanger			
	Water Pressure Drop	kPa			60			
	Piping Connection	Inch			G1.5"			
Allowable Water Flow	Min./Rated./Max.	L/S	1.49	2.39	3.98	2.99	4.78	7.96
Noise Level (Power Pressure)		dB(A)	70.7			75		
IP Class		/	IPX4			IPX4		
Net Dimension(L×D×H)		mm	1187*1087*1680			2200*1100*1966		
Splint packing Dimension(L×D×H)		mm	1242*1107*1830			2340*1202*2122		
Net Weight		kg	375			760		
Splint gross Weight		kg	466			851		
Container Loading Capacity (20/40HQ)		number	8/18			4/10		
Pdesignh (35/55℃)		kW	34.004/32.685			61.411/60.100		
SCOP (35/55℃)		kWh/kWh	4.54/3.55			4.50/3.46		
SCOPon (35/55℃)		kWh/kWh	4.54/3.55			4.51/3.47		
QH (35/55℃)		kWh/year	70253/67527			126875/124166		
QHE (35/55℃)		kWh/year	15480/19011			28191/35852		
ηs,h (35/55℃)		--	178.5/139.1			177.0/135.5		
Seasonal space heating energyefficiency classes:		--	A+++			A+++		
Seasonal space heating energyefficiency classes:		--	A++			A++		
Operation Ambint Temp.(℃)		-25~45						
Operation water Temp.(℃)		10~70(DHW)						
Operation water Temp.(℃)		10~70(Heating)						
Operation water Temp.(℃)		12~30(Cooling)						
Note: (1) Heating condition: water inlet/outlet temperature: 30℃/35℃, Ambient temperature: DB 7℃/WB 6℃;								
(2) Heating condition: water inlet/outlet temperature: 40℃/45℃, Ambient temperature: DB 7℃/WB 6℃;								
(3) Cooling condition: water inlet/outlet temperature: 23℃/18℃, Ambient temperature: DB35℃/WB24℃;								
(4) Cooling condition: water inlet/outlet temperature: 12℃/7℃, Ambient temperature: DB35℃/WB24℃;								