


DC Inverter Air Source Heat Pumps (Monoblock Type)

1. Working source temperature range: -25°C to 45°C
2. Control Object: water tank temperature
(Setting range: Heating: $30^{\circ}\text{C} \sim 55^{\circ}\text{C}$; Cooling: $32^{\circ}\text{C} \sim 12^{\circ}\text{C}$)
3. Control Way: wire controller
4. Water Pump: start/stop according to water tank temp
5. Working Modes: hot water/heating/cooling/hot water+cooling/hot water+heating

SPRISUN

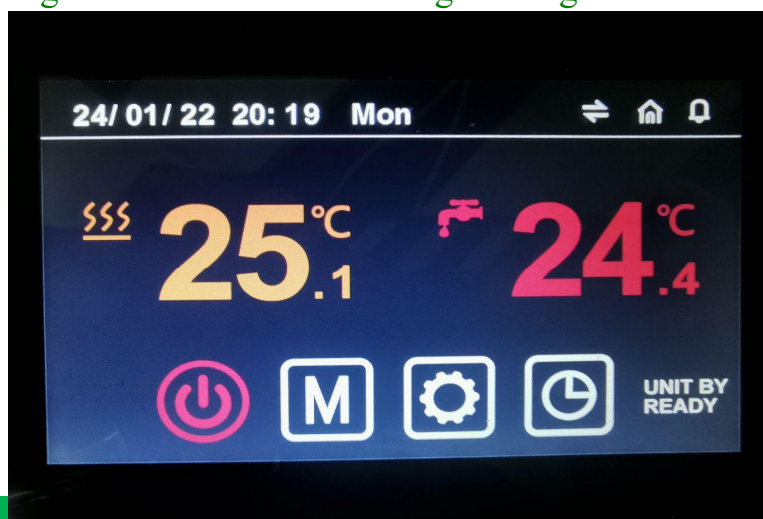

CGK-150V3L-B




Guangzhou Sprisun New Energy Technology Development Co., Ltd.

Installation Diagram

Symbol	Name
	3-way valve
	2-way valve
	Ball valve
	Non-return valve
	Filter
	Water pump
	Temp sensor
	Release valve
	Expansion tank




Notice:

1. Pls select the right modes according to your demand then install it according to the installation diagram. If only hot water function required, pls select heating+hot water mode , and then put the hot water sensor into the hot water tank.
2. Two-way valve and BV valve are optional for installation. Only If you need to control the temperature by different zone, then pls install both.
3. Fan coil can be controlled by linkage with the secondary circulation pump . Meanwhile, a passive linkage thermostat shall be installed.

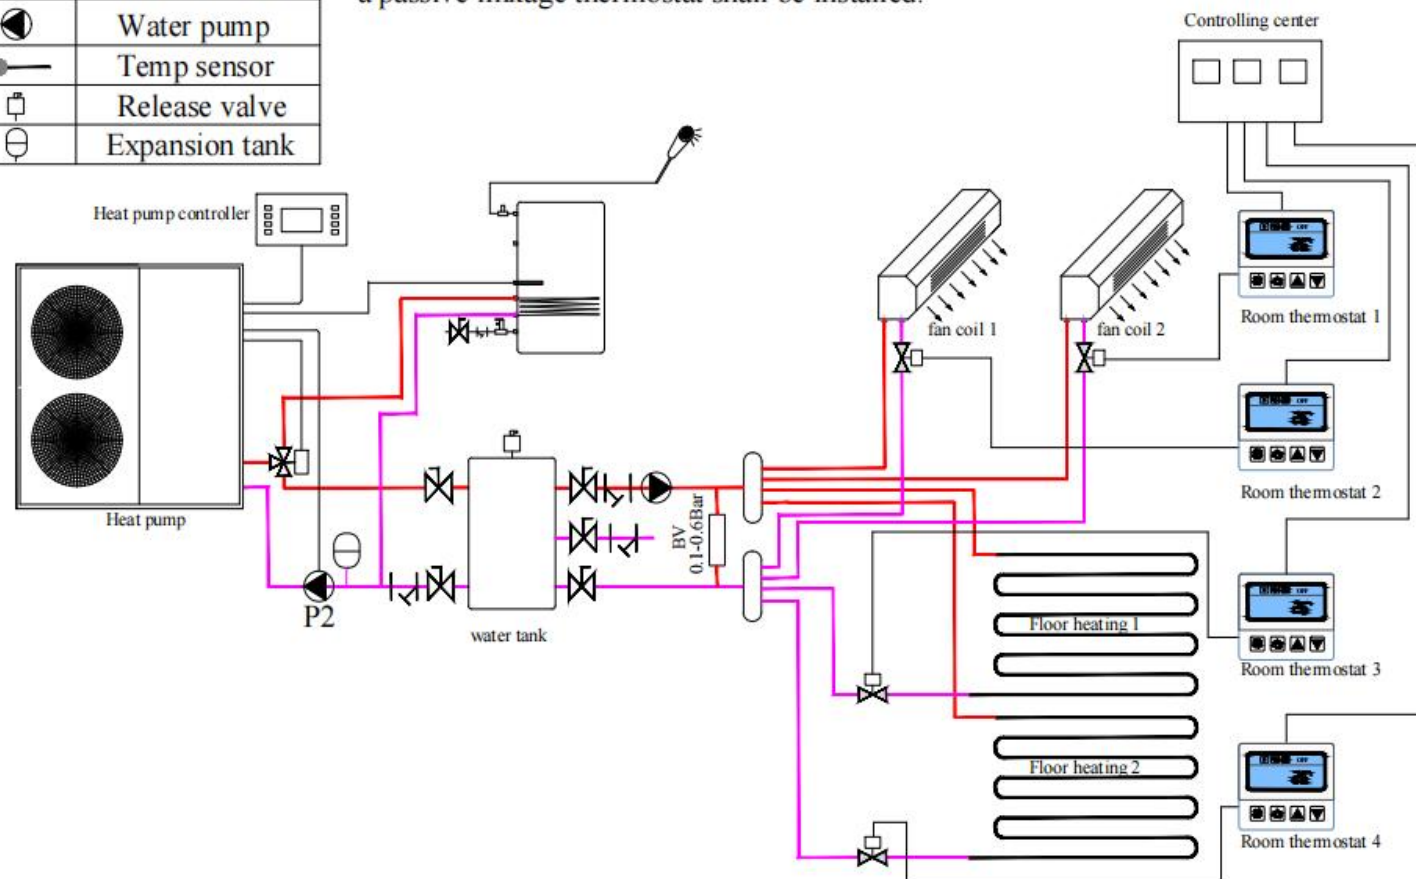

DC inverter air source heat pump

Standard Materials


Name	Description	Picture	Name	Description	Picture	Name	Description	Picture
Condenser	Plate Heat Exchanger		Evaporator	Hydropilic Aluminium foil and internal thread copper pipe heat exchanger		High Pressure Sensor	Match-well 0-4.5MPa	
Compressor	Panasonic Rotary Compressor		Expansion Valve	FUJIKOKI		Low Pressure Sensor	Match-well 0-3.45MPa	
4-way valve	SANHUA		DC Fan	NIDEC DC Fan		Package	corrugated board case / plywood case	
Controller	Touch screen Controller							

Unit Name			DC Inverter Air		
Model			CGK-150V3L-B		
Power Supply / Refrigerant		V/Hz/P	380-420/50/3 - R32		
Max. Heating Capacity (A7℃/W35℃)		kW	45.1		
C.O.P (A7℃/W35℃)		W/W	4.2		
Heating Capacity Min./Max.(A7℃/W35℃)		kW	20.75	/	45.10
Heating Power Input Min./Max.(A7℃/W35℃)		W	3952	/	10738
C.O.P Min./Max.(A7℃/W35℃)		W/W	4.2	/	5.25
Max. Heating Capacity(A7℃/W45℃)		kW	43.3		
C.O.P (A7℃/W45℃)		W/W	3.72		
Heating Capacity Min./Max.(A7℃/W45℃)		kW	19.92	/	43.30
Heating power input Min./Max.(A7℃/W45℃)		W	4992	/	12886
C.O.P Min./Max.(A7℃/W45℃)		W/W	3.36	/	3.99
Max. Cooling Capacity(A35℃/W18℃)		kW	41.1		
E.E.R (A35℃/W18℃)		W/W	3.61		
Cooling Capacity Min./Max.(A35℃/W18℃)		kW	18.92	/	41.13
Cooling Power Input Min./Max.(A35℃/W18℃)		W	4839	/	11399
E.E.R Min./Max.(A35℃/W18℃)		W/W	3.61	/	3.91
Max. Cooling Capacity(A35℃/W7℃)		kW	31.6		
E.E.R(A35℃/W7℃)		W/W	2.82		
Cooling Capacity Min./Max.(A35℃/W7℃)		kW	14.54	/	31.60
Cooling Power Input Min./Max.(A35℃/W7℃)		W	4224	/	11206
E.E.R Min./Max.(A35℃/W7℃)		W/W	2.82	/	3.44
Water Flow		m³/h	7.76		
Hot Water Flow Rate		L/h	931		
Max Power Input		kW	16.11		
Max Current		A	33.99		
Wire diameter		mm²	6.0		
Fuse or circuitbreakerer		A	40A		
Compressor	Type - Quantity/System		Twin Rotary - 1		
Fan	Quantity		2		
	Airflow	m3/h	12000		
	Rated power	W	600		
Water Side Heat Exchanger	Type		Plate Heat Exchanger		
	Water Pressure Drop	kPa	40		
	Piping Connection	Inch	G1-1/2"		
Allowable Water Flow	Min./Rated./Max.	L/S	1.35	2.15	3.59
Sound pressure level(1m)		dB(A)	53.2~63.6		
Sound power level(1m)		dB(A)	75		
Pdesignh (35/55℃)	kW		/		
SCOP (35/55℃)	kWh/kWh		/		
SCOPon (35/55℃)	kWh/kWh		/		
QH (35/55℃)	kWh/year		/		
QHE (35/55℃)	kWh/year		/		
ηs, h (35/55℃)	--		/		
Seasonal space heating	--		A+++		
Seasonal space heating	--		A++		
机身尺寸Net Dimension(L×D×H)		mm	1400*525*1570		
纸箱包装外尺寸 Carton packing Dimension(L×D×H)		mm	/		
夹板包装外尺寸Splint packing Dimension(L×D×H)		mm	1480*580*1717		
净重Net Weight		kg	260		
纸箱包装毛重 Carton gross Weight		kg	/		
夹板包装毛重 Splint gross Weight		kg	295预估		
Note: (1) Heating condition: water inlet/outlet temperature: 30℃ /35℃, Ambient temperature: DB 7℃/WB 6℃; (不含除霜)					
(2) Heating condition: water inlet/outlet temperature: 40℃ /45℃, Ambient temperature: DB 7℃/WB 6℃;					

(3) Cooling condition: water inlet/outlet temperature: 23℃ /18℃, Ambient temperature: DB35℃/WB24℃;
(4) Cooling condition: water inlet/outlet temperature: 12℃ /7℃, Ambient temperature: DB35℃/WB24℃;

4. 8 7. 8 12. 9

CGK-150V3L-B		
Heating capacity (KW)		
20.41	18.86	21.38
23.46	21.93	24.10
26.96	25.80	26.99
32.88	32.66	32.09
40.59	39.83	39.67
45.10	43.30	42.43
47.36	45.46	47.44
49.72	47.73	49.76
30/35	40/45	50/55

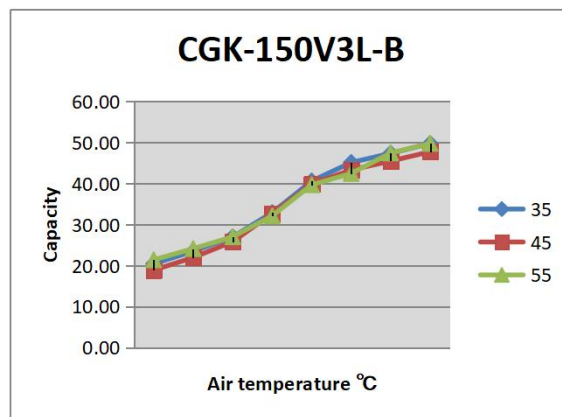

CGK-150V3L-B		
COP kW/kW		
2.11	2.04	1.74
2.32	2.22	1.91
2.61	2.41	2.07
3.07	2.81	2.36
3.33	3.05	2.56
3.65	3.42	2.87
4.20	3.72	3.12
4.70	4.02	3.37
5.27	4.70	3.95
35	45	55

