


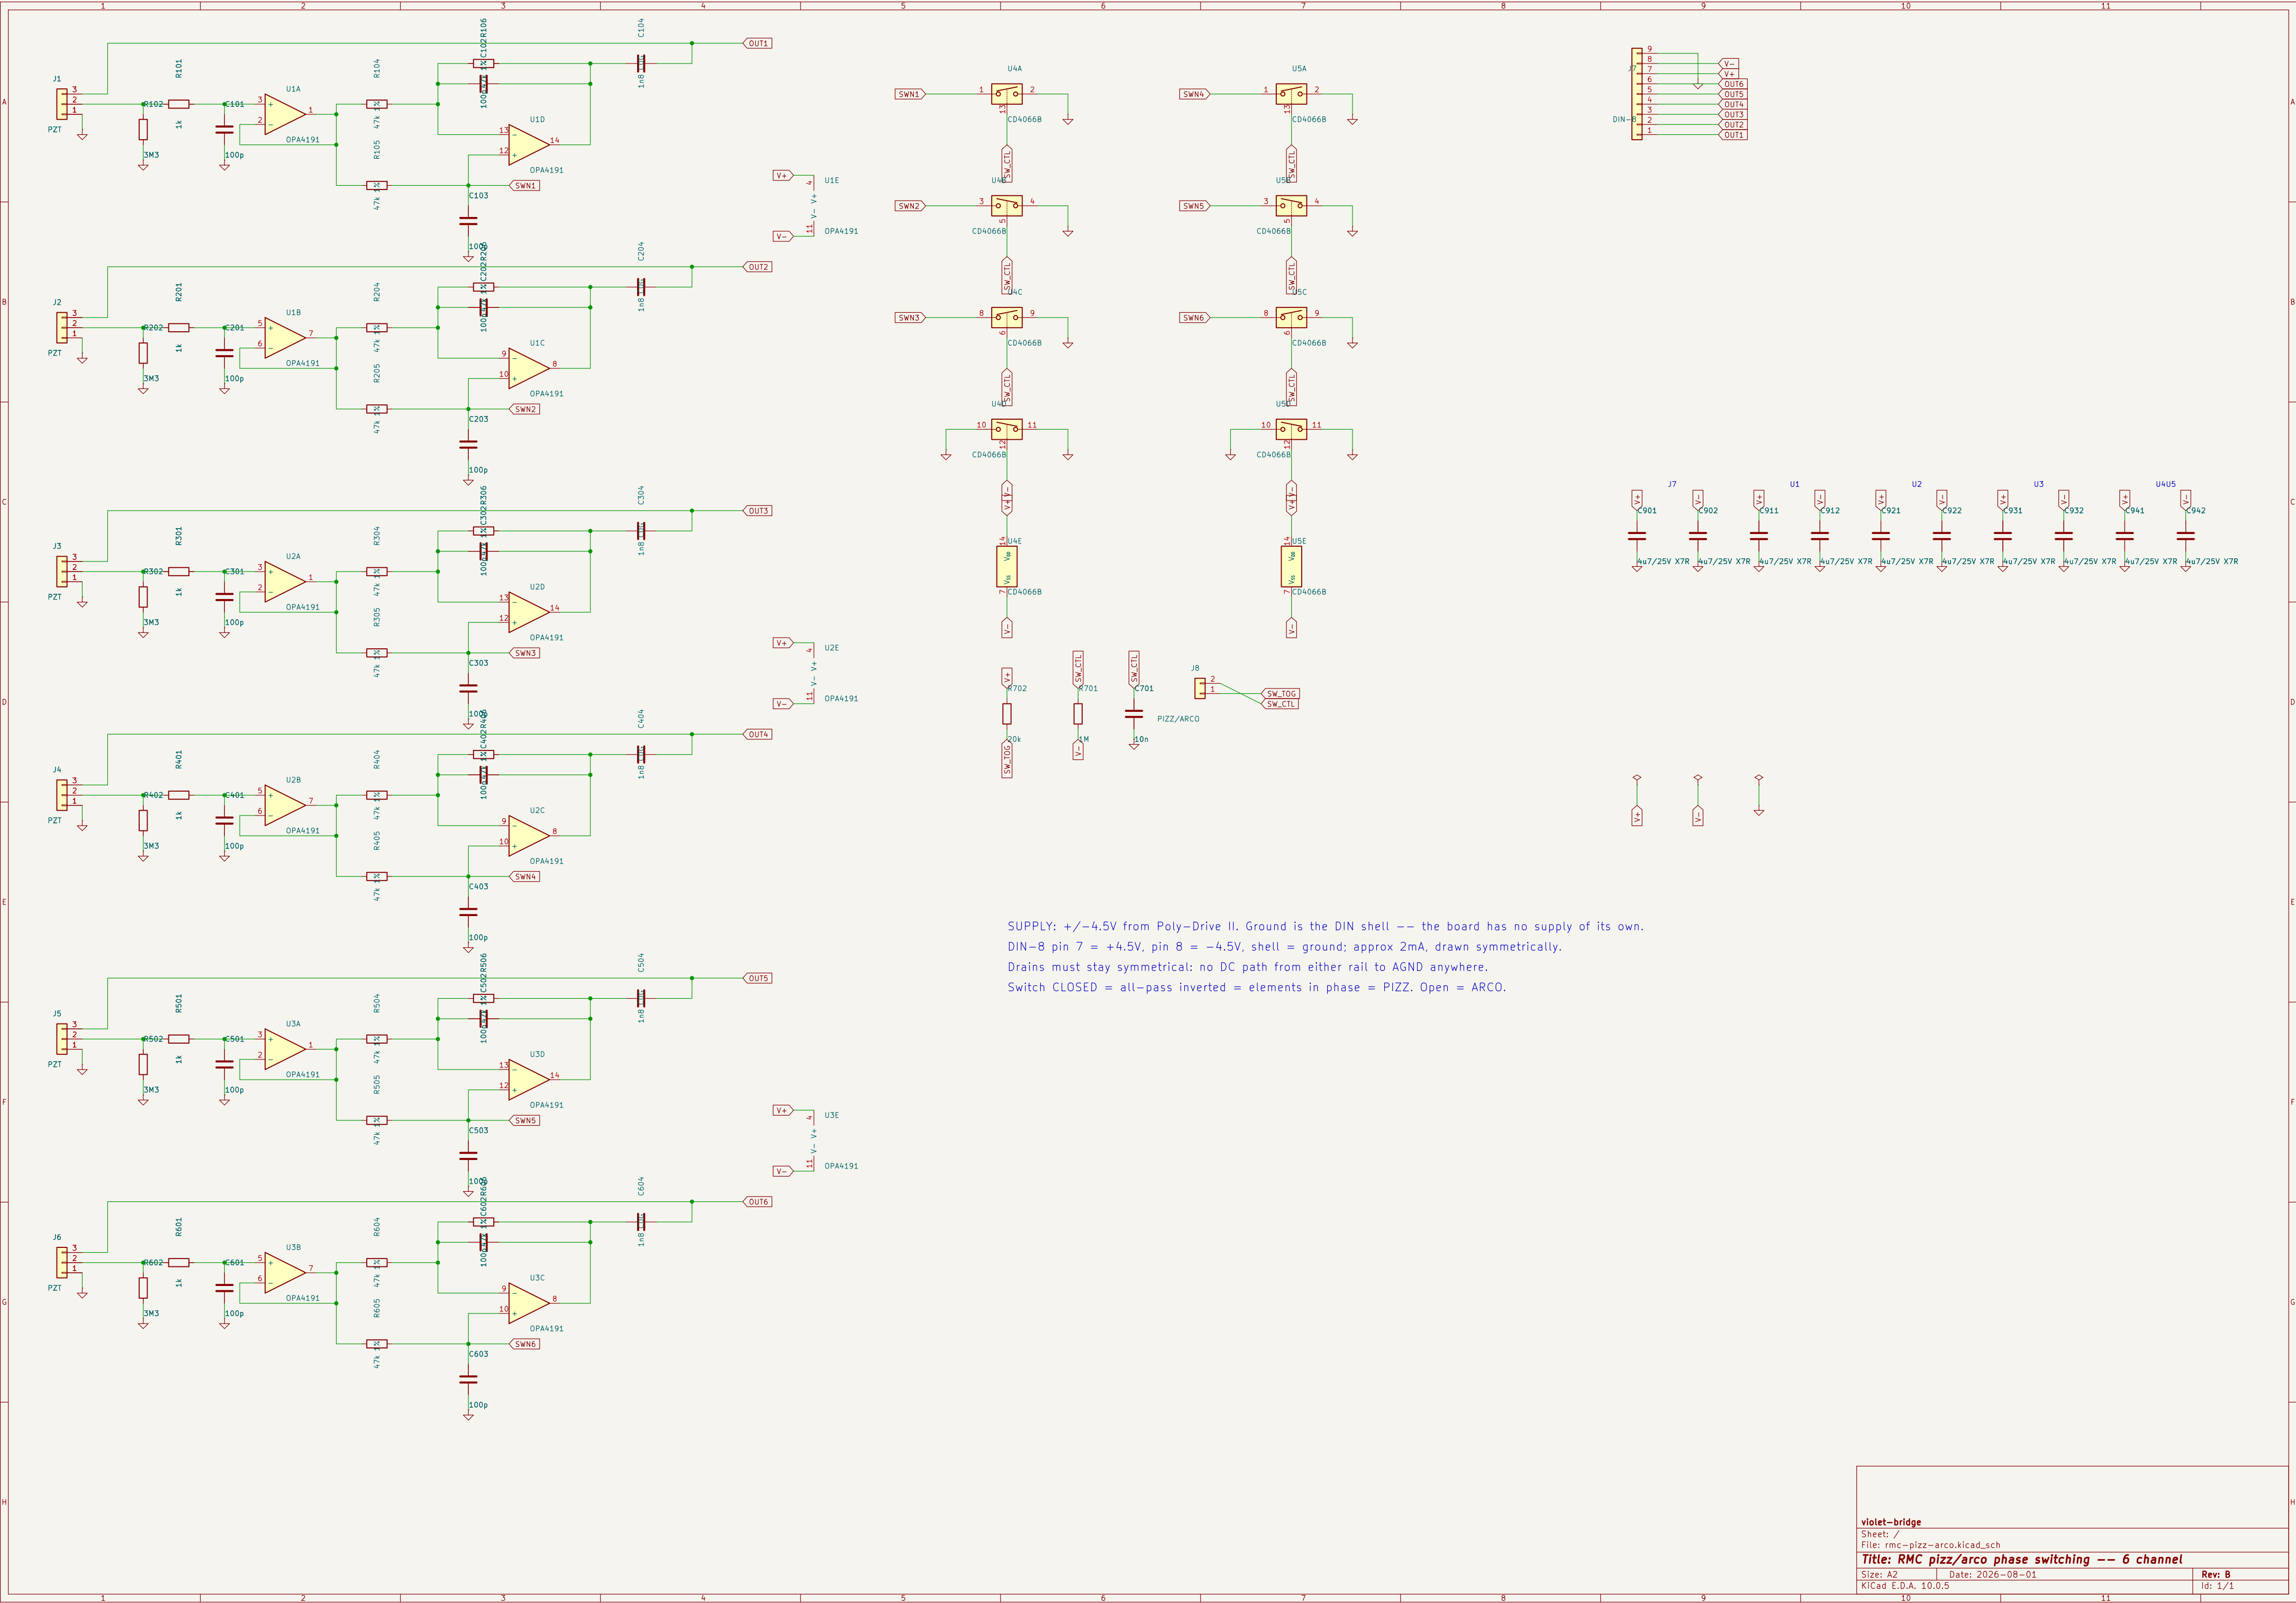

SUPPLY: +/-4.5V from Poly-Drive II. Ground is the DIN shell -- the board has no supply of its own.  
DIN-8 pin 7 = +4.5V, pin 8 = -4.5V, shell = ground; approx 2mA, drawn symmetrically.  
Drains must stay symmetrical: no DC path from either rail to AGND anywhere.  
Switch CLOSED = all-pass inverted = elements in phase = PIZZ. Open = ARCO.