




SUPPLY: 9-15V DC, and it MUST float -- signal ground (GNDA) sits at mid-supply.
Intended source: 9V onboard floating Battery pack, approx 2.1mA.
Switch closed = all-pass grounded = inverted (-1).

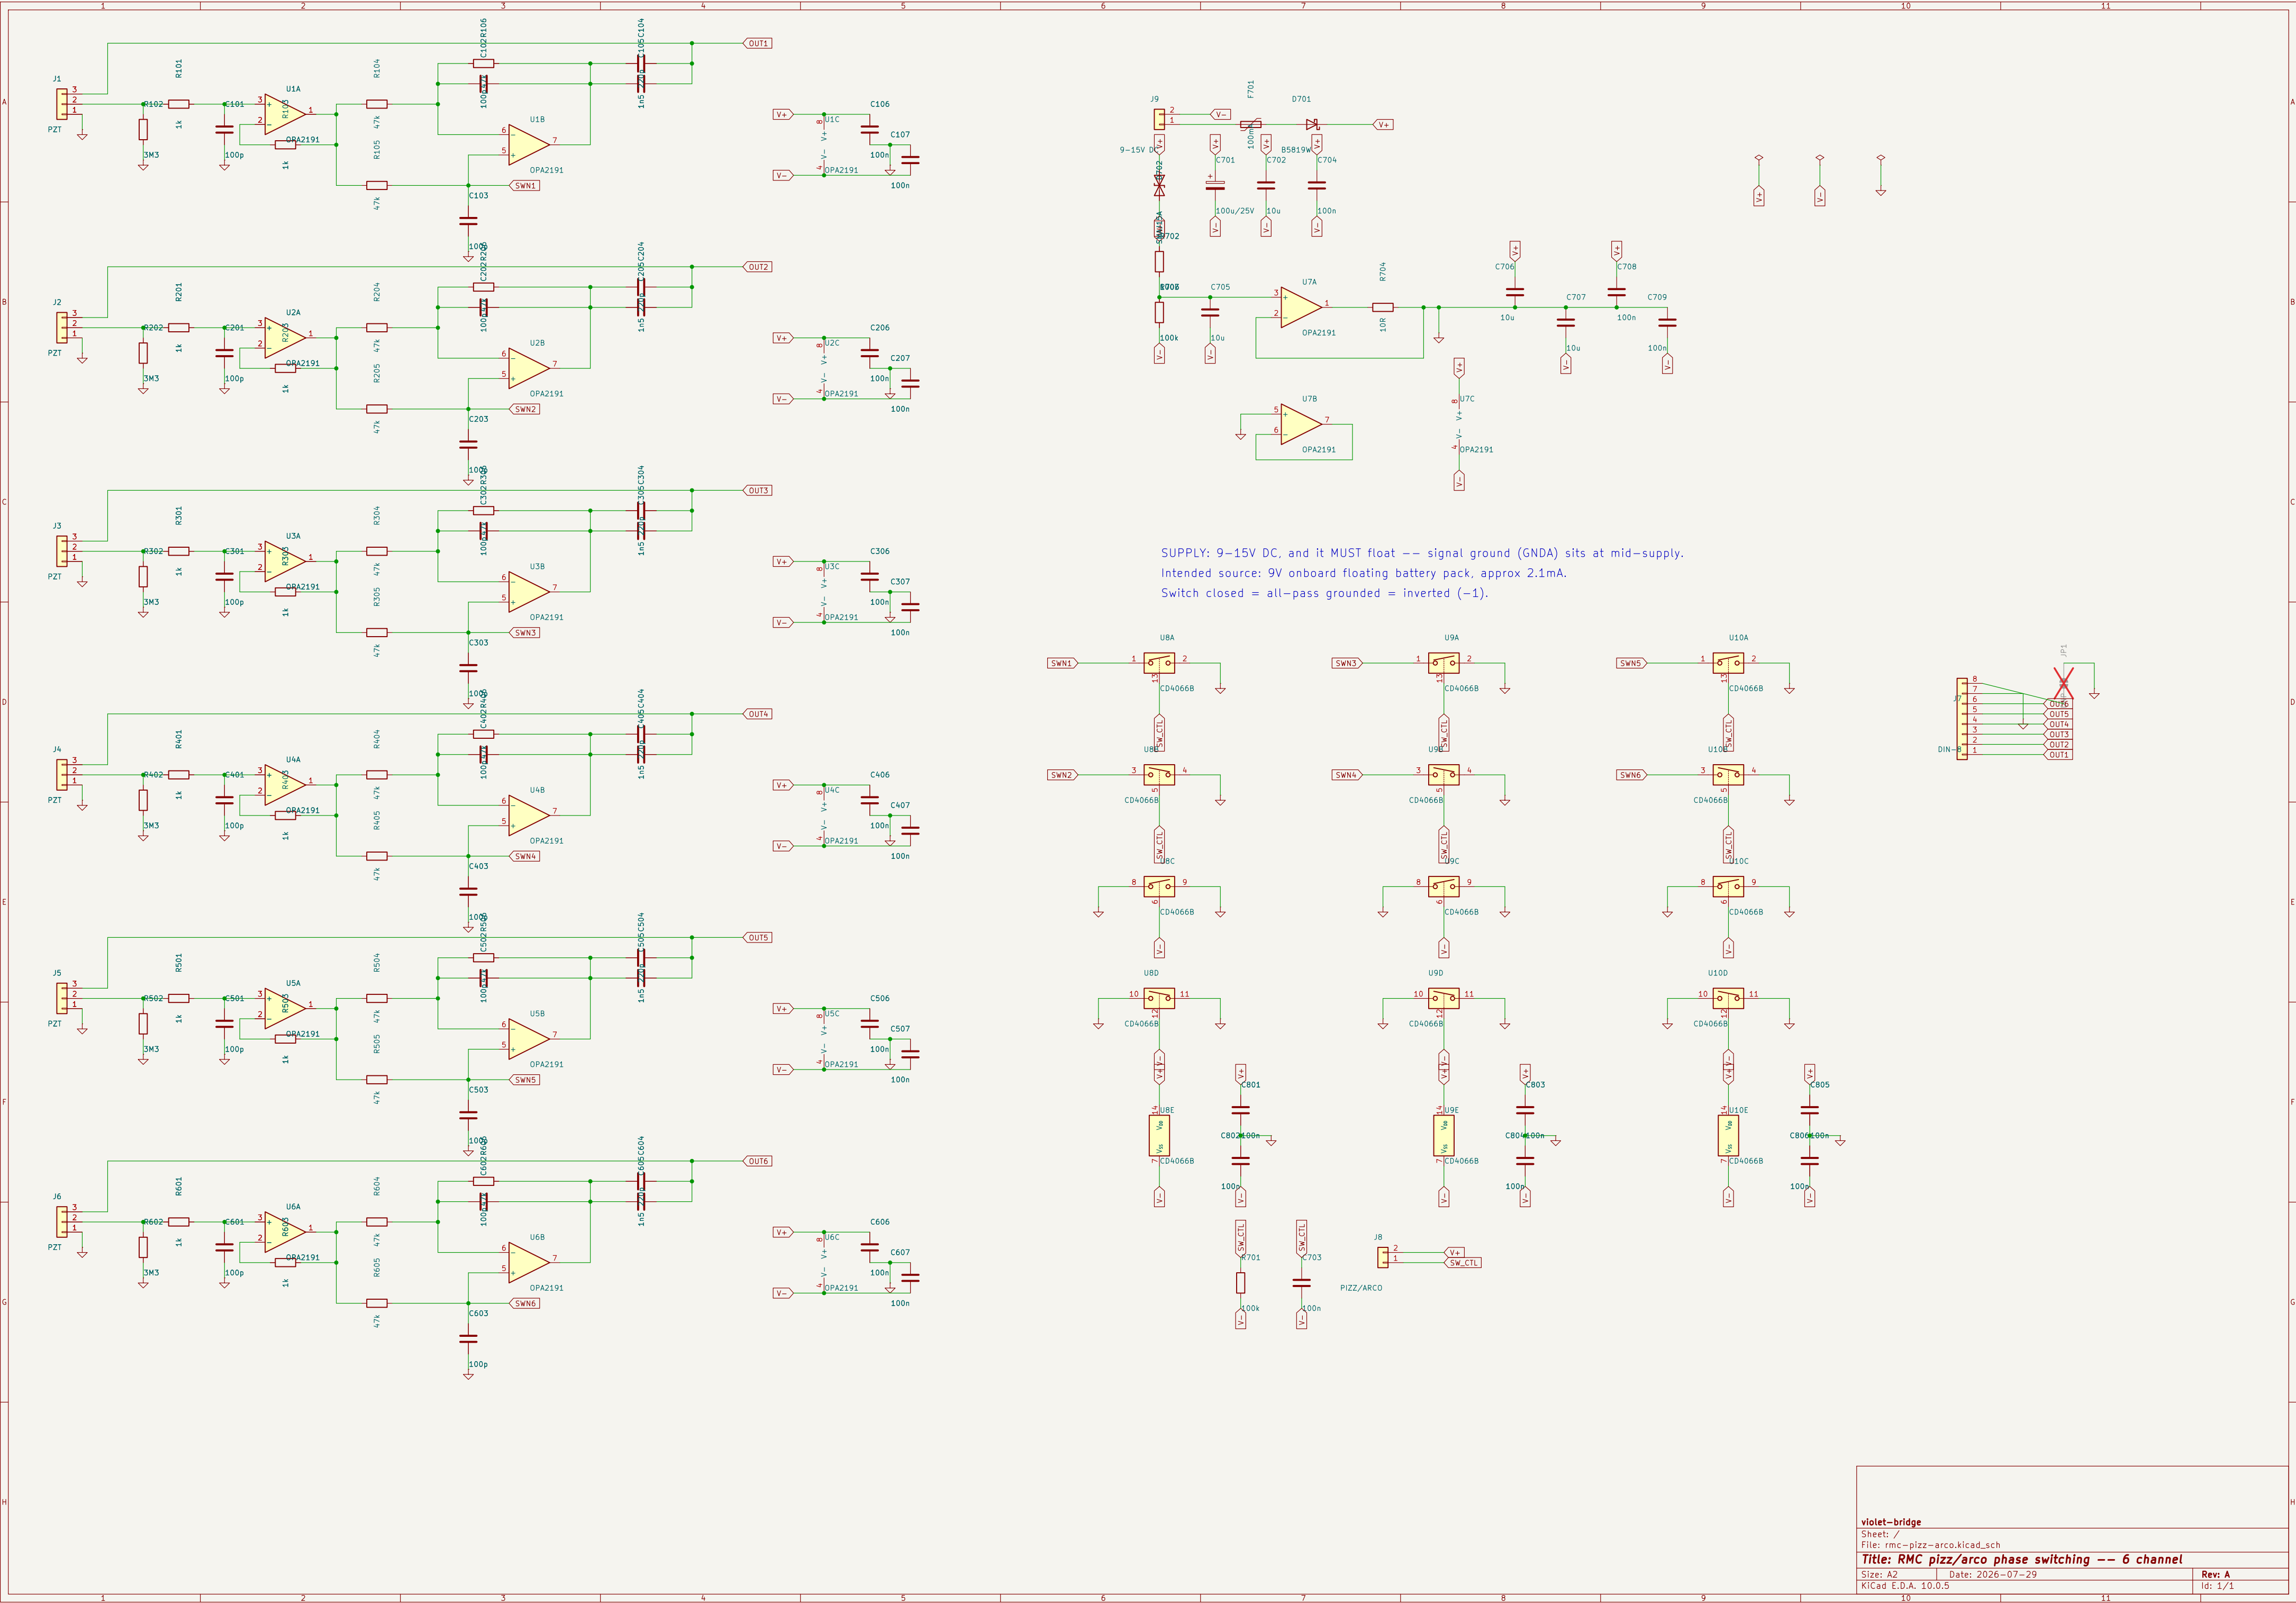