




SCOPE AND PROPOSED FINISH	
1	QUOTATION / DFM REVIEW ONLY - NOT RELEASED FOR MACHINING.
2	Units mm. Do not scale. Read with sheet 2 and frame-reference.step.
3	One-piece lower frame; caps, keys, pads and hardware excluded.
4	CNC mill/drill from solid. Sheet profile cutting alone is insufficient.
5	Material: titanium; grade and stock condition to be agreed.
6	Nominal geometry retained from PETG prototype d24a674.
7	Proposed general linear tolerance +/-0.10; angles +/-0.5 deg.
8	Functional fits on sheet 2 override general proposal; confirm before release.
9	Deburr all edges. Proposed edge break 0.10-0.20 except fits/stops.
10	Whistle seats: proposed Ra 1.6 um; no burrs or tool ridges.
11	Protect spring seats, stop faces and bearing lands from edge breaks.
12	CAD defines unlisted contours; all sharp internal corners need DFM review.
13	Section A-A: foot-end clamp at Y=0. Pocket floor Z=1.90.
14	Base top Z=3.50; nominal nut-pocket roof thickness 1.60.

RELEASE HOLDS	
1	HOLD 1: confirm hole 5/6 measurements and resulting key positions.
2	HOLD 2: 1.10 CAD pin bores are a PRINT allowance, not a metal friction fit.
3	Agree pin retention and bore limits using actual 1 x 12 steel pins.
4	HOLD 3: six sharp hex pockets need EDM/broaching or approved relief.
5	No unapproved cutter radii in key sweeps, seats or nut corners.
6	HOLD 4: confirm titanium grade, clamp fit and all proposed tolerances.
7	A geometry drawing does not establish titanium clamp compliance.

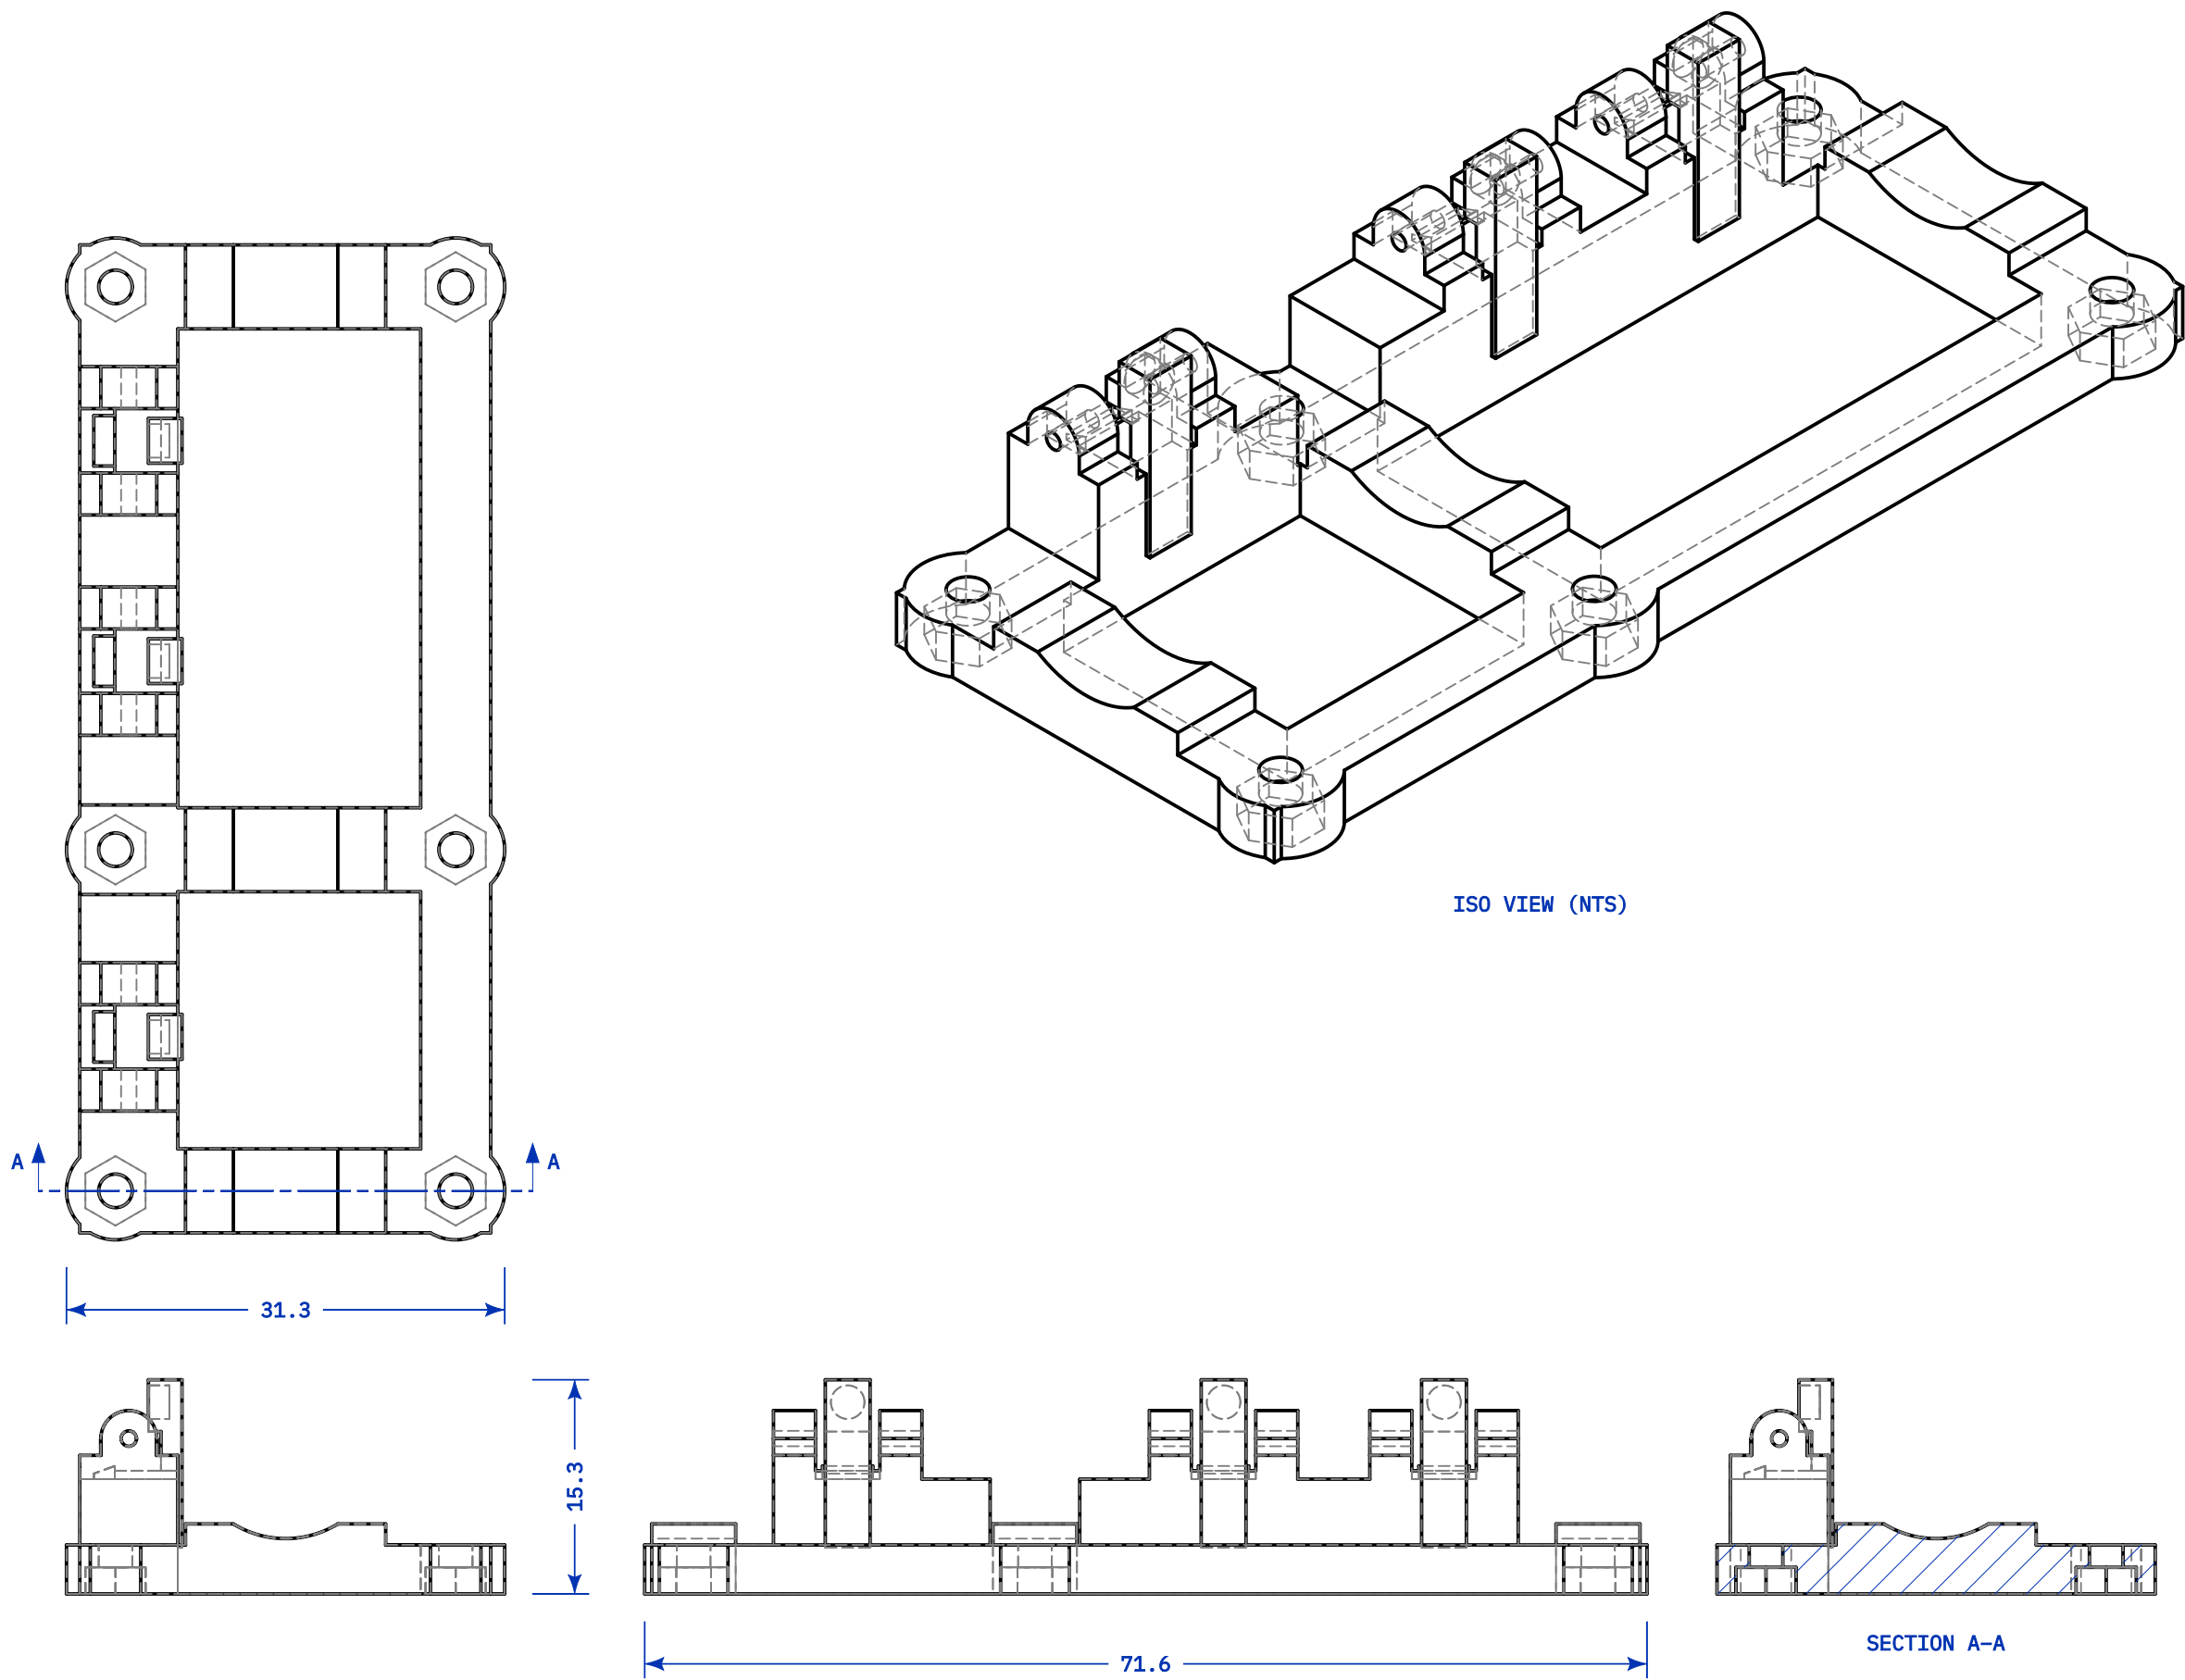

TITLE	FRAME / MACHINING REVIEW	DWG NO.	WK-TI-001-1	SCALE	2:1	MAT.	Ti / TBD	REV	P1
GEN. TOL.	DRAFT / SEE NOTES	DRAWN BY	PZFREO / draftwright						