





SCOPE AND PROPOSED FINISH	
1	QUOTATION / DFM REVIEW ONLY - NOT RELEASED FOR MACHINING.
2	Units mm. Do not scale. Read with sheet 2 and frame-reference.step.
3	One-piece lower frame; caps, keys, pads and hardware excluded.
4	CNC mill/drill from solid. Sheet profile cutting alone is insufficient.
5	Material: titanium; grade and stock condition to be agreed.
6	Nominal geometry retained from PETG prototype d24a674.
7	Proposed general linear tolerance +/-0.10; angles +/-0.5 deg.
8	Functional fits on sheet 2 override general proposal; confirm before release.
9	Deburr all edges. Proposed edge break 0.10-0.20 except fits/stops.
10	Whistle seats: proposed Ra 1.6 um; no burrs or tool ridges.
11	Protect spring seats, stop faces and bearing lands from edge breaks.
12	CAD defines unlisted contours; all sharp internal corners need DFM review.
13	Section A-A: foot-end clamp at Y=0. Pocket floor Z=1.90.
14	Base top Z=3.50; nominal nut-pocket roof thickness 1.60.

RELEASE HOLDS	
1	HOLD 1: confirm hole 5/6 measurements and resulting key positions.
2	HOLD 2: 1.10 CAD pin bores are a PRINT allowance, not a metal friction fit.
3	Agree pin retention and bore limits using actual 1 x 12 steel pins.
4	HOLD 3: six sharp hex pockets need EDM/broaching or approved relief.
5	No unapproved cutter radii in key sweeps, seats or nut corners.
6	HOLD 4: confirm titanium grade, clamp fit and all proposed tolerances.
7	A geometry drawing does not establish titanium clamp compliance.

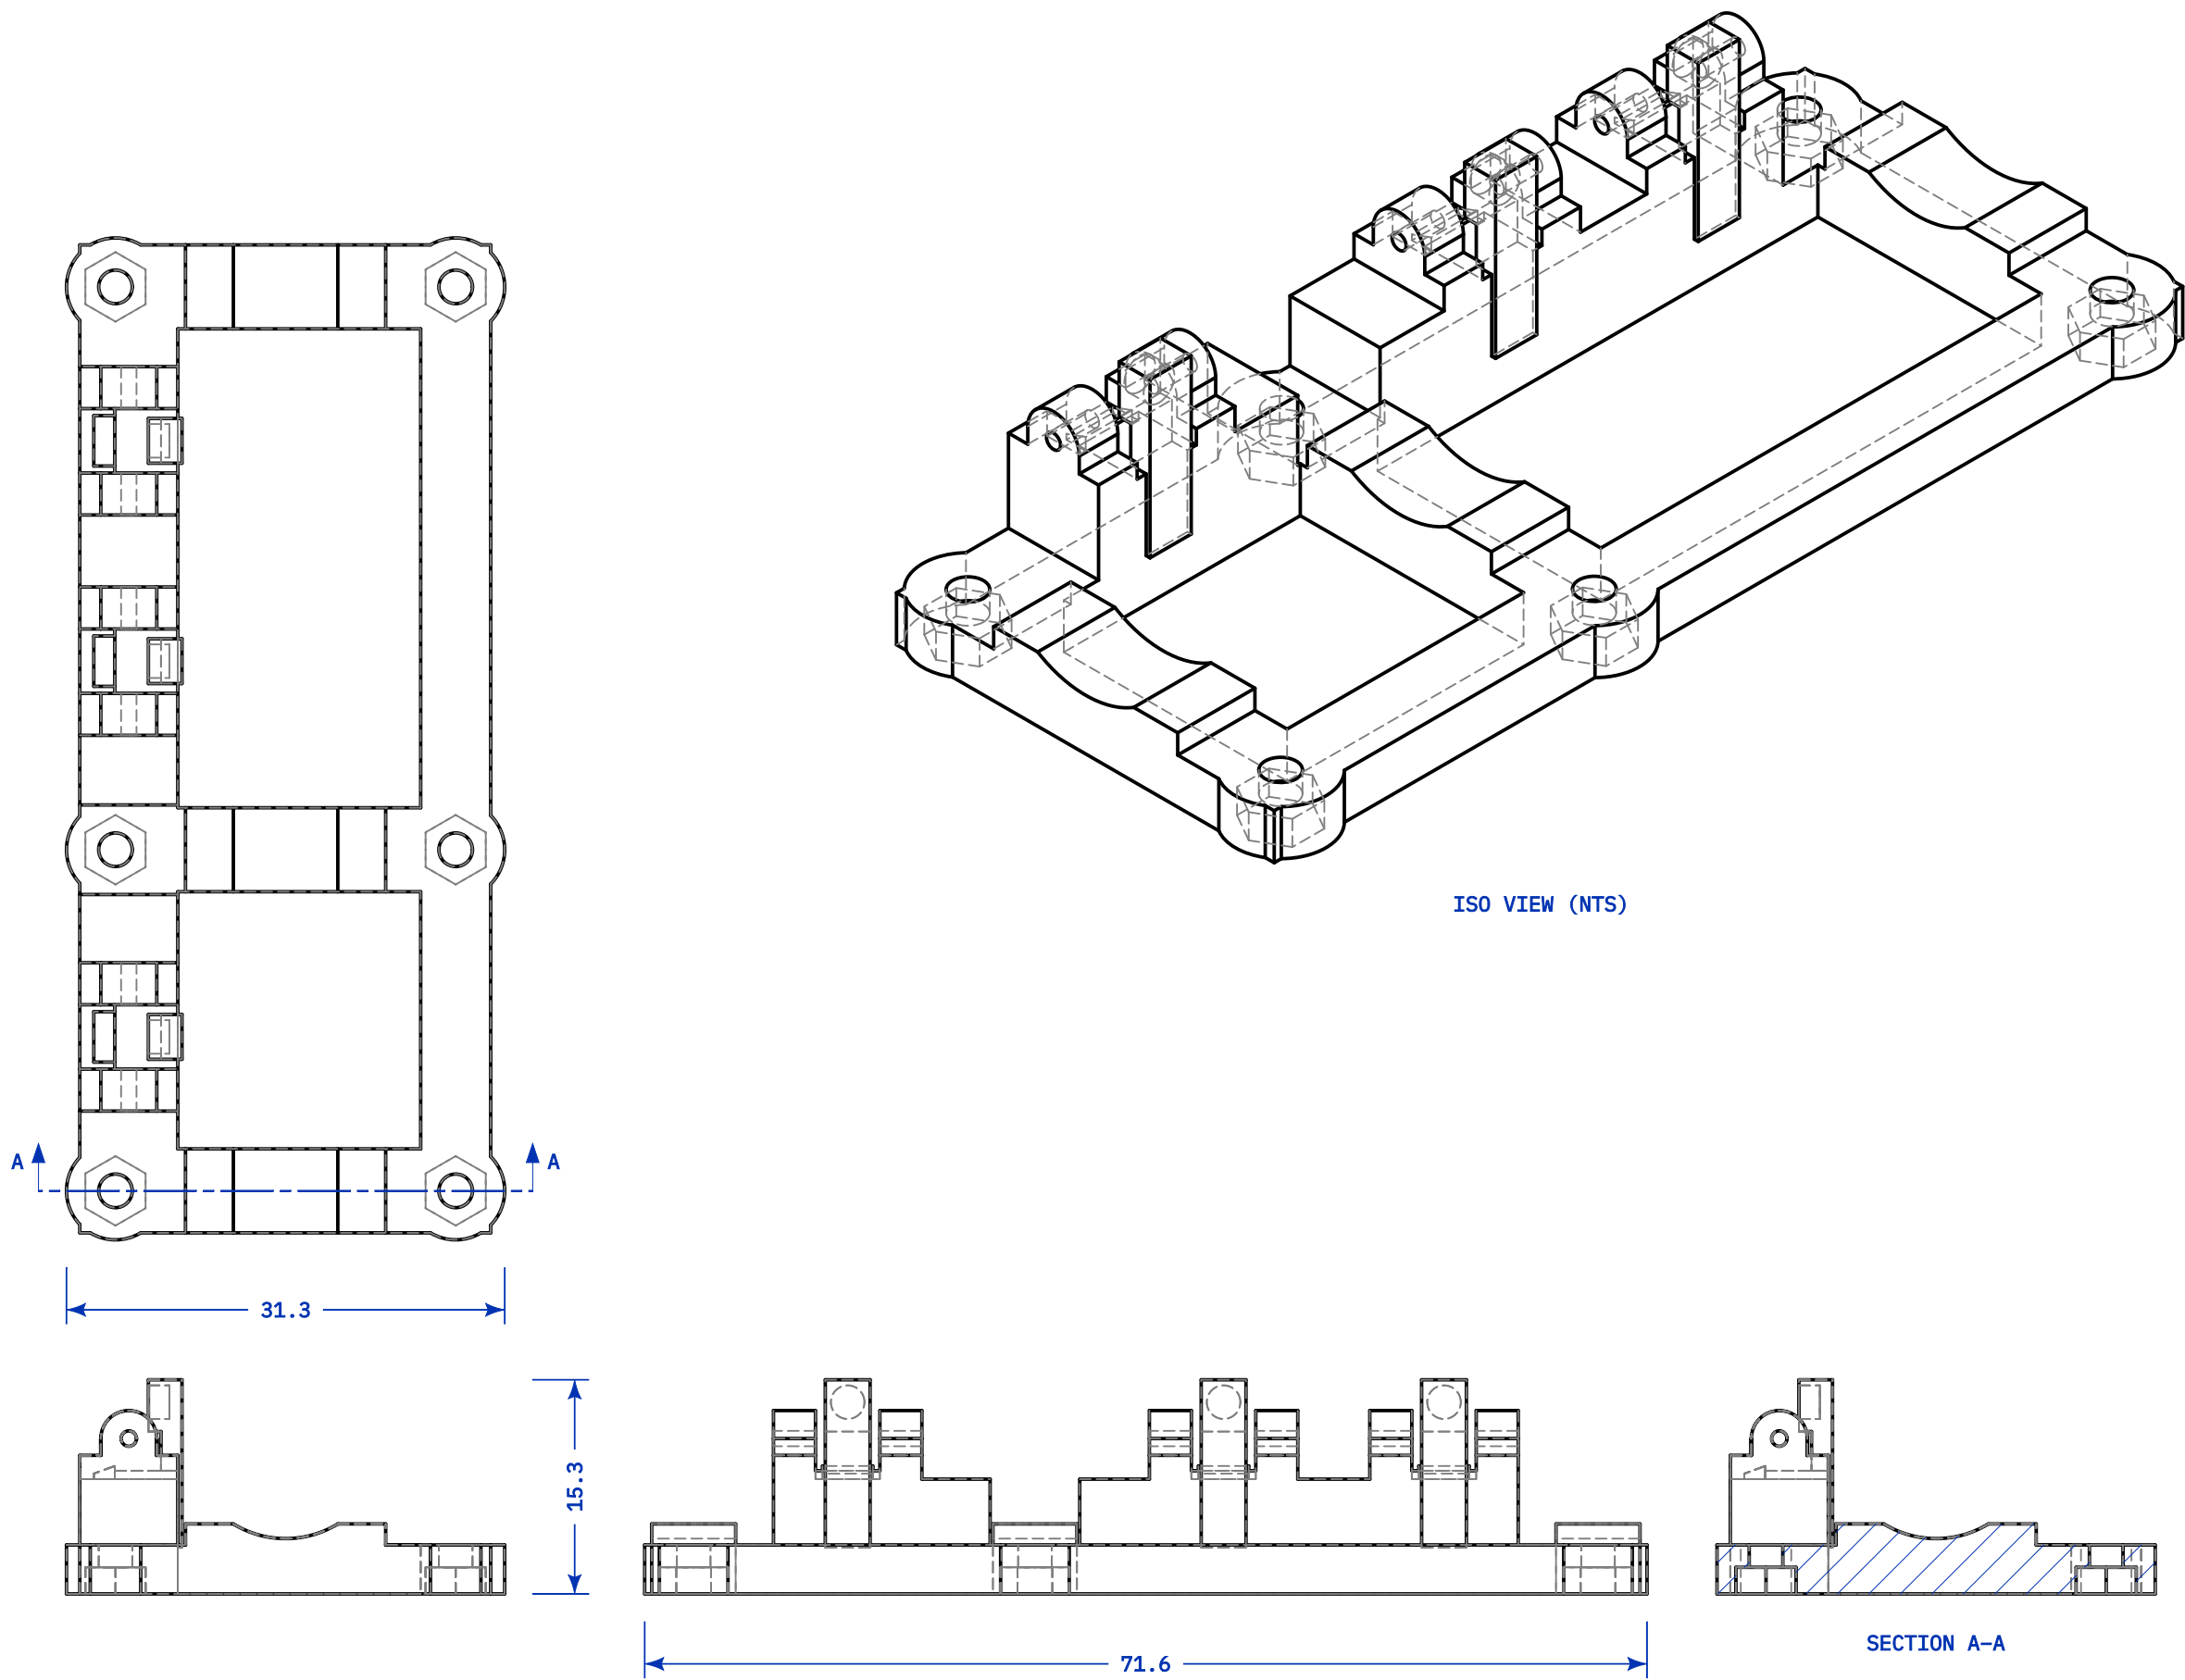

TITLE	FRAME / MACHINING REVIEW	DWG NO.	WK-TI-001-1	SCALE	2:1	MAT.	Ti / TBD	REV	P1
GEN. TOL.	DRAFT / SEE NOTES	DRAWN BY	PZFREO / draftwright						

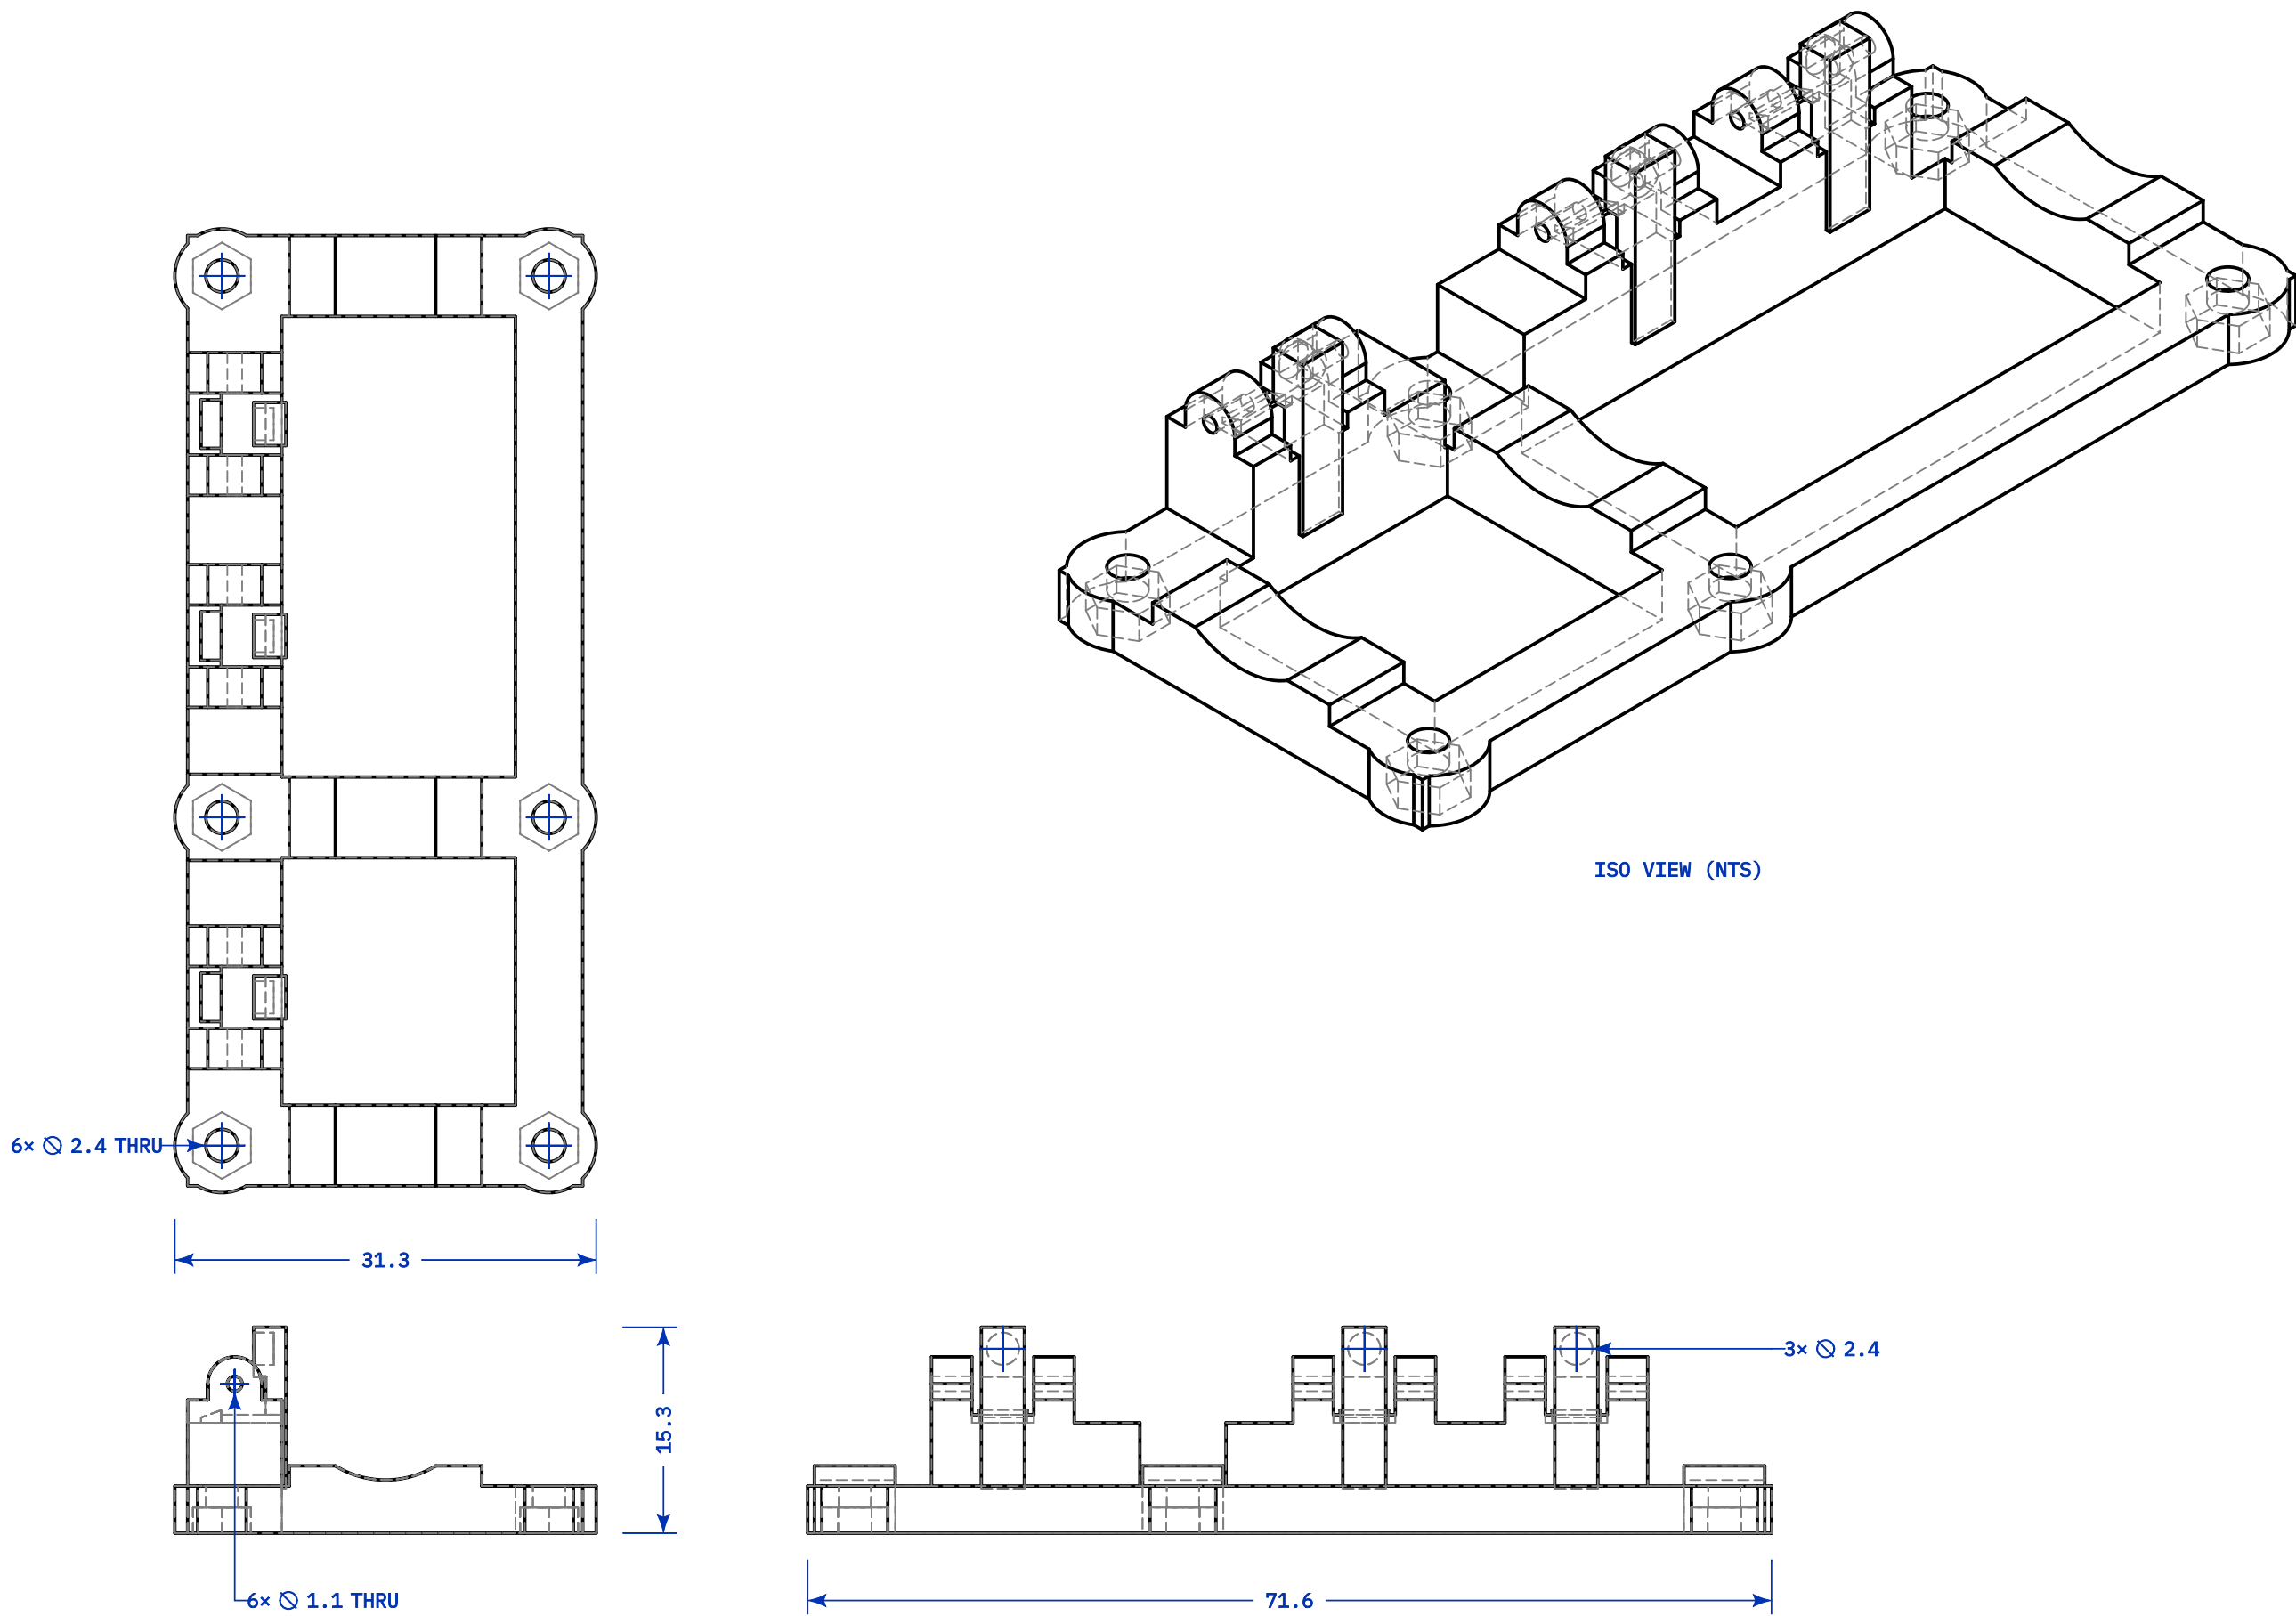

ISO VIEW (NTS)

FEATURE	X	Y	Z / DIRECTION
Clamp 1: 2 bolts / nut pockets	+/-12.150	0.000	Z axis
Clamp 2: 2 bolts / nut pockets	+/-12.150	24.375	Z axis
Clamp 3: 2 bolts / nut pockets	+/-12.150	64.595	Z axis
Key 4: spring socket	-9.800	53.595	13.700 / +X
Key 5: spring socket	-9.800	37.850	13.700 / +X
Key 6: spring socket	-9.800	11.000	13.700 / +X
Key 4: paired hinge bores	-11.200	53.595 +/- 3.800	11.100 / Y
Key 5: paired hinge bores	-11.200	37.850 +/- 3.800	11.100 / Y
Key 6: paired hinge bores	-11.200	11.000 +/- 3.800	11.100 / Y

FEATURE DEFINITIONS / PROPOSED FITS	
1	Coordinate origin: X=whistle axis; Y=foot-end clamp centre; Z=base.
2	+Y points toward mouthpiece. All coordinates match supplied STEP.
3	6 bolt holes: diameter 2.40 THRU; proposed +0.05 / -0.00.
4	6 nut pockets from underside: 4.30 AF x 1.90 deep; proposal +/-0.05.
5	Nut pocket flat normals parallel X. Nominal nut 4.00 AF x 1.60.
6	Pocket roof Z=1.90; lug top Z=3.50; roof thickness 1.60.
7	3 spring sockets: diameter 2.40 x 1.50 full-diameter depth.
8	Socket floor X=-8.300; flat floor required, drill tip not included.
9	6 hinge bores: CAD diameter 1.10 through 3.00-thick ears; FIT ON HOLD.
10	Each hinge pair: 4.60 clear axial gap; 10.60 outer span.
11	Common hinge axis X=-11.200, Z=11.100. Verify all six coaxial.
12	3 whistle seats: R7.150, axis X=0 / Z=11.100, axial width 6.00.
13	Seat radius proposed +/-0.02; all seats share one axis.
14	Key spacing 4-5=15.745 / 5-6=26.850 nominal; MEASUREMENT HOLD.



TITLE	FRAME / FEATURE SCHEDULE	DWG NO.	WK-TI-001-2	SCALE	2:1	MAT.	Ti / TBD	REV	P1
GEN. TOL.	DRAFT / SEE NOTES	DRAWN BY	PZFREO / draftwright						