

Optics Alignment Results


X-ray generator : 9kW Rotating anode(45kV 200mA ID:1703)  
Target product id : Cu Fine focus (A-26-Cu)  
Goniometer : Inplane Goniometer with encoder  
Attachment base :  $\chi\phi Z$  attachment  
Attachment head : Standard attachment head  
Incident primary : Standard  
CBO : CBO  
Selection slit : PB  
Incident optics unit : Ge(220)x2  
Incident Soller slit : Soller slit open (short)  
Incident slit : Integrated incident slit box  
Length-limiting slit : 10 mm  
Receiving slit #1 : Receiving slit box #2  
Filter 1 : None  
Receiving optics unit #1 : PSA open  
Receiving Soller slit : Soller slit 2.5°  
Receiving slit #2 : Virtual receiving slit box  
Filter 2 : None  
Receiving attenuator : No unit  
Detector : HyPix-3000 (horizontal)  
Detector monochromator: None  
Detector slit : None

Optics attribute : PB-Ge(220)x2  
Optics alignment name: User defined settings

| Axis           | Position   | Offset |
|----------------|------------|--------|
| 2 $\theta$     |            | 0.8384 |
| $\omega$       |            | 0.7726 |
| Ts             | -5.7175625 |        |
| Zs             | -0.2421875 |        |
| Zr             | 0.1615625  |        |
| 2 $\theta\chi$ |            | 0.0000 |
| M              | 0          |        |
| $\omega m$     | 0          |        |

## Ts


Date : 2025-07-08 09:58:23  
X-ray : 45 kV, 200 mA, Cu  
Peak position, mm : -5.7175  
FWHM, mm : 0.8050  
Intensity, cps : 29432984.1328

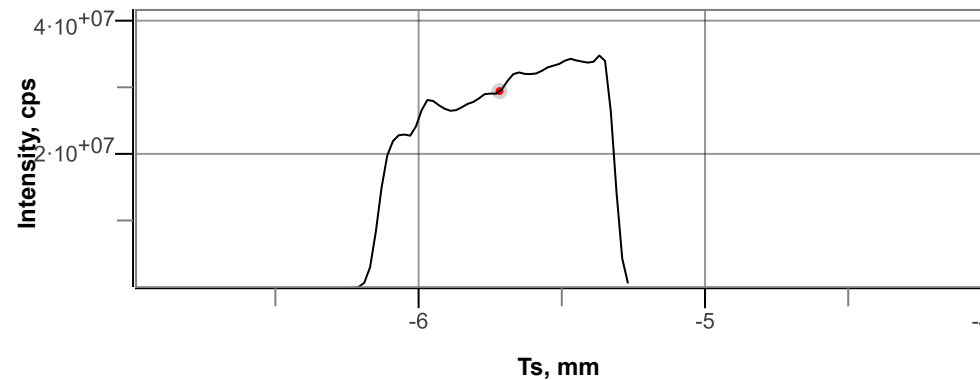

---


20

Date : 2025-07-08 10:00:34  
X-ray : 45 kV, 200 mA, Cu  
Peak position, ° : 0.8384  
FWHM, ° : 0.0211  
Intensity, cps : 24719079.0712

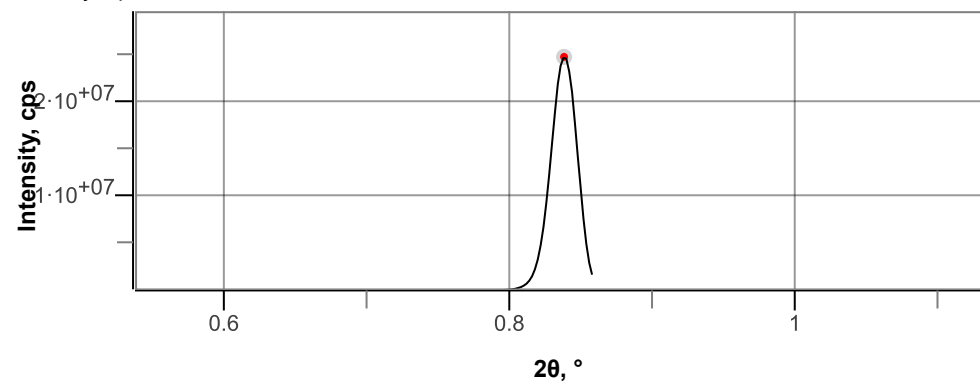

Zr

Date : 2025-07-08 10:01:12  
X-ray : 45 kV, 200 mA, Cu  
Peak position, mm : 0.1614  
FWHM, mm : 0.0669  
Intensity, cps : 20388483.2307

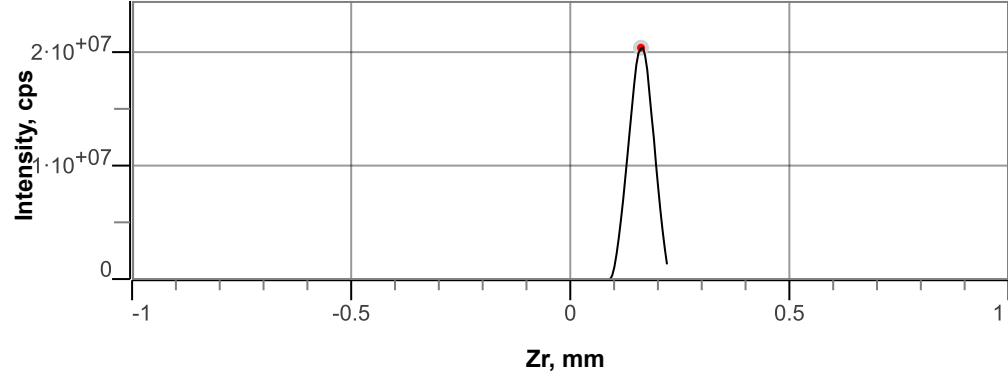

$\omega$

Date : 2025-07-08 10:01:54  
X-ray : 45 kV, 200 mA, Cu  
Peak position, ° : 0.7726  
FWHM, ° : 0.1662  
Intensity, cps : 17255377.6398

