

DIN-01


MALE STRAIGHT CONNECTOR

DIN METRIC | 24° CONE

Male straight connector is used to connect tubes with a 24° cone end to a female port with metric threads. Designed for high-pressure hydraulic systems, it provides a leak-free and reliable connection.



TECHNICAL DRAWING

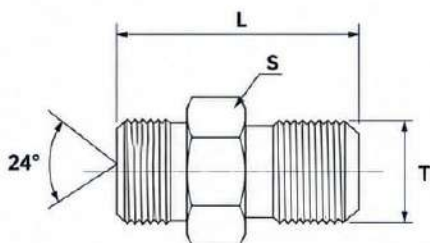

KEY FEATURES

- ✓ High pressure performance
- ✓ Leak-free connection
- ✓ Precision engineered
- ✓ Durable and long service life
- ✓ Complies with DIN standards

APPLICATIONS



TECHNICAL SPECIFICATIONS

Connection Type	DIN Metric (24° Cone)
Material	Carbon Steel / Stainless Steel (SS316)
Surface Finish	Zinc Plated / Plain / SS Natural
Working Pressure	Up to 630 bar (depending on size)
Temperature Range	-40°C to +120°C
Standard	DIN 2353 / ISO 8434-1
Application	Hydraulic Systems, Industrial Machinery, Mobile Equipment

MATERIAL OPTIONS



DIMENSIONS & PART NUMBER

Tube O.D. (mm)	Thread (M)	Part Number (Carbon Steel)	Part Number (Stainless Steel)	L (mm)	S (mm)	T (mm)	Working Pressure (bar)	Weight (kg)
6	M12 x 1.5	HP-DIN-001-06	HP-DIN-001-06-SS	32	14	6	630	0.032
8	M14 x 1.5	HP-DIN-001-08	HP-DIN-001-08-SS	34	17	8	630	0.045
10	M16 x 1.5	HP-DIN-001-10	HP-DIN-001-10-SS	36	19	10	630	0.060
12	M18 x 1.5	HP-DIN-001-12	HP-DIN-001-12-SS	38	22	12	420	0.082
15	M22 x 1.5	HP-DIN-001-15	HP-DIN-001-15-SS	42	27	15	420	0.128
18	M26 x 1.5	HP-DIN-001-18	HP-DIN-001-18-SS	44	32	18	420	0.174
22	M30 x 2.0	HP-DIN-001-22	HP-DIN-001-22-SS	48	36	22	420	0.266
28	M36 x 2.0	HP-DIN-001-28	HP-DIN-001-28-SS	52	41	28	420	0.412
35	M45 x 2.0	HP-DIN-001-35	HP-DIN-001-35-SS	60	50	35	420	0.620
42	M52 x 2.0	HP-DIN-001-42	HP-DIN-001-42-SS	68	60	42	420	0.880

NOTES

- Dimensions are for reference only and may vary slightly.
- Working pressure is subject to tube material, wall thickness and application.
- Custom sizes and special materials are available on request.
- Contact HidropeX technical team for further assistance.

ORDERING EXAMPLE

HP-DIN-001-10-SS

- Material (SS = Stainless Steel)
- Size (Tube O.D. 10 mm)
- Product Code