




3 Triax to 4 wire sensor measurement





5219



PP001079
Wire, Stranded, High Temp, Flexible, SIAC, Silicone Rubber, White, 0.5 mm², 328 ft, 100 m



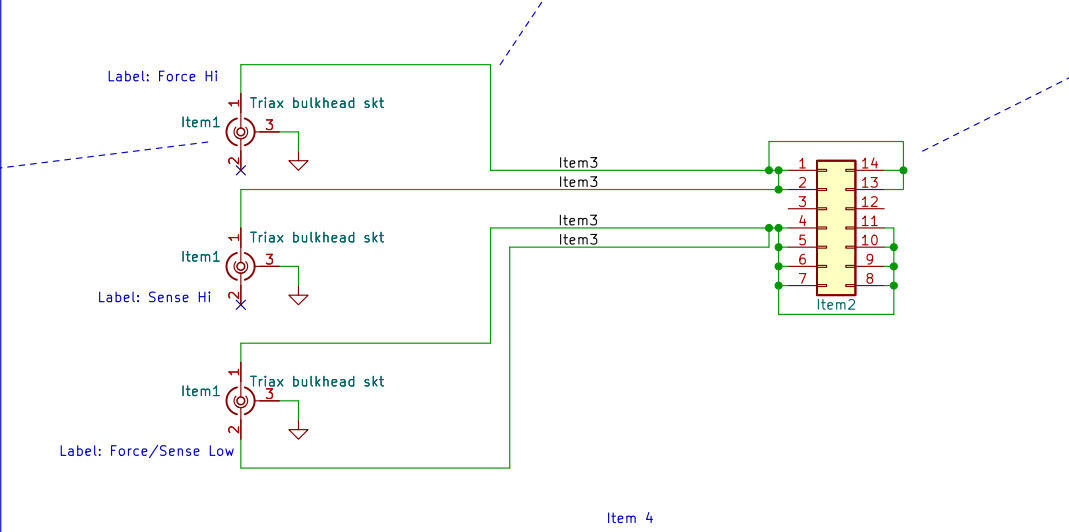



Item 4

Parts list:

- Pomona 5219, Triax bulkhead socket, 3 off
- Pomona 5251, SOIC 14 test clip – 1 off
- Multicomp 0.5mm² flexible cable, 100mm – 4 off
- Diecast box 115x90x55 – 1 off

Assembly Instructions:

- Triax chassis connection is shown as GND
- All connections should be heat shrunk
- Apply labels for sockets to exterior of box
- Assembly should be labelled with drawing number

Silveray Ltd
 Sheet: /
 File: td2210_reva.kicad_sch
Title: TD 22010 –3 Triax to 2 wire sensor measurement
 Size: A4 Date: 2022-11-25 Rev: a
 KiCad E.D.A. kicad (6.0.7) Id: 1/1

1. Pomona 5219, Triax bulkhead socket, 3 off
2. Pomona 5251, SOIC 14 test clip - 1 off
3. Multicomp 0.5mm² flexible cable, 100mm - 4 off
4. Diecast box 115x90x55 - 1 off

1. Triax chassis connection is shown as GND
2. All connections should be heat shrunk
3. Apply labels for sockets to exterior of box
4. Assembly should be labelled with drawing number

Id: 1/1