

PRE-INSTALLATION MANUAL



Cloud Smart Bathtub

T602-0711-U2 NOVIA

Pre-installation Instruction

NOVIA


T602-0711-U2

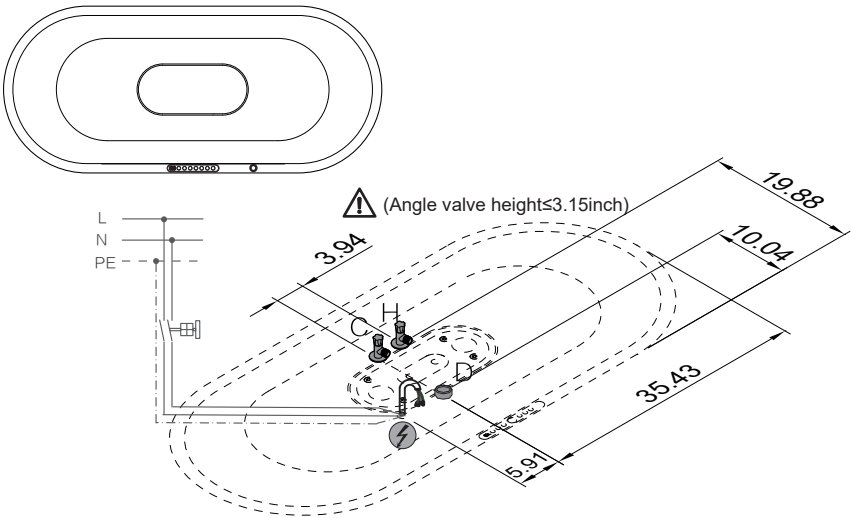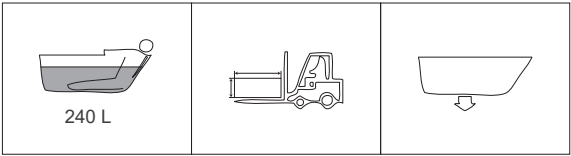

- ⚡ : Reserved cable (Reserved cable 59.06 inch)
D : Ground sewage outlet Ø1.97 (exposed pvc pipe length 1.97inch)
C、H : cold and hot water inlet (Angle valve height ≤ 3.15inch)


Unit: inch

- A three-core power cable (L/N/ ground) of 59.06 inch is reserved. The cable must be waterproof. The recommended power supply is 120V~ 60HZ.
- The power supply system of an independent special loop must be set up and the leakage protection device must be installed. The power supply should use the socket of the grounding terminal, and the grounding leakage terminal must be grounded.
- ※ Electronic components and other devices (sockets, switches, etc.) must be installed in a place that is out of reach of the person using the bathtub as shown on the right (outside the shadow range).

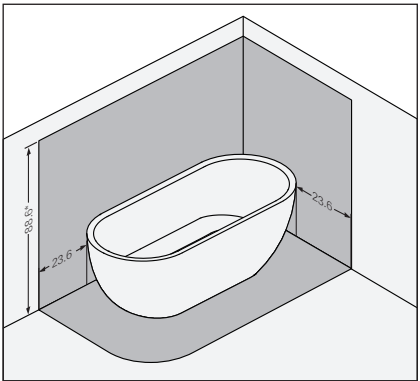


Bathtub Drawing


Name	Model number	Size (inch)	
NOVIA	T602-0711-U2	66.93×29.53×16.61/24.02	Water drainer: Configured Material: Acrylic, etc Color: White Implementation standard : JC/T 779-2010 (Glass fiber reinforced plastic bathtub)

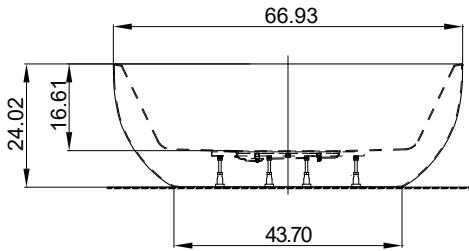

Front view

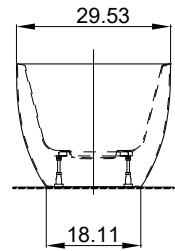

Left view

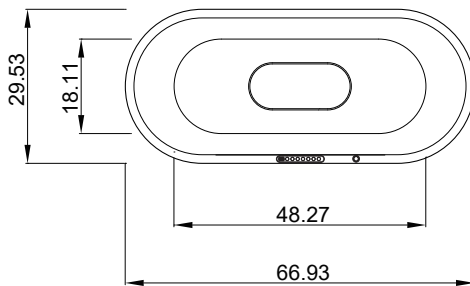

Top view

AXENT

Tel: 1-949-250-4576
E-mail: support@axentproducts.com www.axentbath.us