
版本 REV.	设计 DESIGN	日期 DATE	变更内容 CONTENTS	标记 MARK	处数 qty.
01	万雪梅	20240930	新建		

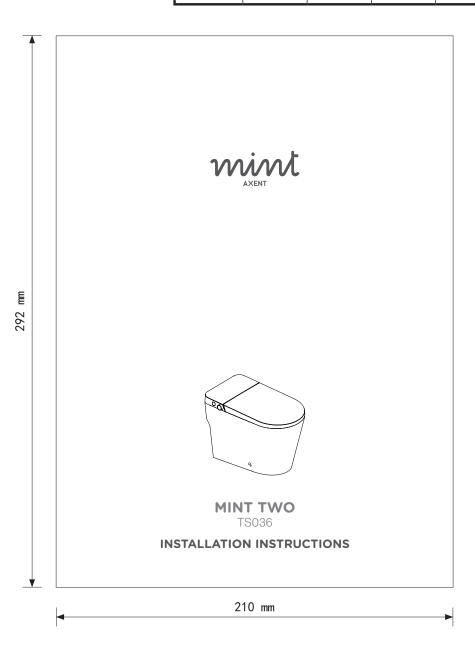

机型编号 TYPE 米特二号

技术要求

- 1. 印刷字体需清晰、均匀、平整、无重影;
- 2. 尺寸为 292×210mm, 公差 ±1mm;
- 3. 装订方式: 骑马钉;
- 4. 黑白印刷;
- 5. 所有材料满足欧盟包材指令和 RoHS 要求。


设计 DESIGN	万雪梅	20240930	 材料	才料 4.20 7FF 15 4F			
审核 CHECK			MATERIAL	120g 双胶纸		. 3 式	
工艺 PROCESS			图幅 SIZE	A4	比例 SCALE	1:2	
标准化 STANDARDIZE					单位 UNIT	mm	
批准 APPROVE			第 SHEET	1 张	共 OF	1 张	

名称 TITLE	安装说明书
编号 PART NO.	224000207600

AXENT

XIAMEN AXENT CORPORATION LIMITED 厦门优胜卫厨科技有限公司





MINT TWO

TS036

INSTALLATION INSTRUCTIONS



SAFETY SYMBOLS

The following warning signs warn you of dangerous situations and their severity:



DANGER! High Risk, Lethal Hazards, Severe Injuries



WARNING! Medium Risk, Severe Injuries



CAUTION! Low Risk, Minor Injuries



NOTE! Damage to Property

TARGET READERSHIP AND INSTALLER QUALIFICATIONS

Installation must be carried out by qualified professionals.

Repairs should only be performed by trained and qualified persons.



NOTE!

Follow all local installation regulations and country specific voltage and plumbing standards. DO NOT install the intelligent toilet in rooms where there is a danger of frost. The room temperature and water temperature must not be less than 4°C (39°F).

Condensation may form when the intelligent toilet is brought from a cold location to a warm one. Leave the unit switched off for a few hours before operating.



DANGER!

Risk of fatal electric shock

The appliance must be grounded and plugged into a GFCl outlet.

DO NOT remove individual components from (inside of) the intelligent toilet.

If the unit has a damaged cord or plug, return the product to a service center for repair. The cord or plug may only be changed by qualified personnel.




CAUTION!

DO NOT reuse old hoses. Please use new hoses and included components. Axent Corp is not liable or responsible for damaged caused by 3rd party components


TECHNICAL SUPPORT

For any questions or any assistance with this product, please contact your dealer or call us at 1-949-250-4576 support@axentproducts.com www.axentbath.us

Standard delivery contents



Main body



Installation template



Installation Manual



Filter



Battery




Bowl Mounting Hardware










Remote Control



Remote Control Holder





Holder and Anchor Bolt



Remote Control Mounting Hardware



The below parts are not included with the toilet.



Wax Ring

1

3/8" Nominal Pipe Thread (NPT)

91/2"-14"

11"-24"

12"-24"

4"-8"

(ex.baseboards.tiles, etc.)


Please verify these dimensions before beginning installation. These dimensions may vary in some locations. Recommended operating pressure 15 - 108 psi.

2



Please run water until clear.

3




4




To ensure the normal maintenance work, please make sure that the distance between the wall and the product meets the requirements.


5


























INSTALLATION


12







Please add a liquid detergent that can produce a large amount of bubbles when mixed with water.








INSTALLATION





















19 OPTIONAL
















3




















TEST









Please check for leaks before caulking.

AXENT Intelligence Inc.

www.axentbath.us support@axentproducts.com 1-949-250-4576