

1.0. OVERVIEW

The 440FX PCIset consists of a host-to-PCI bridge and memory controller, and an I/O subsystem core that allows an optimized price/performance path for the next generation of personal computers based on the Pentium Pro processor. The host-to-PCI bridge consists of two components; the PCI Bridge/Memory Controller (PMC) and the Data Bus Accelerator (DBX). The PMC and the DBX includes the following functions.

- Support for one/two Pentium Pro Processors at bus frequencies up to 66 MHz
- 64-bit GTL+ based host bus data interface
- 32-bit host address support
- 32-bit PCI bus interface
- 64/72-bit main memory interface
- Extensive data buffering between all interfaces for high throughput and concurrent operations

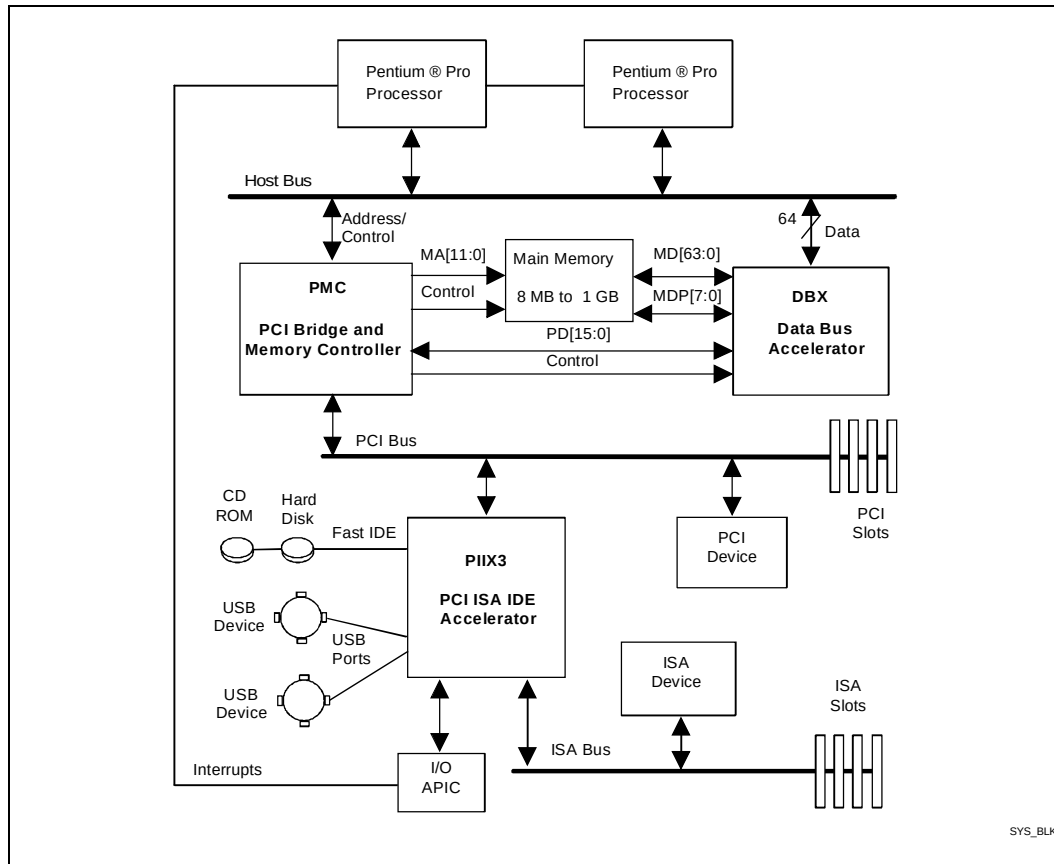


Figure 1. 440FX PCIsset System Block Diagram