FT 8 modules: original versus FT_withHole

Original: X (+0 degrees)

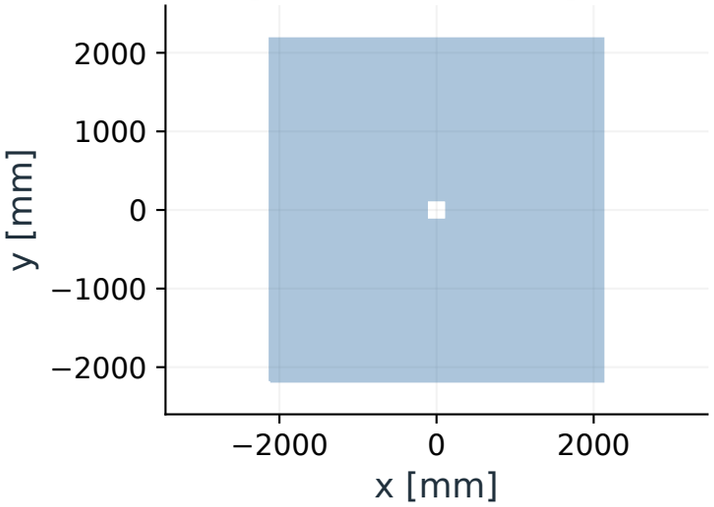

XY envelope: 4234.4 x 4354.0 mm
Beam aperture: 260 x 260 mm (before rotation)

Original: U (-5 degrees)

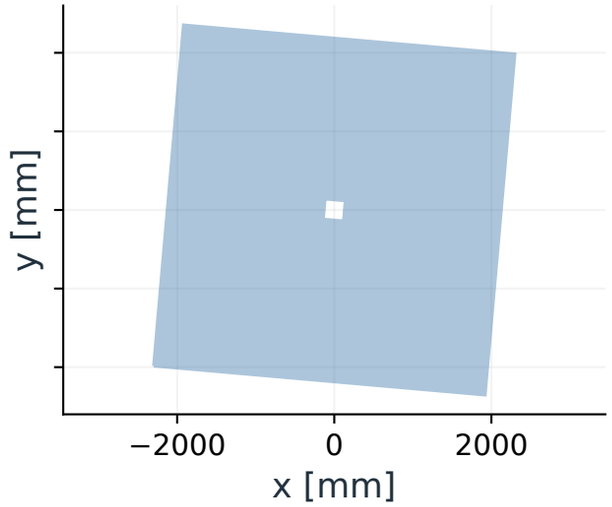

XY envelope: 4597.8 x 4706.5 mm
Beam aperture: 260 x 260 mm (before rotation)

Original: V (+5 degrees)

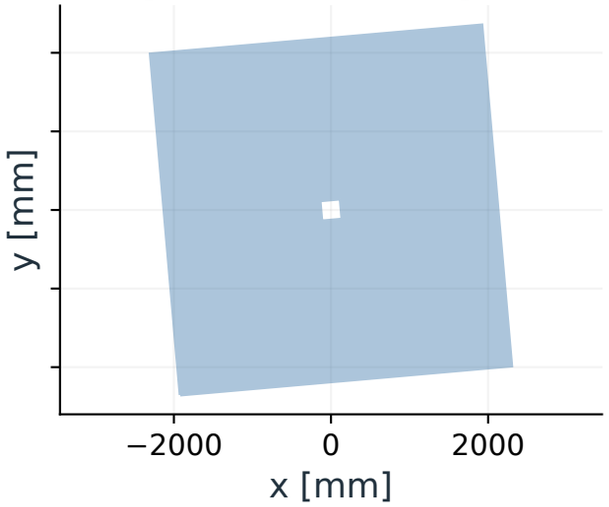

XY envelope: 4597.8 x 4706.5 mm
Beam aperture: 260 x 260 mm (before rotation)

FT_withHole: X (+0 degrees)

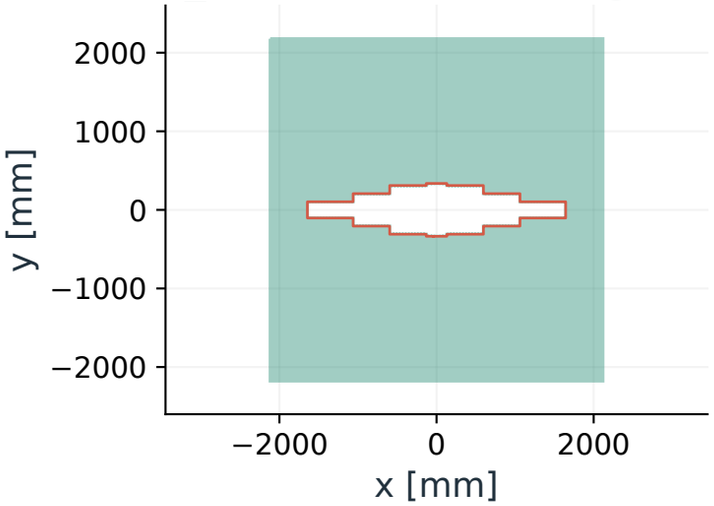

XY envelope: 4234.4 x 4354.0 mm
Stepped hole: 3288.4 x 672.6 mm

FT_withHole: U (-5 degrees)

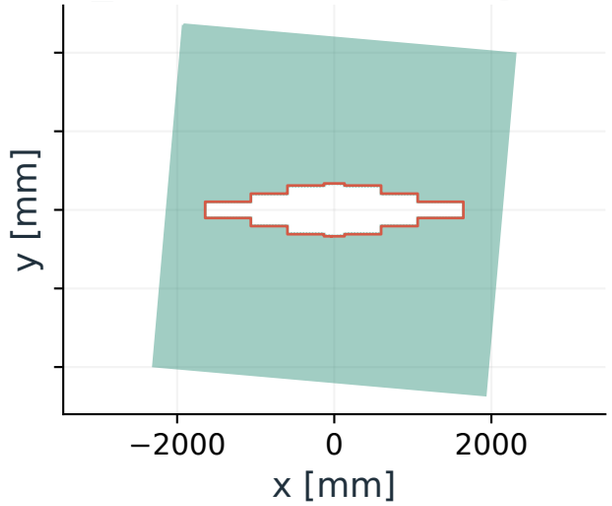

XY envelope: 4597.8 x 4706.5 mm
Stepped hole: 3288.4 x 672.6 mm

FT_withHole: V (+5 degrees)

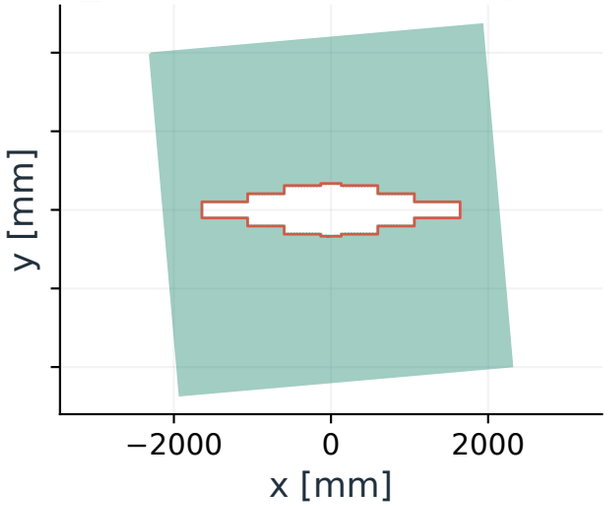

XY envelope: 4597.8 x 4706.5 mm
Stepped hole: 3288.4 x 672.6 mm

FT 10 modules: original versus FT_withHole

Original: X (+0 degrees)

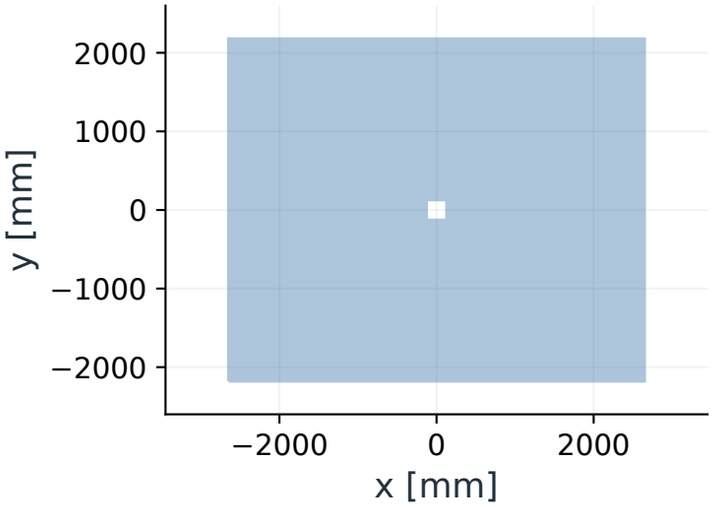

XY envelope: 5293.0 x 4354.0 mm
Beam aperture: 260 x 260 mm (before rotation)

Original: U (-5 degrees)

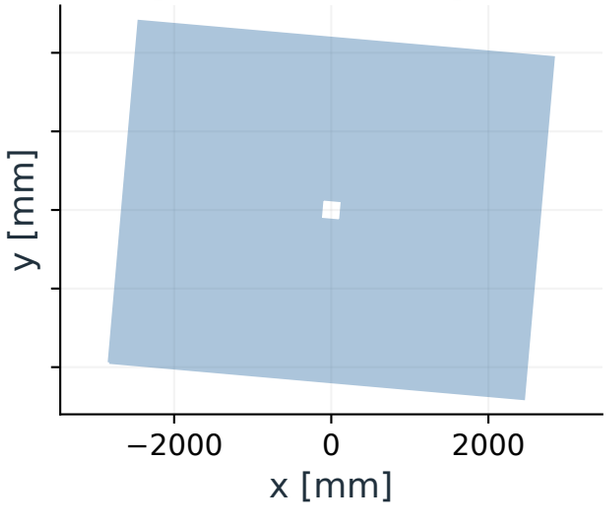

XY envelope: 5652.3 x 4798.7 mm
Beam aperture: 260 x 260 mm (before rotation)

Original: V (+5 degrees)

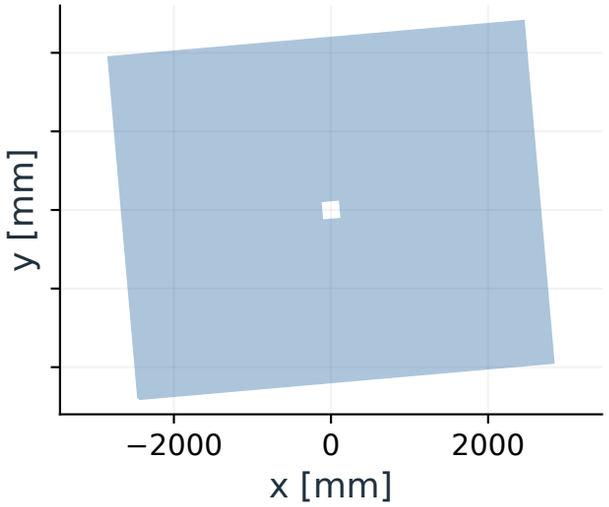

XY envelope: 5652.3 x 4798.7 mm
Beam aperture: 260 x 260 mm (before rotation)

FT_withHole: X (+0 degrees)

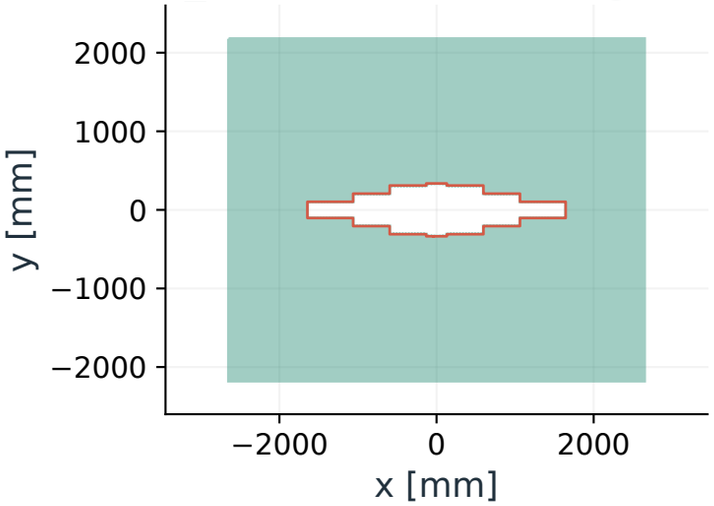

XY envelope: 5293.0 x 4354.0 mm
Stepped hole: 3288.4 x 672.6 mm

FT_withHole: U (-5 degrees)

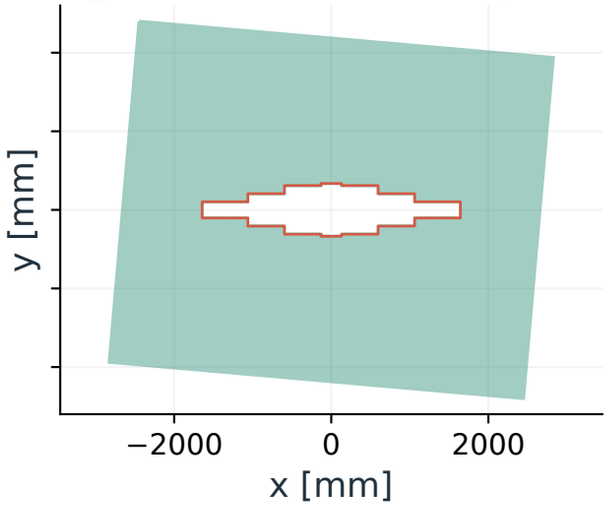

XY envelope: 5652.3 x 4798.7 mm
Stepped hole: 3288.4 x 672.6 mm

FT_withHole: V (+5 degrees)

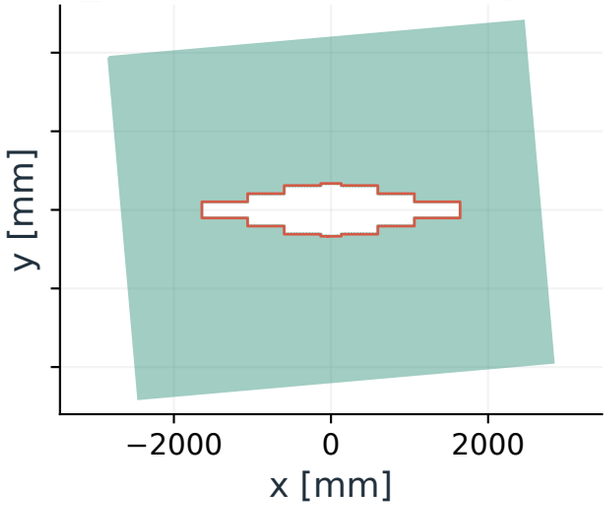

XY envelope: 5652.3 x 4798.7 mm
Stepped hole: 3288.4 x 672.6 mm

FT 12 modules: original versus FT_withHole

Original: X (+0 degrees)

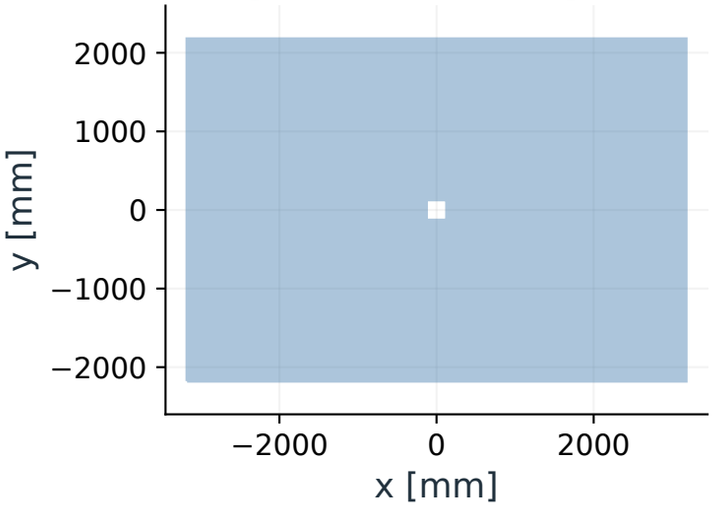

XY envelope: 6351.6 x 4354.0 mm
Beam aperture: 260 x 260 mm (before rotation)

Original: U (-5 degrees)

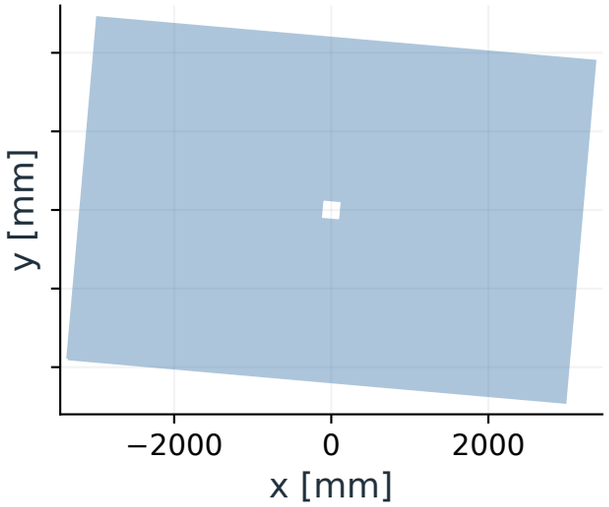

XY envelope: 6706.9 x 4891.0 mm
Beam aperture: 260 x 260 mm (before rotation)

Original: V (+5 degrees)

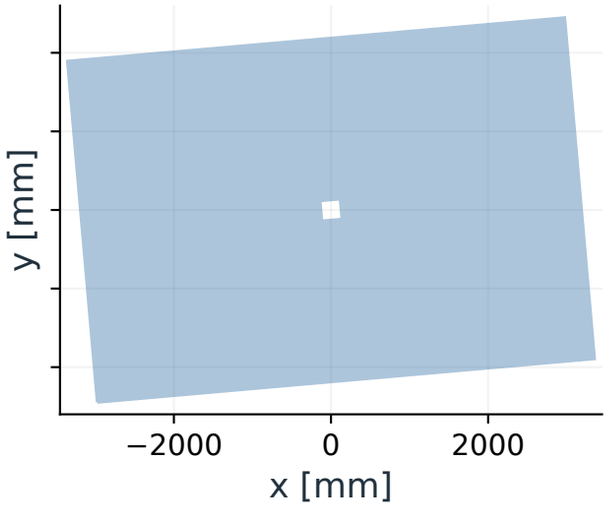

XY envelope: 6706.9 x 4891.0 mm
Beam aperture: 260 x 260 mm (before rotation)

FT_withHole: X (+0 degrees)

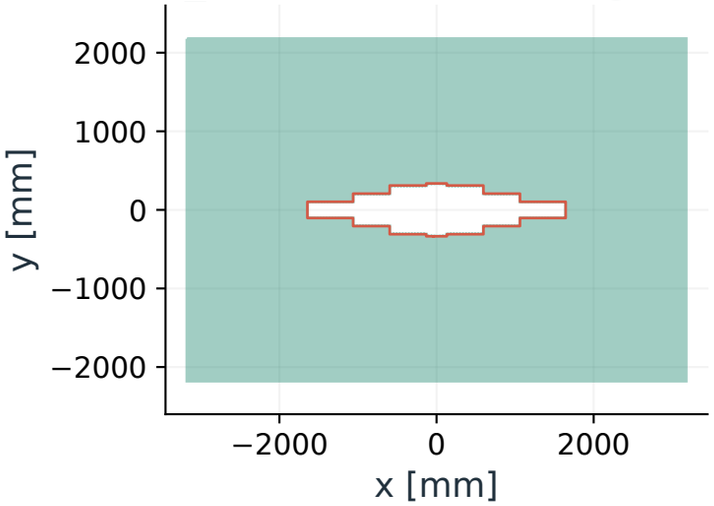

XY envelope: 6351.6 x 4354.0 mm
Stepped hole: 3288.4 x 672.6 mm

FT_withHole: U (-5 degrees)

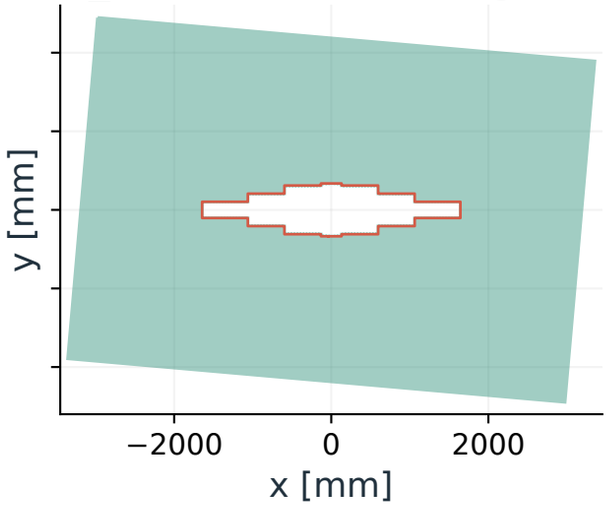

XY envelope: 6706.9 x 4891.0 mm
Stepped hole: 3288.4 x 672.6 mm

FT_withHole: V (+5 degrees)

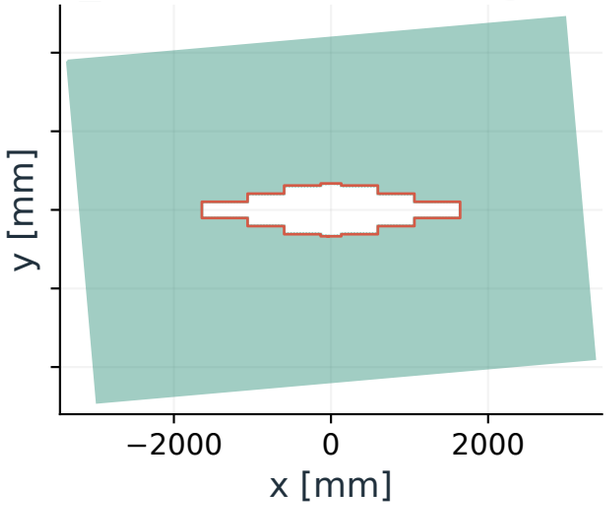

XY envelope: 6706.9 x 4891.0 mm
Stepped hole: 3288.4 x 672.6 mm