Compal Confidential

ZIWB2/ZIWB3/ZIWE1
DIS M/B Schematics Document

Intel Boardwell U Processor with DDR3L
AMD Topaz XT / Jet LE

2014-02-10

LA-B091P

REV：1.0

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date 2012/07/12	Title: Cover Page

Size	Document Number	Rev
C	LA-B091P	1.0

Date: Wednesday, February 12, 2014 Sheet 1 of 55

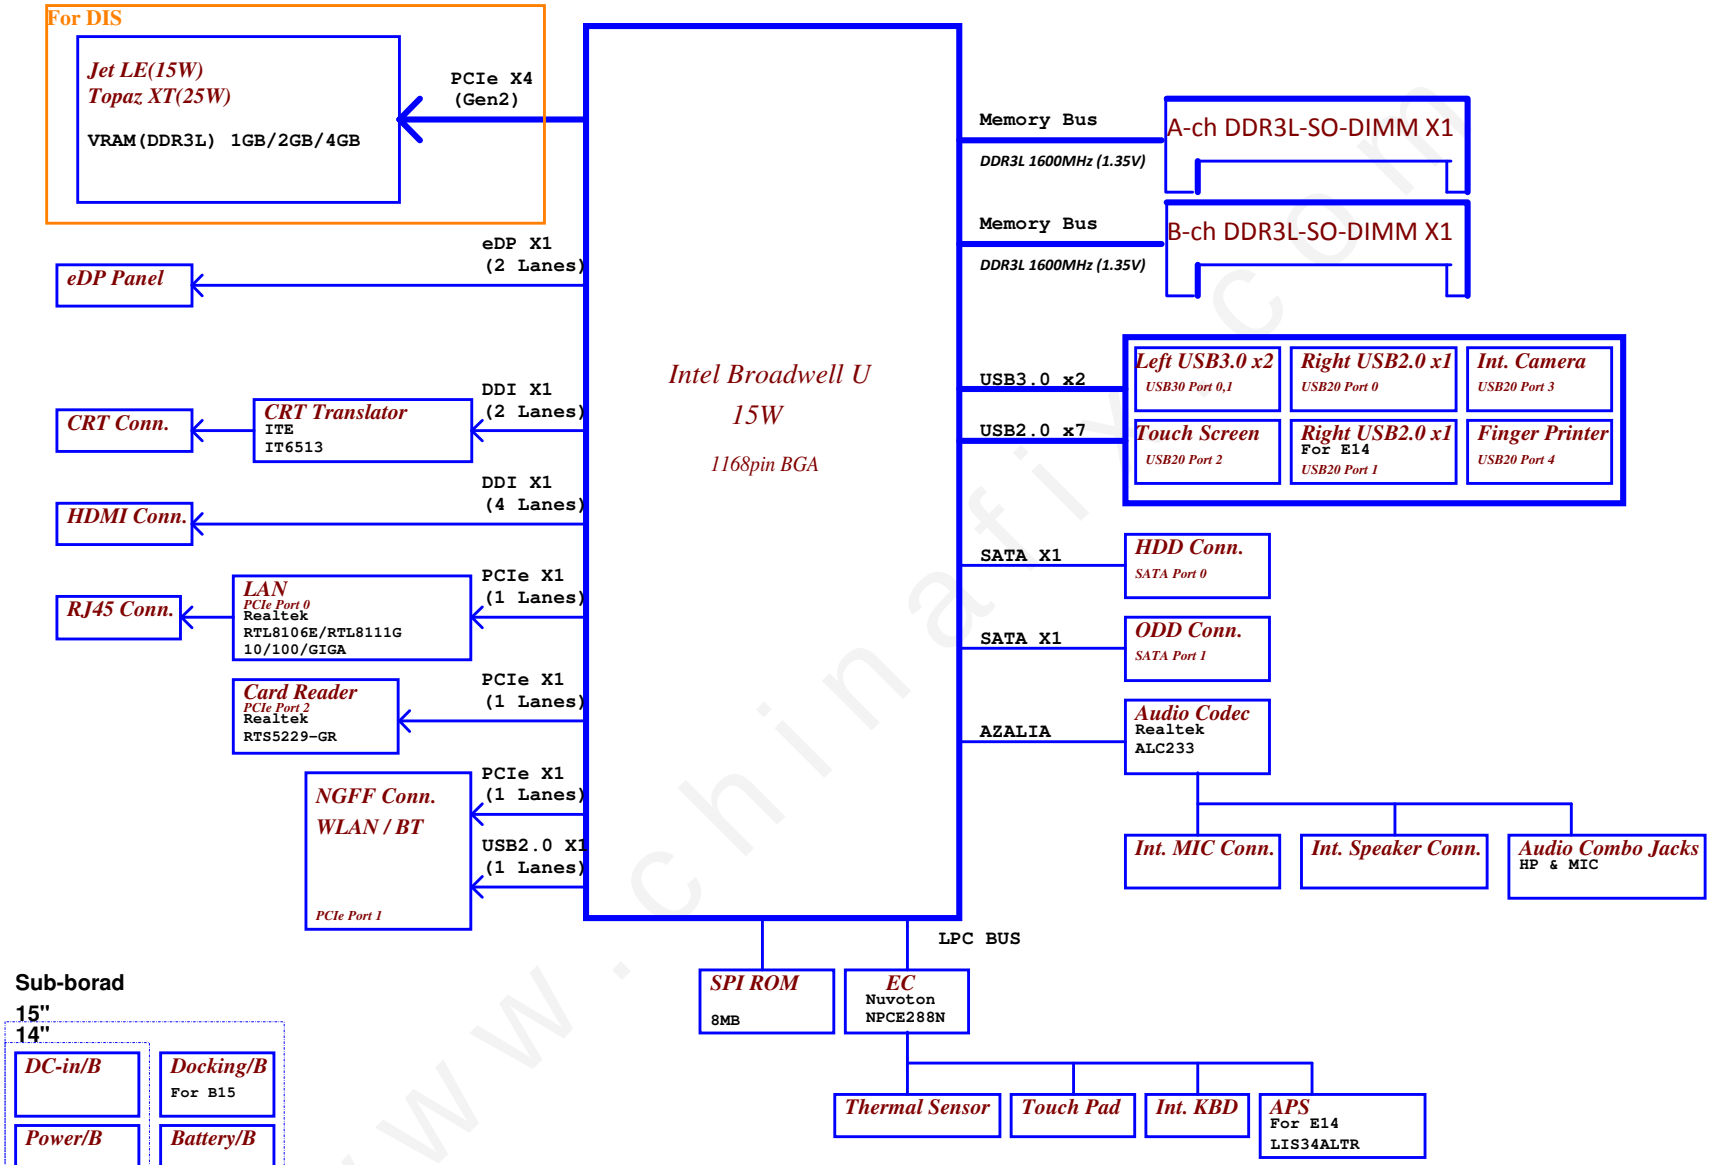

Sub-borad

15"
14"

DC-in/B	Docking/B For B15
Power/B	Battery/B
IO/B For E14 USB Charge	ODD/B

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.			
Title	MB Block Diagram		
Size	Document Number		Rev
C			1.0
Date:	Wednesday, February 12, 2014	Sheet	2 of 55

Voltage Rails

power plane / State	+B	+5VALW +3VALW	+1.5V	+5VS +3VS +1.5VS +V1.05S_VCCP +VCC_CORE +VGA_CORE +VCC_GFXCORE_AXG +1.8VS +0.75VS +1.05VS
S0	O	O	O	O
S3	O	O	O	X
S5 S4/AC	O	O	X	X
S5 S4/ Battery only	O	X	X	X
S5 S4/AC & Battery don't exist	X	X	X	X

USB Port Table

	USB 2.0	Port	3 External USB Port
EHCI1	UHCI0	0	USB Port (Left Side) USB3.0
		1	USB Port (Left Side) USB3.0
	UHCI1	2	Touch Screen
		3	Camera
	UHCI2	4	
		5	
	UHCI3	6	
		7	
EHCI2	UHCI4	8	
		9	USB Port (Right Side USB-BD)
	UHCI5	10	Mini Card(WLAN)
		11	Card Reader
	UHCI6	12	
		13	

BOM Structure Table

Item	BOM Structure	
ZIWB2 (14")	B14@	
ZIWB3 (15")	B15@	
ZIWE1 (14")	E14@	
CPU_SA00006SM20	i5_4200U@	
CPU_SA00007AM00	QFSY@	
CPU_SA00006SU30	i3_4100U@	
CPU_SA000072Q10	i3_4005U@	
CPU_SA00006SX20	i3_4010U@	
LAN 10/100 Transformer	100@	
LAN GIGA Transformer	GIGA@	
LAN Switch mode	SWITCH@	
LAN RTL8106E-CG	8106ELDO@	
LAN RTL8111GS-CG	8111GLDO@	
LAN RTL8106EUS-CG	8106ESW@	
LAN RTL8111GUS-CG	8111GSW@	
Audio_233	233@	
Audio_233VB	233VB@	
For B15	Docking@	
For B14, E14	NoDocking@	
For Deep Sleep	DS3@	
For No Deep Sleep	NoDS3@	
WLAN Support ISCT	ISCT@	
WLAN No Support ISCT	NoISCT@	
For Intel ZERO ODD	ZODD@	
For No Intel ZERO ODD	NoZODD@	
For Green CLK	GCLK@	
For No Green CLK	NoGCLK@	
For No Green CLK	NoGCLKDIS@	Only in DIS Schematic
Green CLK IC For DIS	GCLKDIS@	
Green CLK IC For UMA	GCLKUMA@	
GPU support Dual Rank	DR@	Only in DIS Schematic
GPU Jet LE	JET@	
GPU Topaz XT	TOPAZ@	
For DIS	PX@	
For UMA	UMA@	
Camera	COMS@	
APS (G-sensor)	GS@	
Touch Screen	TS@	
HDMI	HDMI@	
USB 2.0	USB2@	
USB 3.0	USB3@	
Full HD Panel (2 Lane)	FHD@	
ENE EC 9012	9012@	
HDMI Royalty	45@	
Connector	ME@	
VRAM indentify	X76@	No USE
Un-pop component for EMI	@EMI@	
Un-pop component for ESD	@ESD@	
DA600140000	PCB_14_DIS@	
DA600141000	PCB_14_UMA@	
DA600140100	PCB_15_DIS@	
DA600141100	PCB_15_UMA@	

EC SM Bus1 address

Device	Address
Smart Battery	0001 011x

EC SM Bus2 address

Device	Address
Thermal Sensor	0100 1100

PCH SM Bus address

Device	Address	
DDR_JDIMM1	1010 000x	A0h
DDR_JDIMM2	1010 010x	A4h

AMD-GPU SM Bus address

Device	Address	
Internal thermal sensor	0100 0001	41h

SMBUS Control Table

	SOURCE	VGA	BATT	KB9012	SODIMM	WLAN	Thermal Sensor	PCH
SMB_EC_CK1 SMB_EC_DA1	KB9012 +3VALW	X	V +3VALW	X	X	X	X	X
SMB_EC_CK2 SMB_EC_DA2	KB9012 +3VS	V +3VGS	X	X	X	X	V +3VS	V +3VALW
PCH_SMBCLK PCH_SMBDATA	PCH +3VALW	X	X	X	V +3VS	V +3VS	X	X
PCH_SML0CLK PCH_SML0DATA	PCH +3VALW	X	X	X	X	X	X	X
SML1CLK SML1DATA	PCH +3VALW	V +3VGS	X	V +3VS	X	X	V +3VS	X

SIGNAL / STATE	SLP_S1#	SLP_S3#	SLP_S4#	SLP_S5#	+VALW	+V	+VS	Clock
Full ON	HIGH	HIGH	HIGH	HIGH	ON	ON	ON	ON
S1 (Power On Suspend)	LOW	HIGH	HIGH	HIGH	ON	ON	ON	LOW
S3 (Suspend to RAM)	LOW	LOW	HIGH	HIGH	ON	ON	OFF	OFF
S4 (Suspend to Disk)	LOW	LOW	LOW	HIGH	ON	OFF	OFF	OFF
S5 (Soft OFF)	LOW	LOW	LOW	LOW	ON	OFF	OFF	OFF

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12
Title	Notes List		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 3 of 55		

Topaz XT_VRAM_STRAP

		X76@ Vendor UV5, UV6, UV7, UV8	ID	PS_3[3]	PS_3[2]	PS_3[1]	X76@ R_pu RV21	X76@ R_pd RV24
2GBytes	ZZZ01 TH2G@	Hynix 4096Mbits SA00006E800 256Mx16 H5TC4G63AFR-11C	0	0	0	0	NC	4.75K
1GBytes	ZZZ02 TS1G@	Samsung 2048Mbits SA000068U40 128Mx16 K4W2G1646Q-BC1A	1	0	0	1	8.45K	2K
1GBytes	ZZZ03 TM1G@	Micron 2048Mbits SA000067500 128Mx16 MT41J128M16JT-093G:K	2	0	1	0	4.53K	2K
1GBytes	ZZZ04 TH1G@	Hynix 2048Mbits SA00006H400 128Mx16 H5TC2G63FFR-11C	3	0	1	1	6.98K	4.99K
2GBytes	ZZZ05 TM2G@	Micron 4096Mbits SA000077K00 256Mx16 MT41J256M16HA-093G:E	4	1	0	0	4.53K	4.99K
2GBytes	ZZZ06 TS2G@	Samsung 4096Mbits SA000076P00 256Mx16 K4W4G1646D-BC1A	5	1	0	1	3.24K	5.62K
1GBytes	ZZZ07 TM1G2@	Micron 2048Mbits SA00005XB00 128Mx16 MT41K128M16JT-107G:K	6	1	1	0	3.4K	10K
2GBytes	ZZZ08 TM2G2@	Micron 4096Mbits SA000065D00 256Mx16 MT41K256M16HA-107G:E	7	1	1	1	4.75K	NC

ZZZ01 TH2G@ 2G HYNIX X7653638L01 | ZZZ02 TS1G@ 1G SAMSUNG X7653938L03 | ZZZ03 TM1G@ 1G MICRON X7653938L02 | ZZZ04 TH1G@ 1G HYNIX X7653938L01

Jet LE_VRAM_STRAP

		X76@ Vendor UV5, UV6, UV7, UV8	ID	PS_3[3]	PS_3[2]	PS_3[1]	X76@ R_pu RV21	X76@ R_pd RV24
1GBytes	ZZZ09 JH1G@	Hynix 2048Mbits SA00006H400 128Mx16 H5TC2G63FFR-11C	0	0	0	0	NC	4.75K
1GBytes	ZZZ10 JM1G@	Micron 2048Mbits SA000067500 128Mx16 MT41J128M16JT-093G:K	1	0	0	1	8.45K	2K
1GBytes	ZZZ11 JS1G@	Samsung 2048Mbits SA000068U40 128Mx16 K4W2G1646Q-BC1A	2	0	1	0	4.53K	2K
2GBytes	ZZZ12 JH2G@	Hynix 4096Mbits SA00006E800 256Mx16 H5TC4G63AFR-11C	3	0	1	1	6.98K	4.99K
2GBytes	ZZZ13 JS2G@	Samsung 4096Mbits SA000076P00 256Mx16 K4W4G1646D-BC1A	4	1	0	0	4.53K	4.99K
2GBytes	ZZZ14 JM2G@	Micron 4096Mbits SA000077K00 256Mx16 MT41J256M16HA-093G:E	5	1	0	1	3.24K	5.62K
2GBytes	ZZZ08 JM2G2@	Micron 4096Mbits SA000065D00 256Mx16 MT41K256M16HA-107G:E	6	1	1	0	3.4K	10K
1GBytes	ZZZ16 JM1G2@	Micron 2048Mbits SA00005XB00 128Mx16 MT41K128M16JT-107G:K	7	1	1	1	4.75K	NC

ZZZ09 JH1G@ 1G HYNIX X7653638L07 | ZZZ10 JM1G@ 1G MICRON X7653638L08 | ZZZ11 JS1G@ 1G SAMSUNG X7653638L09 | ZZZ12 JH2G@ 2G HYNIX X7653638L04

Power-Up/Down Sequence

"Mars" has the following requirements with regards to power-supply sequencing to avoid damaging the ASIC:

- All the ASIC supplies must reach their respective nominal voltages within 20 ms of the start of the ramp-up sequence, though a shorter ramp-up duration is preferred. The maximum slew rate on all rails is 50 mV/µs.
- The external pull ups on the DDC/AUX signals (if applicable) should ramp up before or after both VDDC and VDD_CT have ramped up.
- VDDC and VDD_CT should not ramp up simultaneously. For example, VDDC should reach 90% before VDD_CT starts to ramp up (or vice versa).
- For power down, reversing the ramp-up sequence is recommended.

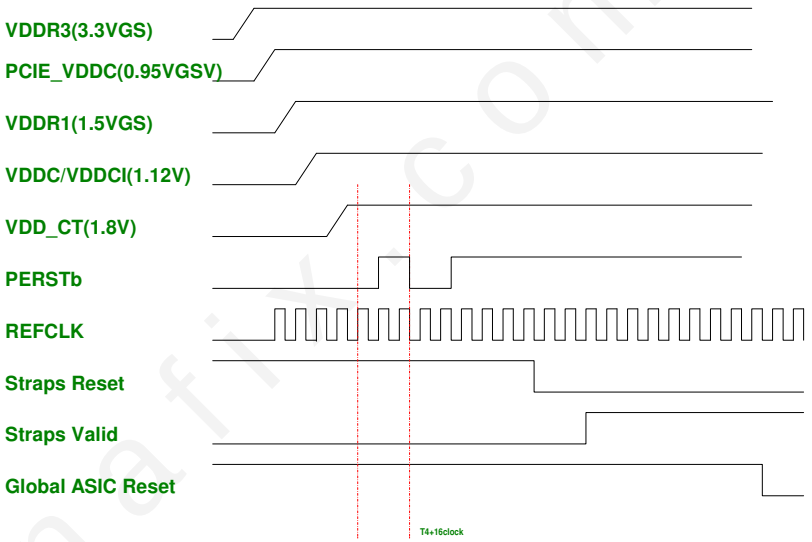

R_pu (Ω)	R_pd (Ω)	Bits [3:1]
NC	4750	000
8450	2000	001
4530	2000	010
6980	4990	011
4530	4990	100
3240	5620	101
3400	10000	110
4750	NC	111

Note: 0402 1% resistors are required.

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12
Title	VGA Notes List		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 4 of 55		

DAZ
DA600140000
PCB 14I LA-B091P REV0 M/B DIS 3
PCB_14_DIS@

DAZ
DA600140100
PCB 14K LA-B091P REV0 M/B DIS 6
PCB_15_DIS@

DAZ
DA600141000
PCB 14I LA-B092P REV0 M/B UMA 3
PCB_14_UMA@

DAZ
DA600141100
PCB 14K LA-B092P REV0 M/B UMA 6
PCB_15_UMA@

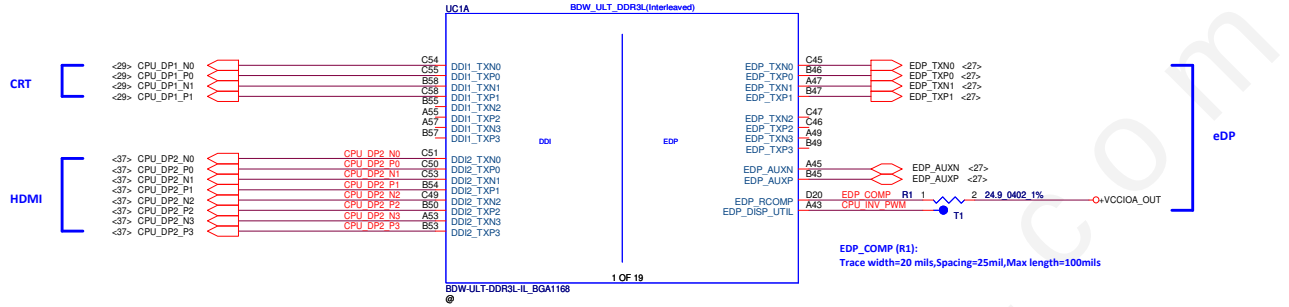

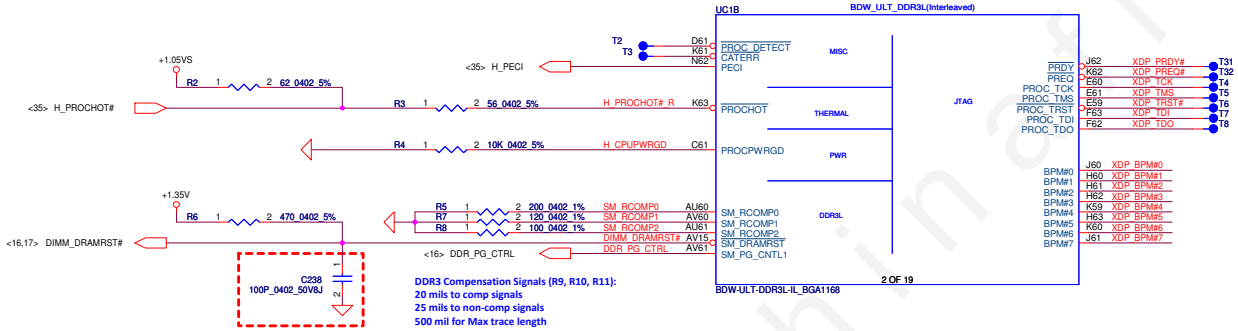

ESD

ESD

UC1
SA00007G020
Intel 2957U 1.4G 2M D0 2cBGA CPU
2957U@

UC1
SA00007G220
S IC CL8064701569500 QFAN D0 1.7G BGA
3558U@

UC1
SA00006SL70
S IC CL8064701477202 QEVD C0 1.8G BGA
i7_4500U@

UC1
SA00006SM80
S IC CL8064701477702 SR170 C0 1.6G C38!
i5_4200U@

UC1
SA00007AM00
S IC CL8064701614813 QFSY C0 1.6G BGA
QFSY@

UC1
SA00006SU50
S IC CL8064701476302 SR16P C0 1.8G C38!
i3_4100U@

UC1
SA000072Q70
S IC CL8064701478404 QEAR D0 1.7G C38
i3_4005U@

UC1
SA00006SX80
S IC CL8064701478202 SR16Q C0 1.7G C38!
i3_4010U@

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.			
Title	HSW MCP(1/11) DDI,MSIC,XDP		
Size: C	Document Number: LA-B091P		Rev: 1.0
Date: Wednesday, February 12, 2014	Sheet 5 of 55		

Interleaved Memory

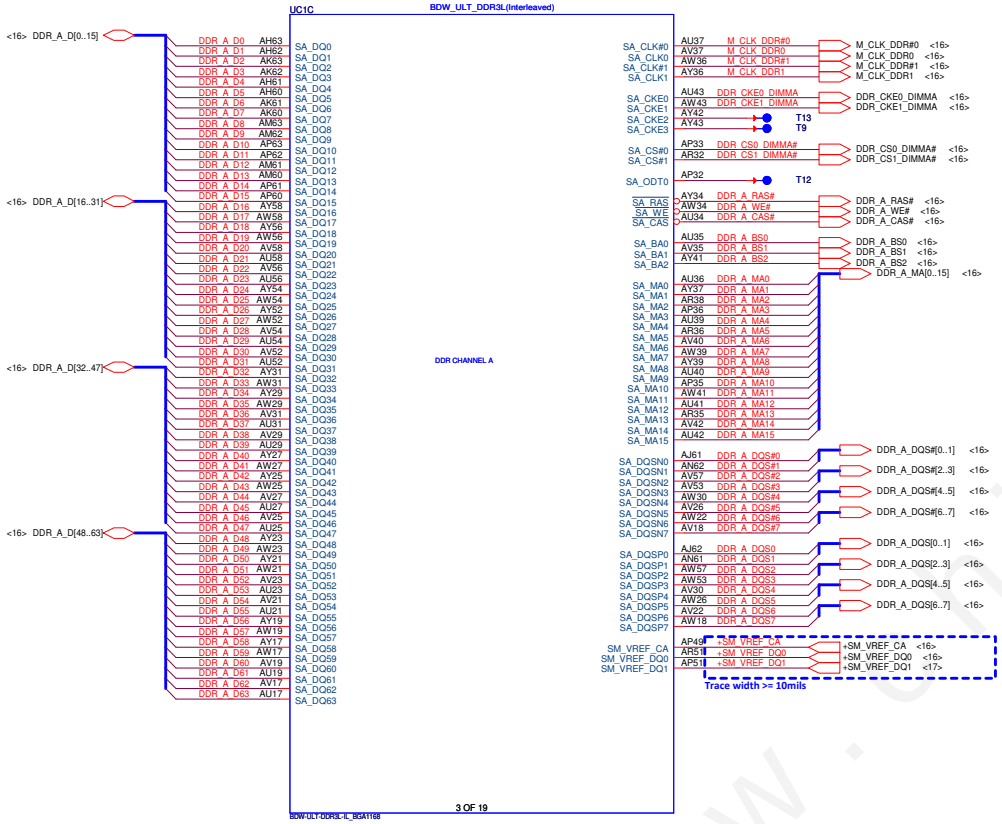

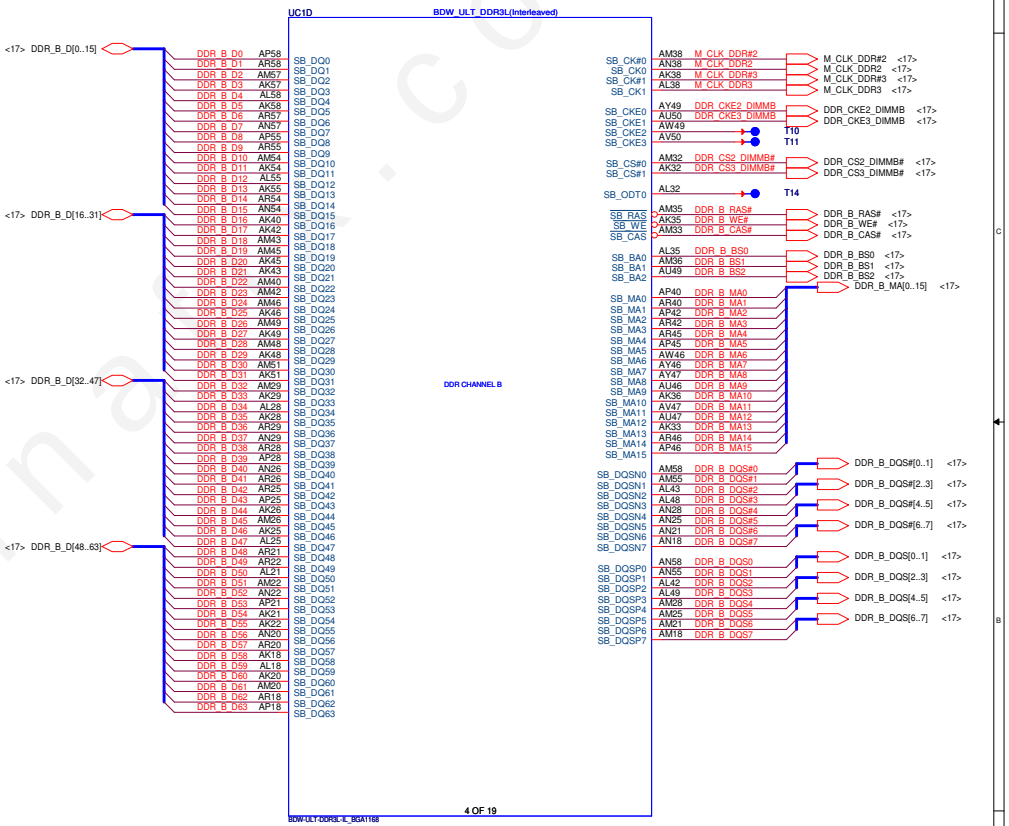

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12
			Title: HSW MCP(2/11) DDRIII

Size	Document Number	Rev
C	LA-B091P	1.0
Date: Wednesday, February 12, 2014	Sheet 6 of 55	

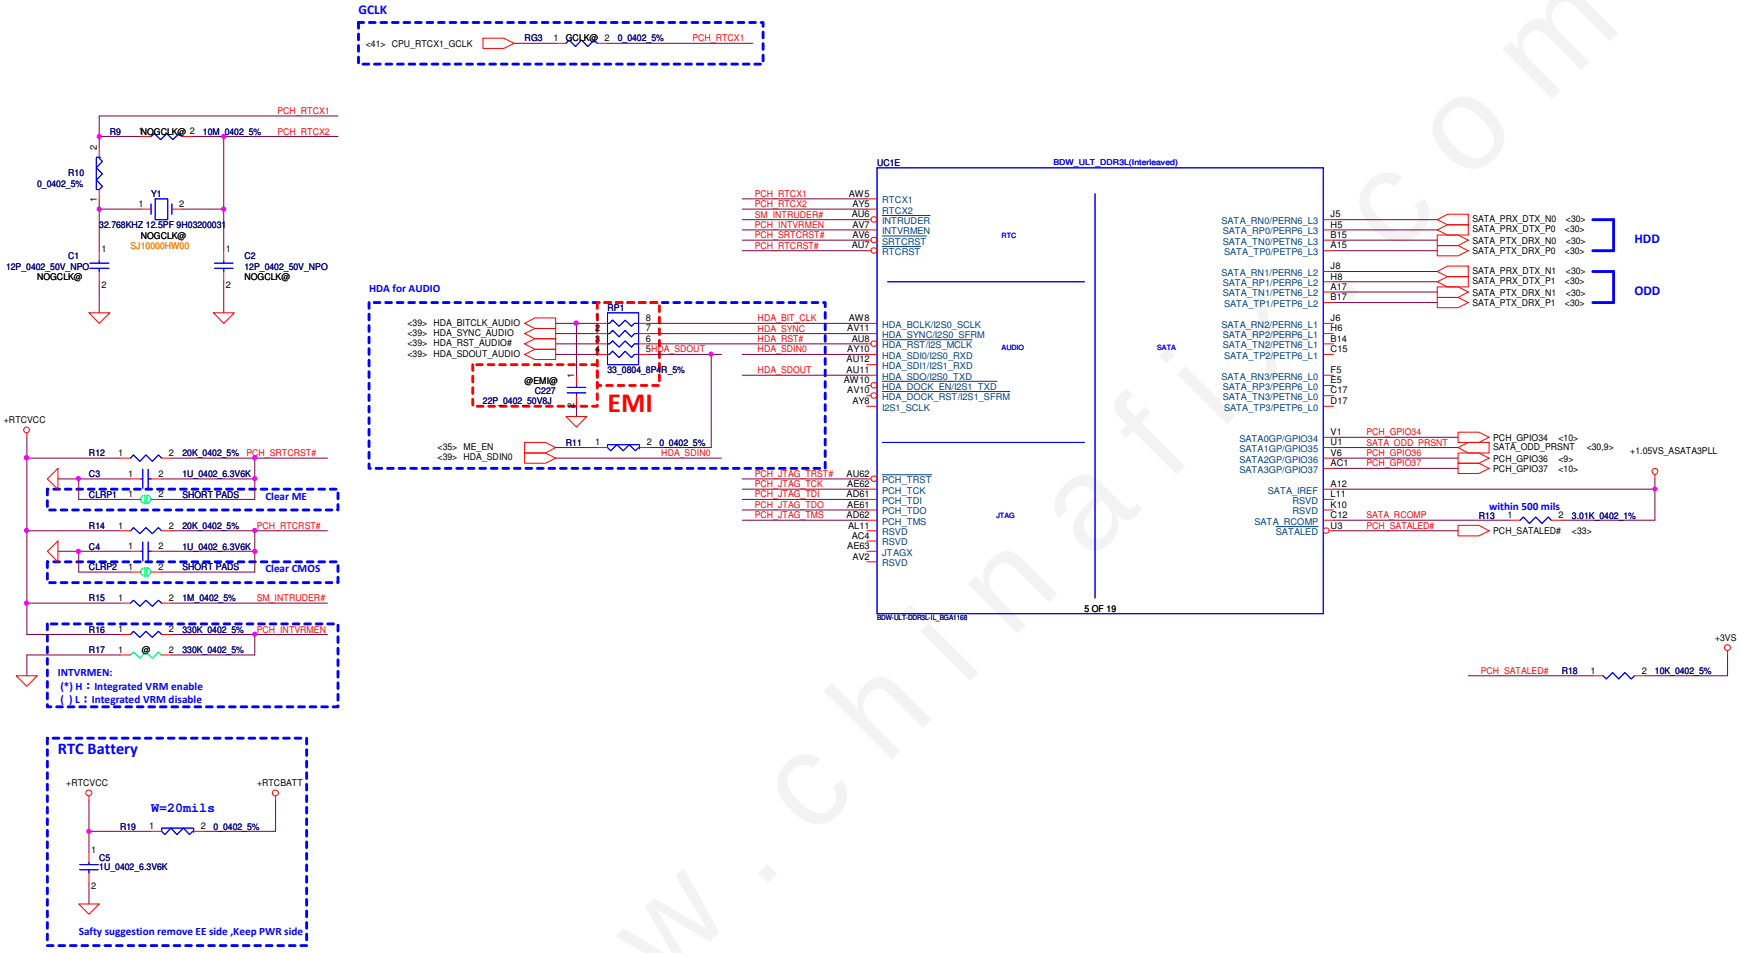

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12
Title	HSW MCP(3/11) RTC,SATA,XDP		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 7 of 55		

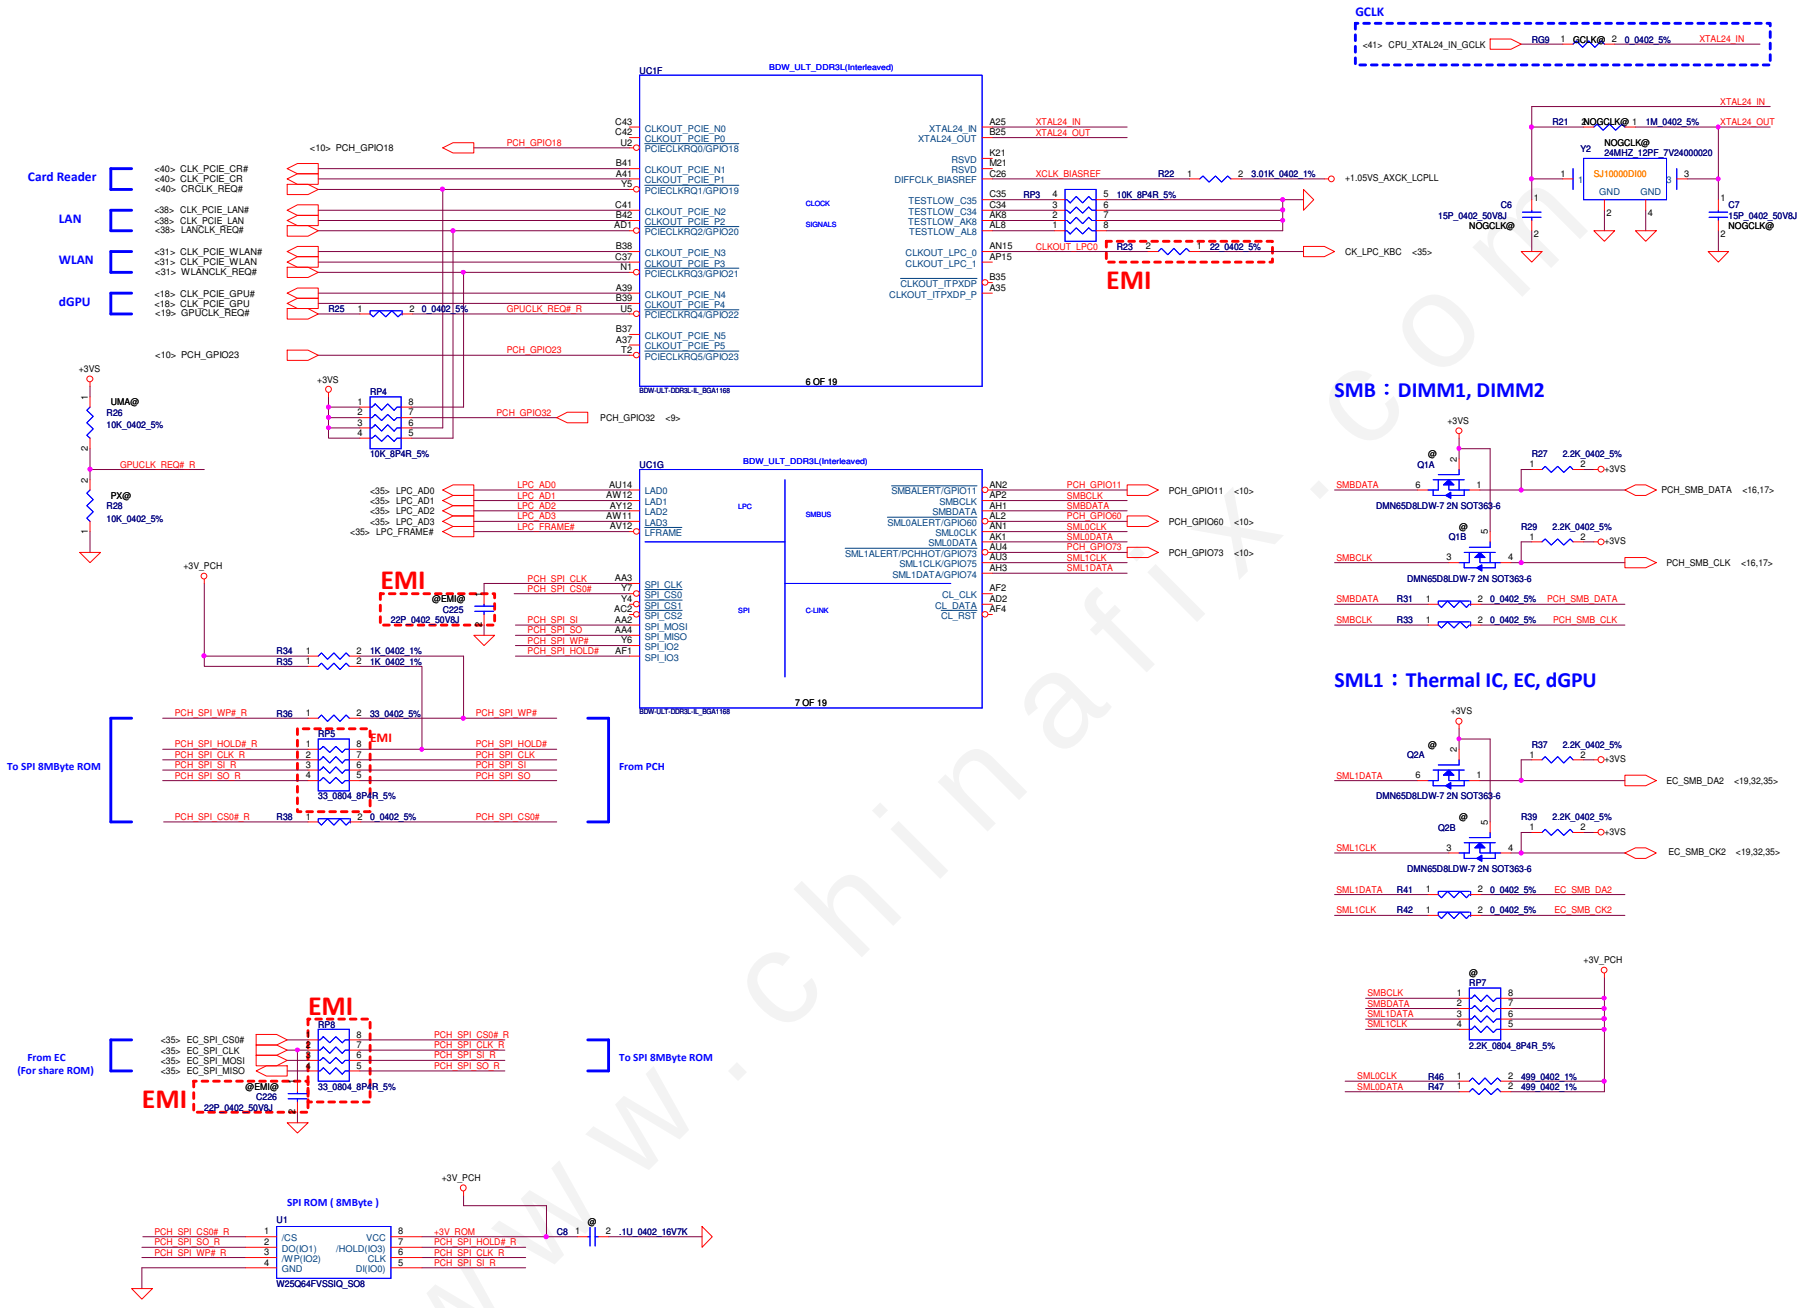

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.			
Title	HSW MCP(4/11) CLK,SPI,SMBUS		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 8 of 55		

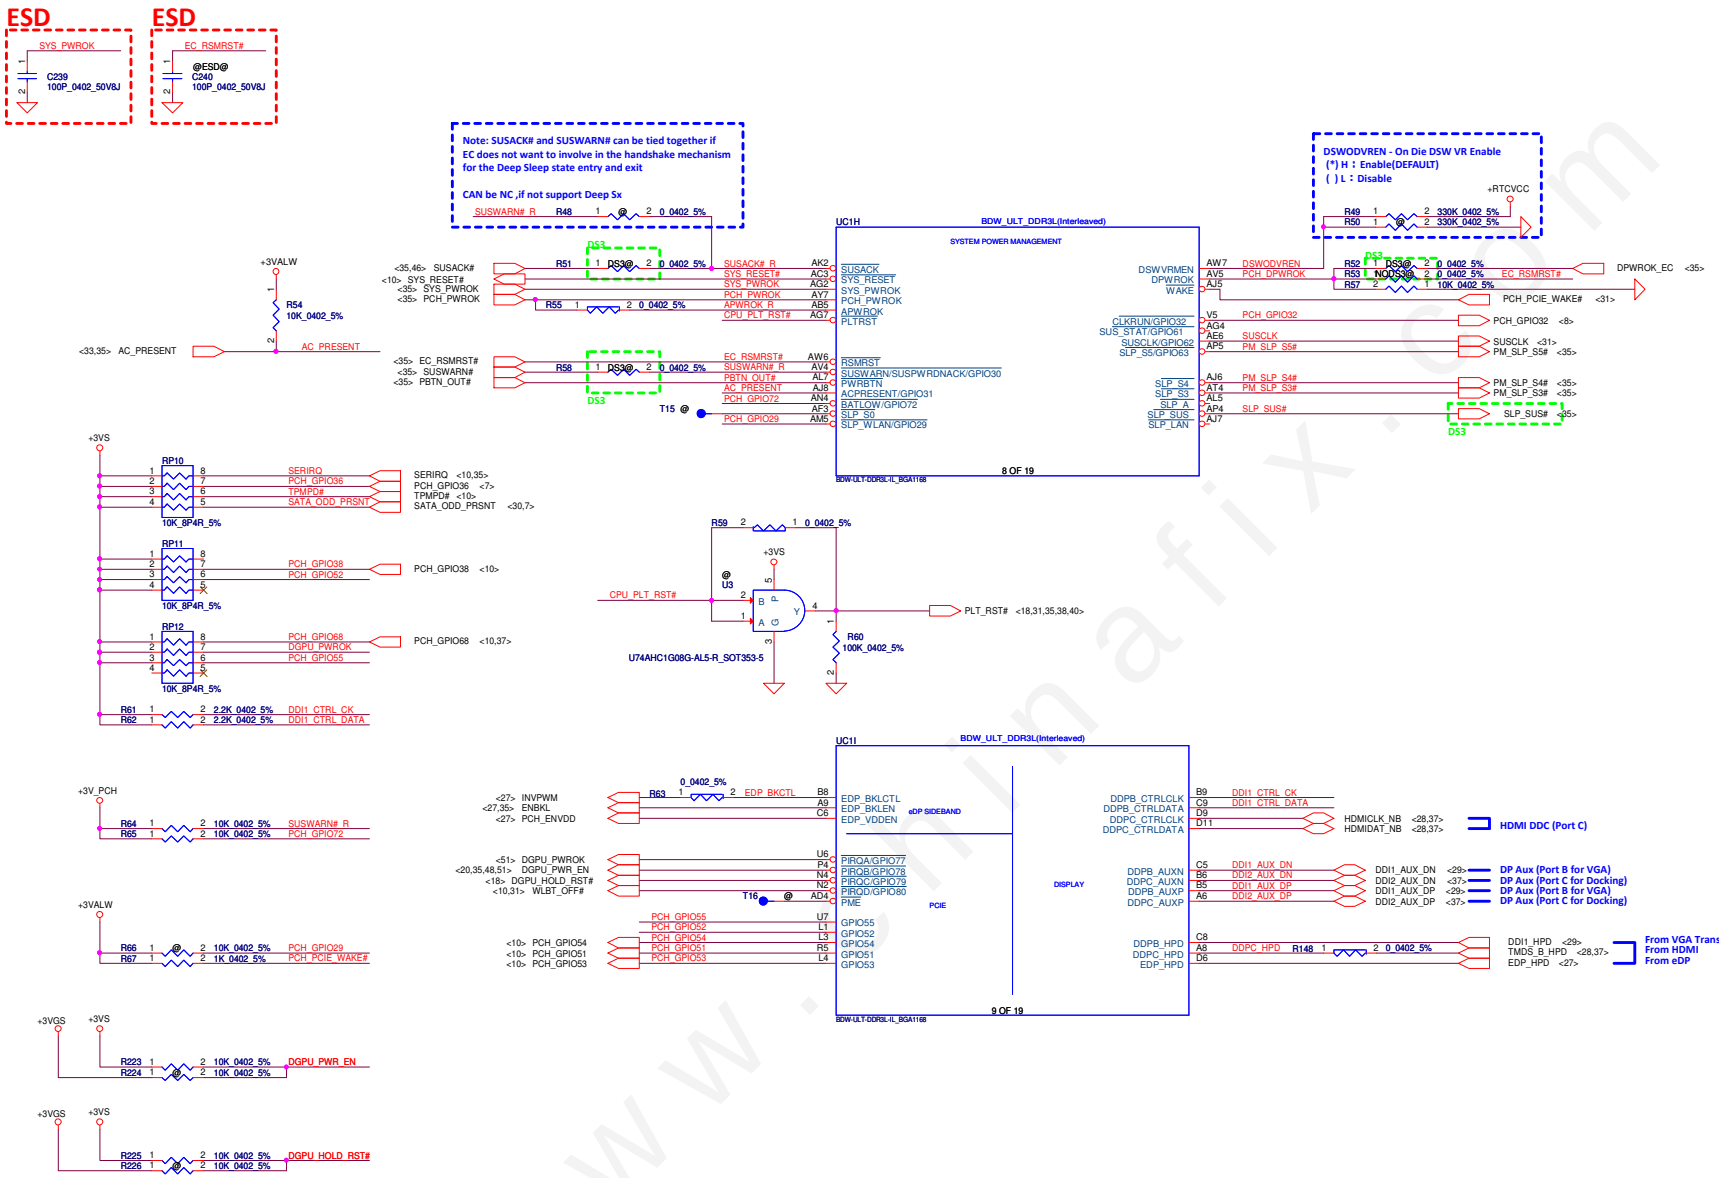

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date 2012/07/12	Title HSW MCP(5/11) PM,GPIO,DDI

Size	Document Number	Rev
C	LA-B091P	1.0
Date: Wednesday, February 12, 2014	Sheet 9 of 55	

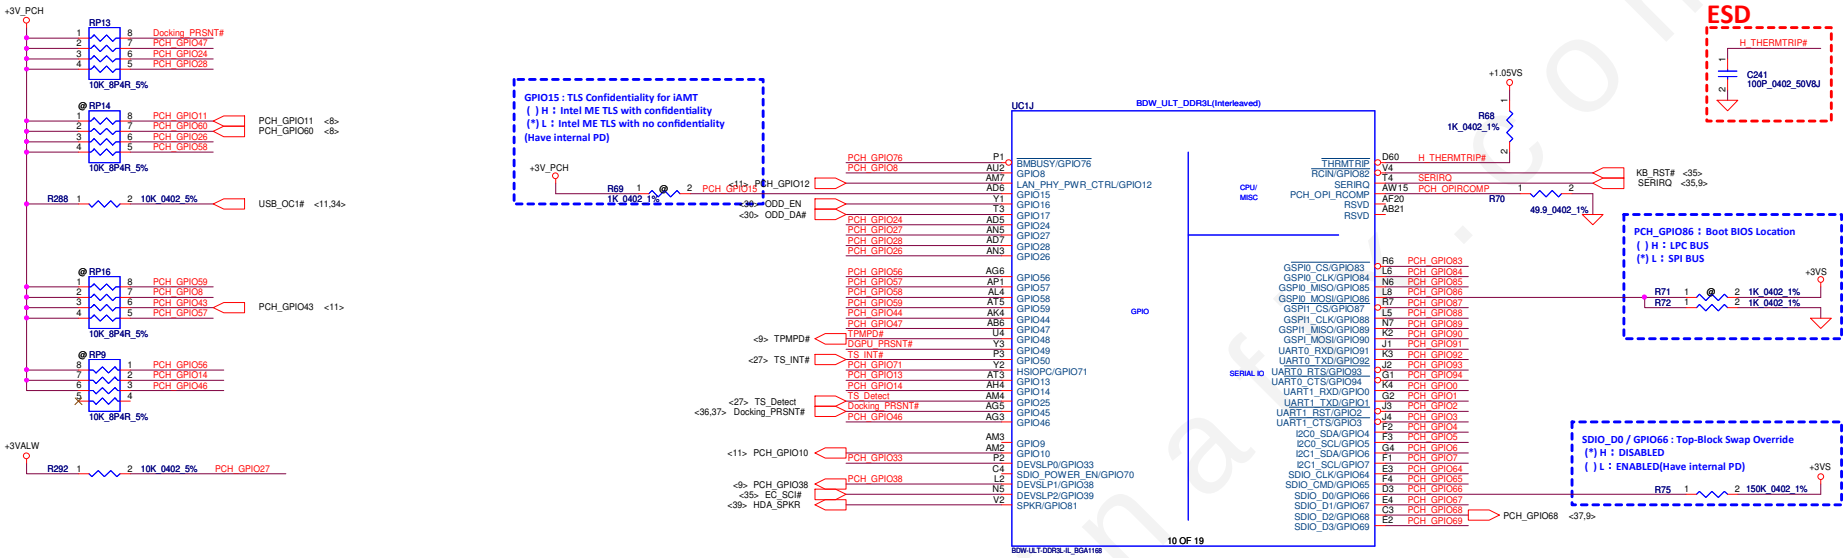

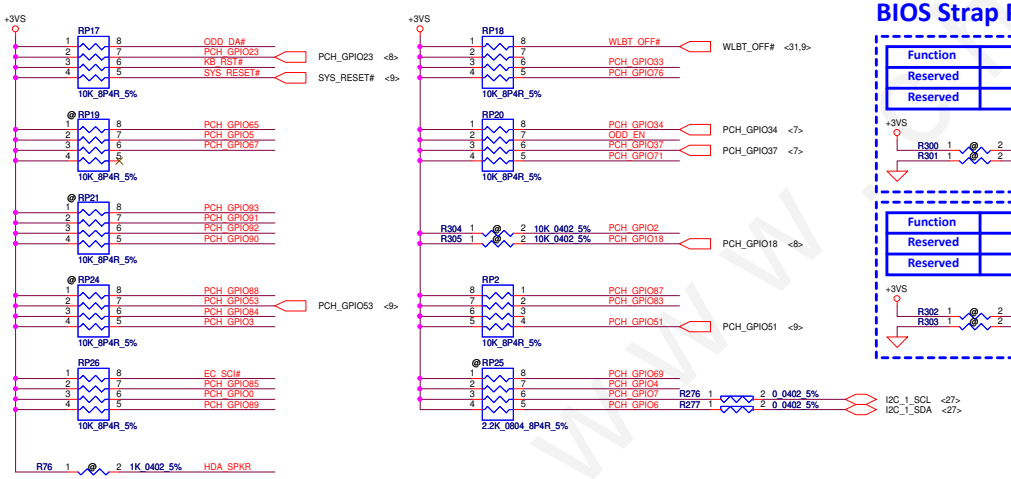

BIOS Strap Pin

Function	GPIO1
Reserved	1
Reserved	0

+3VS
R300 1 @ 2 10K 0402 5%
R301 1 @ 2 10K 0402 5%
PCH_GPIO1

Function	GPIO54
NoDocking SKU	1
Docking SKU	0

+3VS
R248 1 NoDocking@ 2 10K 0402 5%
R247 1 Docking@ 2 10K 0402 5%
PCH_GPIO54
PCH_GPIO54 <9>

Function	GPIO64
JET LE	0
TOPAZ XT	1

+3VS
R245 1 TOPAZ@ 2 10K 0402 5%
R246 1 JET@ 2 10K 0402 5%
PCH_GPIO64

Function	GPIO94
Reserved	1
Reserved	0

+3VS
R302 1 @ 2 10K 0402 5%
R303 1 @ 2 10K 0402 5%
PCH_GPIO94

Function	GPIO44
Zero ODD	1
No Zero ODD	0

+3VS
R284 1 ZODD@ 2 10K 0402 5%
R285 1 NOZODD@ 2 10K 0402 5%
PCH_GPIO44

Function	GPIO13	DGPU_PRSNT# (GPIO49)
SG	0	0
Reserved	0	1
DIS Only	1	0
UMA Only	1	1

+3VS
R282 1 UMA@ 2 10K 0402 5%
R283 1 PX@ 2 10K 0402 5%
PCH_GPIO13
+3VS
R73 1 UMA@ 2 10K 0402 5%
R74 1 PX@ 2 10K 0402 5%
DGPU_PRSNT#

Function	GPIO73
Single Rank	1
Dual Rank	0

+3VS
R286 1 SR@ 2 10K 0402 5%
R287 1 DR@ 2 10K 0402 5%
PCH_GPIO73
PCH_GPIO73 <8>

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.			
Title	HSW MCP(6/11) GPIO,LPIO		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 10 of 55		

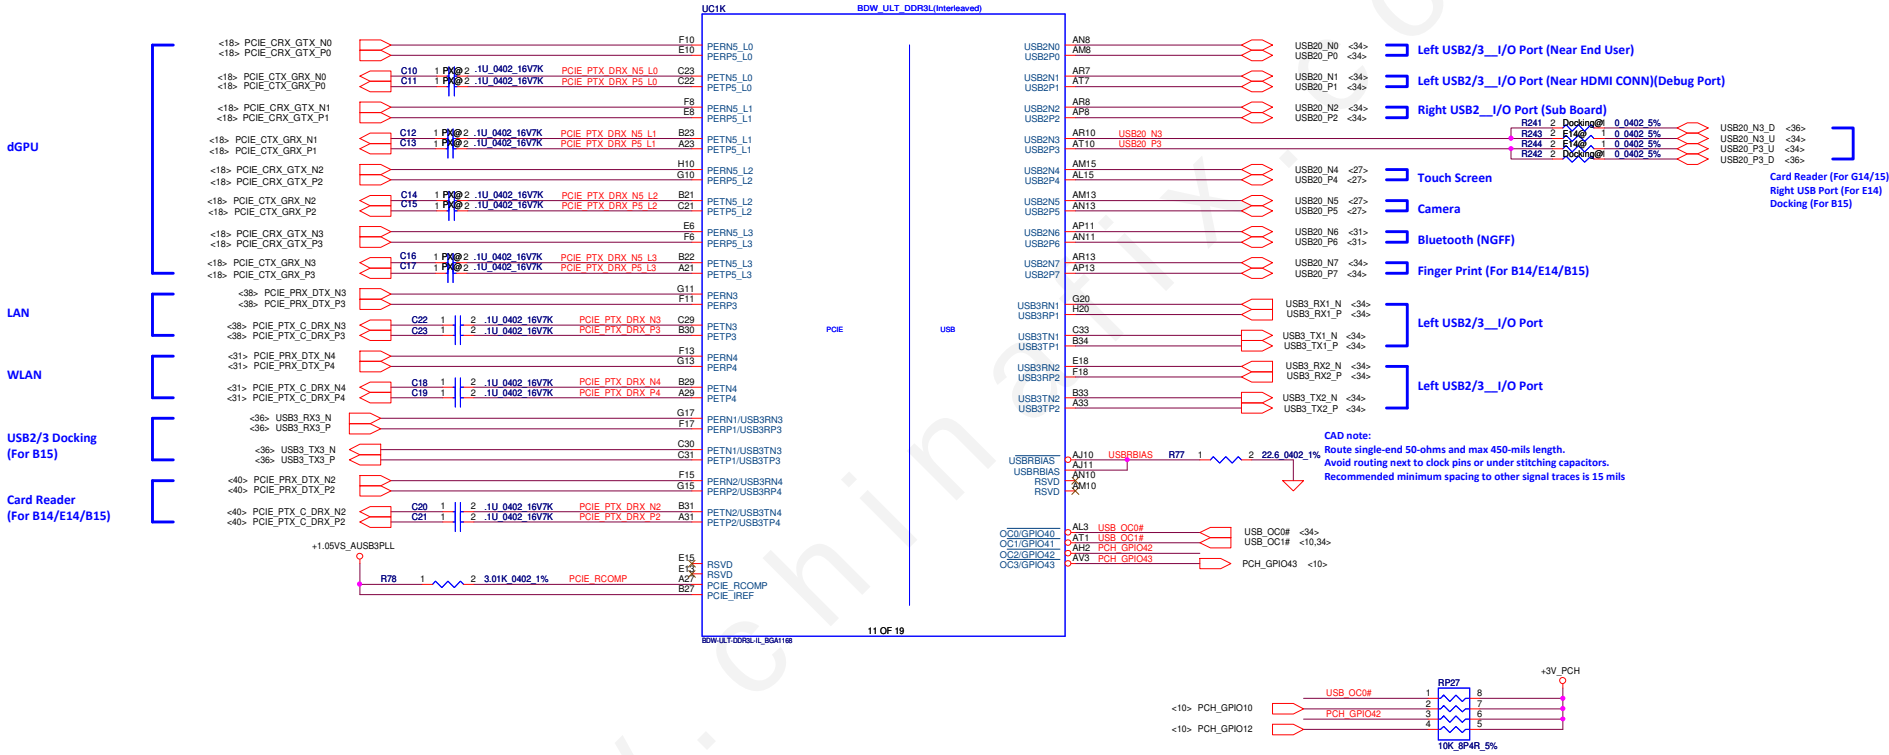

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12
Title	HSW MCP(7/11) PCIE,USB		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 11 of 55		



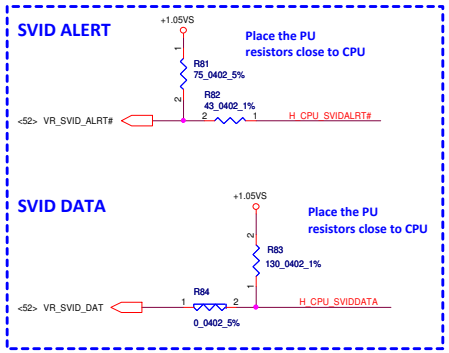

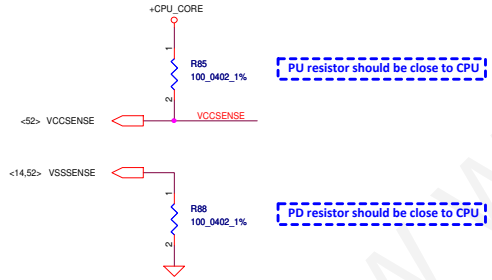



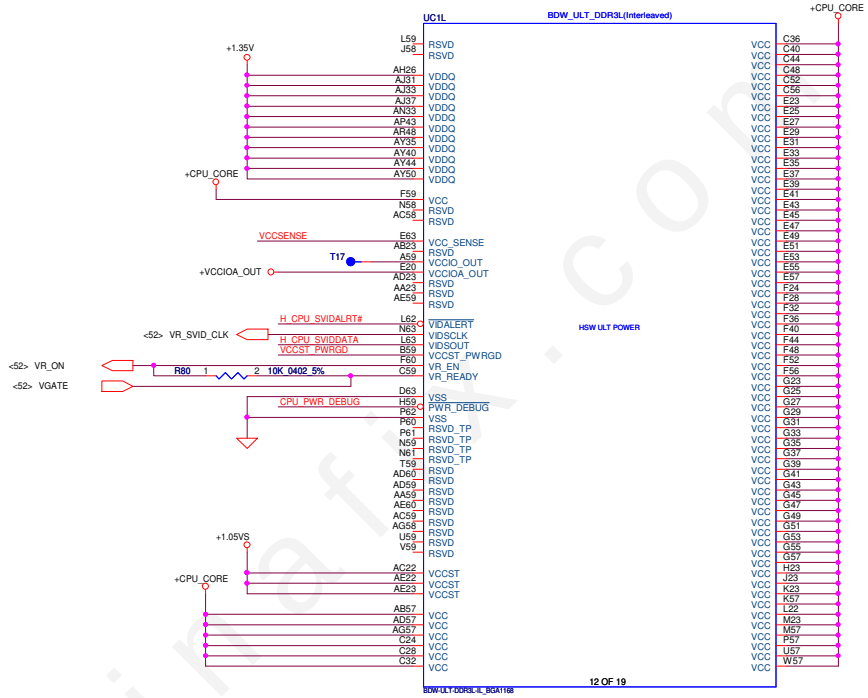

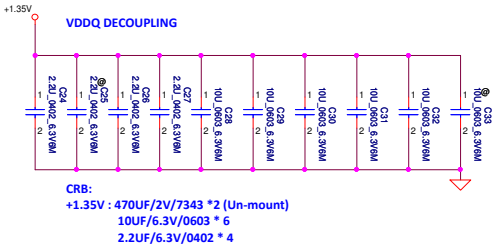

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12
Title	HSW MCP(8/11) Power		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 12 of 55		

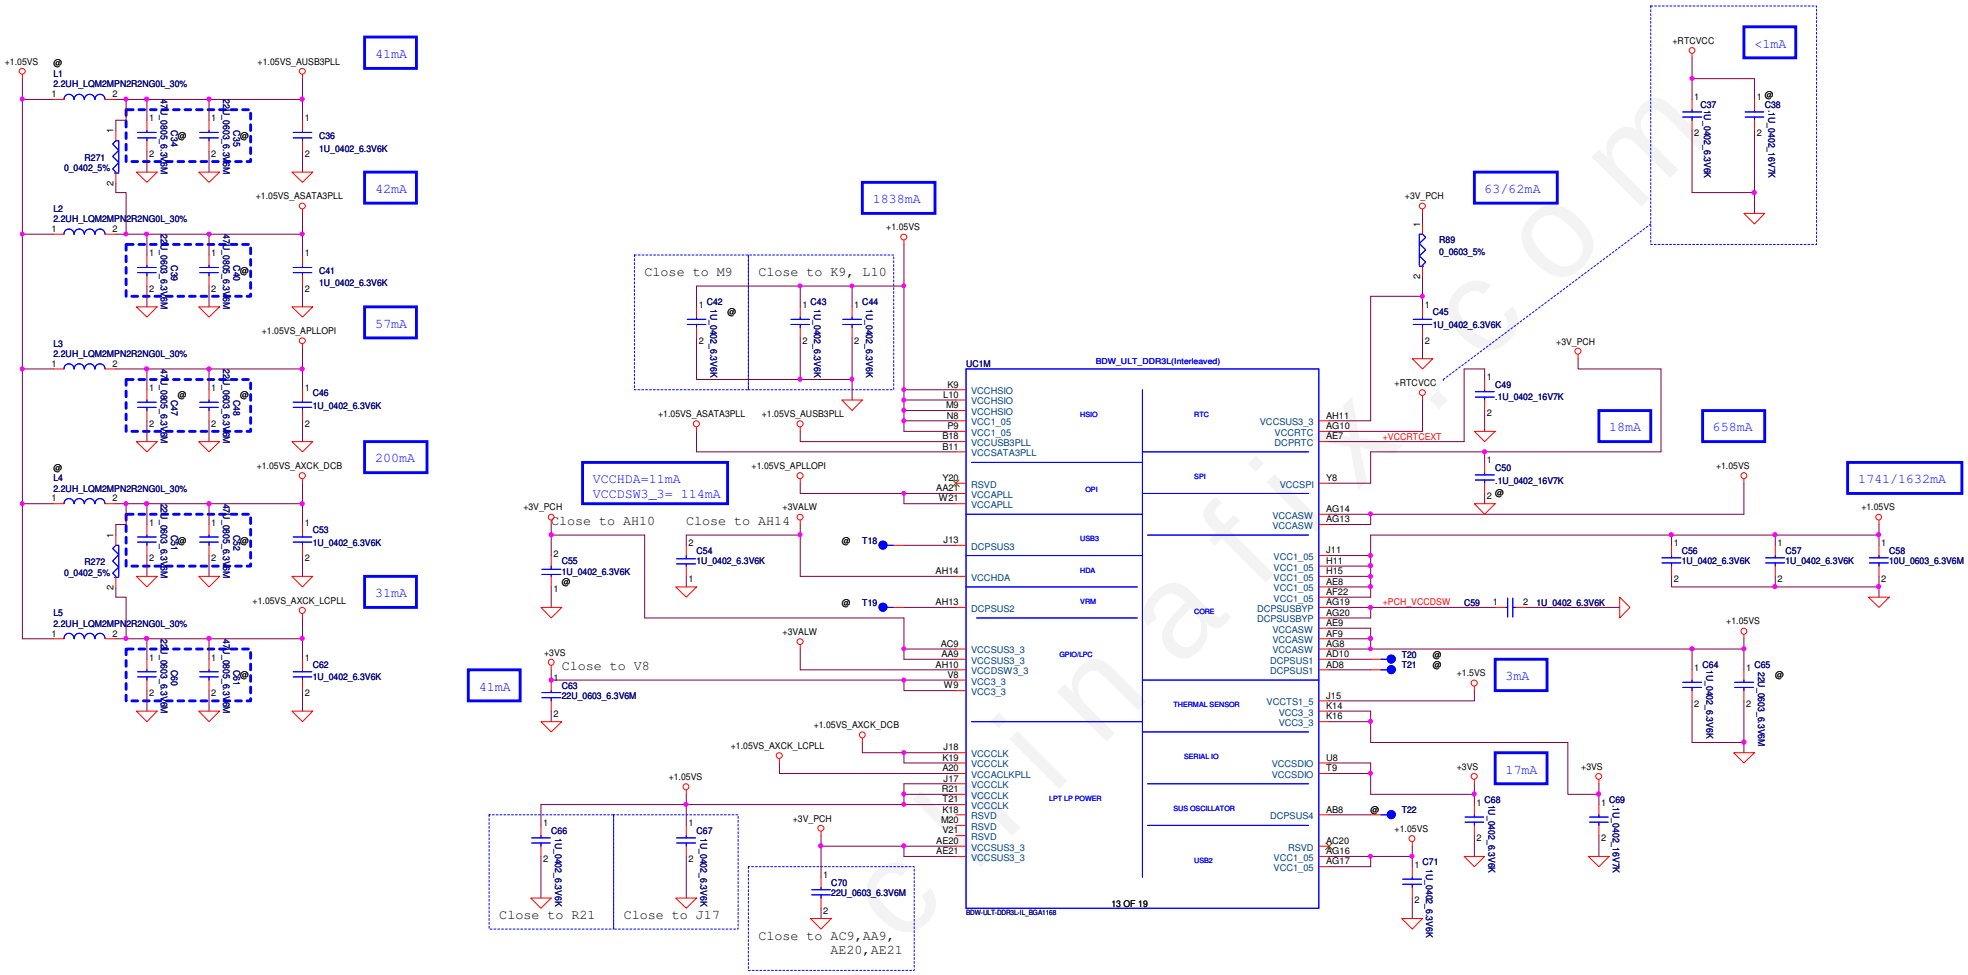

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12
Title	HSW MCP(9/11) Power		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 13 of 55		

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12
Title	HSW MCP(10/11) GND		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 14 of 55		

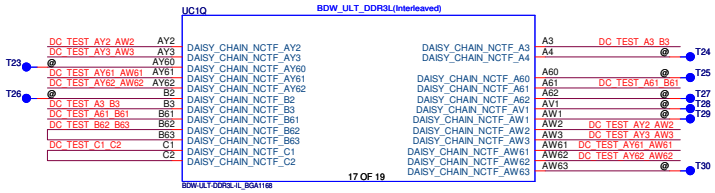

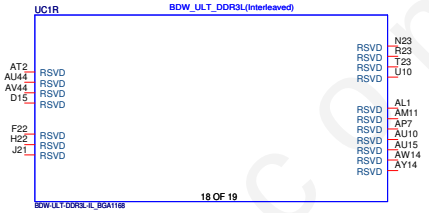

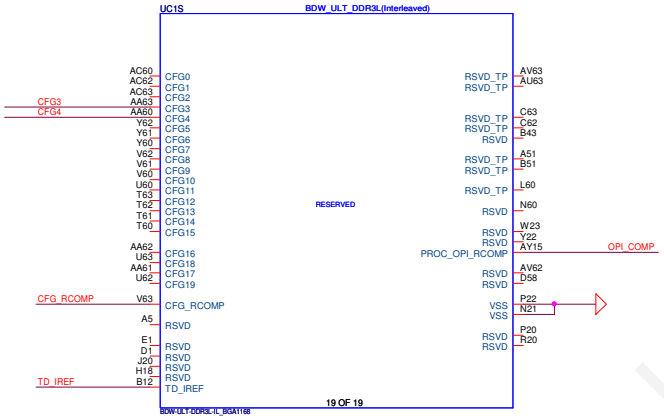



CFG Straps for Processor



Physical Debug Enable (DFX Privacy)	
CFG3	1: DISABLED 0: ENABLED; SET DFX ENABLED BIT IN DEBUG INTERFACE MSR



Display Port Presence Strap	
CFG4	1 : Disabled; No Physical Display Port attached to Embedded Display Port 0 : Enabled; An external Display Port device is connected to the Embedded Display Port

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.	
Title	HSW MCP(11/11) RSVD
Size	C
Document Number	LA-B091P
Rev	1.0
Date:	Wednesday, February 12, 2014
Sheet	15 of 55

DIMM1
Reverse Type
Near CPU

D/DQ Signals link to CPU
CMD Signals from CPU
Clock Signals from CPU
CTL Signals from CPU
SMBUS Signals link to CPU

Layout Note:
Place near JDIMM1

Layout Note:
Place near JDIMM1.203,204

Layout Note:
Place near JDIMM1.199

Address : 00

ESD

Interleaved Memory

DDR3L SODIMM ODT GENERATION

For ODT & VTT power control

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Compal Electronics, Inc.

Title: DDR3L_DIMMA

Size	Document Number	Rev
C	LA-B091P	1.0

Date: Wednesday, February 12, 2014 Sheet 16 of 55

DIMM2
Standard Type
Near User

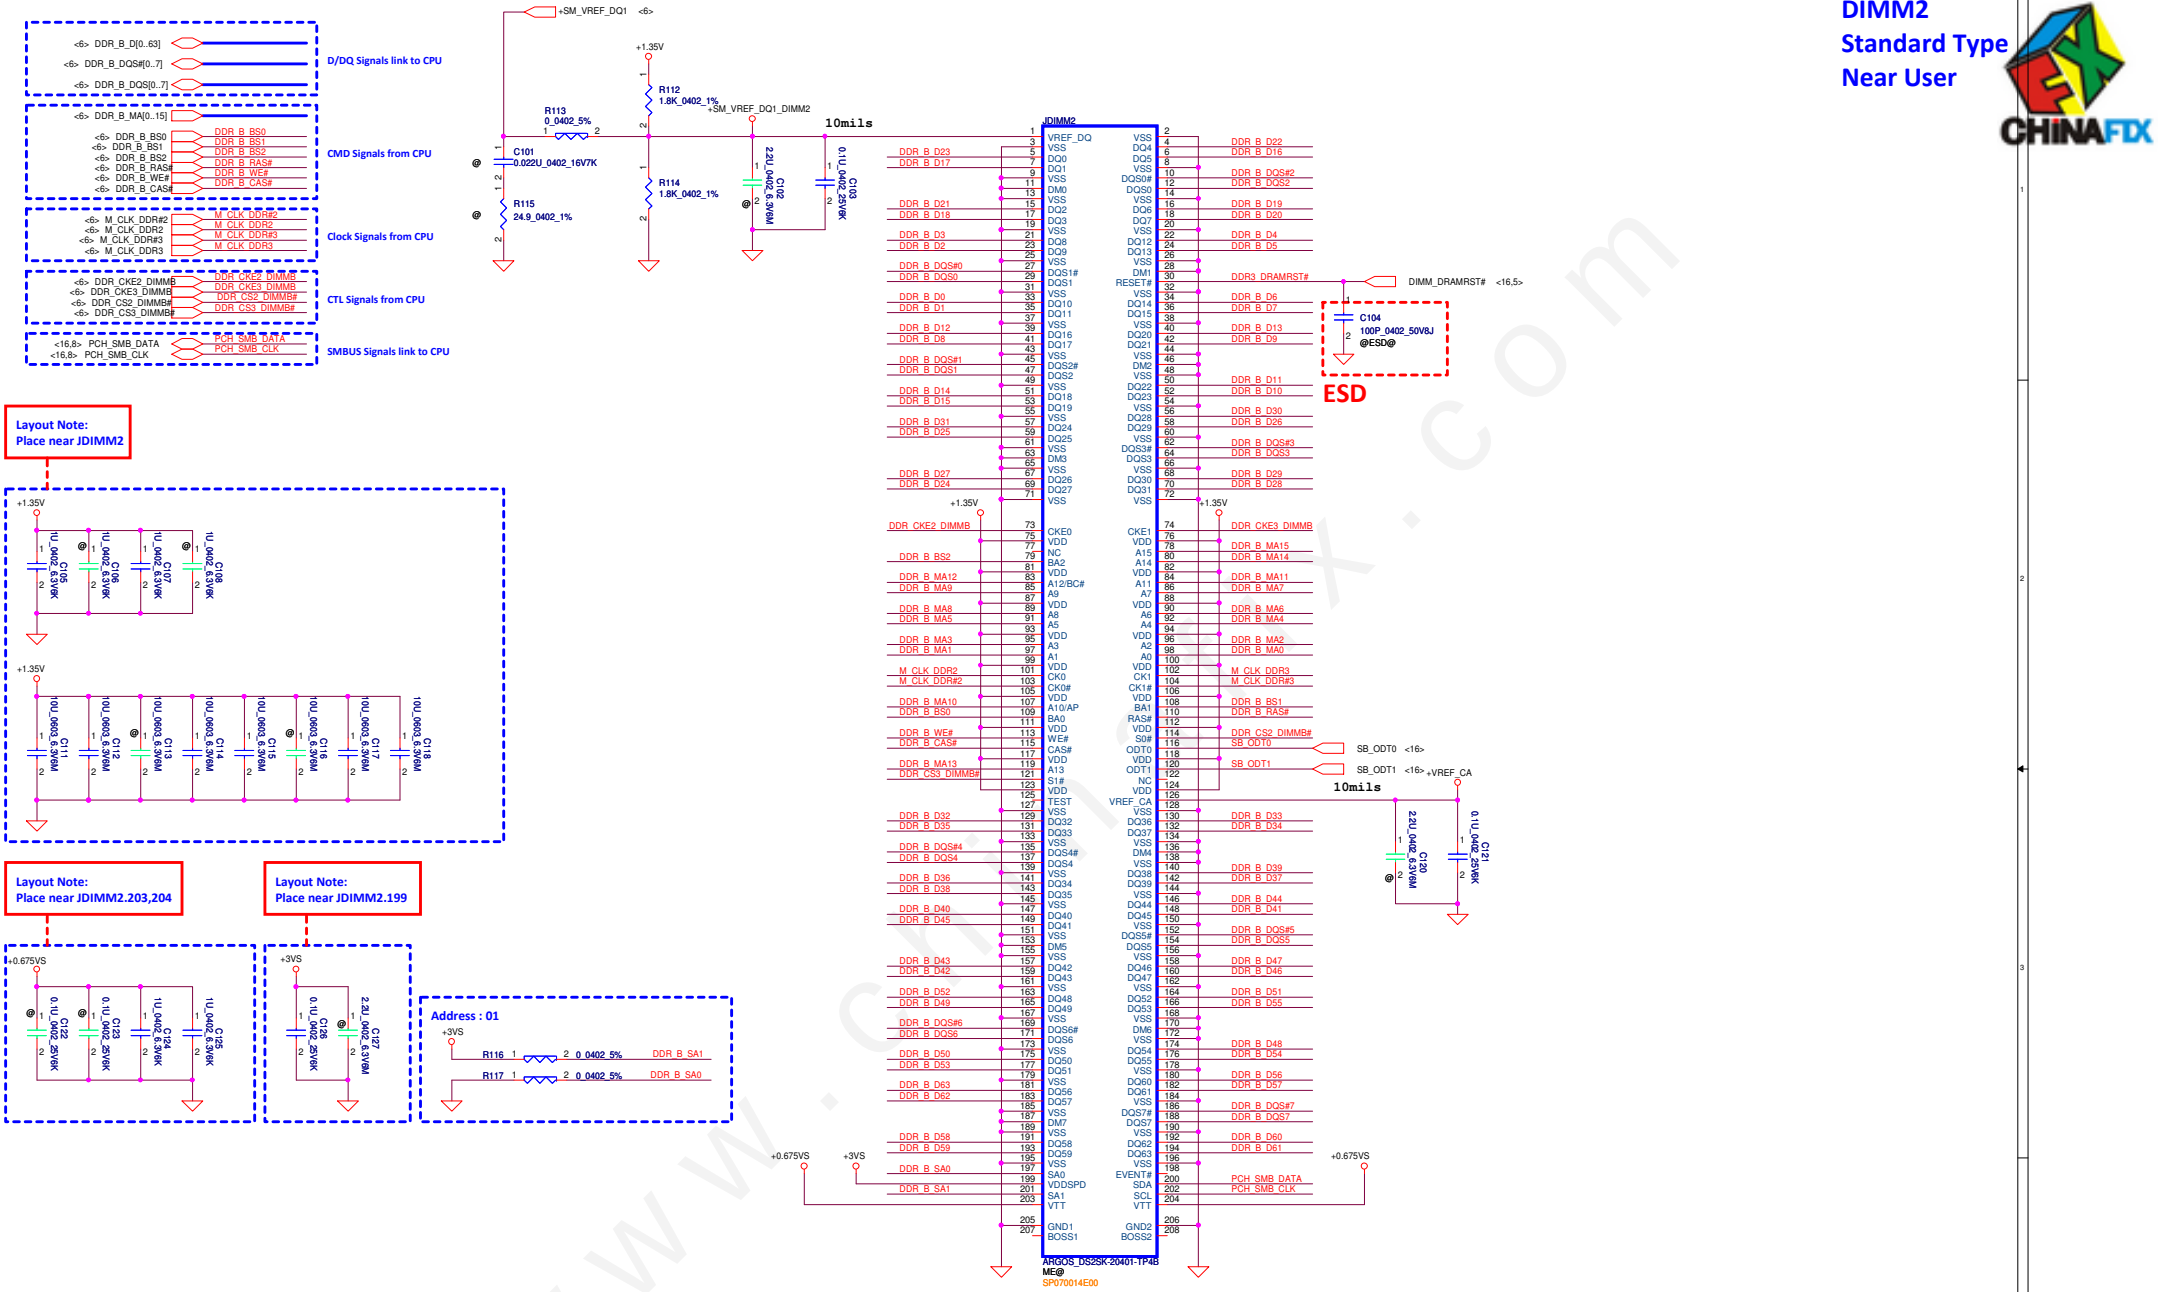

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.

Title: DDR3L DIMMB

Size	Document Number	Rev
C	LA-B091P	1.0

Date: Wednesday, February 12, 2014 Sheet 17 of 55

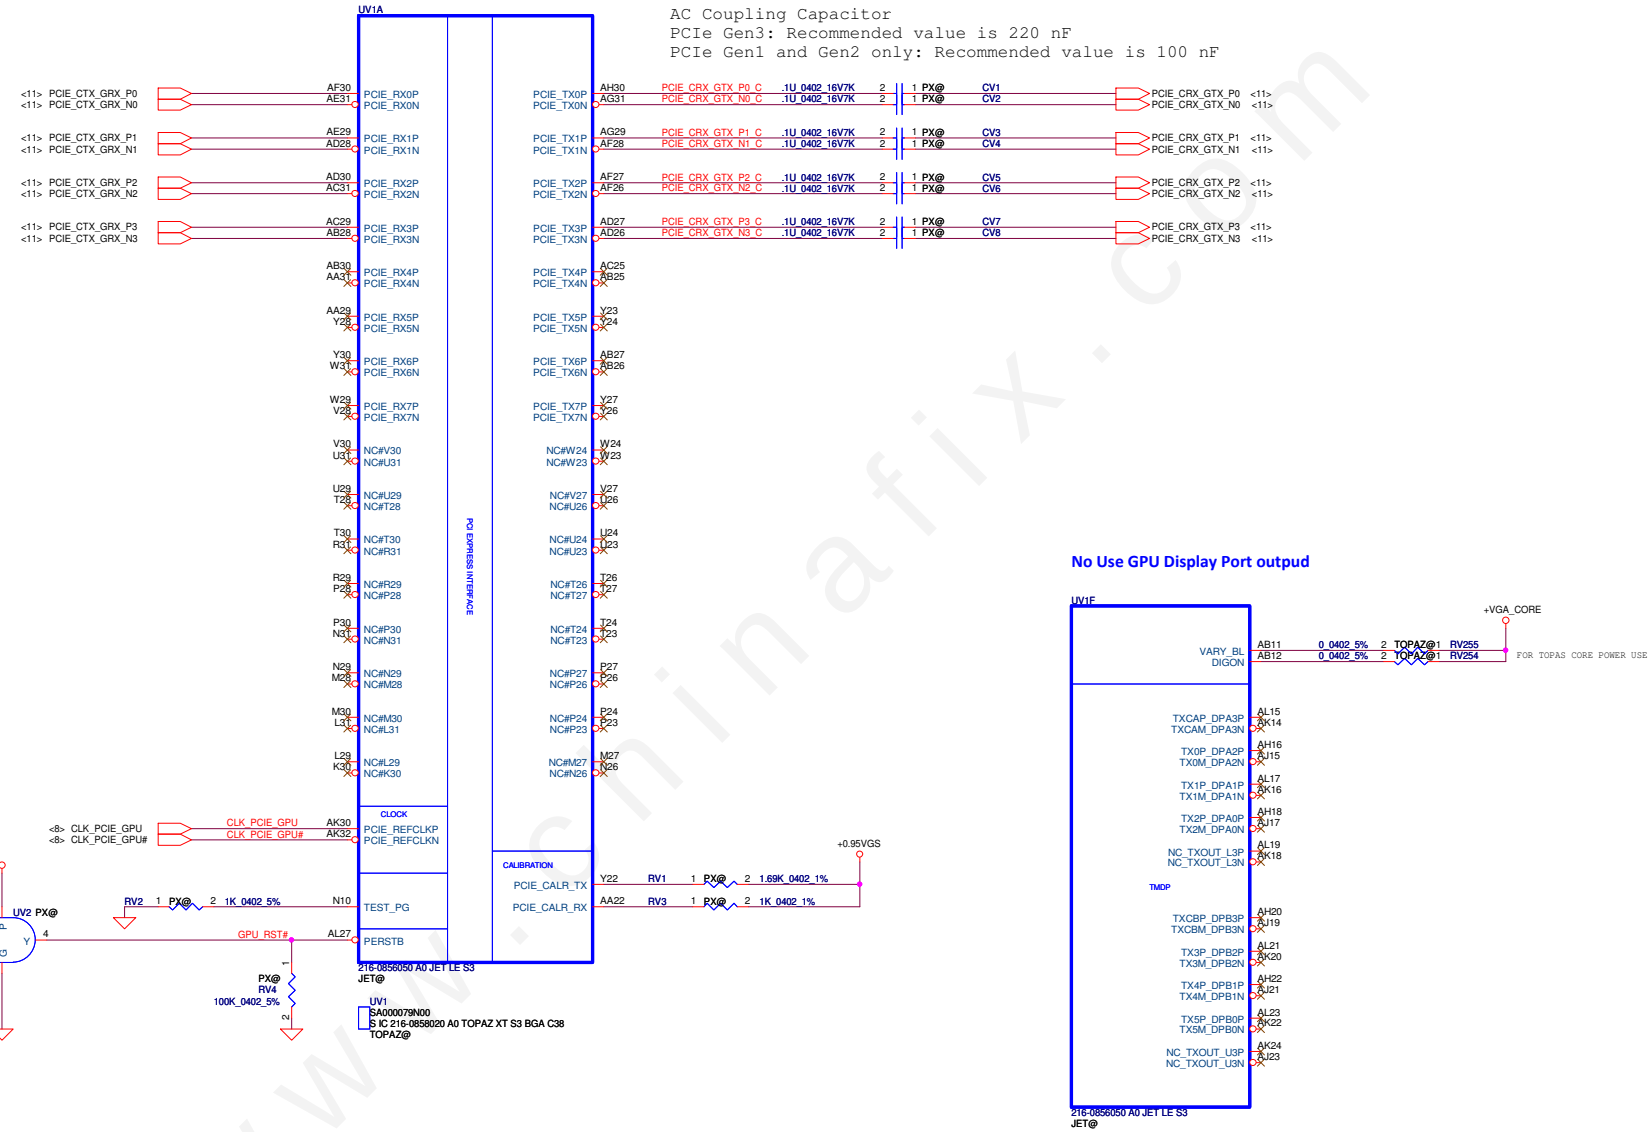

Security Classification	Compal Secret Data		
Issued Date	2013/01/11	Deciphered Date	2013/12/31

Compal Electronics, Inc.

Title: SUN_PCIE/DP

Size: Custom | Document Number: LA-B091P | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 18 of 55

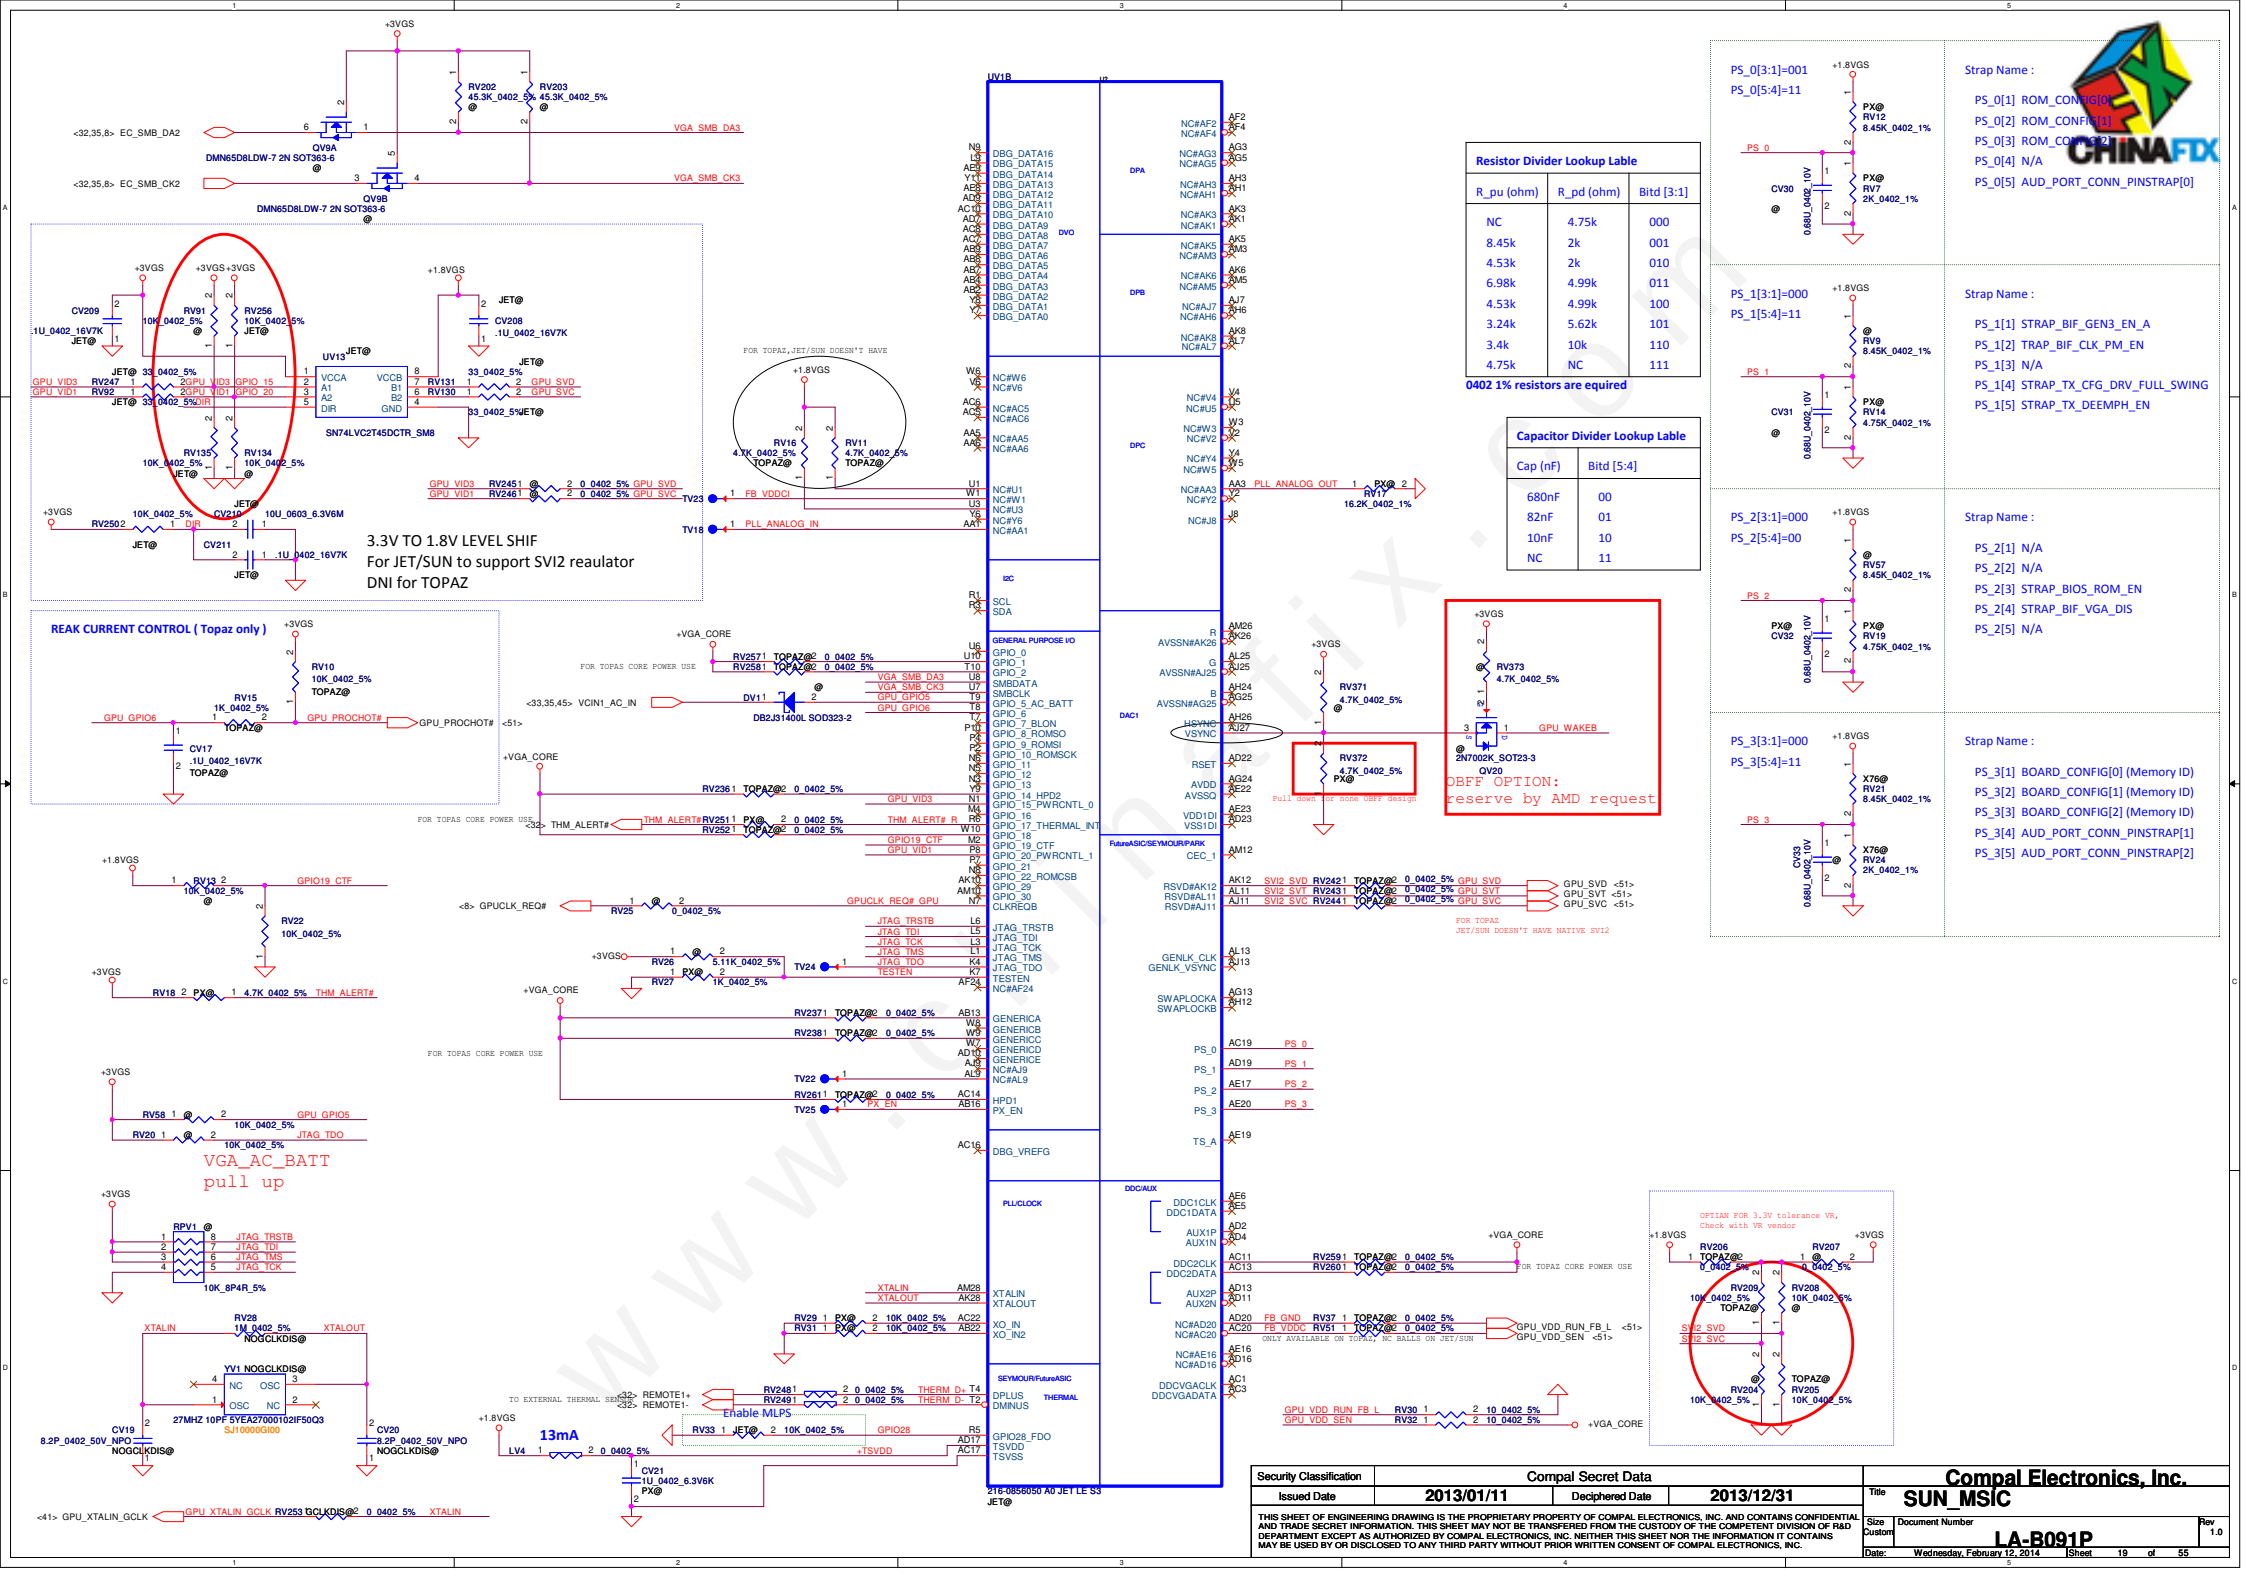

Resistor Divider Lookup Lable		
R_pu (ohm)	R_pd (ohm)	Bitd [3:1]
NC	4.75k	000
8.45k	2k	001
4.53k	2k	010
6.98k	4.99k	011
4.53k	4.99k	100
3.24k	5.62k	101
3.4k	10k	110
4.75k	NC	111

0402 1% resistors are equired

Capacitor Divider Lookup Lable	
Cap (nF)	Bitd [5:4]
680nF	00
82nF	01
10nF	10
NC	11

PS_0[3:1]=001
PS_0[5:4]=11

Strap Name :
PS_0[1] ROM_CONFIG[0]
PS_0[2] ROM_CONFIG[1]
PS_0[3] ROM_CONFIG[2]
PS_0[4] N/A
PS_0[5] AUD_PORT_CONN_PINSTRAP[0]

PS_1[3:1]=000
PS_1[5:4]=11

Strap Name :
PS_1[1] STRAP_BIF_GEN3_EN_A
PS_1[2] TRAP_BIF_CLK_PM_EN
PS_1[3] N/A
PS_1[4] STRAP_TX_CFG_DRV_FULL_SWING
PS_1[5] STRAP_TX_DEEMPH_EN

PS_2[3:1]=000
PS_2[5:4]=00

Strap Name :
PS_2[1] N/A
PS_2[2] N/A
PS_2[3] STRAP_BIOS_ROM_EN
PS_2[4] STRAP_BIF_VGA_DIS
PS_2[5] N/A

PS_3[3:1]=000
PS_3[5:4]=11

Strap Name :
PS_3[1] BOARD_CONFIG[0] (Memory ID)
PS_3[2] BOARD_CONFIG[1] (Memory ID)
PS_3[3] BOARD_CONFIG[2] (Memory ID)
PS_3[4] AUD_PORT_CONN_PINSTRAP[1]
PS_3[5] AUD_PORT_CONN_PINSTRAP[2]

Security Classification	Compal Secret Data		
Issued Date	2013/01/11	Deciphered Date	2013/12/31

Compal Electronics, Inc.

Title: SUN_MSIC

Size: Custom | Document Number: LA-B091P | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 19 of 55

+1.35VS to +1.35VGS (6.234A)

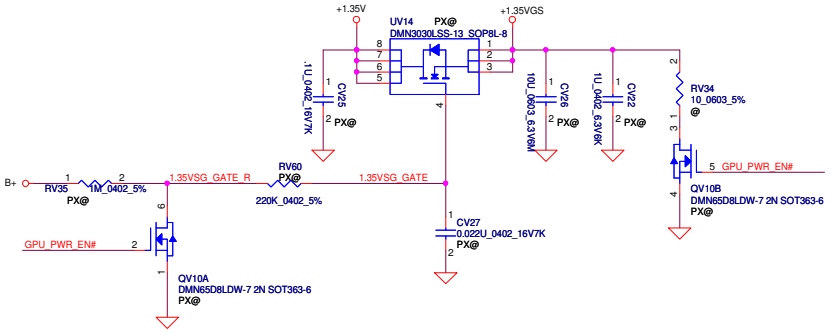

+1.05VS to +0.95VGS

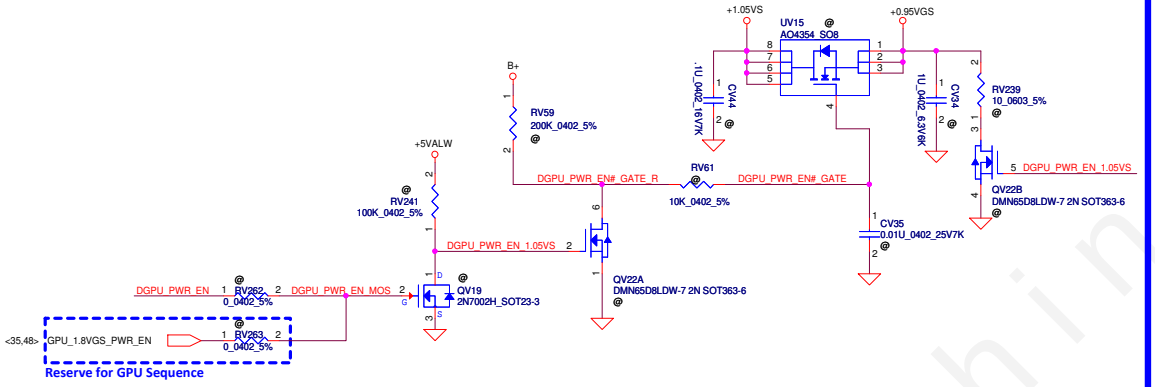

+3VS to +3VS_VGA (25mA)

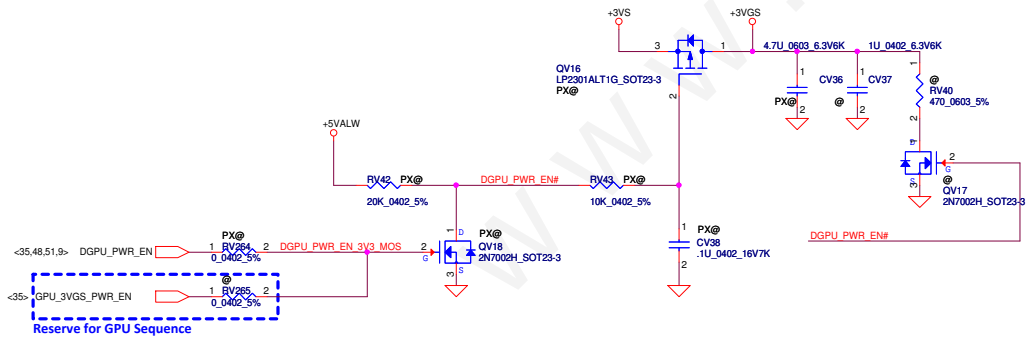

No Use GPU Display Port outpud

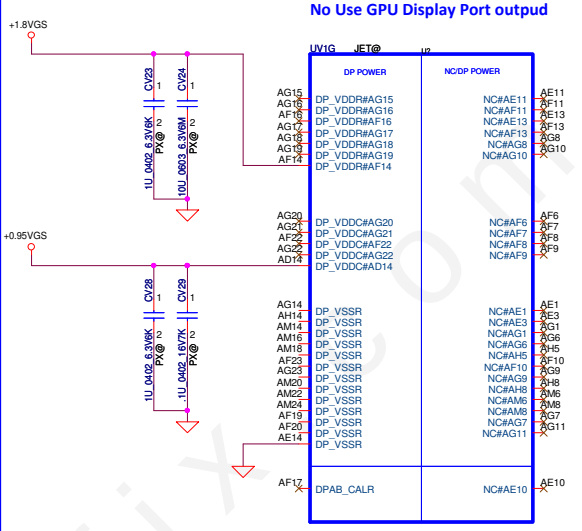

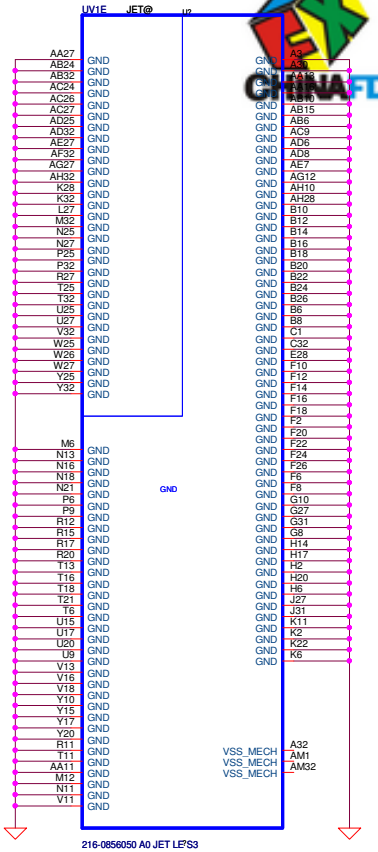

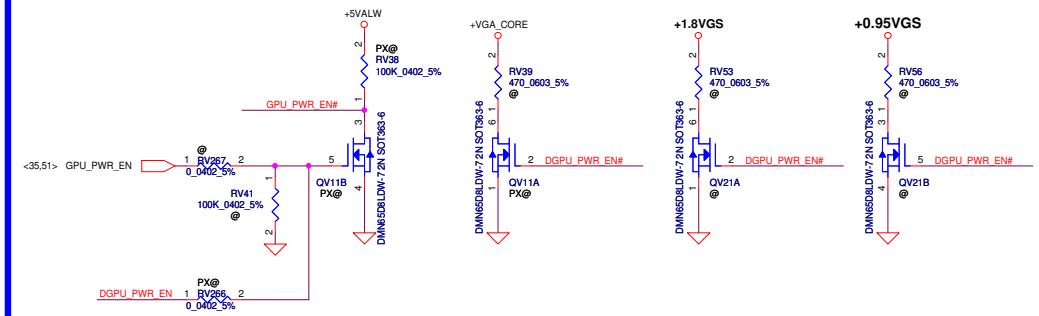

Security Classification	Compal Secret Data		
Issued Date	2013/01/11	Deciphered Date	2013/12/31

Compal Electronics, Inc.

Title: SUN_Power/GND

Size: Custom | Document Number: LA-B091P | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 20 of 55

+VGA_CORE		10uF	2.2uF	1uF	0.1uF
VDDC	TBD	7	16	4	3
VDDCI	3.5A				

+0.95VGS		10uF	1uF	0.1uF
PCIE_VDDC	1A	1	5(1@)	0
BIF_VDDC	0.8A	0	1(1@)	0
SPLL_VDDC	100mA	0	1	1

+1.35VGS		10uF	1uF	0.1uF	0.01uF
VDDR1	1.5A	5(3@)	5	5	0

+1.8VGS		10uF	1uF	0.1uF
PCIE_PVDD	100mA	1	1	0
MPLL_PVDD	130mA	2	1	0
SPLL_PVDD	75mA	0	1	0
VDDR4	(300mA)	0	0	0
VDD_CT	13mA	0	1	0
+TSVDD	13mA	0	1	0
+DP_VDDR		1	1	0
+DP_VDDC		0	1	1

+3VGS		10uF	1uF	0.1uF
VDDR3	25mA	0	1	0

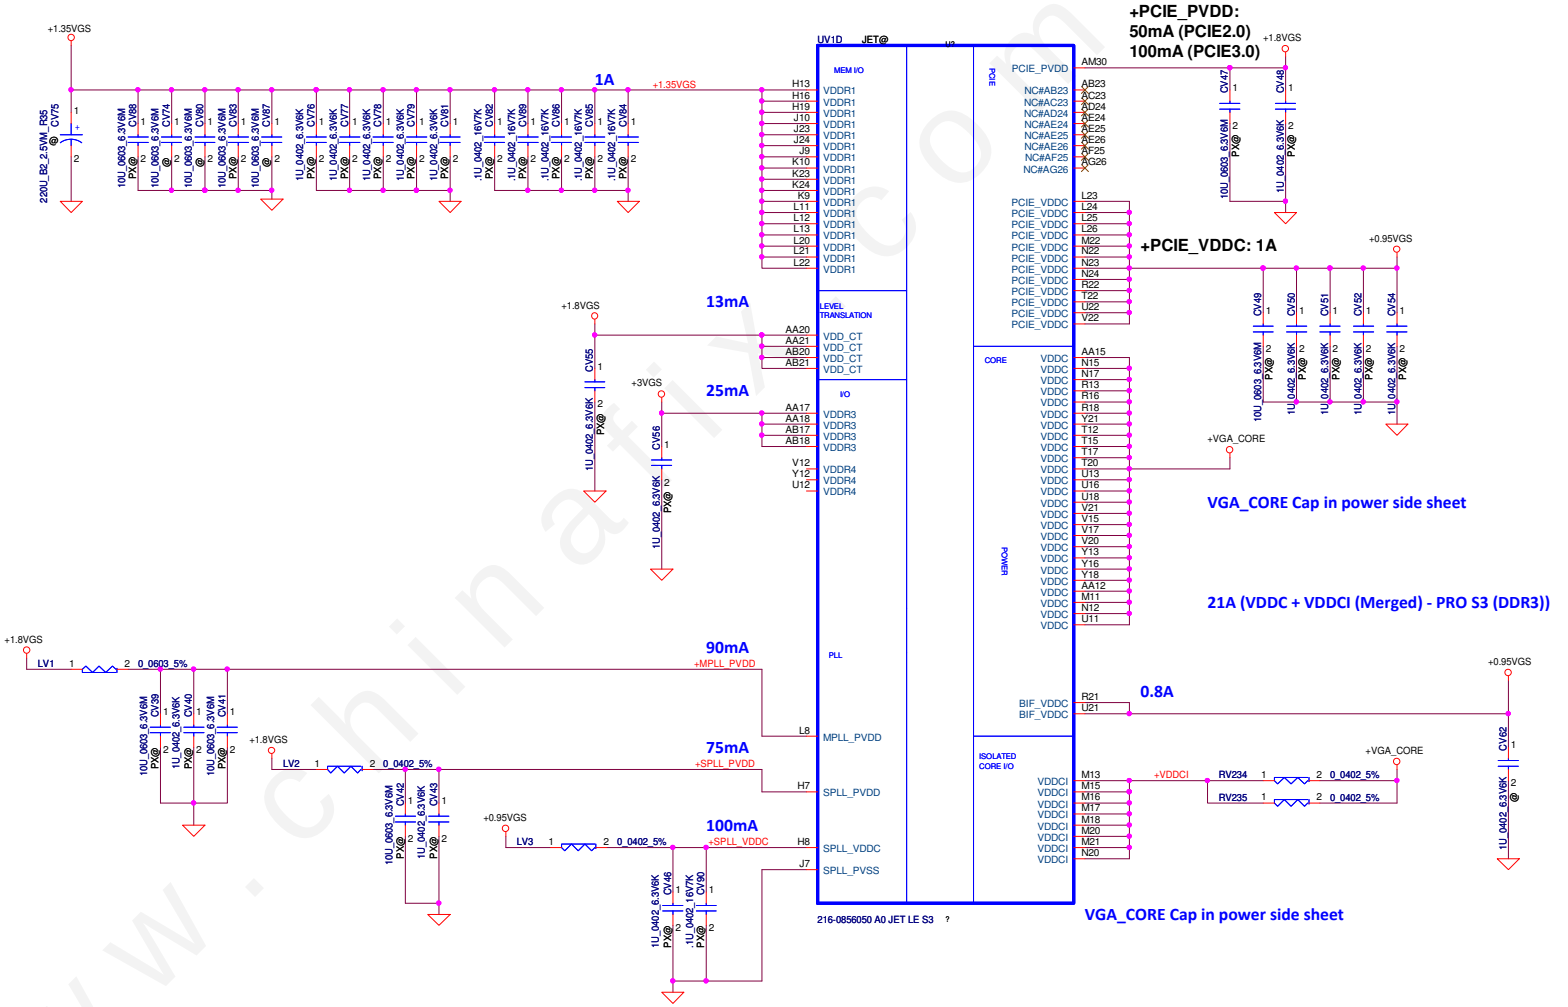

Security Classification	Compal Secret Data		
Issued Date	2013/01/11	Deciphered Date	2013/12/31

Compal Electronics, Inc.

Title: SUN_Power

Size: Custom | Document Number: LA-B091P | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 21 of 55

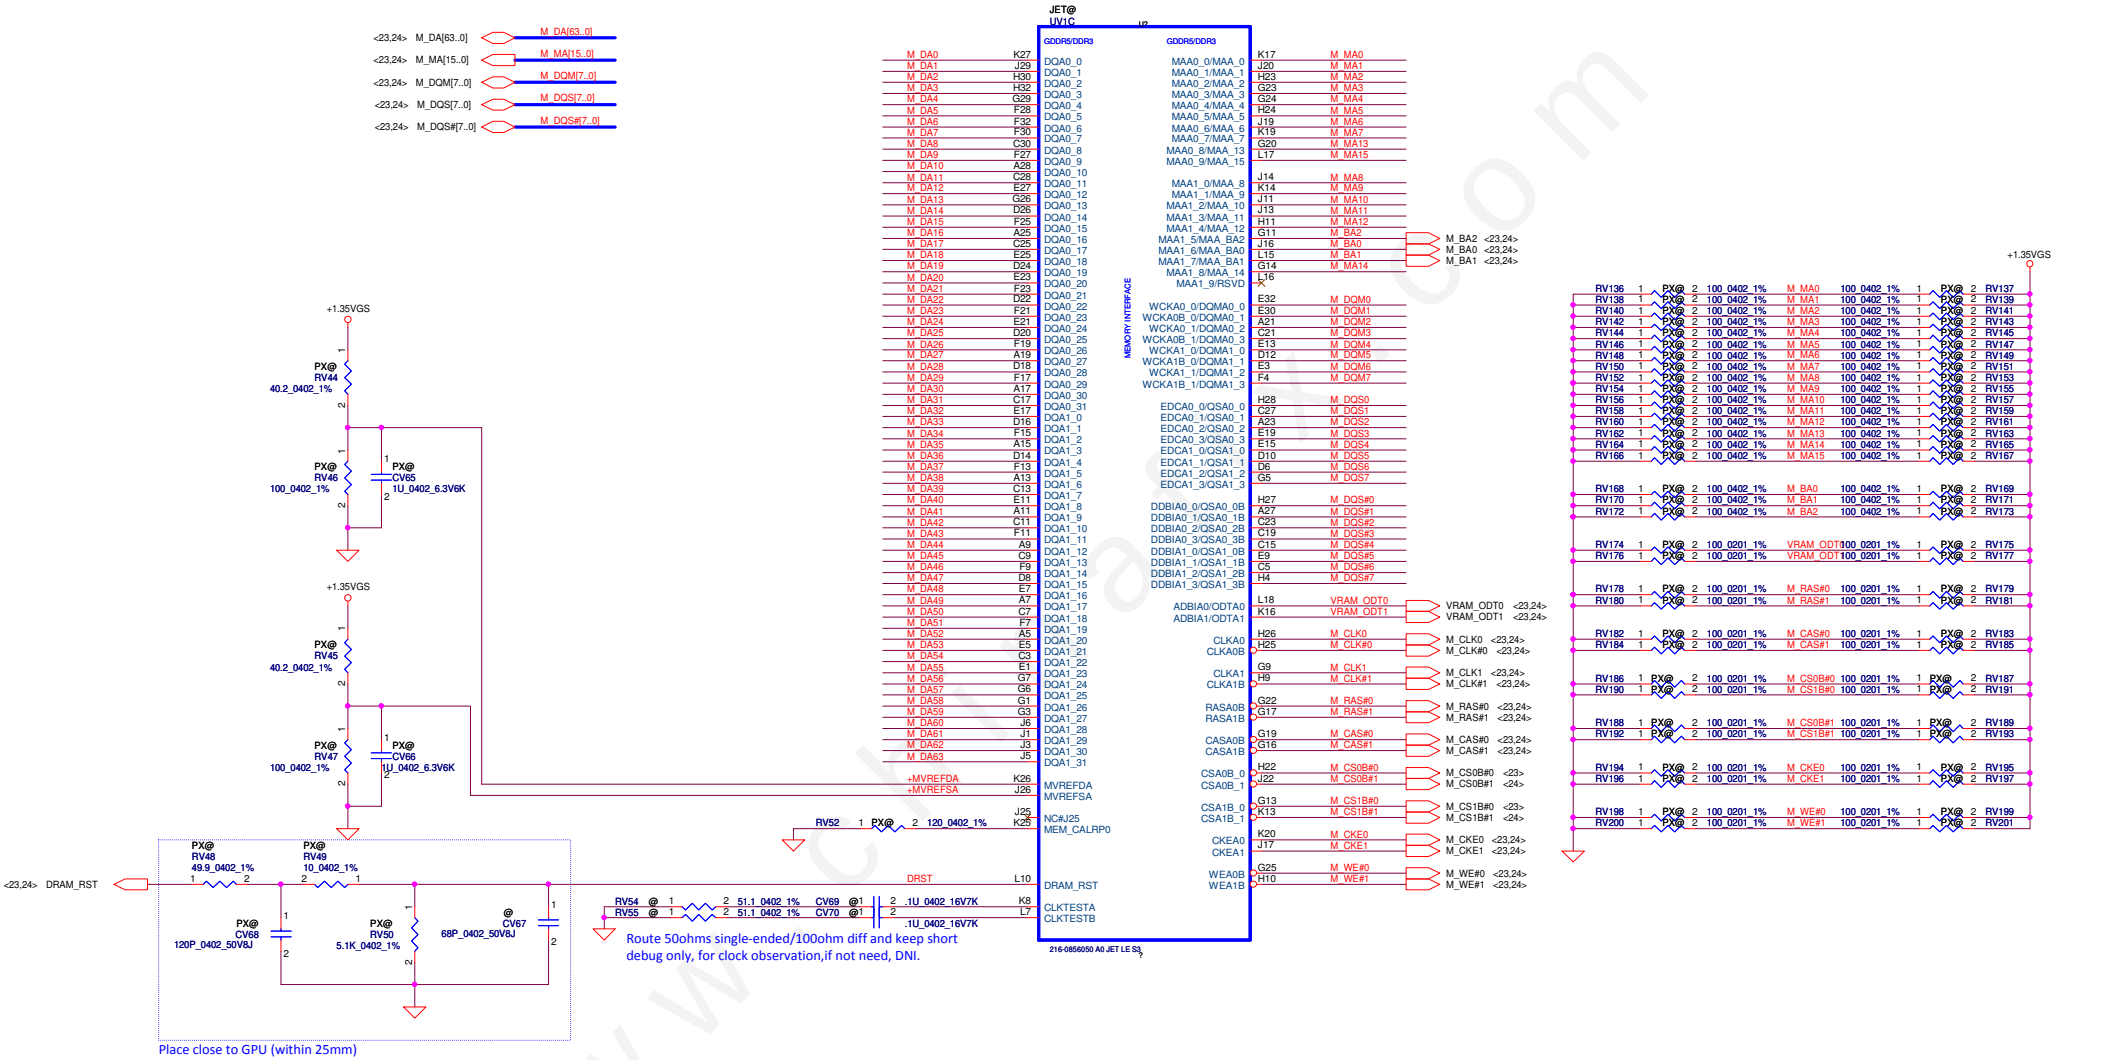

Security Classification	Compal Secret Data		
Issued Date	2013/01/11	Deciphered Date	2013/12/31

Compal Electronics, Inc.

Title: SUN_MEM

Size: Custom | Document Number: LA-B091P | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 22 of 55

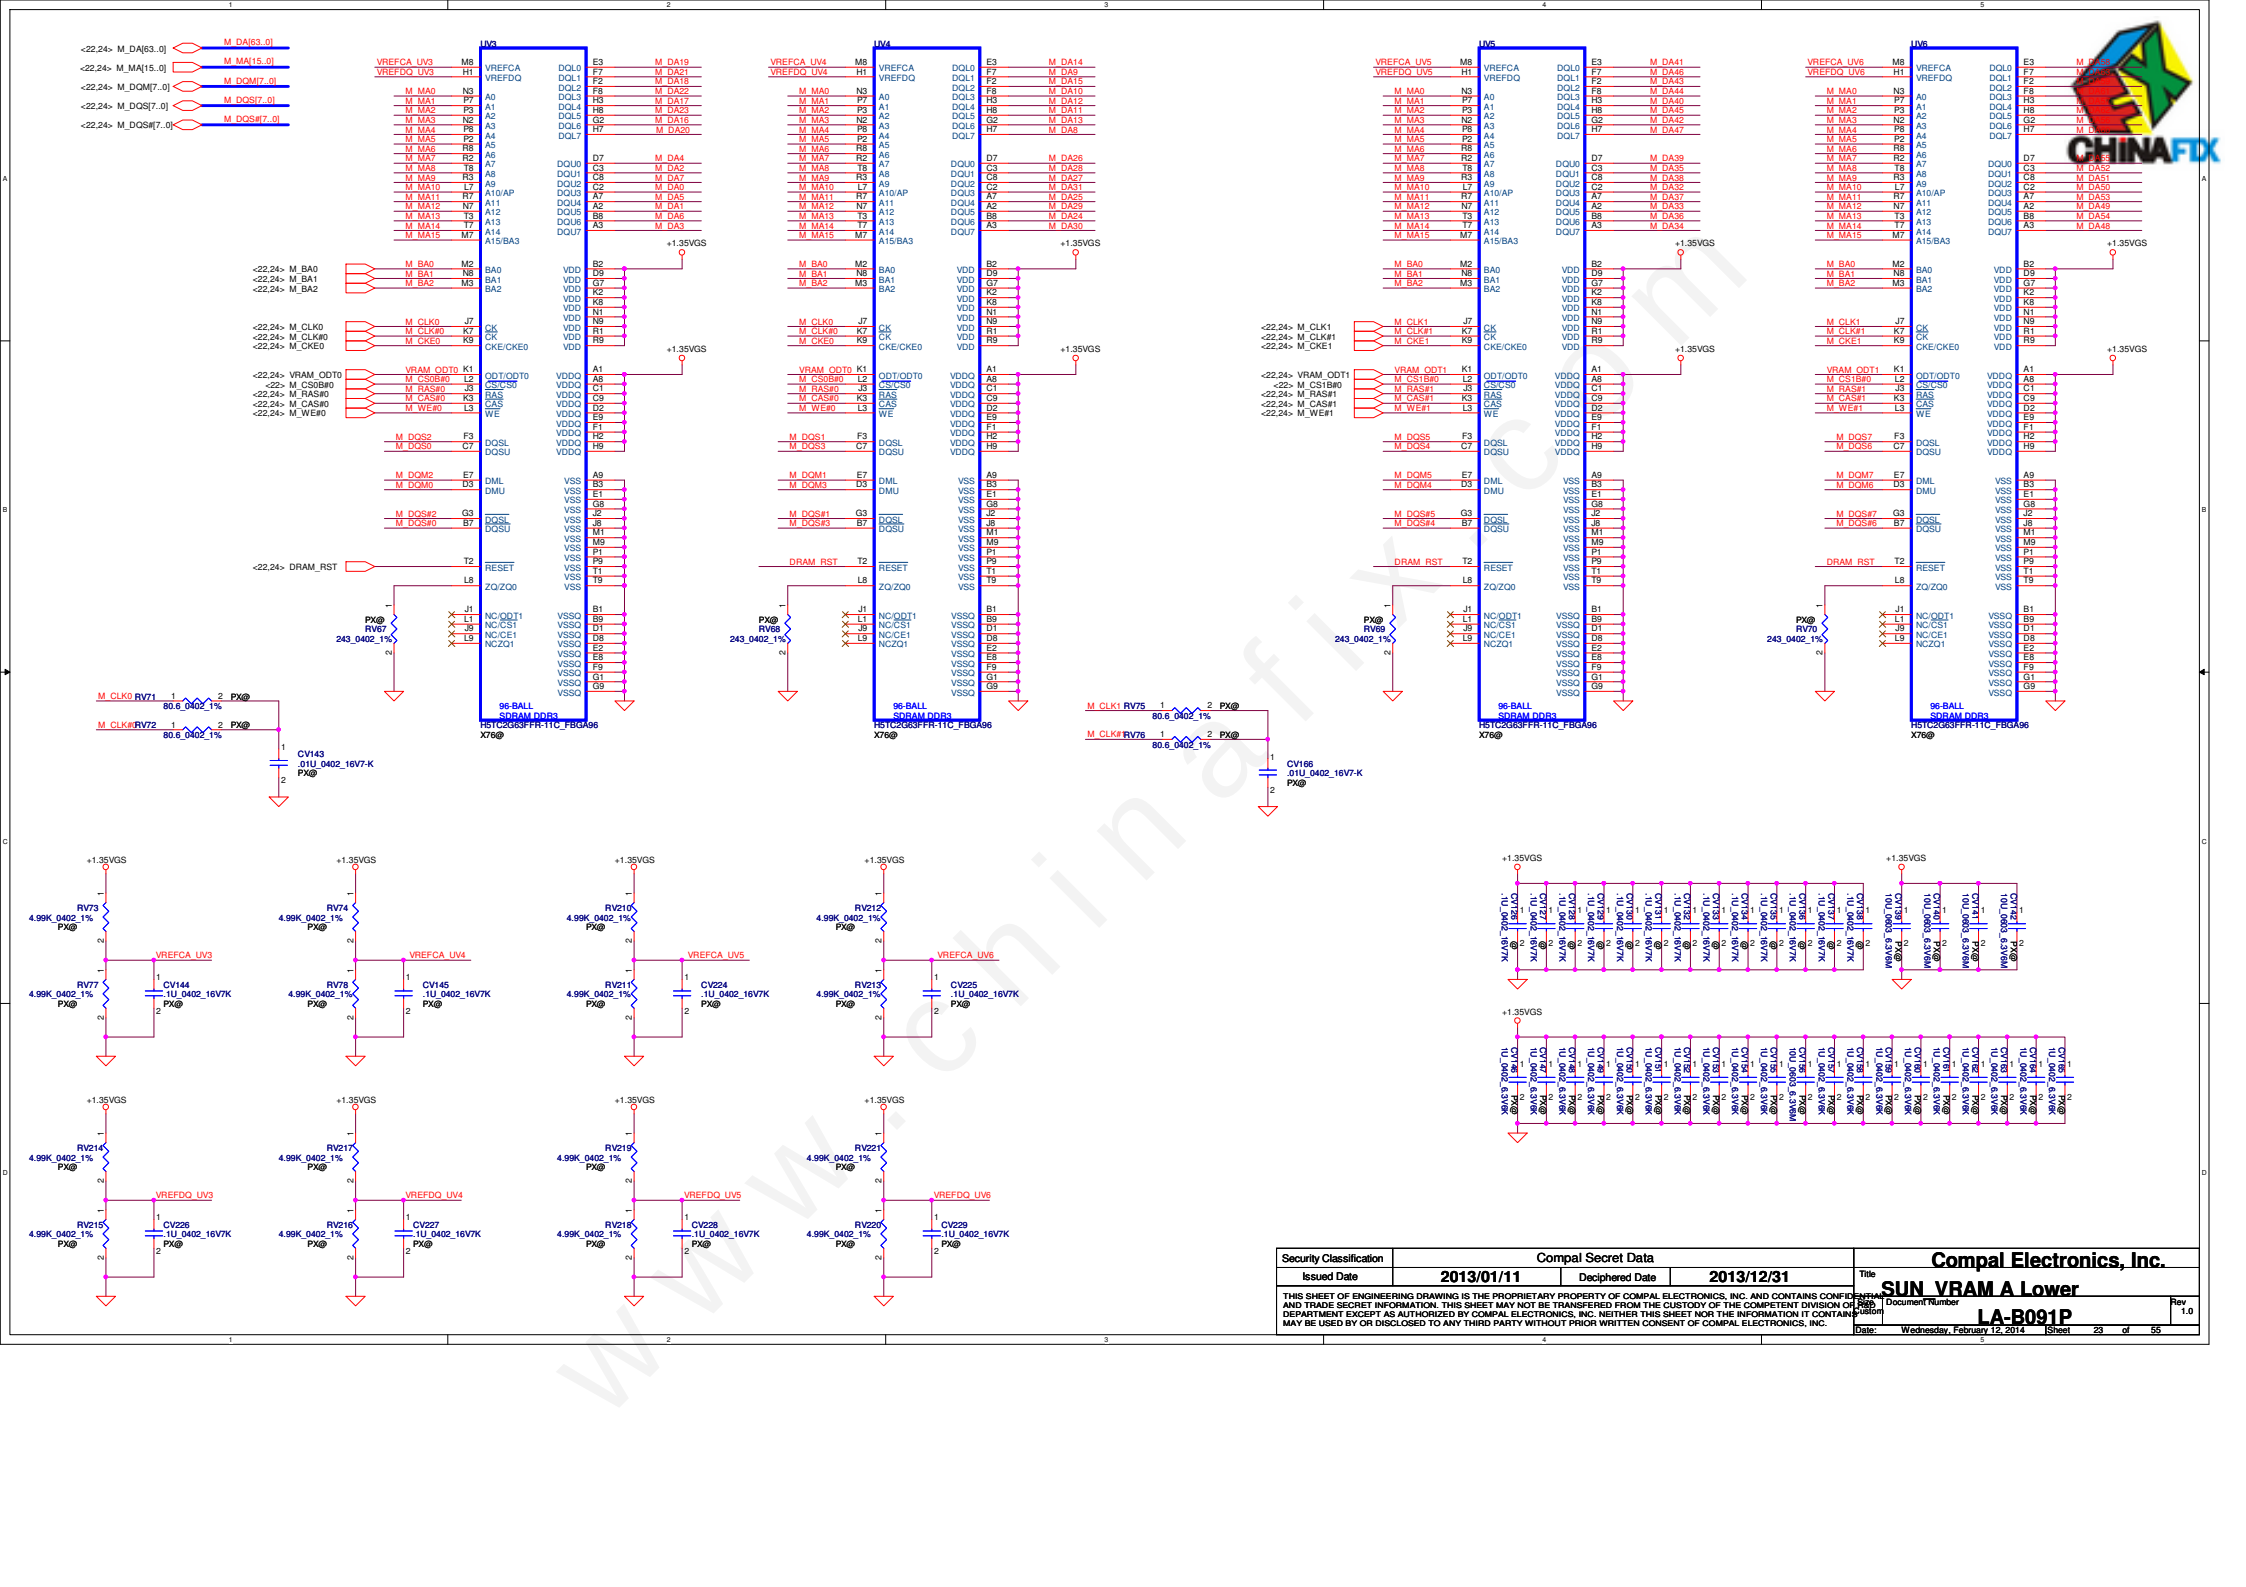

Security Classification	Compal Secret Data		
Issued Date	2013/01/11	Deciphered Date	2013/12/31

Compal Electronics, Inc.

Title: SUN_VRAM A Lower

Size: B | Document Number: LA-B091P | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 23 of 55

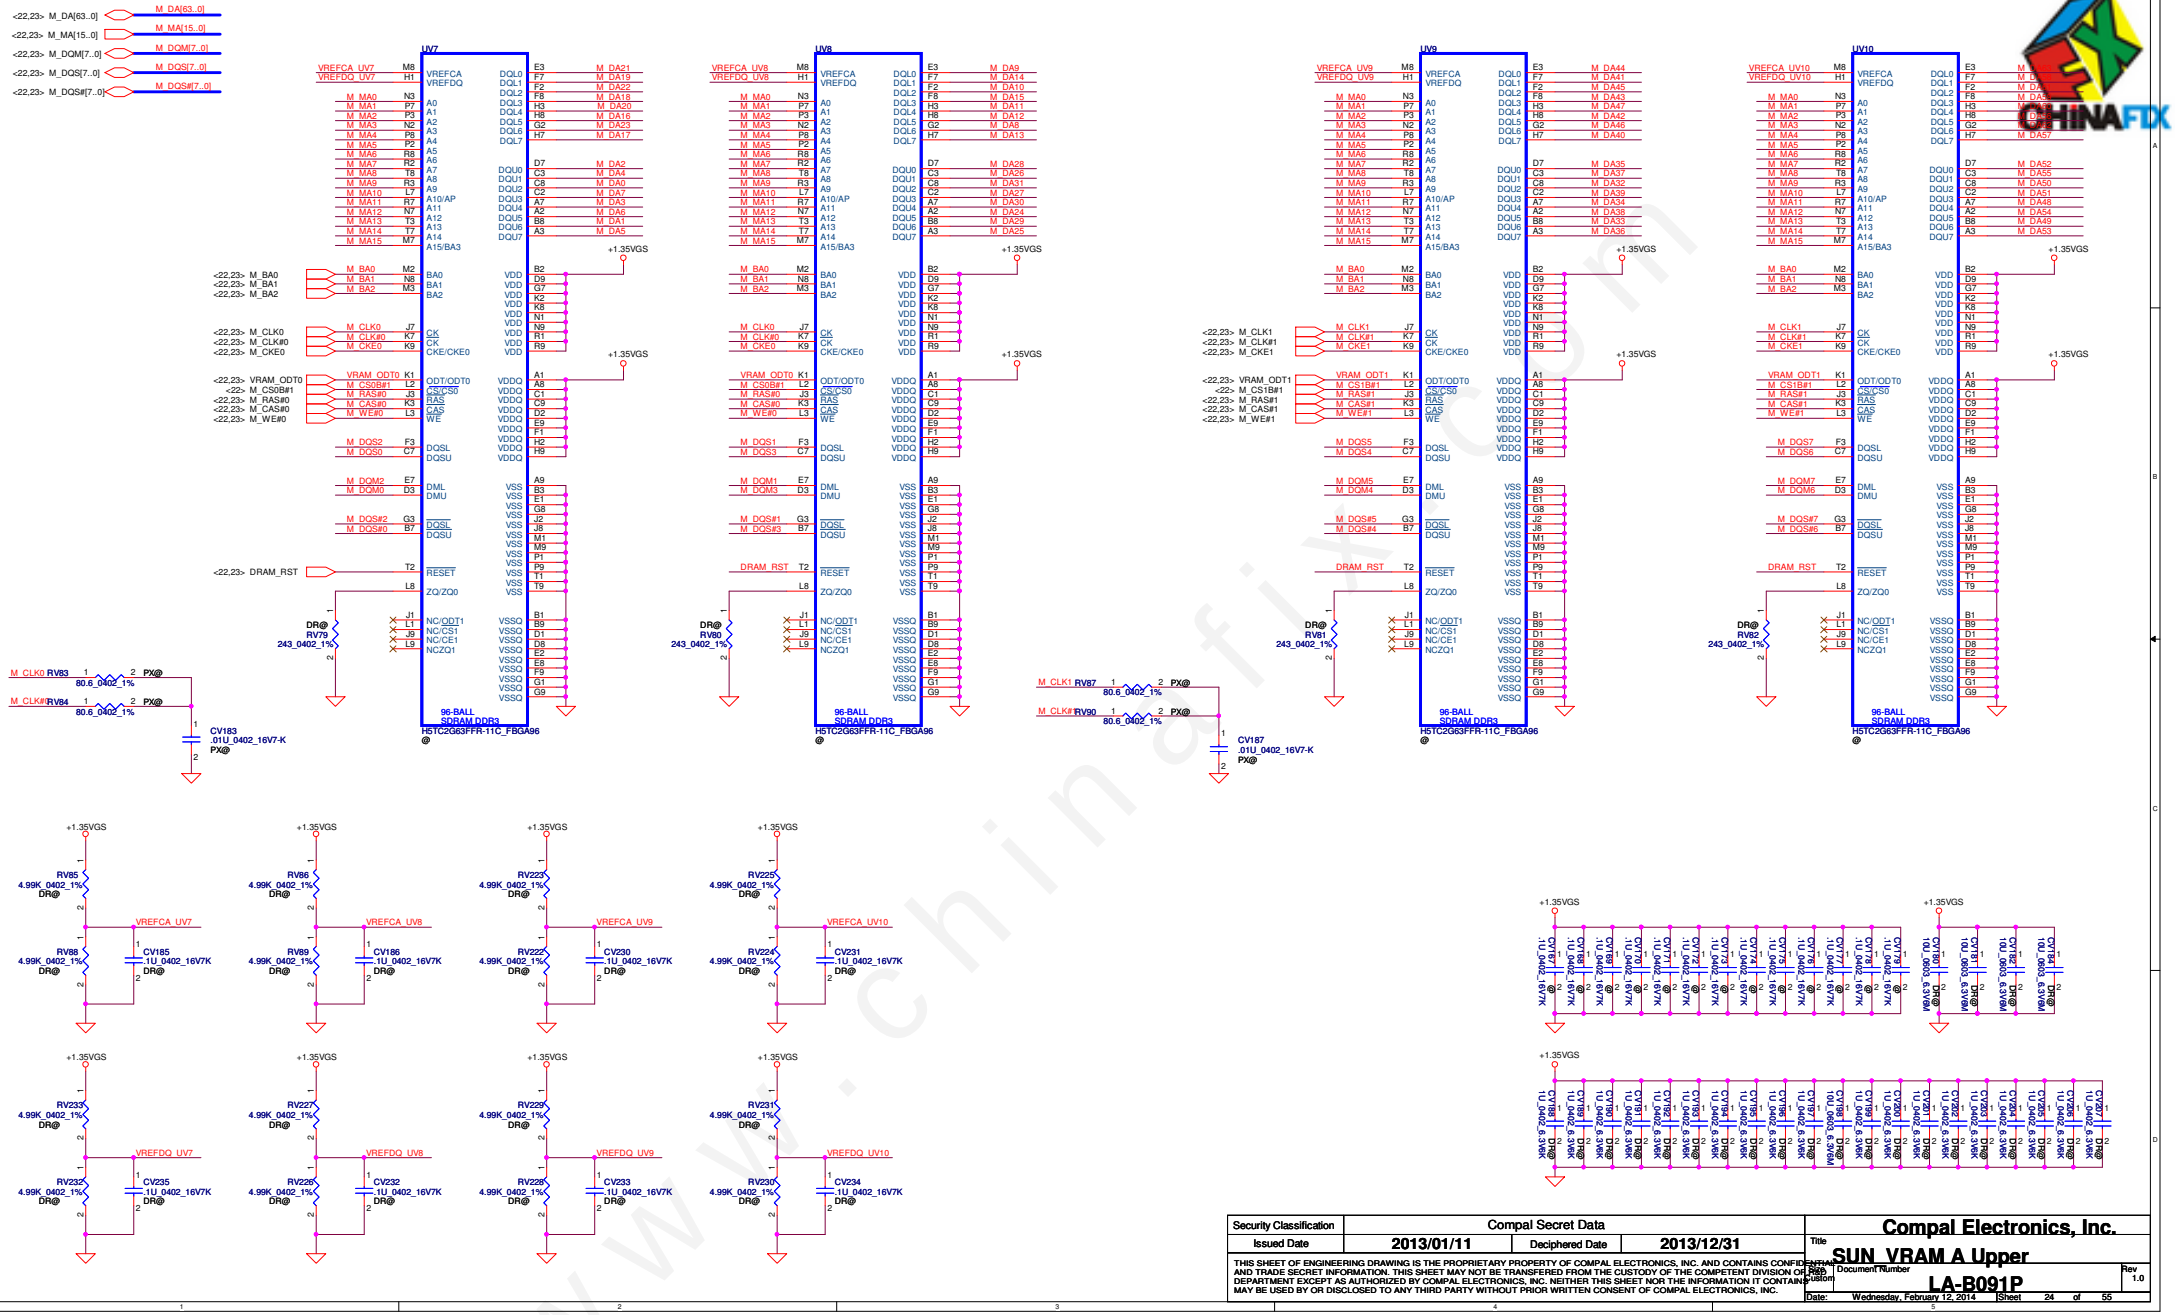

Security Classification	Compal Secret Data		
Issued Date	2013/01/11	Deciphered Date	2013/12/31

Compal Electronics, Inc.

Title: SUN_VRAM A Upper

Size: B | Document Number: LA-B091P | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 24 of 55

Security Classification	Compal Secret Data		
Issued Date	2013/01/11	Deciphered Date	2013/12/31

Compal Electronics, Inc.

Title: **SUN_VRAM A Lower**

Size: Custom | Document Number: **LA-B091P** | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 25 of 55

Security Classification	Compal Secret Data		
Issued Date	2013/01/11	Deciphered Date	2013/12/31

Compal Electronics, Inc.

Title: **SUN_VRAM A Upper**

Size: Custom | Document Number: **LA-B091P** | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 26 of 55

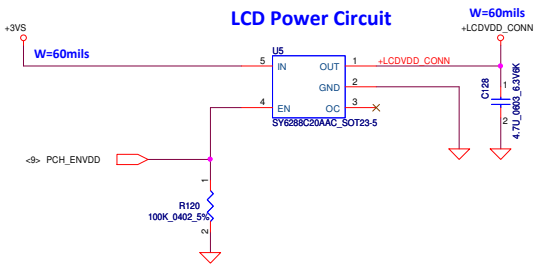

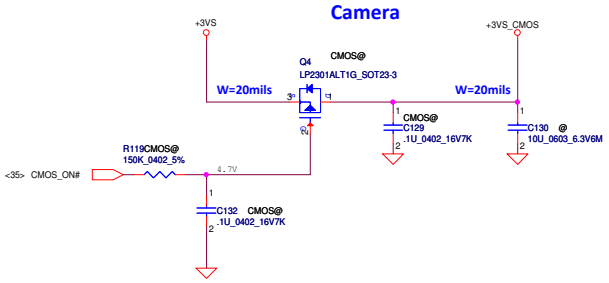

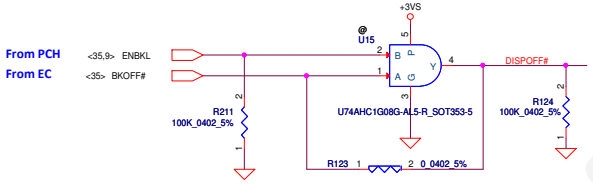



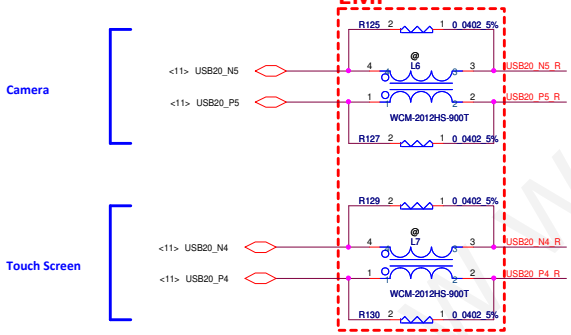

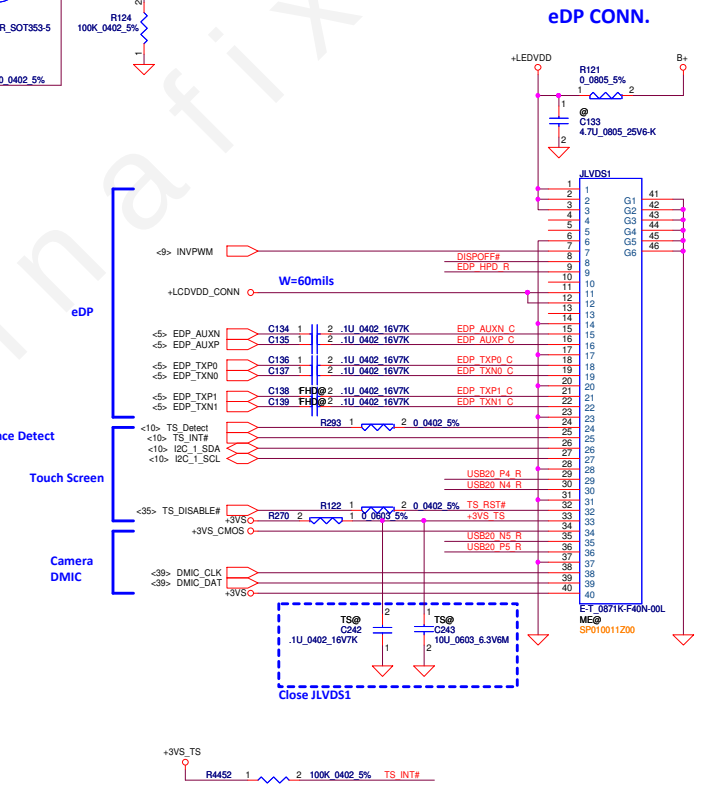

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.			
Title	LVDS/CAMERA		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 27 of 55		

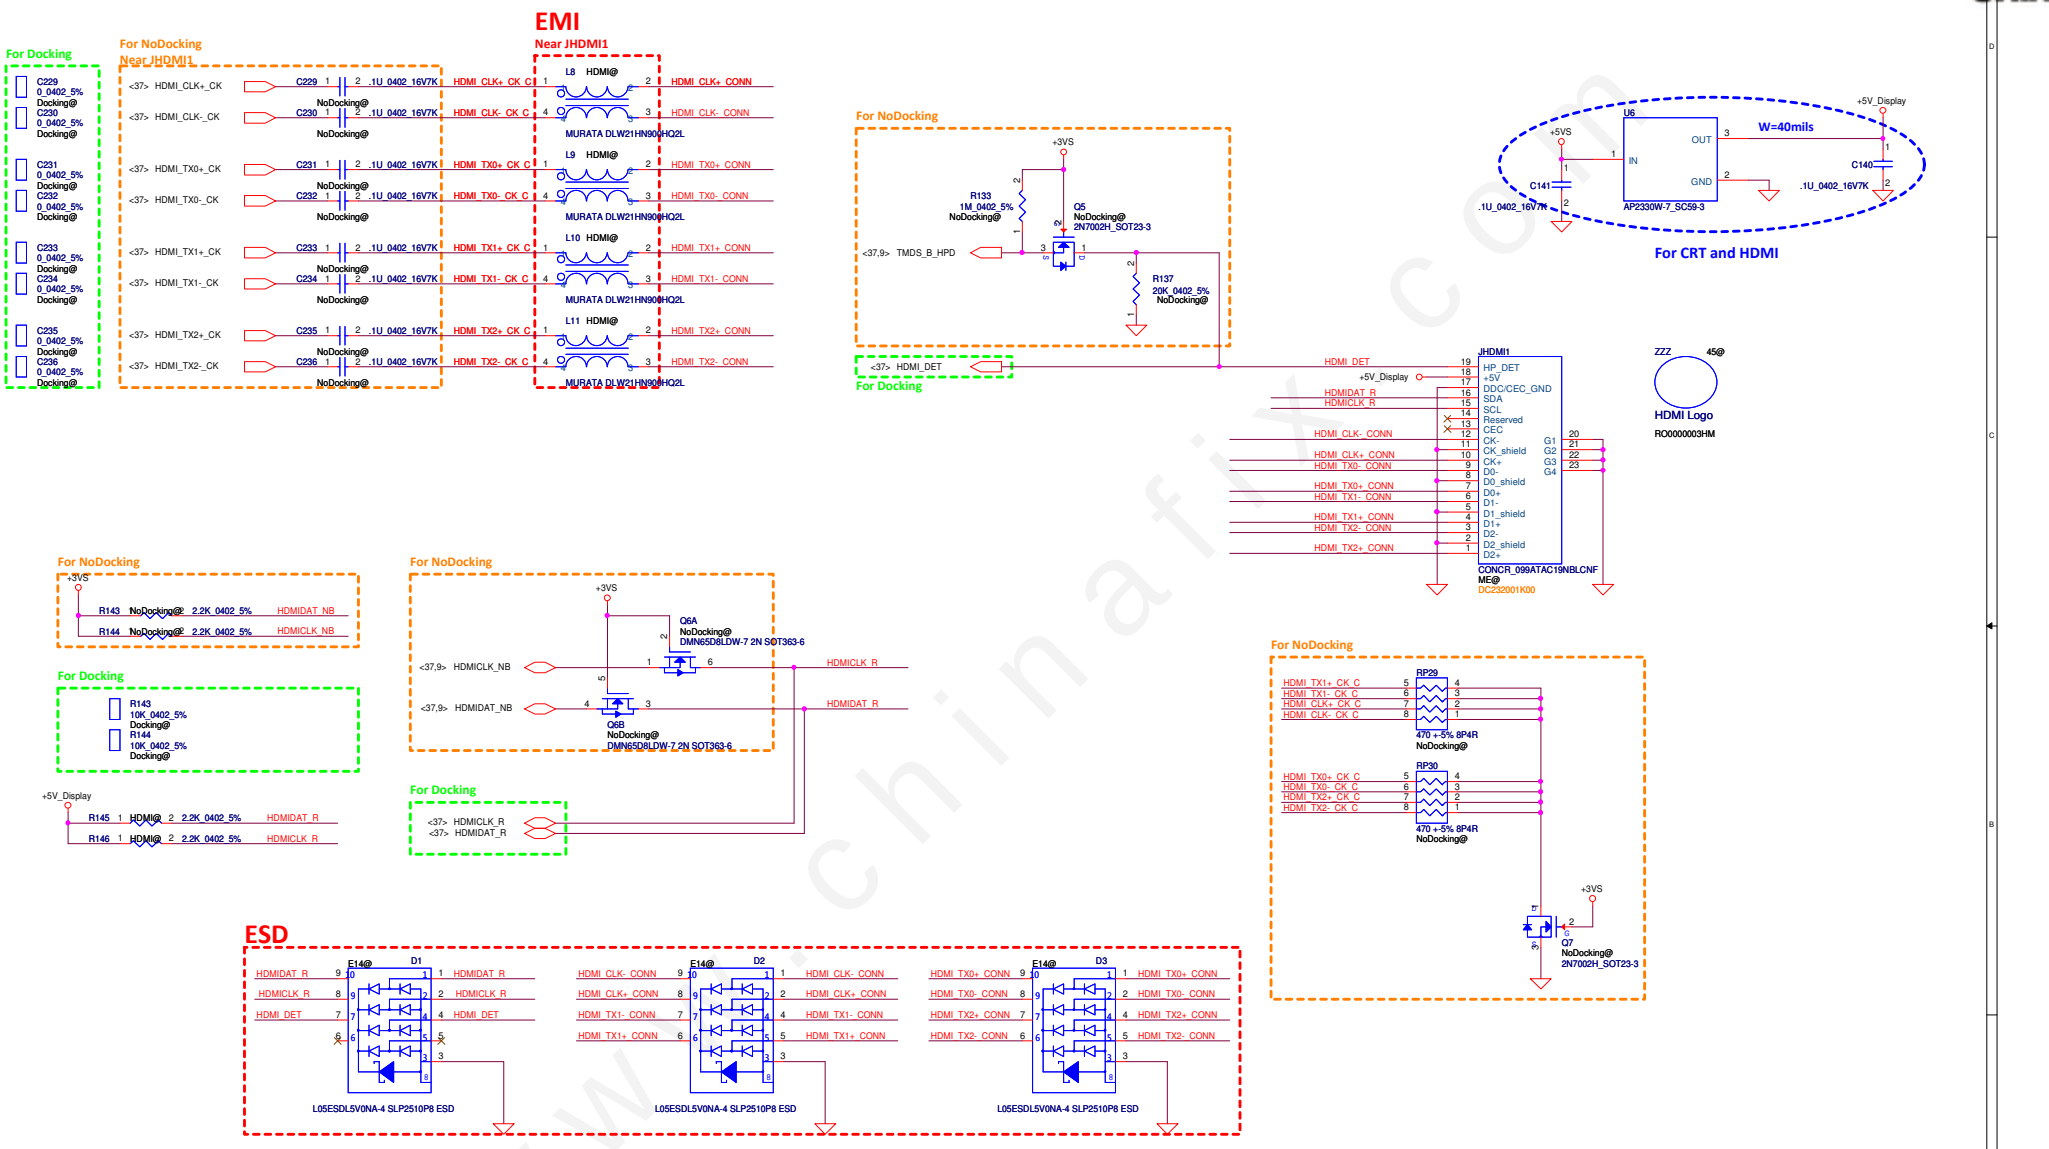

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Title	HDMI CONN		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 28 of 55		

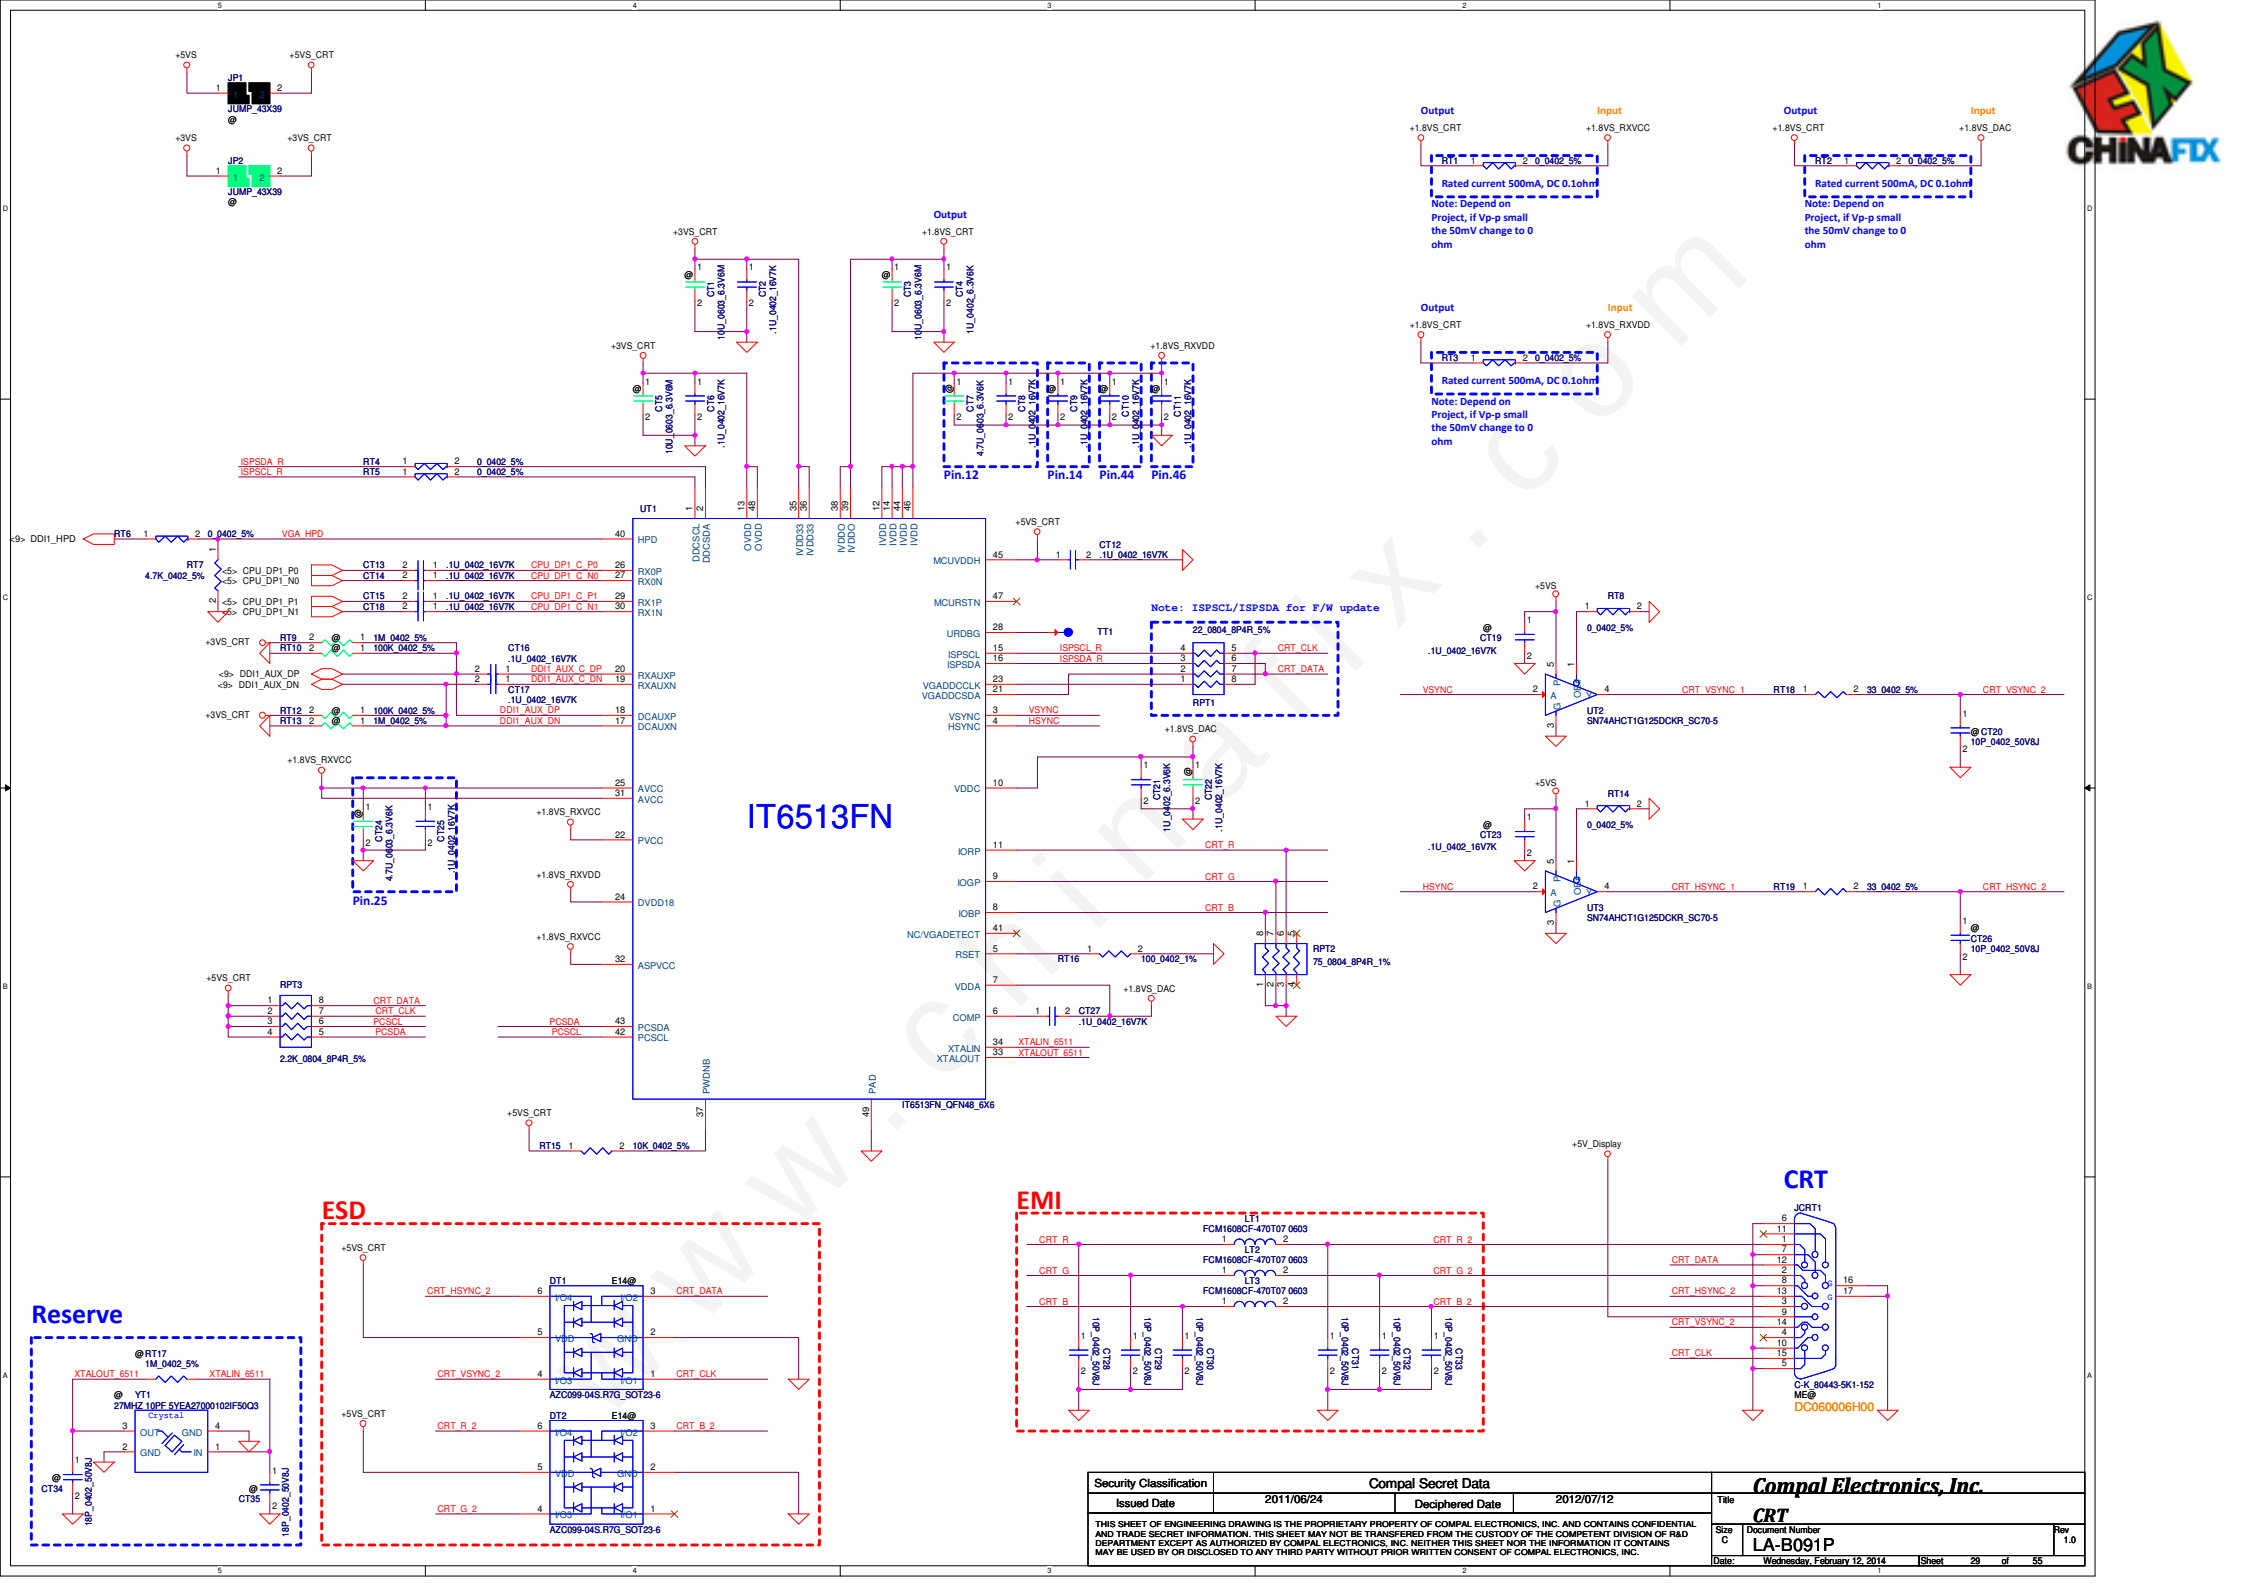

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Compal Electronics, Inc.

Title: CRT

Size	Document Number	Rev
C	LA-B091P	1.0

Date: Wednesday, February 12, 2014 Sheet 29 of 55

HDD

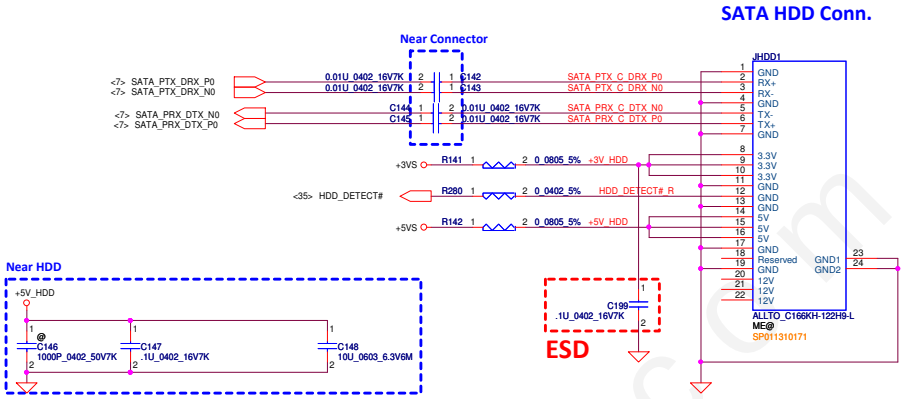

ODD

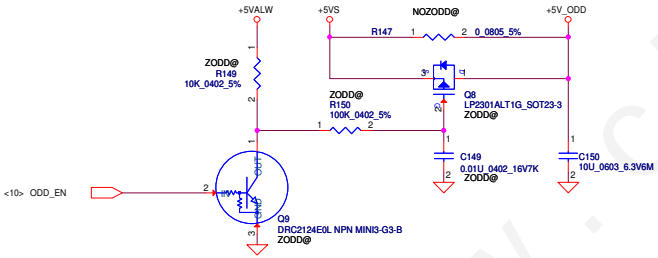

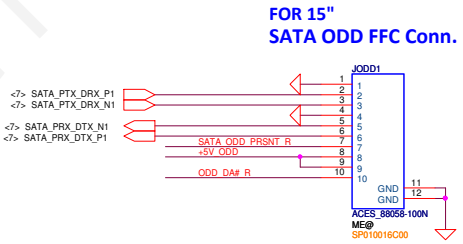

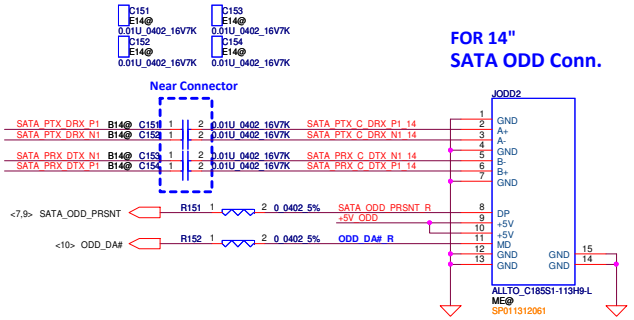

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.			
Title: HDD/ODD/BT Connector			
Size: C	Document Number: LA-B091P		Rev: 1.0
Date: Wednesday, February 12, 2014	Sheet 30 of 55		

NGFF for WLAN / BT(Key E)

Support ISCT(Intel Smart Connect Technology)

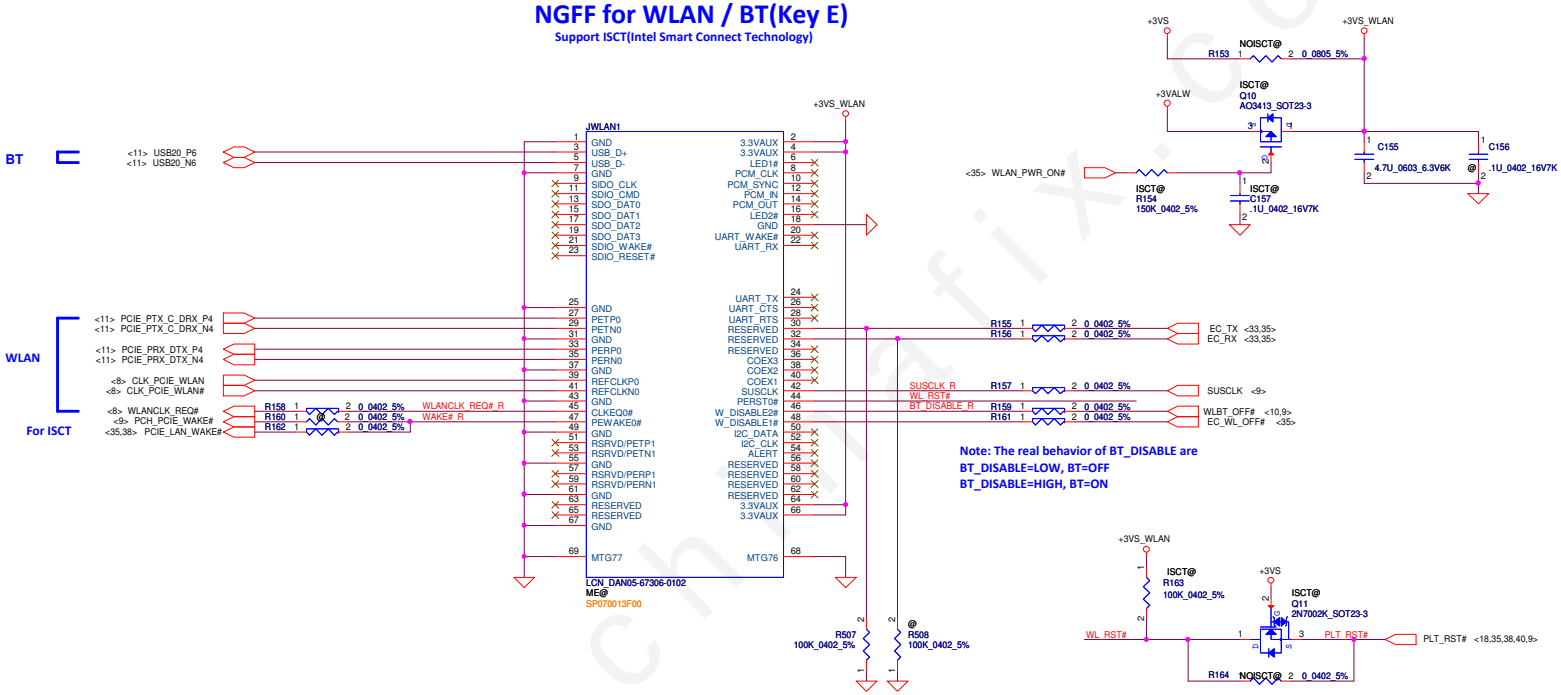

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.			
Title	Mini-Card/NEW Card/SIM		
Size	Document Number	LA-B091P	Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 31 of 55		

3 Channel



REMOTE1,2+/-:
Trace width/space:10/10 mil
Trace length:<8"

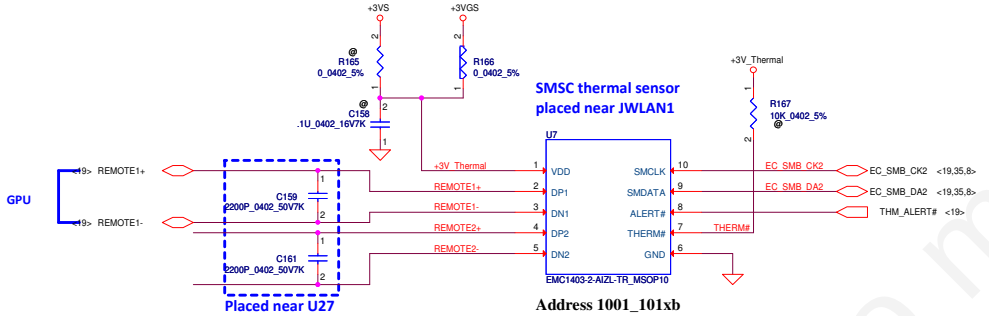

2 Channel

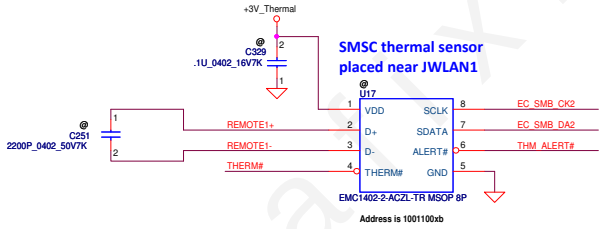

FAN Conn

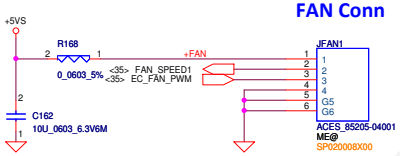

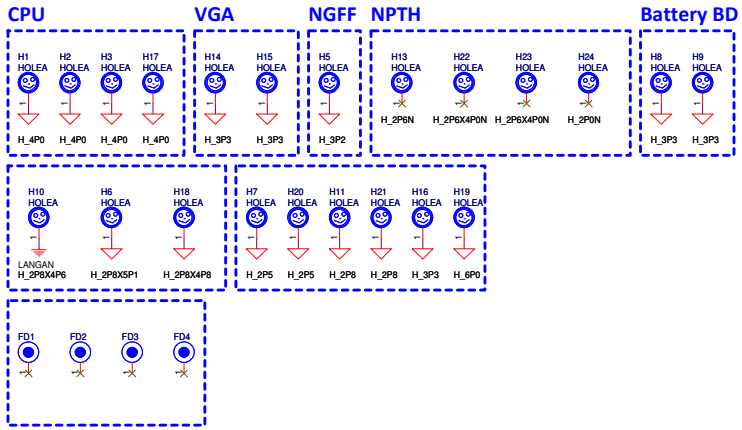

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12
Title	Fintek-Thermal IC/FAN/screw		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 32 of 55		

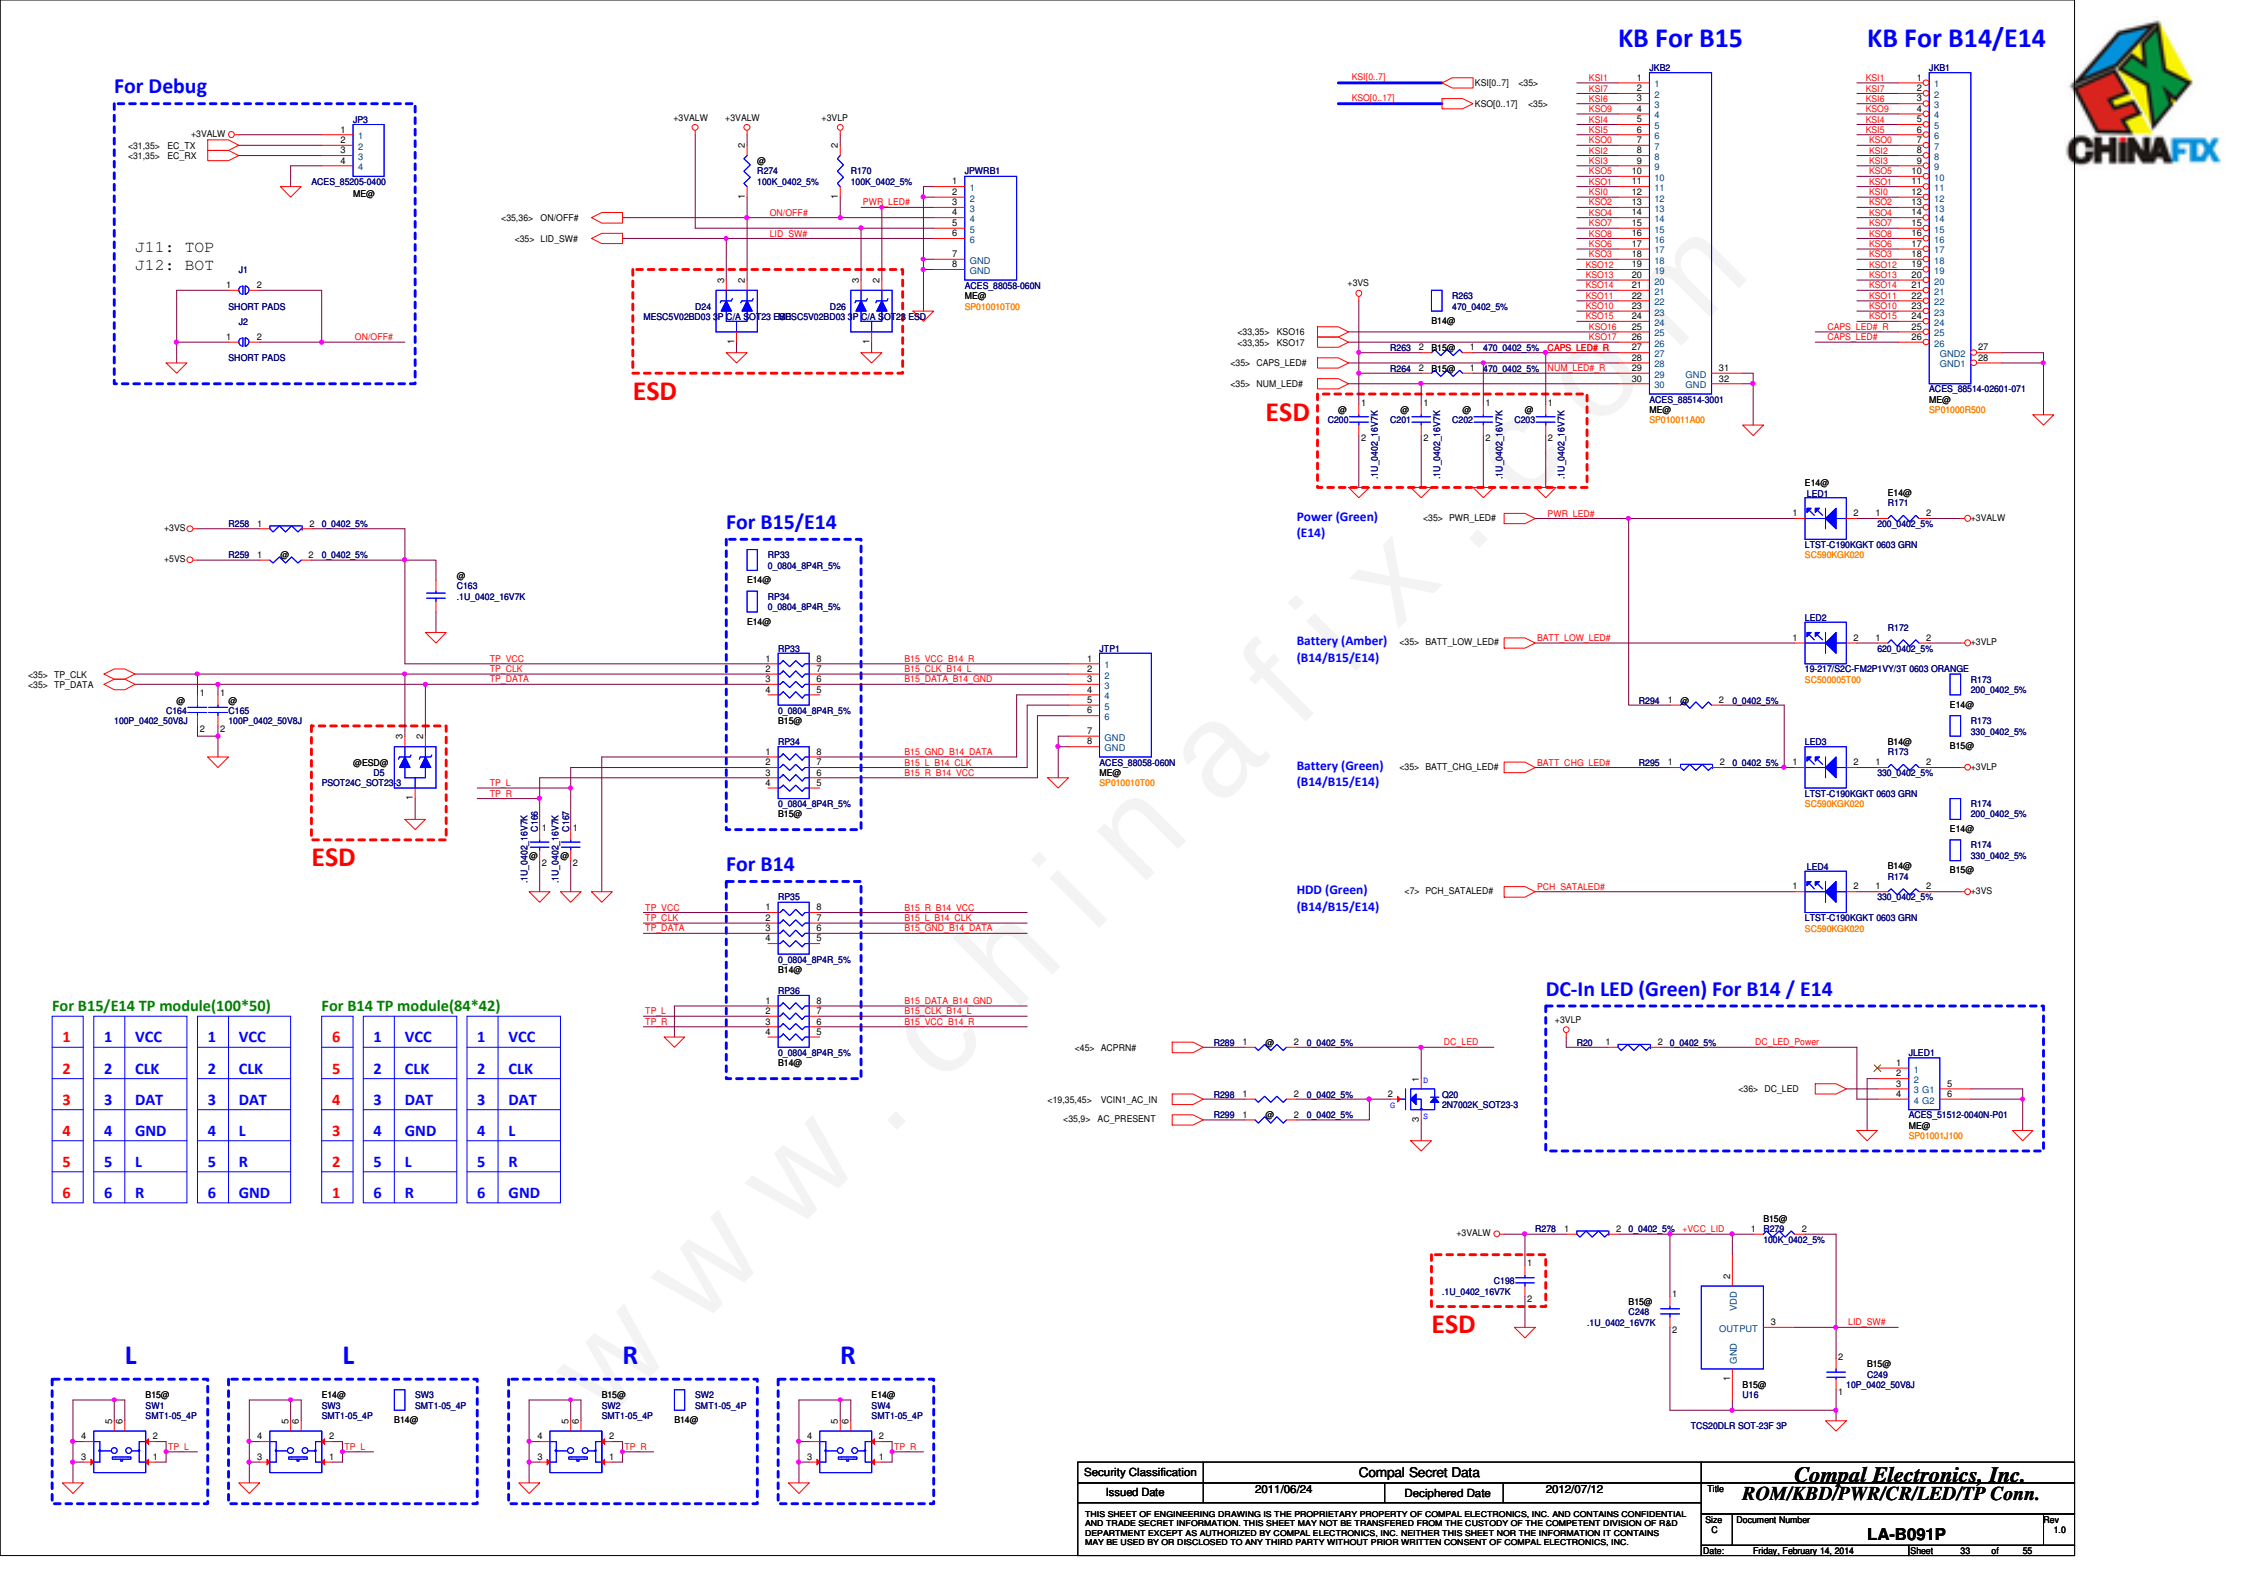

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Compal Electronics, Inc.	
Title	ROM/KBD/PWR/CR/LED/TP Conn.
Size C	Document Number LA-B091P
Rev	1.0
Date: Friday, February 14, 2014	Sheet 33 of 55

Finger Print

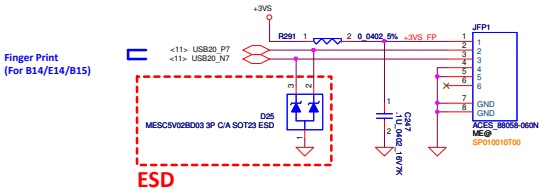

USB2.0_Port

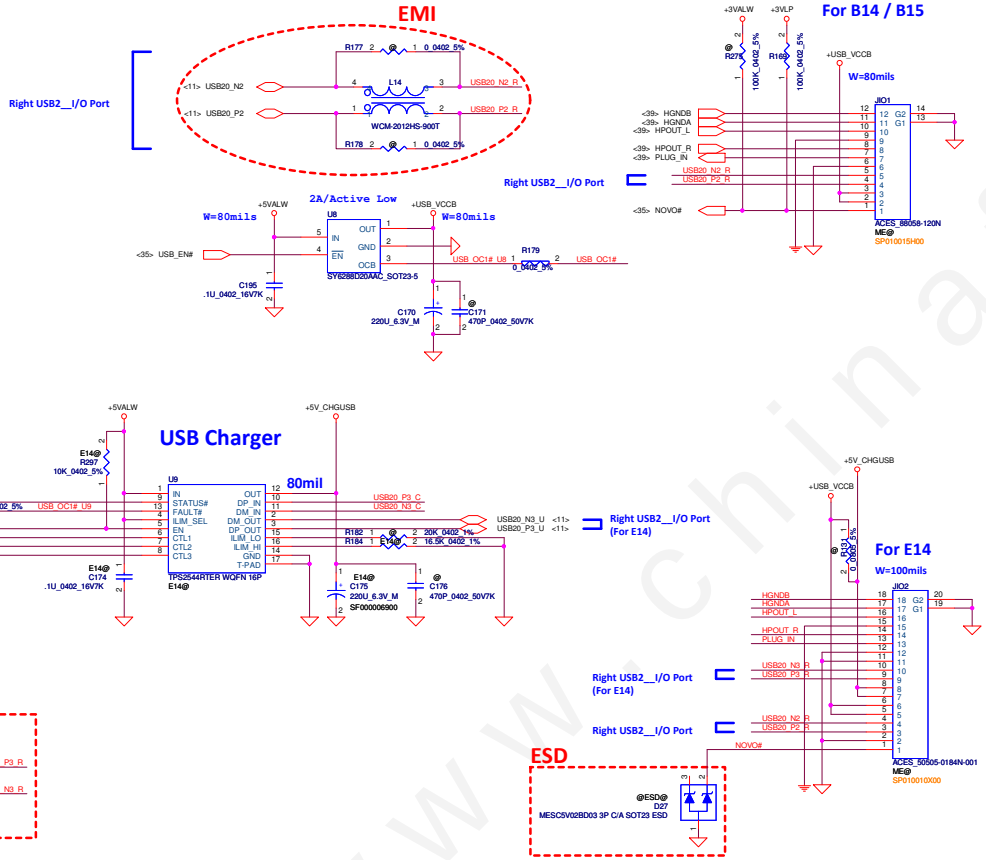

USB3.0_Port

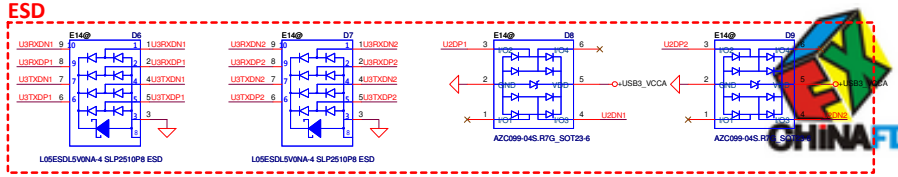

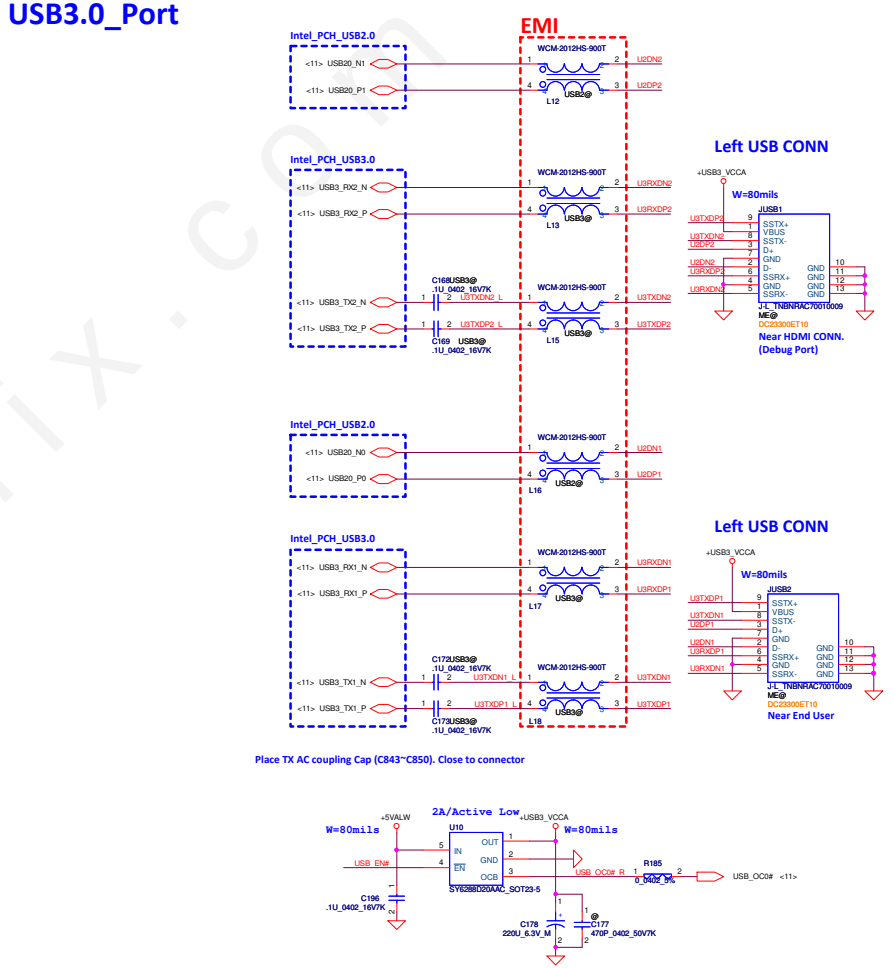

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12	Title: USB3.0/Left USB Ports

Size: Custom	Document Number		Rev: 1.0
Date: Wednesday, February 12, 2014	Sheet 34 of 55		

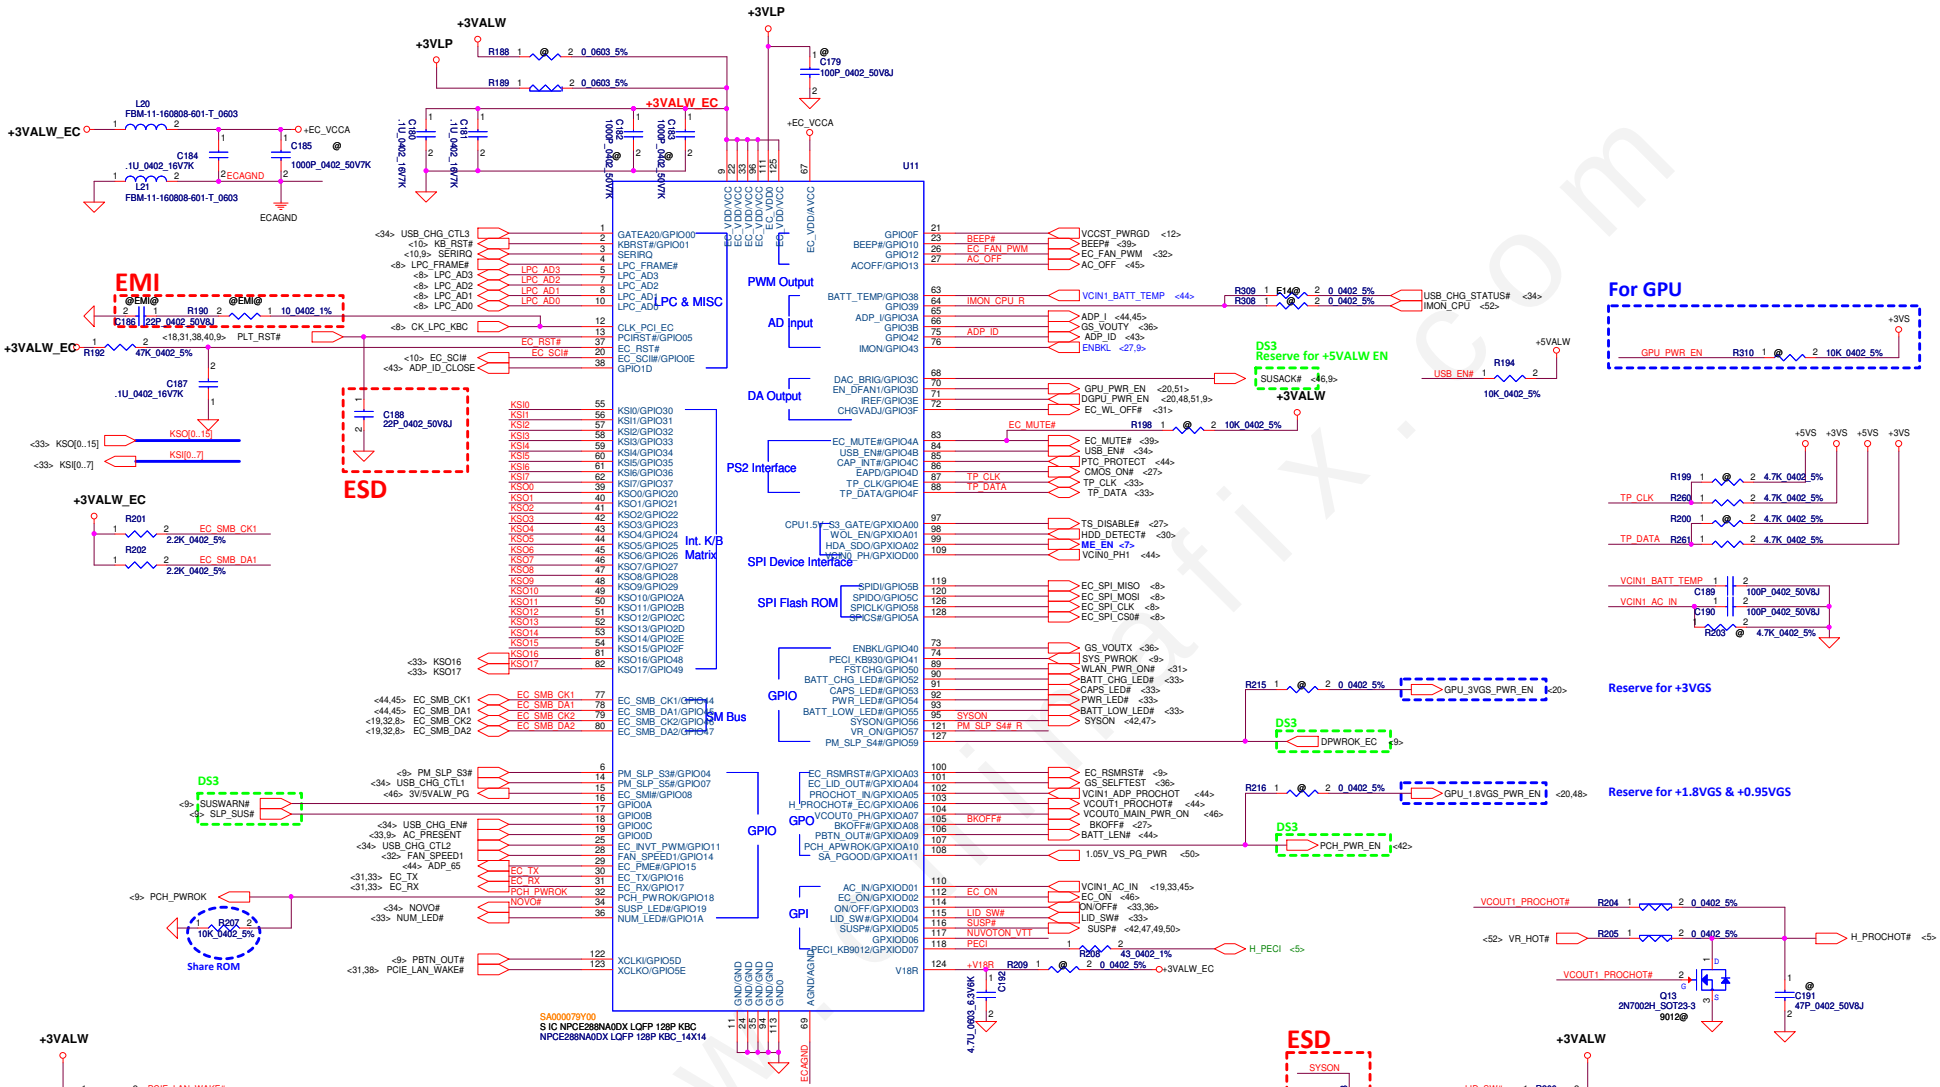

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Compal Electronics, Inc.

Title: **BIOS & EC I/O Port**

Size	Document Number	Rev
C	LA-B091P	1.0

Date: Wednesday, February 12, 2014 | Sheet 35 of 55

To Docking BD

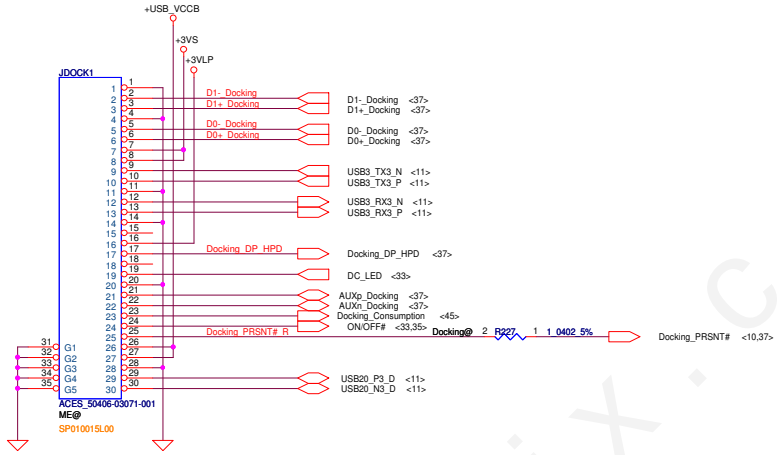

APS (G-Sensor)

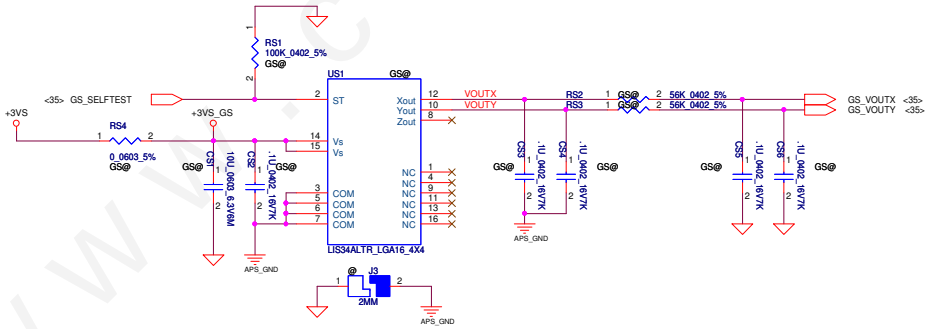

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.

Title: Docking

Size: C | Document Number: LA-B091P | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 36 of 55

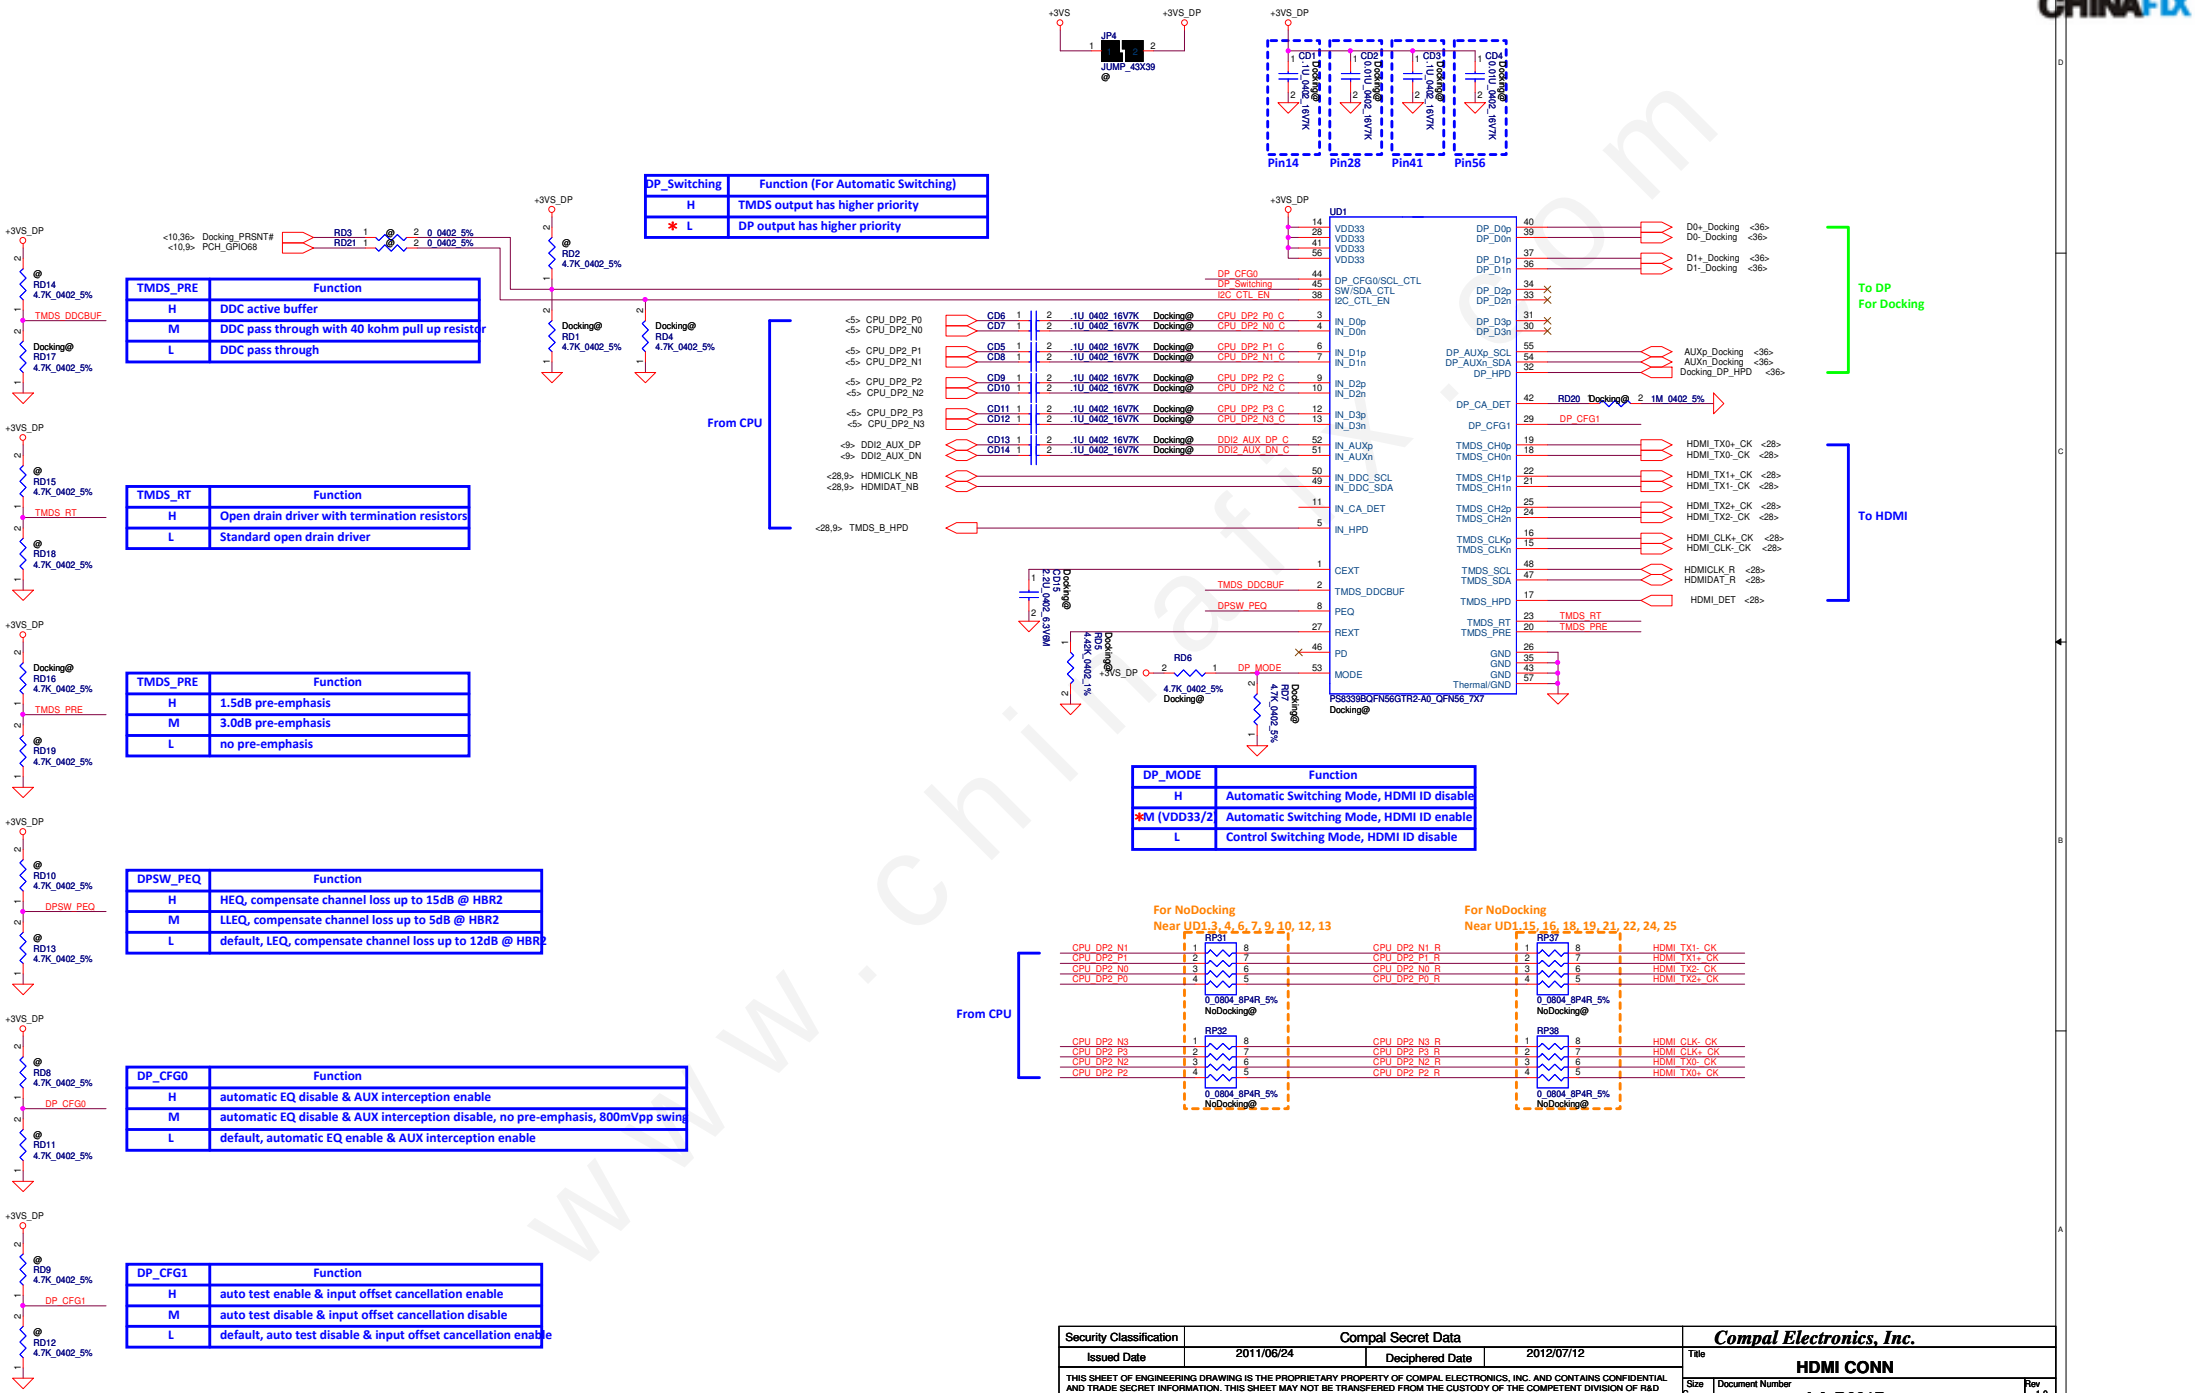

TMDS_PRE	Function
H	DDC active buffer
M	DDC pass through with 40 kohm pull up resistor
L	DDC pass through

TMDS_RT	Function
H	Open drain driver with termination resistors
L	Standard open drain driver

TMDS_PRE	Function
H	1.5dB pre-emphasis
M	3.0dB pre-emphasis
L	no pre-emphasis

DPSW_PEQ	Function
H	HEQ, compensate channel loss up to 15dB @ HBR2
M	LLEQ, compensate channel loss up to 5dB @ HBR2
L	default, LEQ, compensate channel loss up to 12dB @ HBR2

DP_CFG0	Function
H	automatic EQ disable & AUX interception enable
M	automatic EQ disable & AUX interception disable, no pre-emphasis, 800mVpp swing
L	default, automatic EQ enable & AUX interception enable

DP_CFG1	Function
H	auto test enable & input offset cancellation enable
M	auto test disable & input offset cancellation disable
L	default, auto test disable & input offset cancellation enable

DP_Switching	Function (For Automatic Switching)
H	TMDS output has higher priority
* L	DP output has higher priority

DP_MODE	Function
H	Automatic Switching Mode, HDMI ID disable
*M (VDD33/2)	Automatic Switching Mode, HDMI ID enable
L	Control Switching Mode, HDMI ID disable

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Compal Electronics, Inc.

Title: HDMI CONN

Size	Document Number	Rev
C	LA-B091P	1.0

Date: Wednesday, February 12, 2014 Sheet 37 of 55

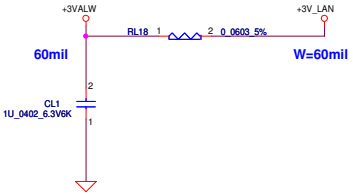

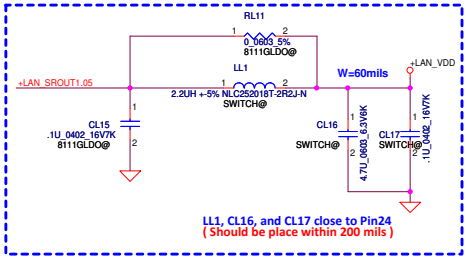

		1.0 V source	LL1	CL16, CL17	CL9, CL10	RL11	CL15
SA000005V700	RTL8111G	LDO	X	X	X	O	O
	~~RTL8111G~~	~~External~~	~~X~~	~~X~~	~~X~~	~~X~~	~~O~~
	RTL8111GS/ RTL8111GUS/ RTL8106EUS	SWR	O	O	O	X	X
SA000065Y00	RTL8106E	LDO	X	X	X	X	X

Please refer to the table above when using different 1.0V supply source.
For RTL8111GS, RTL8111GUS, RTL8106E and RTL8106EUS, External 1.0V Supply Is Not Permitted.

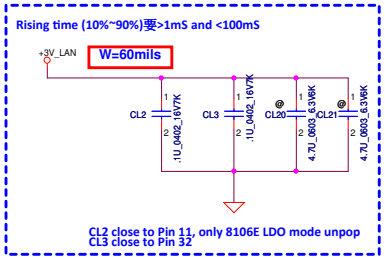





RJ-45 CONN.

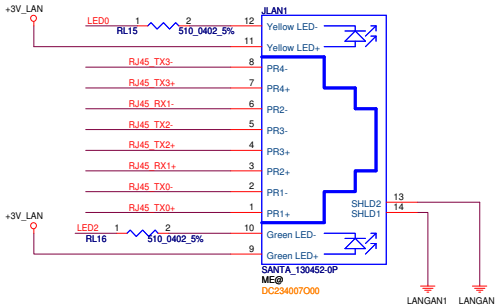



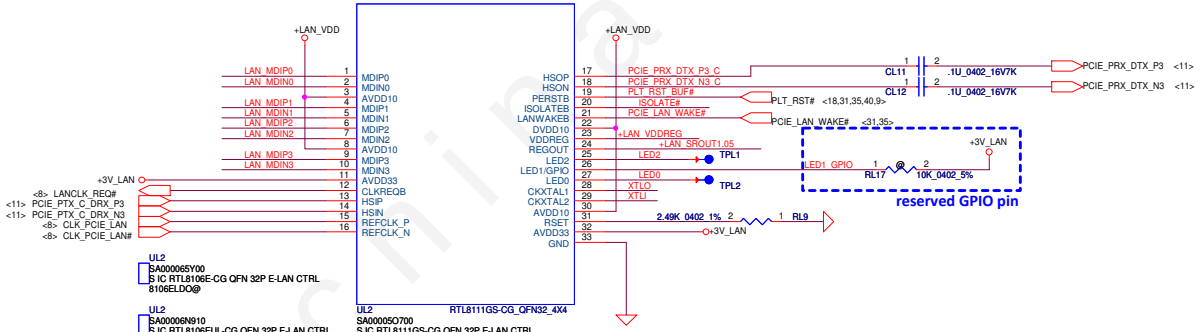



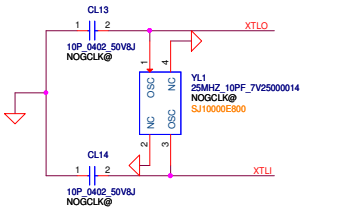



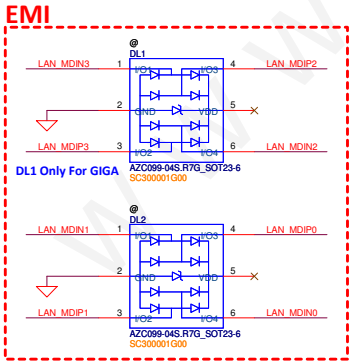

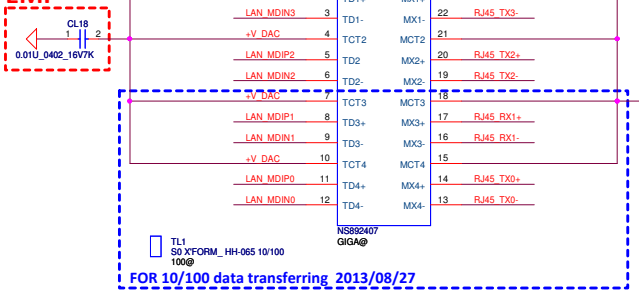



Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Title	LAN RTL8411-CG		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 38 of 55		

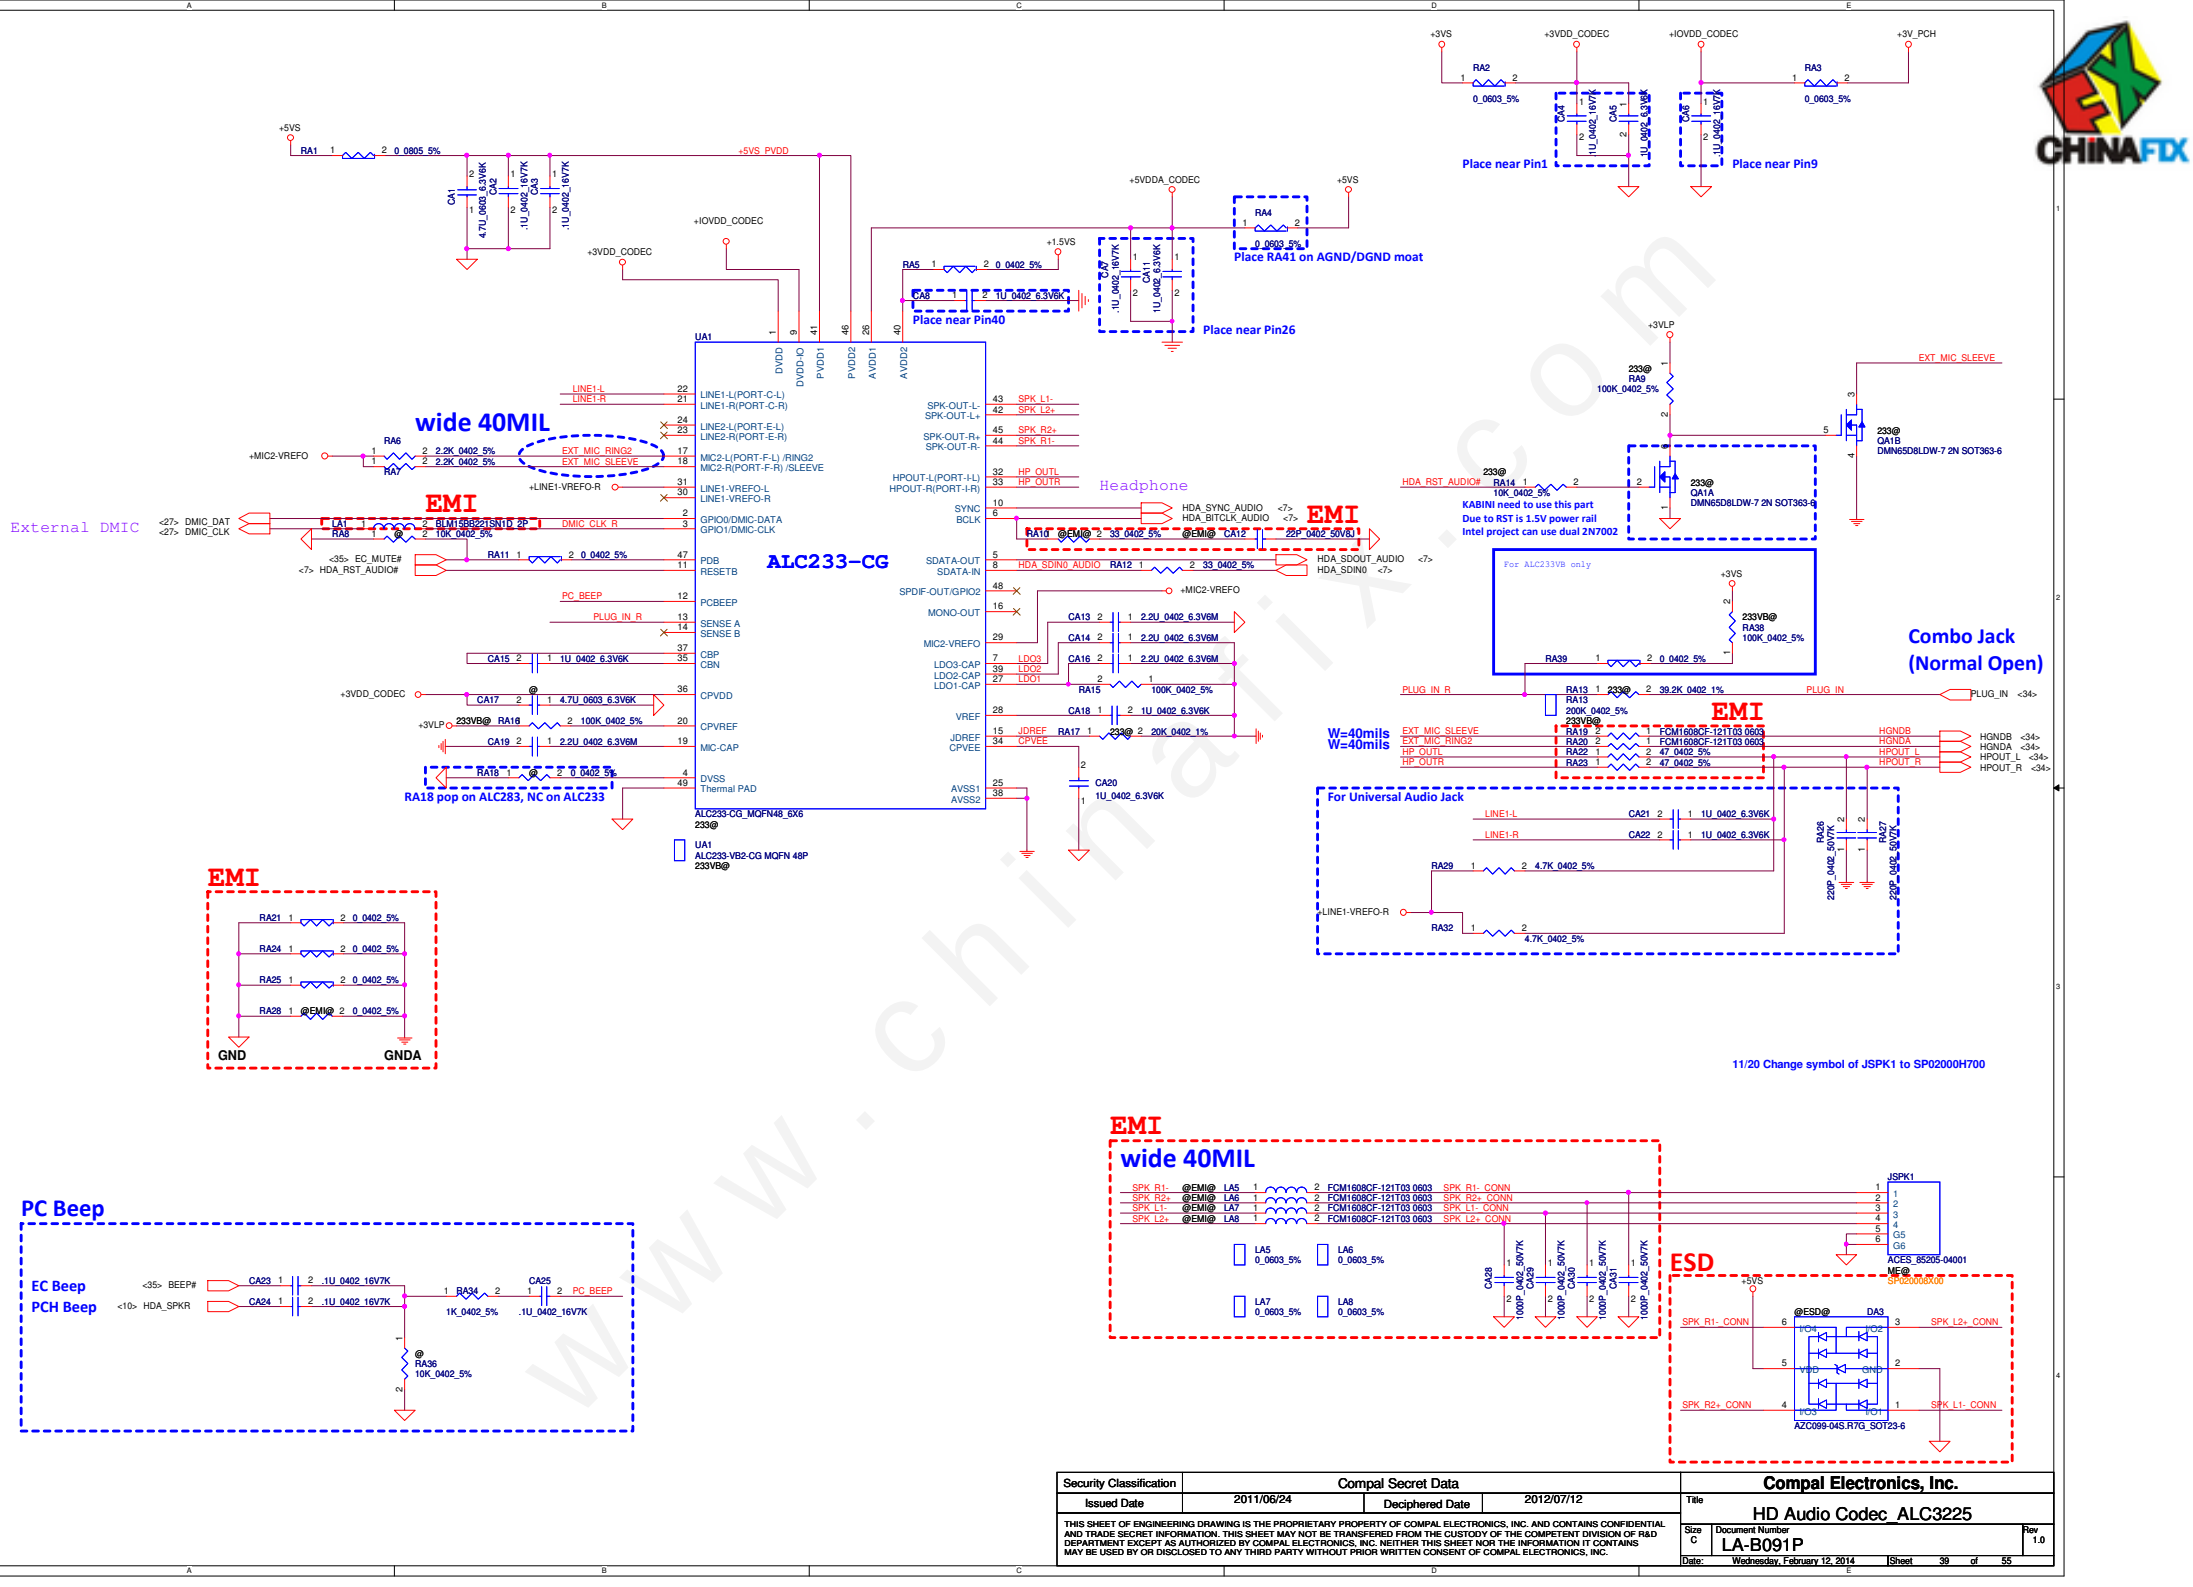

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.

Title: HD Audio Codec_ALC3225

Size	Document Number	Rev
C	LA-B091P	1.0

Date: Wednesday, February 12, 2014 | Sheet 39 of 55

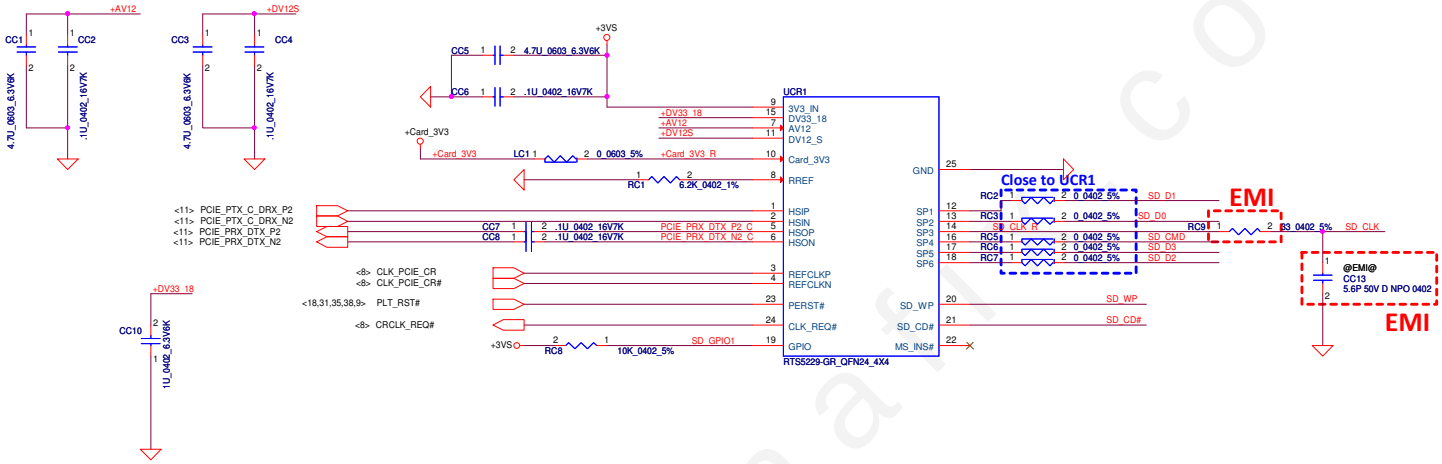

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.			
Title	P24-CardRead/RTS5229		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 40 of 55		

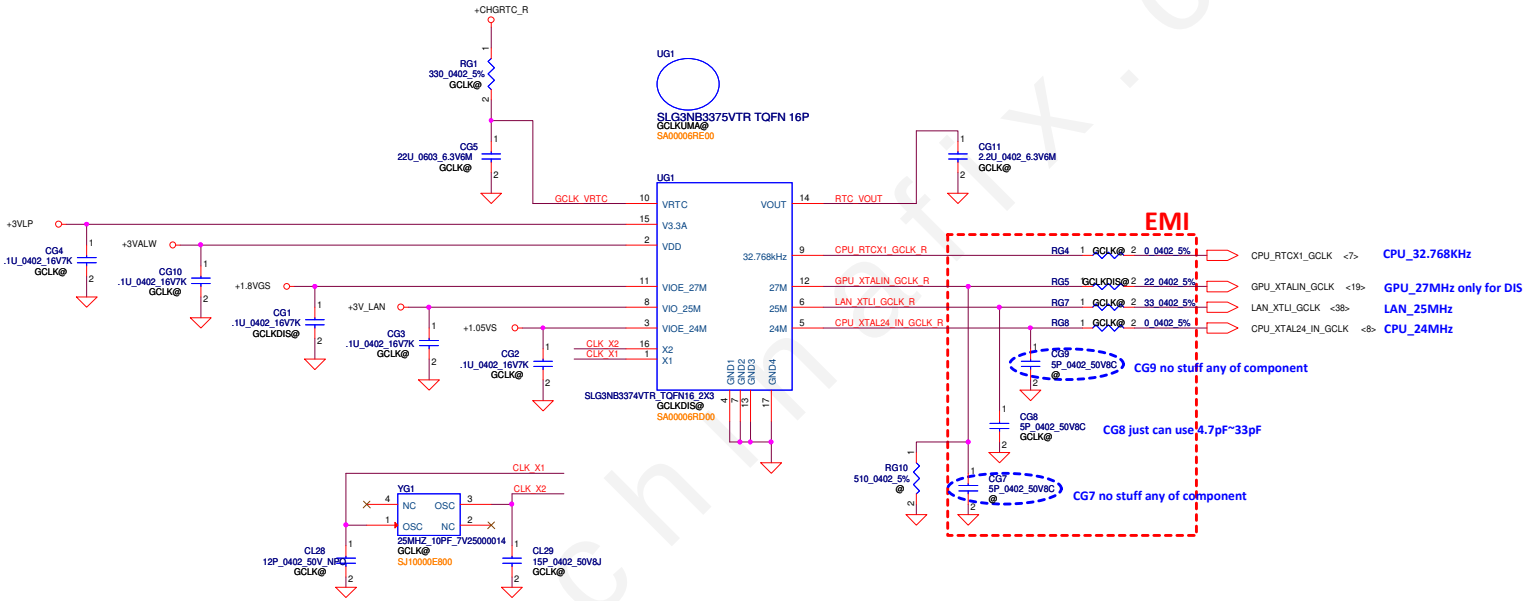

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.			
Title: GCLK			
Size	Document Number: LA-B091P		Rev: 1.0
Date: Wednesday, February 12, 2014	Sheet 41 of 55		

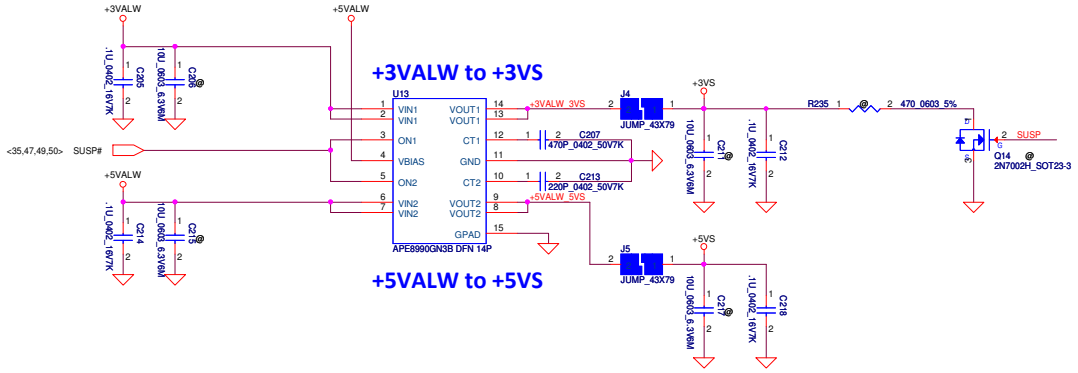

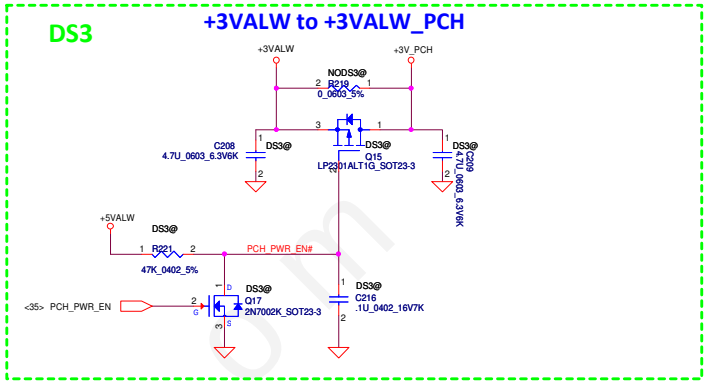

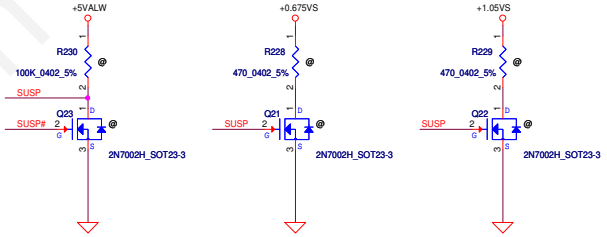

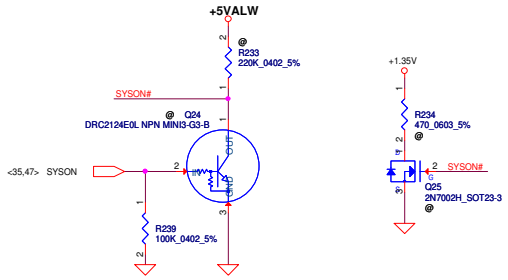

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12
Title	DC Interface		
Size C	Document Number LA-B091P		Rev 1.0
Date: Wednesday, February 12, 2014	Sheet 42 of 55		

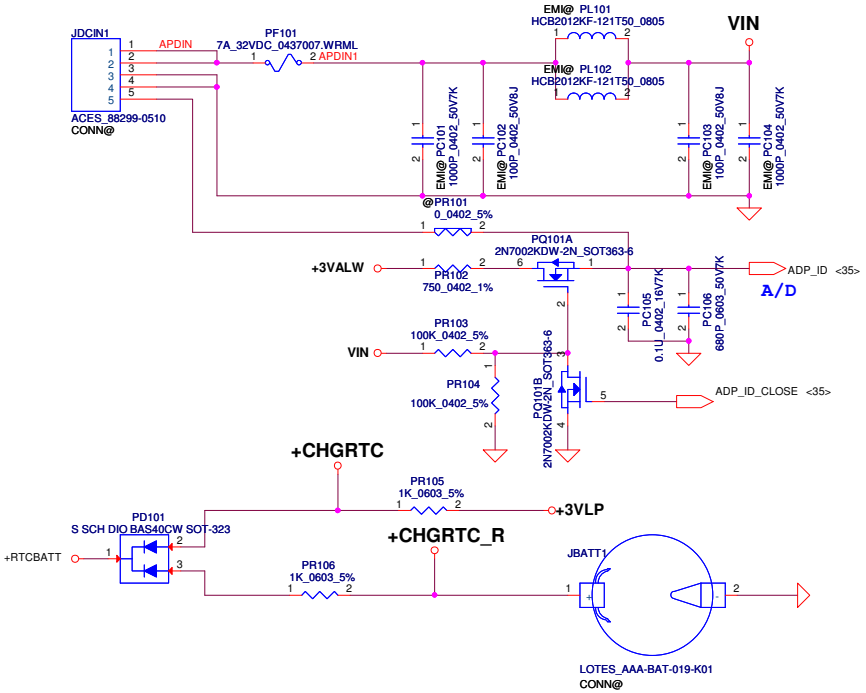

RTC Battery

ADP_ID		
AC Adapter	90W	65W
R(K ohm)	open	10
ADP_ID(V)	3.3	1.65
Detection voltage	>2.64	1.32~1.98

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.

Title: PWR DCIN / RTC Battery

Size: Custom | Document Number: BE_BDW | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 43 of 55

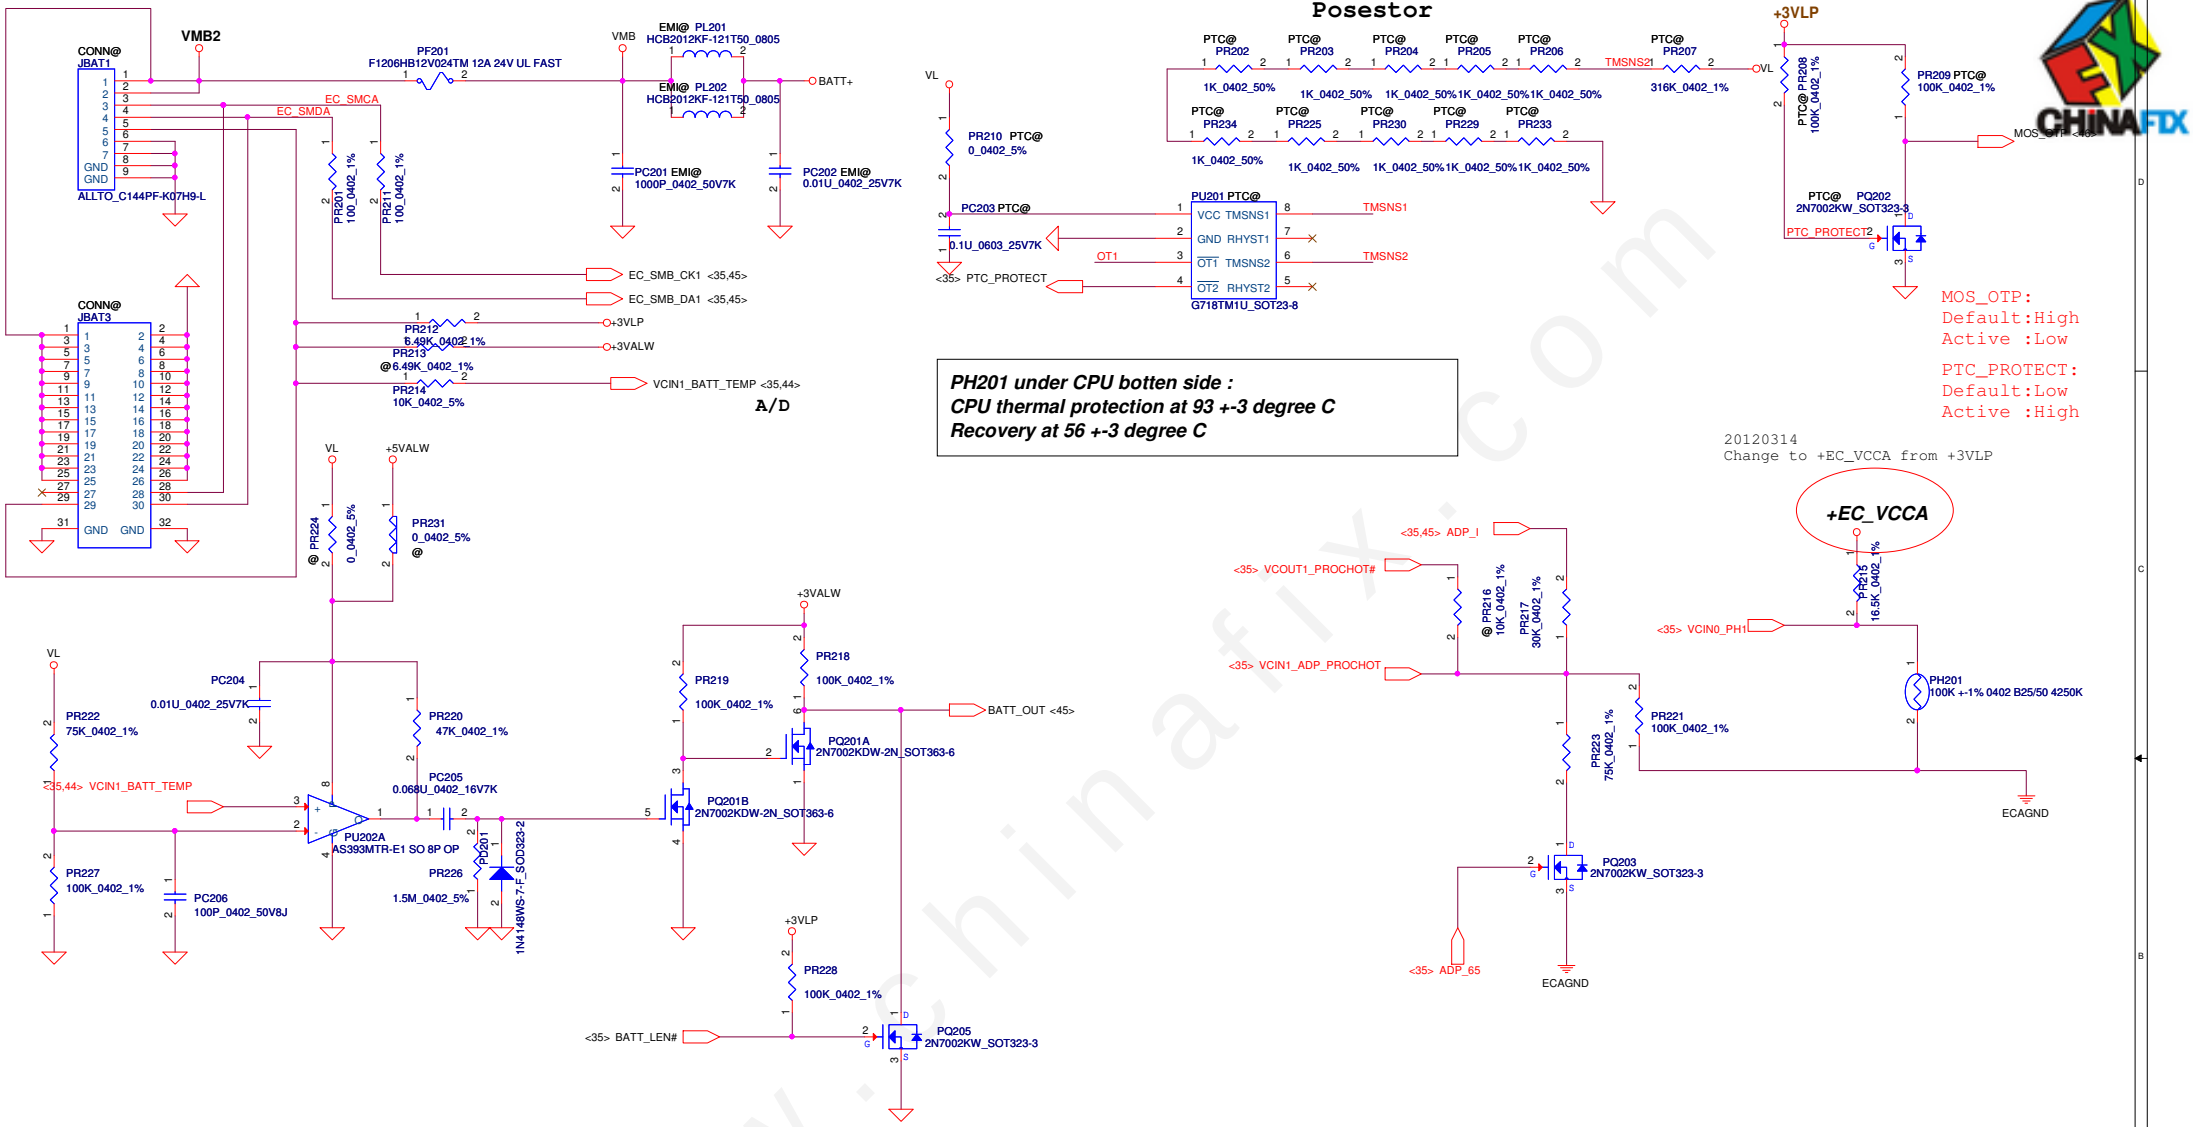

135W: 150W(Turbo_V=1.2) active 135W(Turbo_V=1.072) recovery
90W : 100W(Turbo_V=1.2) active 90W(Turbo_V=0.903) recovery
65W : 70W(Turbo_V=1.2) active 65W(Turbo_V=0.918) recovery
45W : 65W(Turbo_V=1.2) active 45W(Turbo_V=0.829) recovery

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.

Title: PWR-BATTERY CONN/OTP

Size: Custom | Document Number: BE_BDW | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 44 of 55

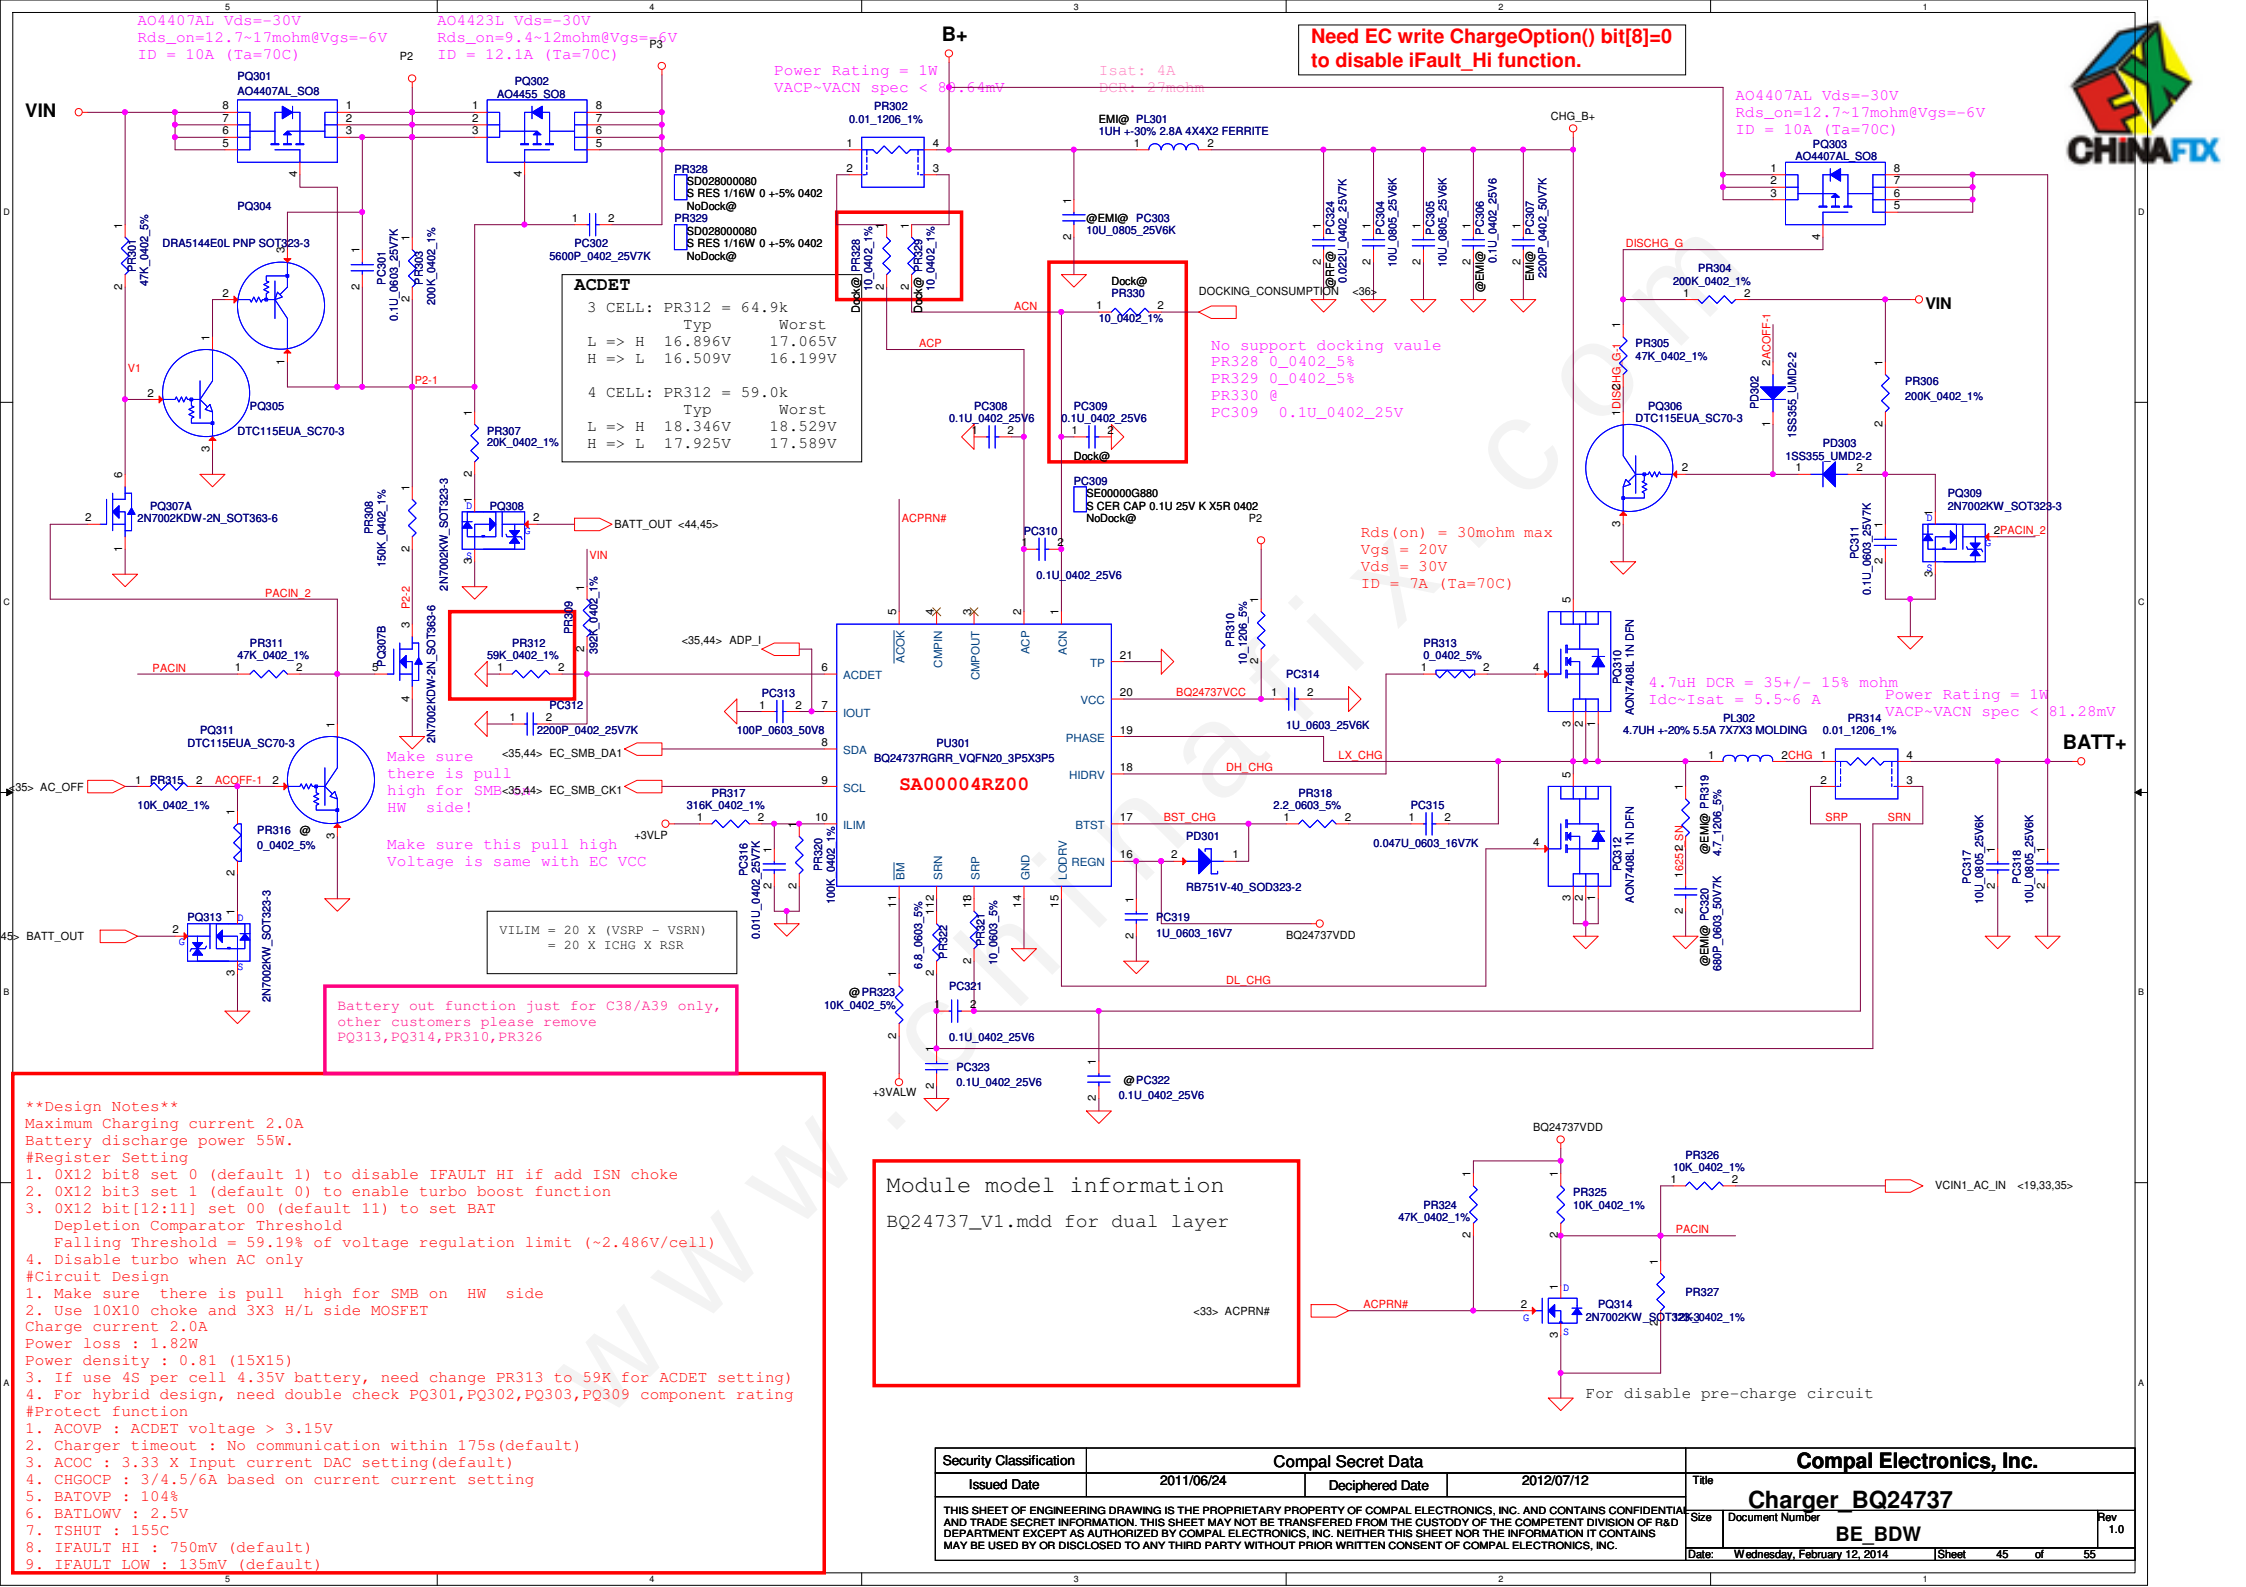
AO4407AL Vds=-30V
Rds_on=12.7~17mohm@Vgs=-6V
ID = 10A (Ta=70C)
AO4423L Vds=-30V
Rds_on=9.4~12mohm@Vgs=-6V
ID = 12.1A (Ta=70C)
B+
Need EC write ChargeOption() bit[8]=0 to disable iFault_Hi function.
VIN
PQ301 AO4407AL_SO8
PQ302 AO4455_SO8
Power Rating = 1W
VACP~VACN spec < 80.64mV
Isat: 4A
DCR: 27mohm
EMI@ PL301 1UH +-30% 2.8A 4X4X2 FERRITE
CHG_B+
PQ303 AO4407AL_SO8
AO4407AL Vds=-30V
Rds_on=12.7~17mohm@Vgs=-6V
ID = 10A (Ta=70C)
PR328 SD028000080 S RES 1/16W 0 +-5% 0402 NoDock@
PR329 SD028000080 S RES 1/16W 0 +-5% 0402 NoDock@
PR302 0.01_1206_1%
PQ304 DRA5144E0L PNP SOT323-3
PR301 47K_0402_5%
PC301 0.1U_0603_25V7K
PR303 200K_0402_1%
PC302 5600P_0402_25V7K
ACDET
3 CELL: PR312 = 64.9k
Typ Worst
L => H 16.896V 17.065V
H => L 16.509V 16.199V
4 CELL: PR312 = 59.0k
Typ Worst
L => H 18.346V 18.529V
H => L 17.925V 17.589V
PR328 10_0402_1%
PR329 10_0402_1%
@EMI@ PC303 10U_0805_25V6K
PC324 @0R5@ 0.022U_0402_25V7K
PC304 10U_0805_25V6K
PC305 10U_0805_25V6K
PC306 @EMI@ 0.1U_0402_25V6
PC307 @EMI@ 2200P_0402_50V7K
Dock@ PR330 10_0402_1%
DOCKING_CONSUMPTION <36>
ACN
ACP
No support docking vaule
PR328 0_0402_5%
PR329 0_0402_5%
PR330 @
PC309 0.1U_0402_25V
PC308 0.1U_0402_25V6
PC309 0.1U_0402_25V6
Dock@
PC309 SE00000G880 S CER CAP 0.1U 25V K X5R 0402 NoDock@
DISCHG_G
PR304 200K_0402_1%
PR305 47K_0402_1%
PQ306 DTC115EUA_SC70-3
PD302 1SS355_UMD2-2
PD303 1SS355_UMD2-2
PR306 200K_0402_1%
PQ309 2N7002KW_SOT323-3
PC311 0.1U_0603_25V7K
2PACIN_2
PQ307A 2N7002KDW-2N_SOT363-6
PR308 150K_0402_1%
PQ308 2N7002KW_SOT323-3
BATT_OUT <44,45>
PC310 0.1U_0402_25V6
ACPRN#
Rds(on) = 30mohm max
Vgs = 20V
Vds = 30V
ID = 7A (Ta=70C)
PR309 392K_0402_1%
PR312 59K_0402_1%
PC312 2200P_0402_25V7K
<35,44> ADP_I
PC313 100P_0603_50V8
PR310 10_1206_5%
PR313 0_0402_5%
PC314 1U_0603_25V6K
PQ310 AON7408L 1N DFN
4.7uH DCR = 35+/- 15% mohm
Idc~Isat = 5.5~6 A
Power Rating = 1W
VACP~VACN spec < 81.28mV
PL302 4.7UH +-20% 5.5A 7X7X3 MOLDING
PR314 0.01_1206_1%
BATT+
PR311 47K_0402_1%
PACIN
PQ307B 2N7002KDW-2N_SOT363-6
PQ311 DTC115EUA_SC70-3
<35> AC_OFF
PR315 10K_0402_1%
ACOFF-1
PR316 @ 0_0402_5%
PQ313 2N7002KW_SOT323-3
<45> BATT_OUT
Make sure there is pull high for SMB HW side!
<35,44> EC_SMB_DA1
<35,44> EC_SMB_CK1
Make sure this pull high Voltage is same with EC VCC
PR317 316K_0402_1%
+3VLP
PC316 0.01U_0402_25V7K
PR320 100K_0402_1%
PU301 BQ24737RGRR_VQFN20_3P5X3P5
SA00004RZ00
ACDET
IOUT
SDA
SCL
ILIM
ACOK
CMPIN
CMPOUT
ACP
ACN
TP
VCC
PHASE
HIDRV
BTST
REGN
LODRV
BM
SRN
SRP
GND
BQ24737VCC
LX_CHG
DH_CHG
BST_CHG
PD301 RB751V-40_SOD323-2
PR318 2.2_0603_5%
PC315 0.047U_0603_16V7K
PC319 1U_0603_16V7
BQ24737VDD
DL_CHG
PQ312 AON7408L 1N DFN
PR319 4.7_1206_5%
@EMI@ PC320 680P_0603_50V7K
SRP
SRN
PC317 10U_0805_25V6K
PC318 10U_0805_25V6K
VILIM = 20 X (VSRP - VSRN)
= 20 X ICHG X RSR
Battery out function just for C38/A39 only, other customers please remove PQ313,PQ314,PR310,PR326
PR321 6.8_0603_5%
PR322
PR323 10K_0402_5%
PC321 0.1U_0402_25V6
PC323 0.1U_0402_25V6
@PC322 0.1U_0402_25V6
+3VALW
Module model information
BQ24737_V1.mdd for dual layer
<33> ACPRN#
BQ24737VDD
PR324 47K_0402_1%
PR325 10K_0402_1%
PR326 10K_0402_1%
VCIN1_AC_IN <19,33,35>
PACIN
PR327
PQ314 2N7002KW_SOT323-3
For disable pre-charge circuit
Design Notes
Maximum Charging current 2.0A
Battery discharge power 55W.
#Register Setting
1. 0X12 bit8 set 0 (default 1) to disable IFAULT HI if add ISN choke
2. 0X12 bit3 set 1 (default 0) to enable turbo boost function
3. 0X12 bit[12:11] set 00 (default 11) to set BAT
Depletion Comparator Threshold
Falling Threshold = 59.19% of voltage regulation limit (~2.486V/cell)
4. Disable turbo when AC only
#Circuit Design
1. Make sure there is pull high for SMB on HW side
2. Use 10X10 choke and 3X3 H/L side MOSFET
Charge current 2.0A
Power loss : 1.82W
Power density : 0.81 (15X15)
3. If use 4S per cell 4.35V battery, need change PR313 to 59K for ACDET setting)
4. For hybrid design, need double check PQ301,PQ302,PQ303,PQ309 component rating
#Protect function
1. ACOVP : ACDET voltage > 3.15V
2. Charger timeout : No communication within 175s(default)
3. ACOC : 3.33 X Input current DAC setting(default)
4. CHGOCP : 3/4.5/6A based on current current setting
5. BATOVP : 104%
6. BATLOWV : 2.5V
7. TSHUT : 155C
8. IFAULT HI : 750mV (default)
9. IFAULT LOW : 135mV (default)
Security Classification
Compal Secret Data
Issued Date
2011/06/24
Deciphered Date
2012/07/12
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.
Compal Electronics, Inc.
Title
Charger_BQ24737
Size
Document Number
BE_BDW
Rev
1.0
Date: Wednesday, February 12, 2014
Sheet 45 of 55

Module model information

SY8208B_V2.mdd

EN1 and EN2 dont't floating

Change 3V5V_EN to 3VALW_EN

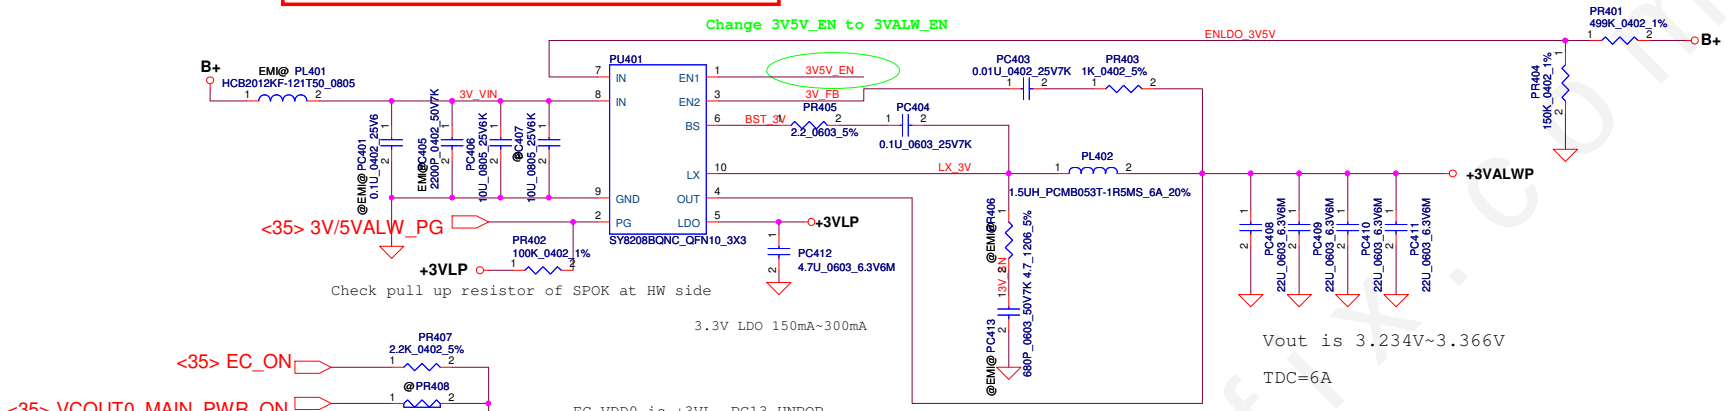

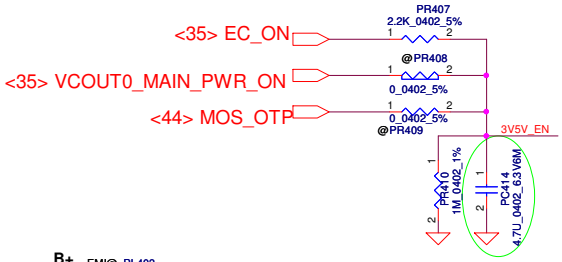

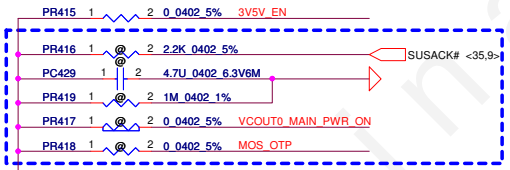

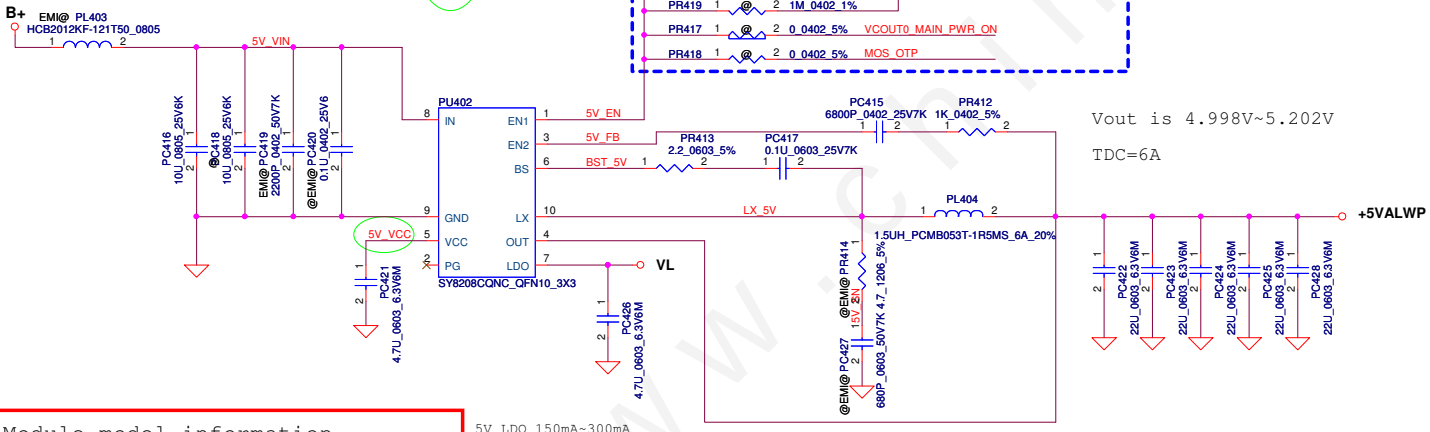

Module model information

SY8208C_V2.mdd

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.

Title: +3VALW/+5VALW

Size: Custom | Document Number: BE_BDW | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 46 of 55

Module model information

RT8207M_V1.mdd For Single layer
RT8207M_V2.mdd For Dual layer

Pin19 need pull separate from +1.5VP.
If you have +1.5V and +0.75V sequence question,
you can change from +1.5VP to +1.5VS.

0.75Volt +/- 5%
TDC 0.7A
Peak Current 1A

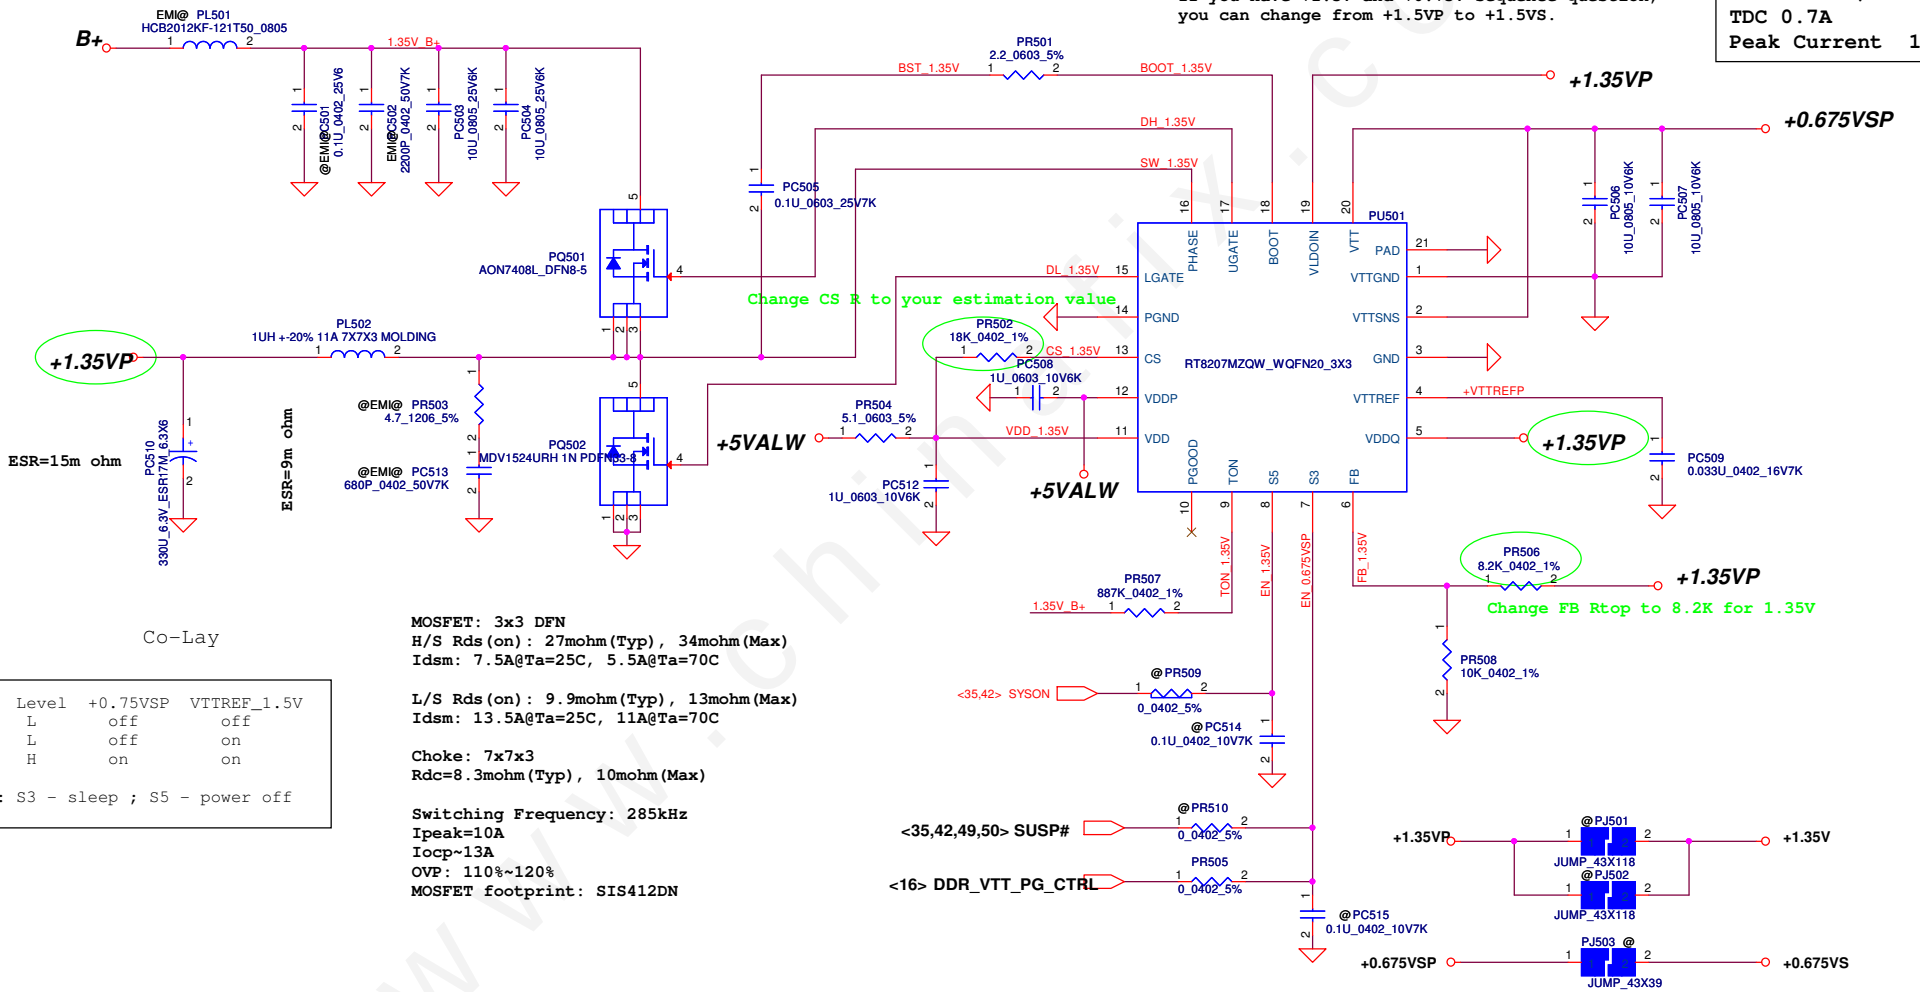

Co-Lay

Mode	Level	+0.75VSP	VTTREF_1.5V
S5	L	off	off
S3	L	off	on
S0	H	on	on

Note: S3 - sleep ; S5 - power off

MOSFET: 3x3 DFN
H/S Rds(on): 27mohm(Typ), 34mohm(Max)
Idsm: 7.5A@Ta=25C, 5.5A@Ta=70C

L/S Rds(on): 9.9mohm(Typ), 13mohm(Max)
Idsm: 13.5A@Ta=25C, 11A@Ta=70C

Choke: 7x7x3
Rdc=8.3mohm(Typ), 10mohm(Max)

Switching Frequency: 285kHz
Ipeak=10A
Iocp~13A
OVP: 110%~120%
MOSFET footprint: SIS412DN

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.

Title: RT8207M

Size: Custom | Document Number: BE_BDW | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 47 of 55

Module model information

APL5930_V1.mdd

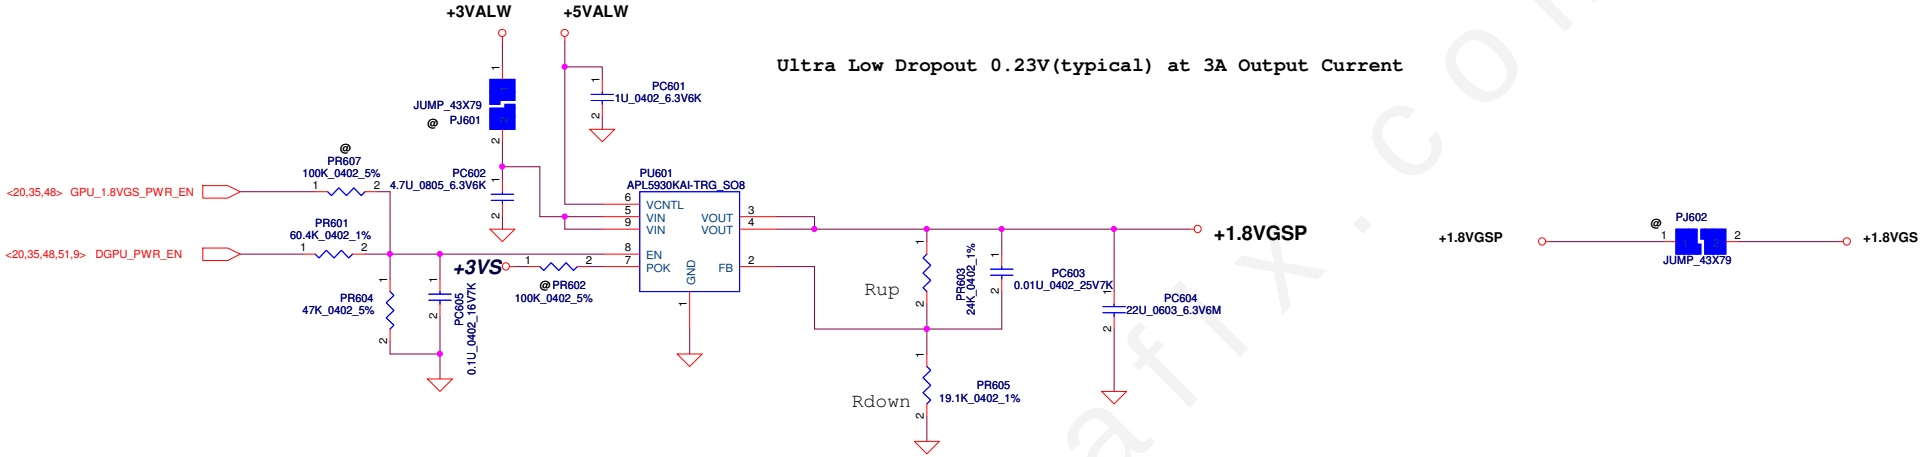

Module model information

SY8003_V1.mdd

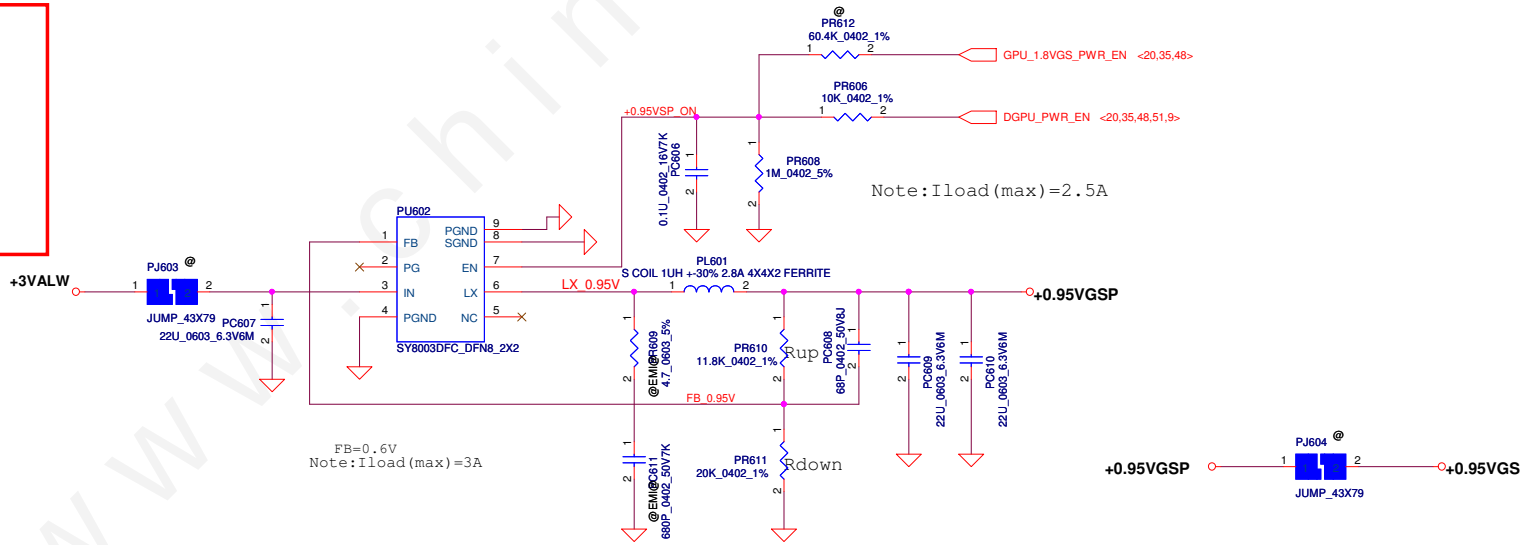

Note:
When design Vin=5V, please stuff snubber to prevent Vin damage

Vout=0.6V* (1+Rup/Rdown)

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.

Title: +1.8VGS-+0.95VVGS

Size: Custom | Document Number: BE_BDW | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 48 of 55

Module model information

SY8003_V1.mdd

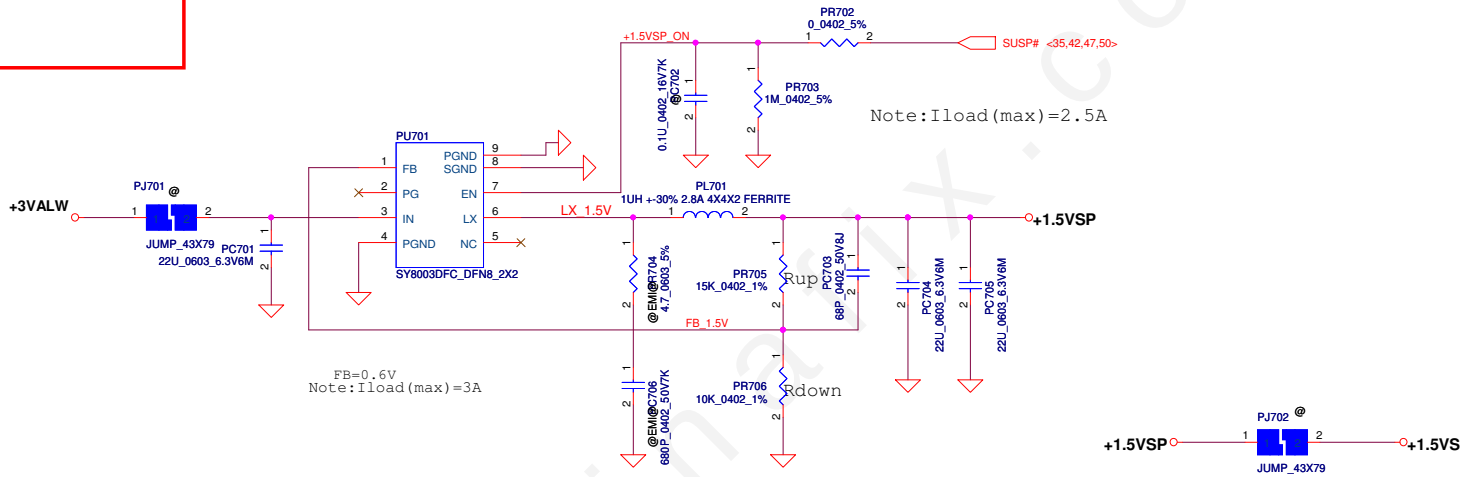

Note:
When design Vin=5V, please stuff snubber to prevent Vin damage

Vout=0.6V* (1+Rup/Rdown)

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2011/06/24	Deciphered Date	2012/07/12
Title	+1.5VS		
Size: Custom	Document Number: BE_BDW		Rev: 1.0
Date: Wednesday, February 12, 2014	Sheet 49 of 55		

Module model information

SY8208D_V1.mdd

EN pin don't floating
If have pull down resistor at HW side, pls delete PR2

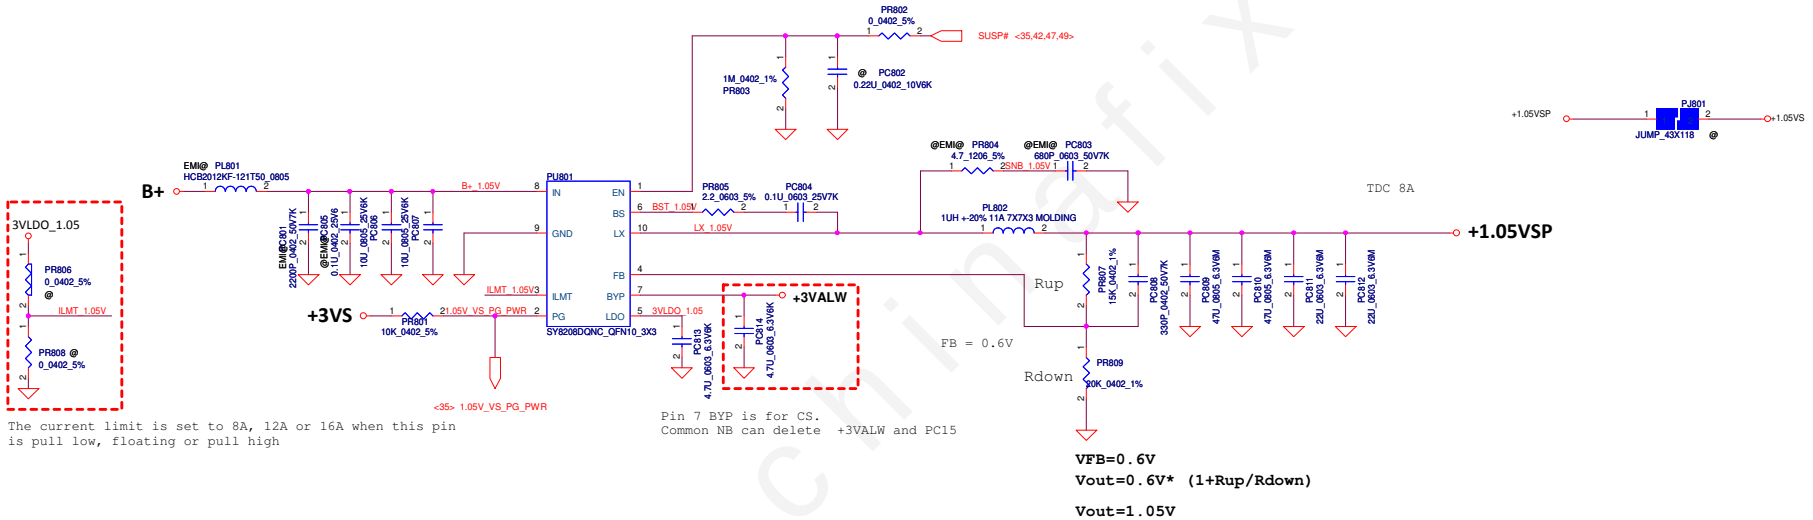

The current limit is set to 8A, 12A or 16A when this pin is pull low, floating or pull high

Pin 7 BYP is for CS.
Common NB can delete +3VALW and PC15

VFB=0.6V
Vout=0.6V* (1+Rup/Rdown)

Vout=1.05V

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.

Title: +1.05VS

Size: C | Document Number: BE_BDW | Rev: 1.0

Date: Wednesday, February 12, 2014 | Sheet 50 of 55

Module model information

ISL62771_V1A.mdd for IC portion

ISL62771_V1B.mdd for SW portion

+VGA_CORE

AMD TOPAZ
TDC 31A, EDC 46.5A
OCP min 58.1A

AMD JET LE
TDC 29A, EDC 39A
OCP min 37.5A

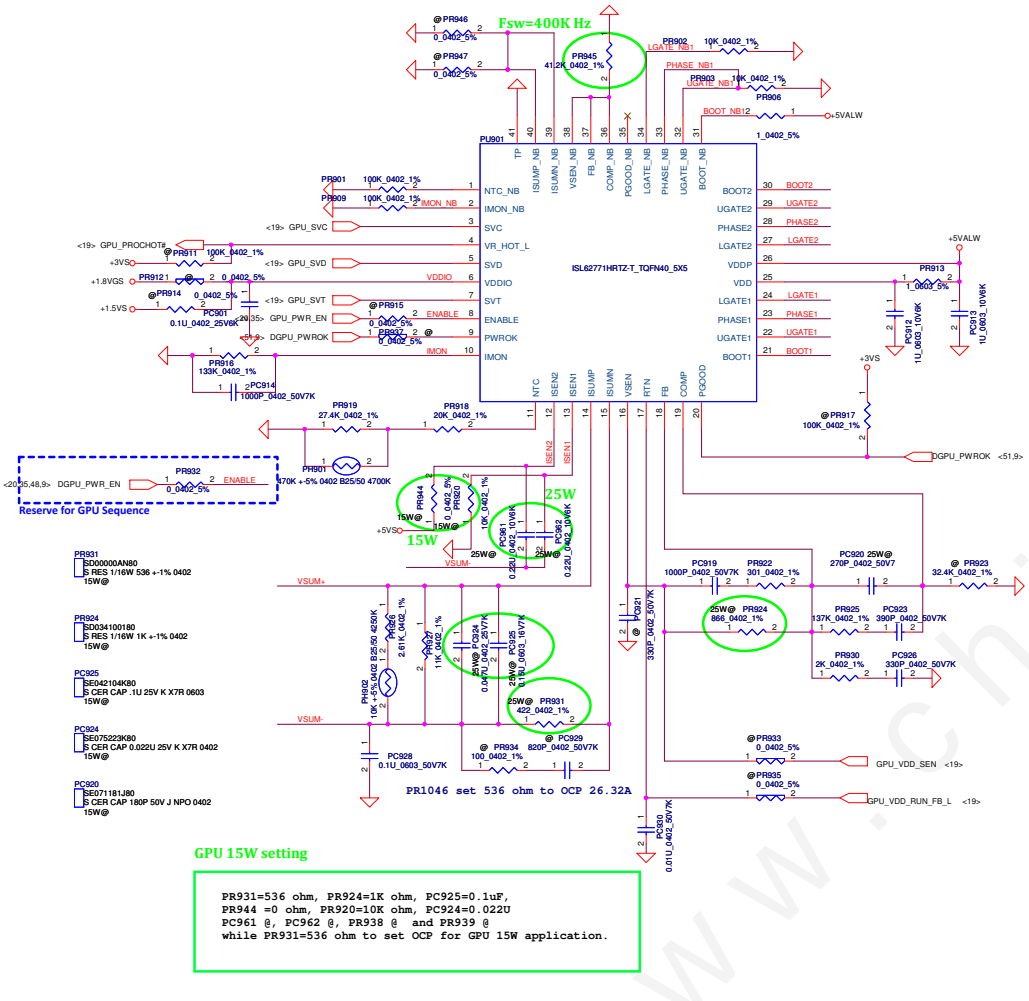

GPU 15W setting

PR931=536 ohm, PR924=1K ohm, PC925=0.1uF,
PR944 =0 ohm, PR920=10K ohm, PC924=0.022U
PC961 @, PC962 @, PR938 @ and PR939 @
while PR931=536 ohm to set OCP for GPU 15W application.

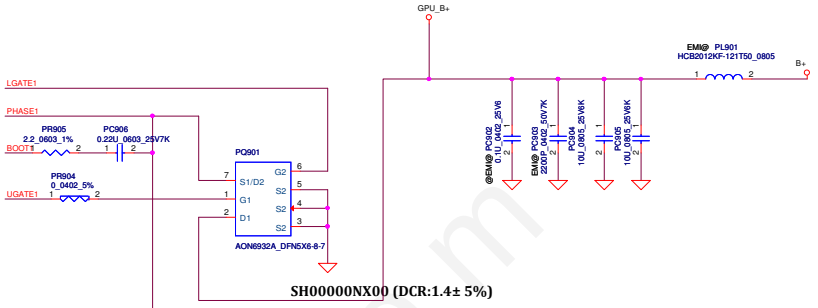

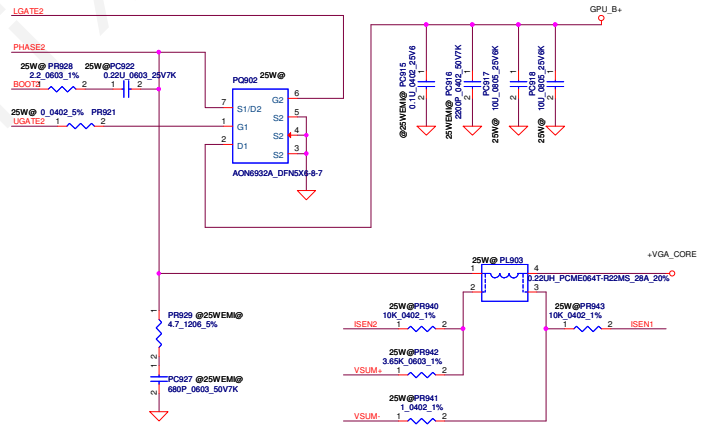

+VGA_CORE

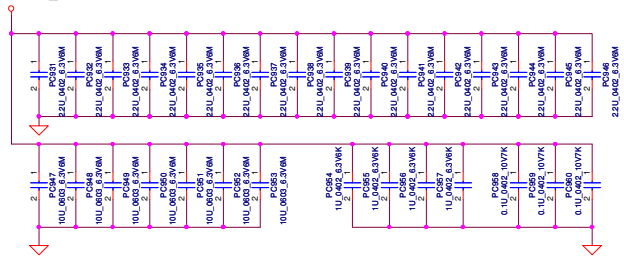

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.	
Title	PWR-+VGA_CORE
Size: Custom	Document Number: BE_BDW
Rev	1.0
Date: Wednesday, February 12, 2014	Sheet 51 of 55

Module model information:
ISL95813 (for 15W & 28W CPU)

Base on BDW PDDG Rev_0_73		
Location	15W TDC 14A MAX 32A OCP 39A Loadline=-2.0mv/A	Note
PR1120	499 Ohm	OCP
PR537	1.27kOhm	Droop
PC528	0.022uF	RC Match
PR507	90.9kOhm	PROG1
PR703	93.1kOhm	IMON
PC518	0.1uF (0402)	RC Filter

H-side MOS: MDV1525URH
Rds(on):
<10.1mohm@Vgs=10V
<14.0mohm@Vgs=4.5V
Id :24A@Vgs=10V

L-side MOS: MDU1511RH
Rds(on):
<2.4mohm@Vgs=10V
<3.3mohm@Vgs=4.5V
Id :100A@Vgs=10V

Choke: 0.12UH (Size:7*7*3)
Rdc=0.62mohm +-5%
Heat Rating Current=41.5A
Saturation Current=41A

+1.05VS
Follow intel guideline
PR1102 130_0402_1%
PR1103 54.9_0402_1%
PC1102 1U_0402_6.3V6K

Note:
VR_SVID_ALRT# Pull high on HW side

<12> VR_SVID_DAT
<12> VR_SVID_ALRT#
<12> VR_SVID_CLK
<12> VR_ON
<12> VGATE
<35> IMON_CPU
<35> VR_HOT#

PU1101
ISL95813HRZ-T_QFN20_3X4
PAD, SCLK, ALERT#, SDA, PRGM1
VR_ON, PGOOD, IMON, VR_HOT#, NTC, COMP, FB, RTN, ISUMN, ISUMP
LGATE, PHASE, UGATE, BOOT, VCC, PRGM2

PR1104 169K_0402_1%
Note:
PR1104=169K
=>Icc(max)=33A
fsw=700KHz

@PR1101 1.91K_0402_1%
PR1122 1.5K_0402_1%
PC1101 1000P_0402_50V7K
PR1106 97.6K_0402_1%
PH1101 470K +-5% 0402 B25/50 4700K
PR1110 3.83K_0402_1%
PR1111 27.4K_0402_1%
PC1109 47P_0402_50V8J
PR1105 0_0603_5%
PR1108 2.2_0603_5%
PC1108 0.22U_0603_16V7K
PC1111 0.1U_0402_25V6
PR1112 124K_0402_1%

Note:
PR1112=124K
=>Slew rate=53mV/us
Vboot = 1.7V

Over temperature protection:
OTP Setting: 100C active
Pin5 (NTC) voltage <0.88V, Protect
Pin5 (NTC) voltage >0.92v, recovery

PR1113 909_0402_1%
33P_0402_50V8J @PC1112
PC1113 6800P_0402_25V7K

Droop
PR1114 2K_0402_1%
PR1115 10_0402_1%
PR1116 1.27K_0402_1%
@PC1114 330P_0402_50V7K
@PC1115 390P_0402_50V7K

PR1117 4.99M_0402_1%

RC Match
PC1116 0.033U_0402_25V7K
PC1117 0.1U_0402_16V4Z
PR1118 4.42K_0402_1%
PR1119 11K_0402_1%
PH1102 10K +-5% 0402 B25/50 4250K

<12> VCCSENSE
@PC1118 330P_0402_50V7K
@PC1119 0.082U_0402_16V7K
PC1120 0.01U_0402_50V7K

OCP Setting
PR1120 287_0402_1%

<12,14> VSSSENSE
@PC1121 4700P_0402_25V7K
@PR1121 1.5K_0402_1%

Local sense put on HW site

CPU_B+
PQ1101 MDV1525URH_PDRN33-8-5
PQ1102 MDU1511RH_POWERDFN56-8-5
PQ1103 MDU1511RH_POWERDFN56-8-5
PC1103 10U_0805_25V6K
PC1104 10U_0805_25V6K
EMI@C1105 0.01U_0402_50V7K
EMI@C1106 220P_0402_50V7K
@RF@ PC1107 0.022U_0402_25V7K
PC1123 33U_25V_M
PC1122 68U_25V_M
EMI@ PL1103 HCB2012KF-121T50_0805
@EMI@ PL1104 HCB2012KF-121T50_0805
B+

PL1102 .15UH 20% PCME064T-R15MS0R667 36A
+CPU_CORE
PR1109 3.65K_0603_1%
@EMI@PR1107 4.7_1206_5%
@EMI@PC1110 680P_0603_50V7K

+5VS

Compal Electronics, Inc.
Title: ISL95813 for BDW-Y&U(15W/28W) CPU
Size: Document Number: BE_BDW
Rev: 1.0
Date: Wednesday, February 12, 2014
Sheet 52 of 55

+CPU_CORE

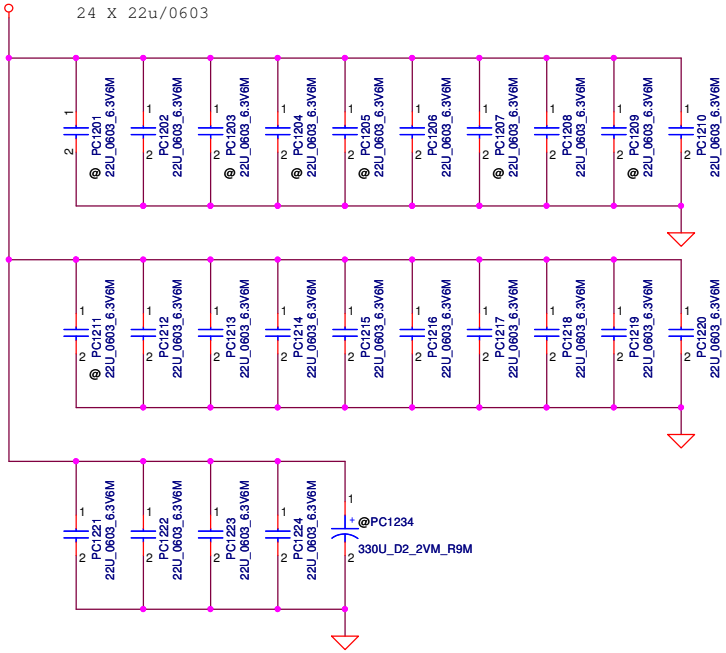

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.

Title: **PWR-PROCESSOR DECOUPLING**

Size	Document Number	Rev
Custom	BE_BDW	1.0

Date: Wednesday, February 12, 2014 | Sheet 53 of 55

Version change list (P.I.R. List)

Item	Reason for change	PG#	Modify List	Date	Phase
1					
2					
3					
4					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					

Security Classification	Compal Secret Data		
Issued Date	2011/06/24	Deciphered Date	2012/07/12

Compal Electronics, Inc.		
Title: PIR (PWR)		
Size: Custom	Document Number: BE_BDW	Rev: 1.0
Date: Wednesday, February 12, 2014	Sheet 54 of 55	

ZIWB2/ZIWB3/ZIWE1 HW PIR List

Item	Page	MODIFICATION LIST	PURPOSE
			EVT TO DVT
1	P.36	Modify DP_SEL schematic	Because the first design is wrong.
2	P.34	Delete D28	It already reserve in sub BD
3	P.36	Modify HPD schematic	Because the first design is wrong.
4	P.36	Modify DP AUX schematic	Cap already reserve in sub BD
5	P.20	Reserve +1.05VS to +0.95VGS	AMD's suggestion
6	P.33	Add D26 for ESD	
7	P.42	Add RV198, RV199	AMD's suggestion
8	P.22~24	Add GPU Termination Resistance	AMD's suggestion
			DVT TO PVT
1	P.35	change U11.111 power rail to +3VLP	It only use +3VLP
2	P.33	un-pop R294, pop R295.	B series's LED need to follow E series
3	P.10	Add R247, R248	For BIOS Stap Pin
4	P.20	Add RV60, delete RV36	for GPU Sequence
5	P.20	Add RV61, delete RV240	for GPU Sequence
6	P.37	Change DP Switch IC solution	For HDMI audio issue
7	P.35	Add C197 for ESD	
8	P.33	Add C198 for ESD	
9	P.30	Add C199 for ESD	
			PVT TO PRE-MP
1	P.33	Reserve R298, R299 for DC-in LED control	To avoid LED shimmer
2	P.38	Change DL1 and DL2 footprint for ESD	

Compal Electronics, Inc.		
Title: HW-PIR1		
Size: Custom	Document Number: LA-B091P	Rev: 1.0
Date: Wednesday, February 12, 2014	Sheet 55 of 55	