

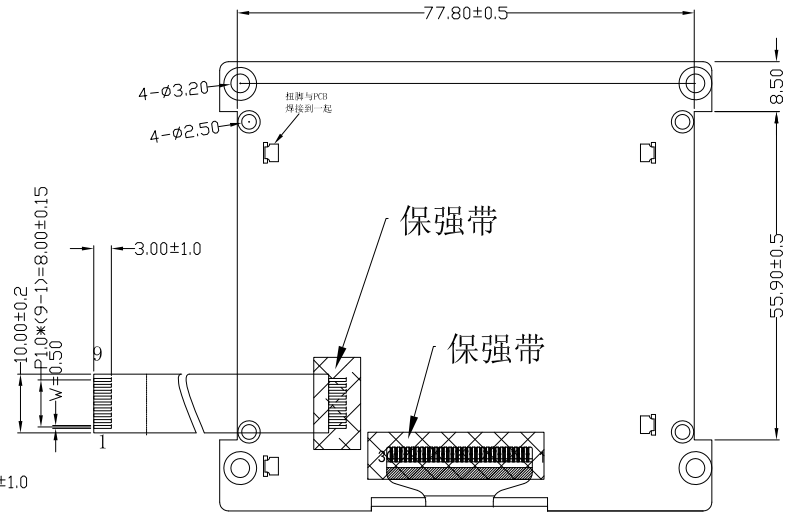
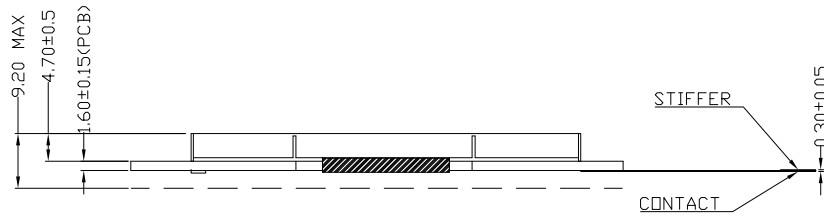


REV.	CHANGE CONTENT	BY	DATE
A	FIRST	JYQ	20.07.13

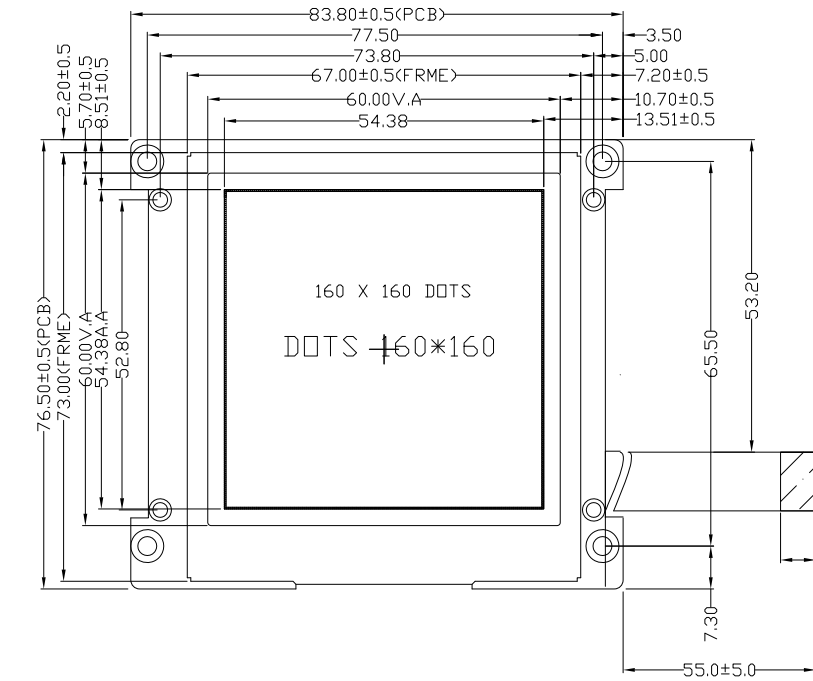


PIN	SYMBOL	
1	SDA	Serial data input terminal.
2	VSS	Ground
3	SCK	Serial clock input terminal.
4	/RST	Reset input, Active L
5	A0	Data type select
6	/CS	Chip select, Active L
7	VDD	Power supply for logic
8	LED+	Anode of LED Backlight
9	LED-	Cathode of LED Backlight



NOTES:

1. OPERATING TEMPERATURE: -40°C TO 70°C
STORAGE TEMPERATURE: -40°C TO 80°C
2. LCD MODEL: FSTN/POSITIVE/TRANSFLECTIVE
3. 1/160 DUTY, 1/12 BAIS, VLCD=16.3V, VDD=3.3V
4. VIEWING ANGLE: 6:00 O'CLOCK
5. BACKLIGHT: WHITE LED, Vf=3.3V, If≤100mA, 5Dies
6. RoHS
7. CONTRAST: Software adjustment
8. CONTROLLER :ST75161
9. UNMARK TOLERANCE IS :±0.3mm



HTDISPLAY Co., Ltd.

DRAWING No. : HG16016025G-VI

DRAWING TITLE: LCM

FILE NO. : 1

DESIGN	JYQ	2020.07.13
CHECKED	SZX	2020.07.13
APPROVED	XYP	2020.07.13

REV. : A	SCALE: 1:1
PROJECTION:	UNIT: mm
	SHEET: 1/1