

REV.	DESCRIPTION	BY	DATE
B	将模块型号VHA改为VH	DAP	20221018

INTERFACE

NO.	SIGNAL
1	VSS
2	CS
3	A0
4	SCL
5	SDA
6	RESET
7	VDD
8	NC
9	LEDA
10	LEDK

A

B

C

D

E

F

A


B

C

D




E

F

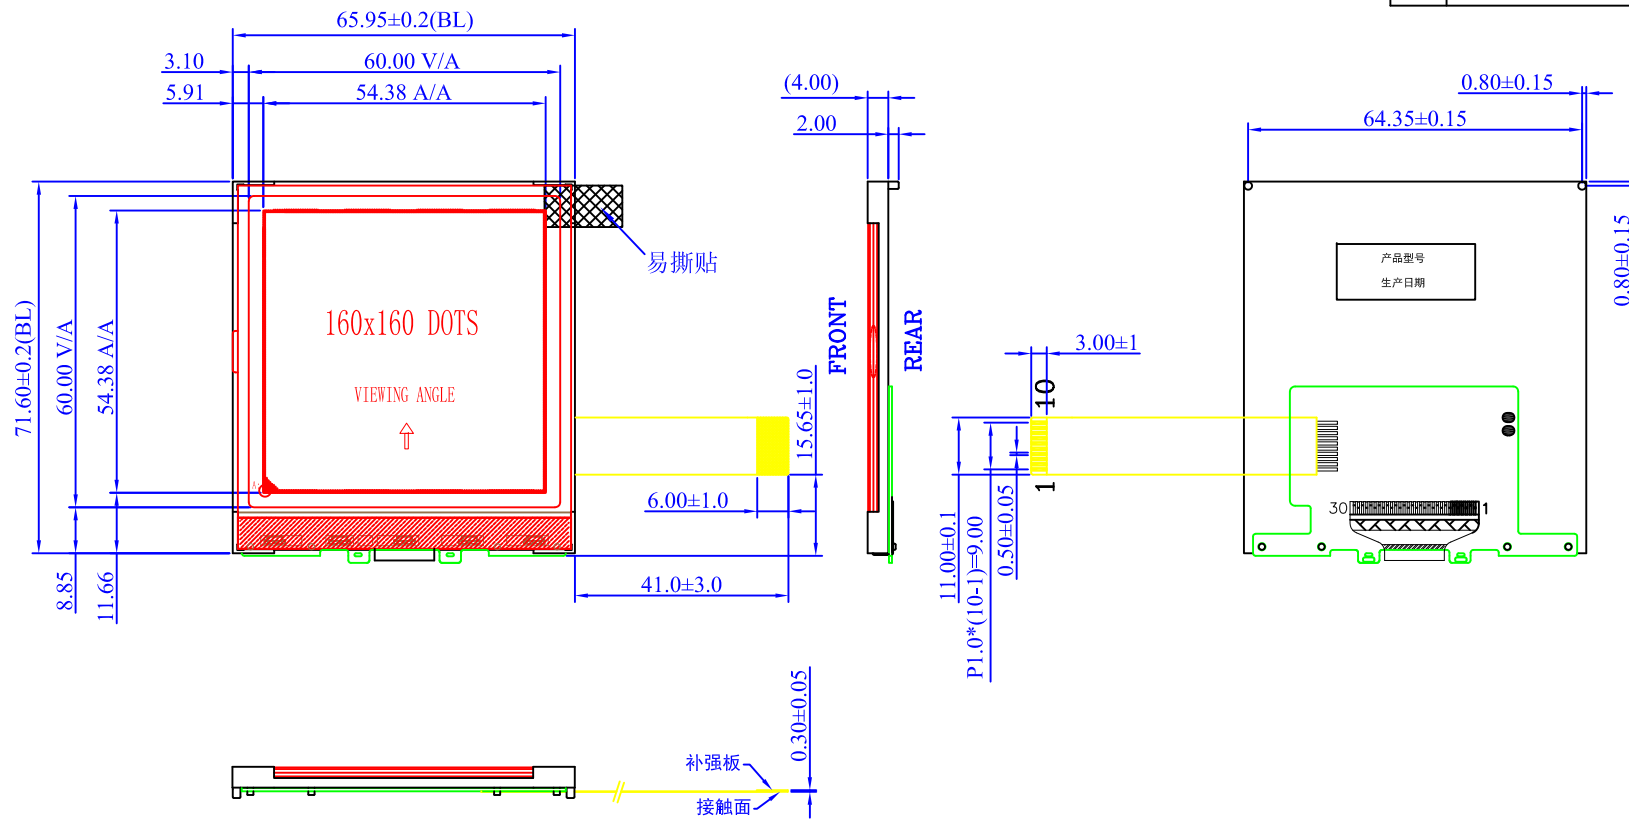

NOTE:

1. OPERATING TEMPERATURE:-40°C TO 70°C
STORAGE TEMPERATURE:-40°C TO 80°C
2. LCD MODEL:FSTN / POSITIVE / TRANFLECTIVE
3. 1/160 DUTY,1/11 BAIS,VLCD=15.5V,VDD=3.3V
4. VIEWING ANGLE: 6:00 O'CLOCK
5. CONTROLLER: ST75161
6. BACKLIGHT:WHITE VF=3.3V IF=70~90mA(TYP) 100mA(max)
7. RoHS COMPLIANT

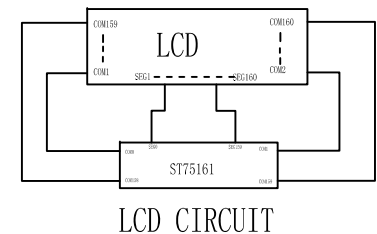

华远显示

深圳市华远显示器件有限公司

DESIGN	LWQ	20220902	TECHNOLOGY		
CHECKED			Q.A		
STANDARD			APPROVED		

DRAWING No.: HYG160160BQG-FF64L-VH

DRAWING TITLE: LCM

FILE NO.: 7

REV.:A

SCALE: -

PROJECTION:

UNIT: mm

SHEET: 1/1