

客户：
客户确认签名：

8

7



6

3



2

1

REV:	DESCRIPTION	BY	DATE
V1.0	New issue	YH-01	2019-06-19

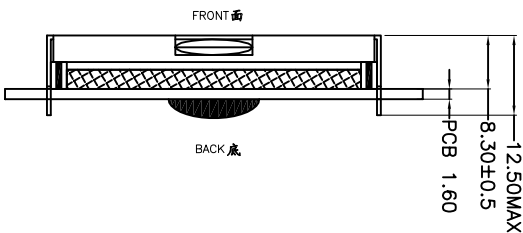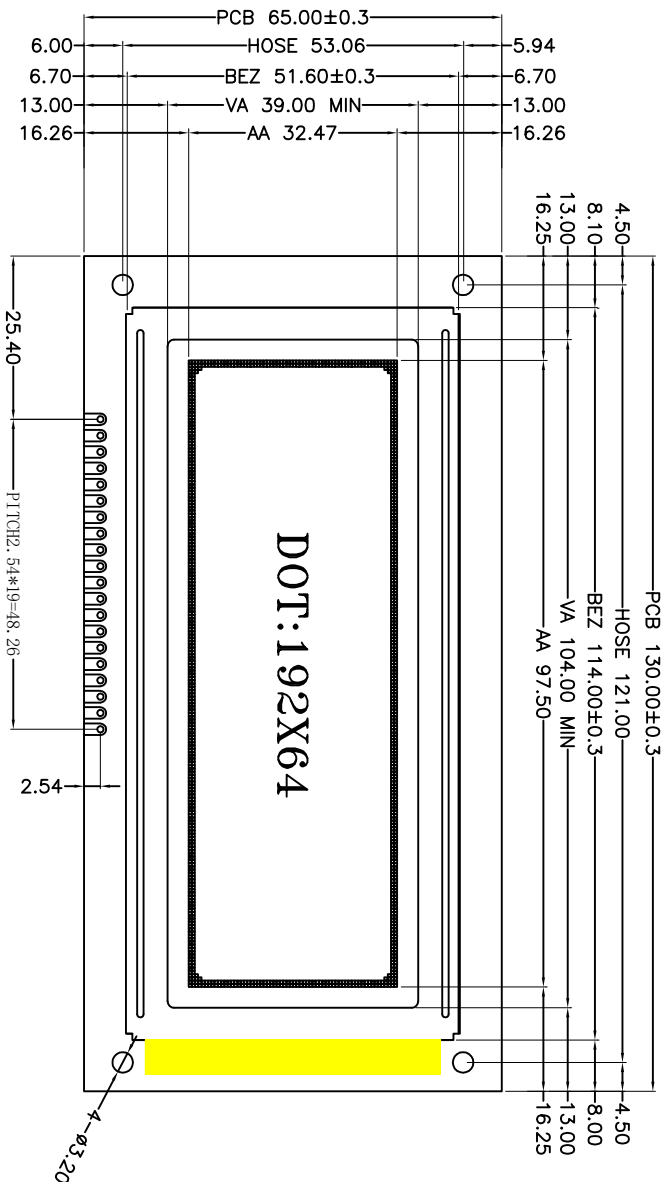

PCB 板面丝印内容:
XXXXXXXXXXXXX
QC OK
YHMD
生产制程 A/B
生产制程 A/B
生产制程 A/B

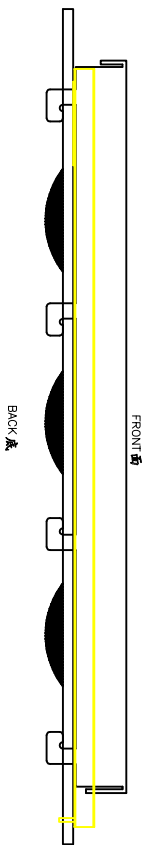

DOTS SIZE
SCALE 10:1

NO	Symbol
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	REST
17	CS2
18	CS3
19	VEE
20	LEDK

显示面积:313

外观图 (APPEARANCE DESIGN)	
GENERAL TOL.	UNITS
0.20	MM




广东烨辉科技有限公司
GUANGDONG YEHUI TECHNOLOGY CO., LTD.

APPROVALS	DATE
DWN: YH-01	2019/06/19
CHK: YH-05	2019/06/19
APP: YH-11	2019/06/19

MODEL NUMBER:

YHBG19264ABN

HH3n\$



SCALE:
NOT TO SCALE

PAGE: 1 OF 1

由 Autodesk 教育版产品制作

- NOTES:
- LCD TYPE: STN (Blue) TRANSMISSIVE/ NEGATIVE
 - OPERATING VOLTAGE: VDD=3.3V, Vop=8.5V
 - VIEWING DIRECTION: 6 O'CLOCK
 - DRIVE METHOD: 1/6 Duty, 1/9 Bias
 - OPERATING TEMP: -20°C TO +70°C
 - STORAGE TEMP: -30°C TO +80°C
 - CONNECTOR TAPE: COB+ZEBRA
 - DRIVER IC: AIP31107+AIP31108*3
 - BACKLIGHT: Edge 4 PCS LED WHITE VI=80mA
 - ALL sub-parts and materials of the parts must comply with the RoHS instructions of EU.
 - LABEL: HF REACH RoHS

A

B

C

D

A

B

C

D

由 Autodesk 教育版产品制作