


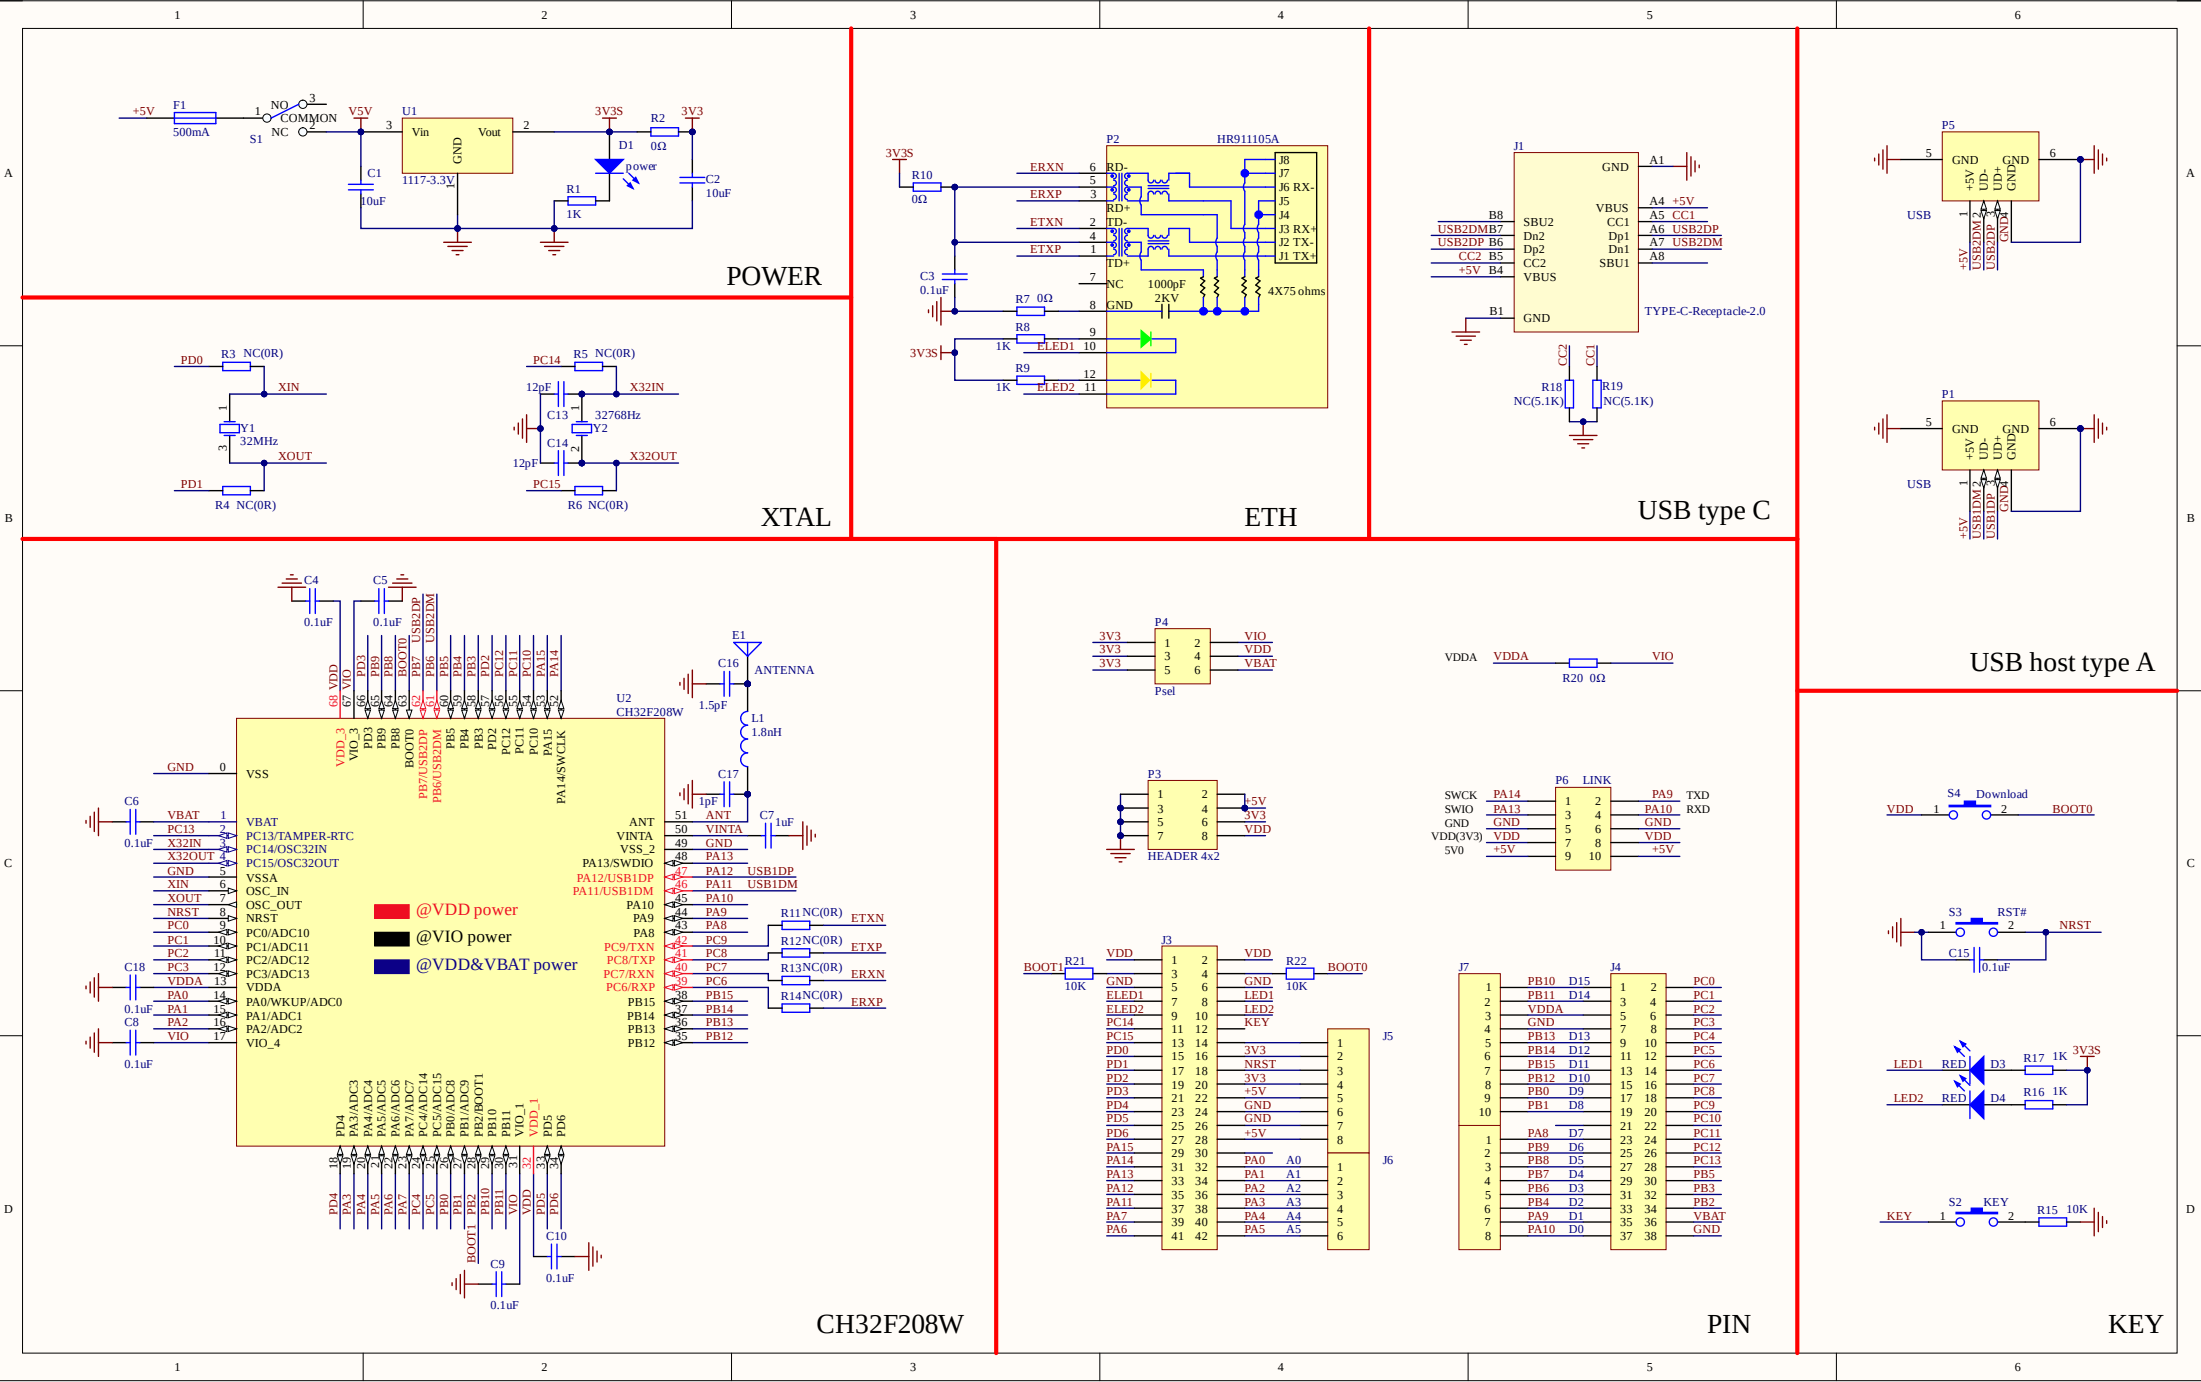

POWER

XTAL

ETH

USB type C


USB host type A

CH32F208W


PIN

KEY


XTAL




BOOT




RST




EEPROM




CAN

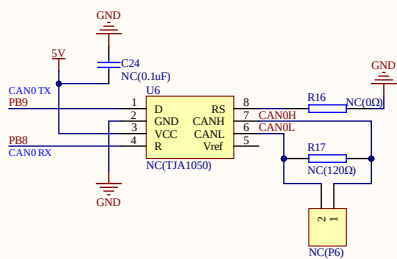


MCU

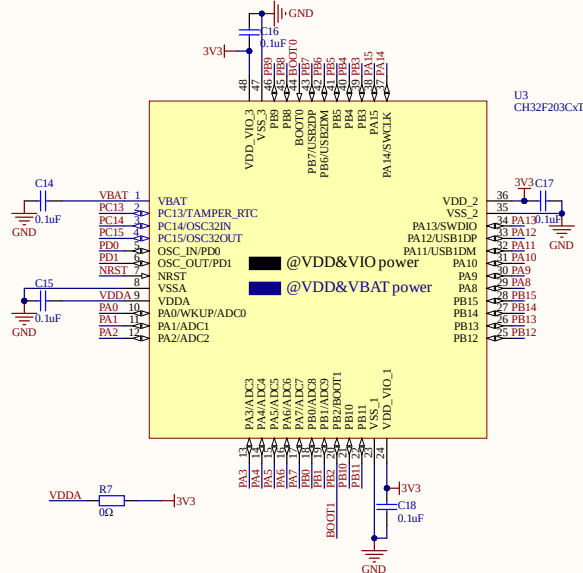


TF CARD

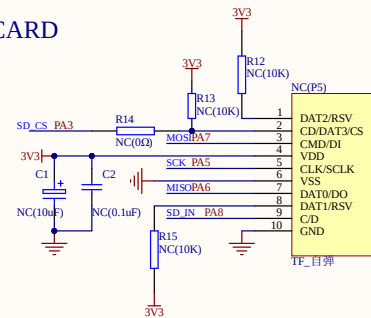


SPI FLASH

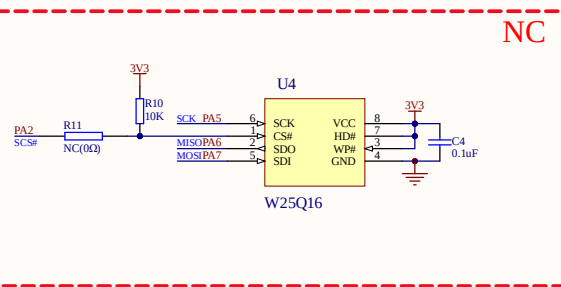


POWER

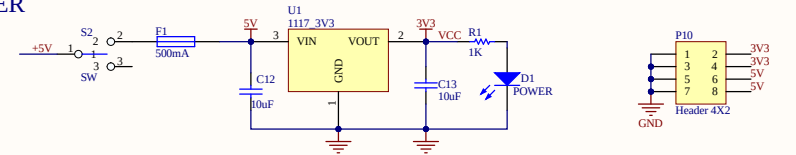


TOUCHKEY




LED




SWD



PIN




UART





Connect 3-4、5-6 pin when use USART download


USB




CH340X

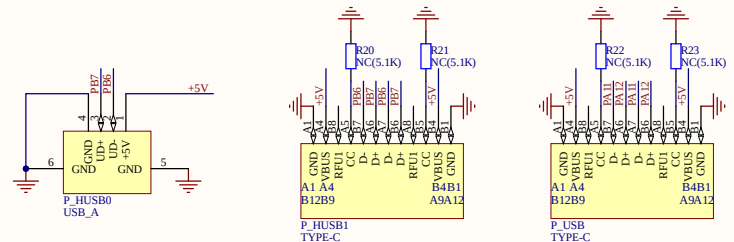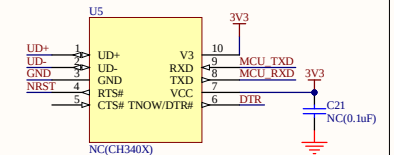


XTAL




BOOT




RST




EEPROM




CAN

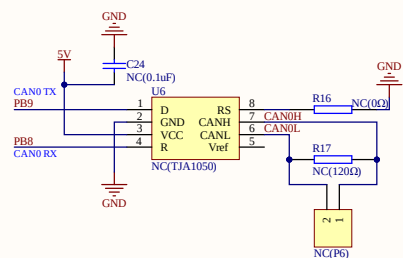


MCU

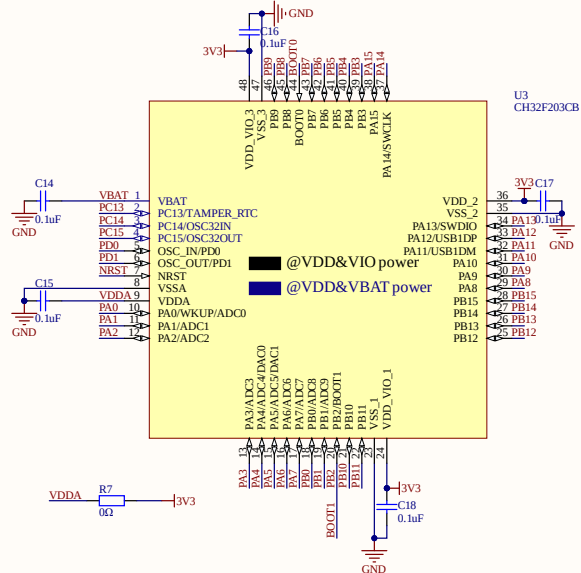


TF CARD

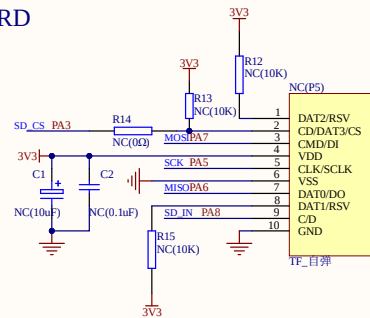


SPI FLASH

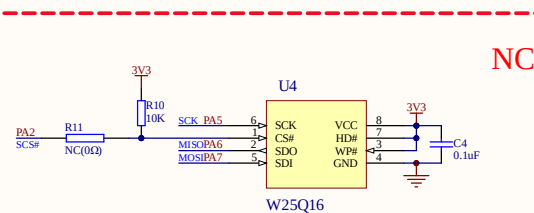


POWER

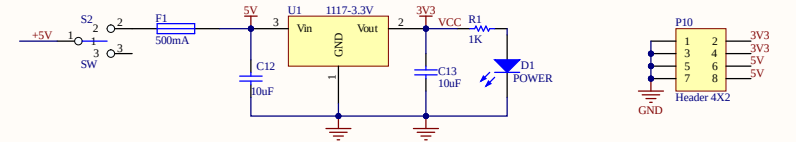


TOUCHKEY




SWD




LED



PIN




UART





Connect 3-4、5-6 pin when use USART download


USB




CH340X

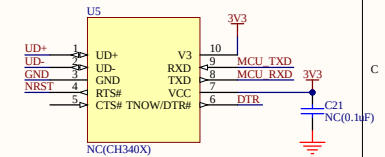


POWER

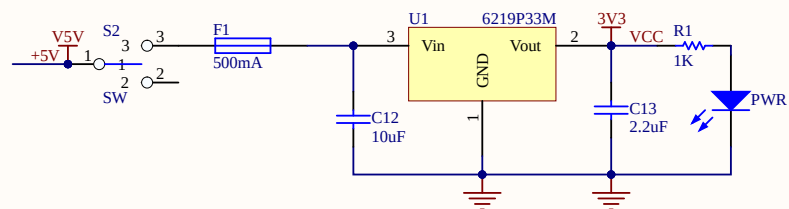

LED




USB




MCU


CH32x203K

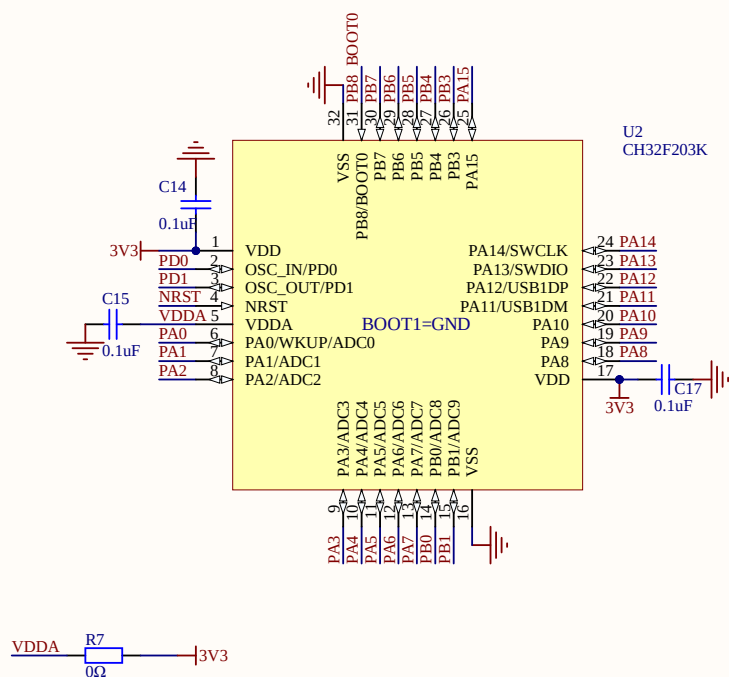


XTAL




RST



PIN

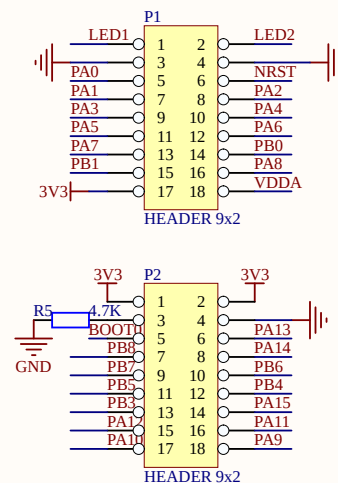


POWER&USB

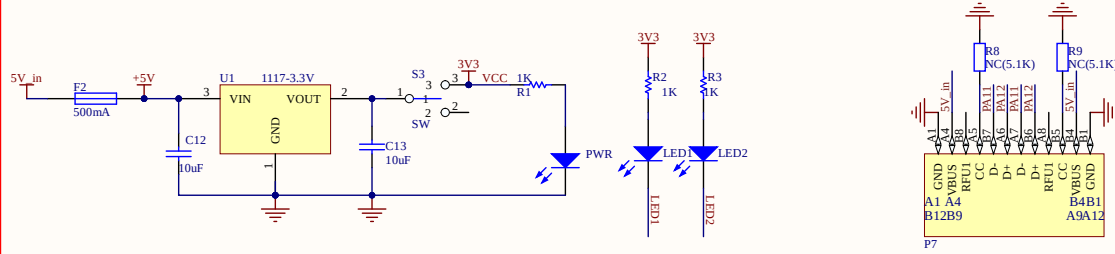



WCH_LinkE

MCU

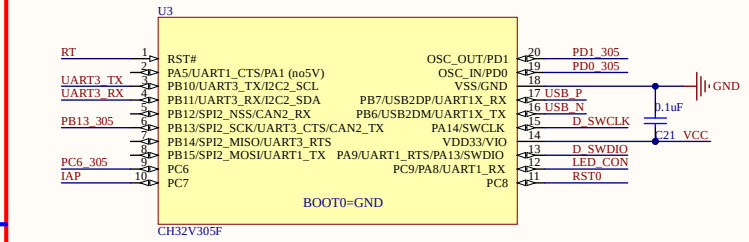

XTAL




MCU

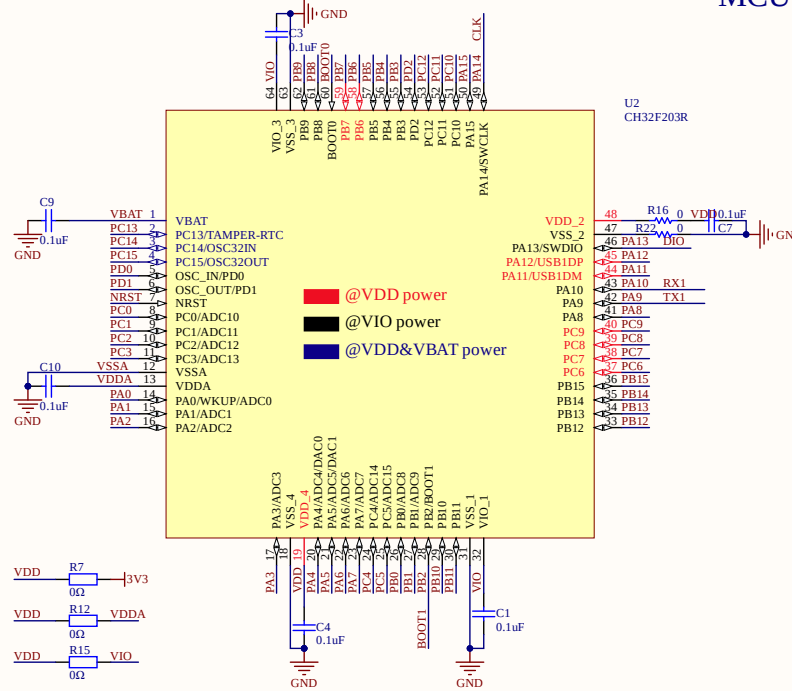


RST

IAP


LED

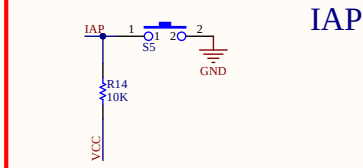


POWER

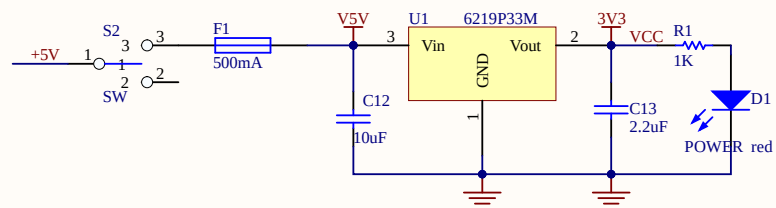


LED



USB

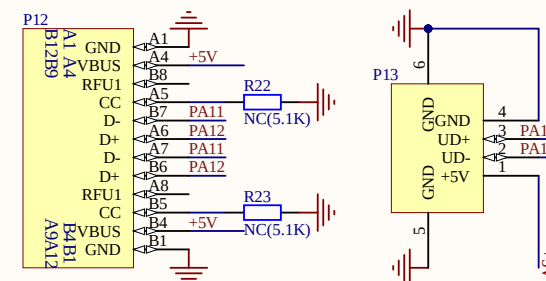


MCU

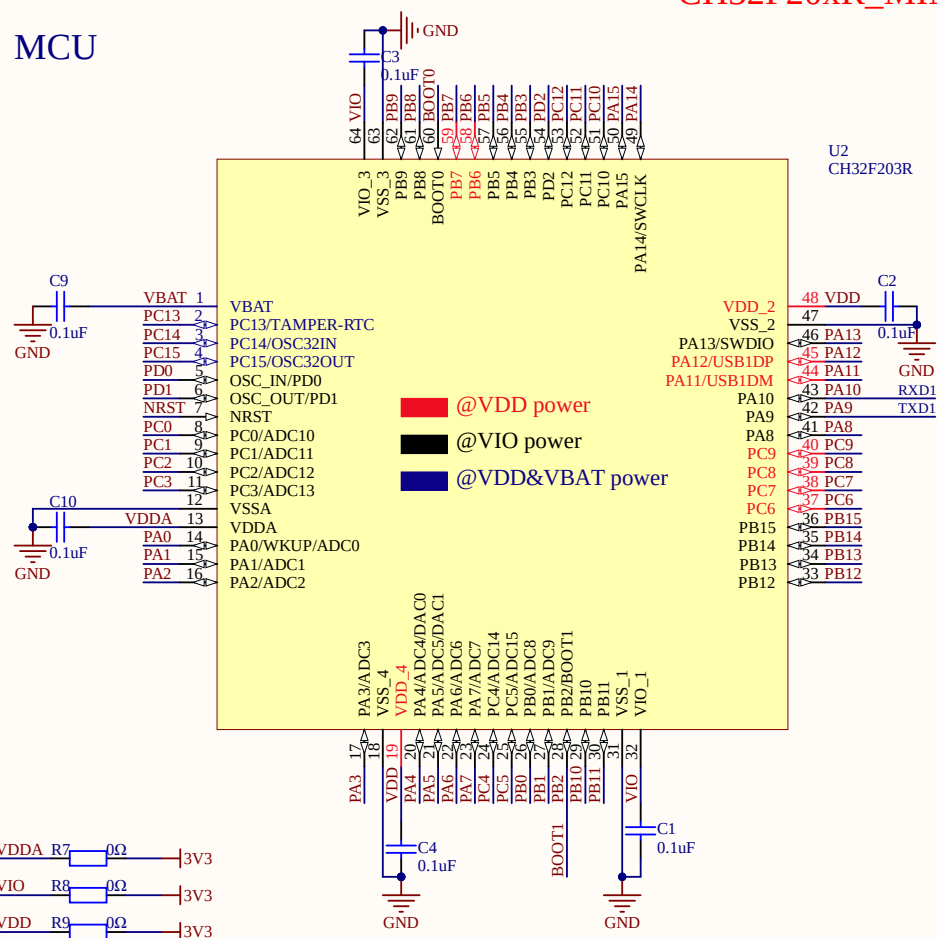


CH32F20xR MINI XTAL


XTAL




BOOT




RST

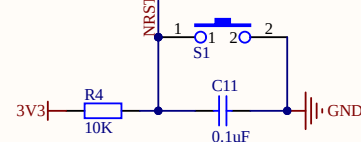

PIN

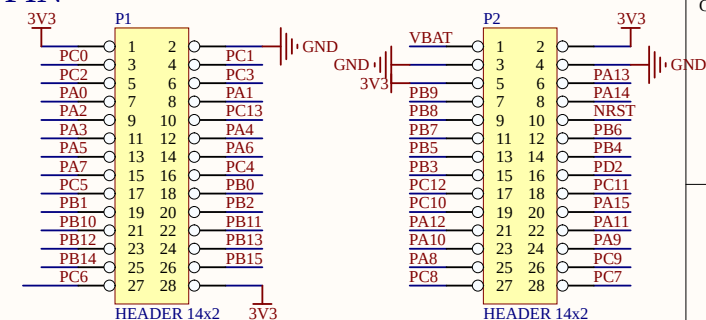


POWER&USB

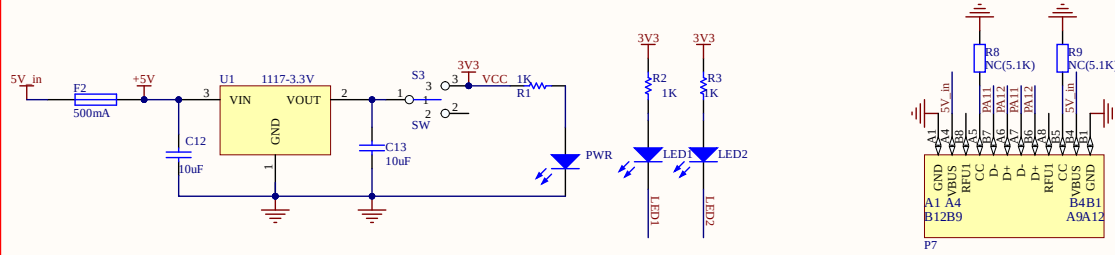



WCH_LinkE

MCU

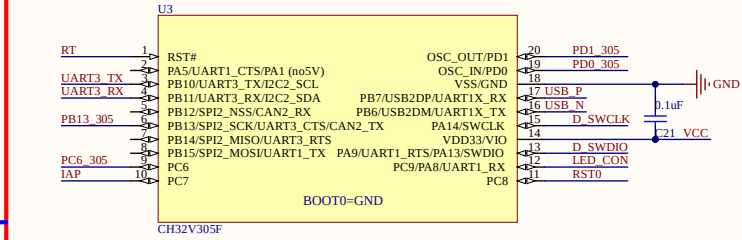


XTAL


MCU

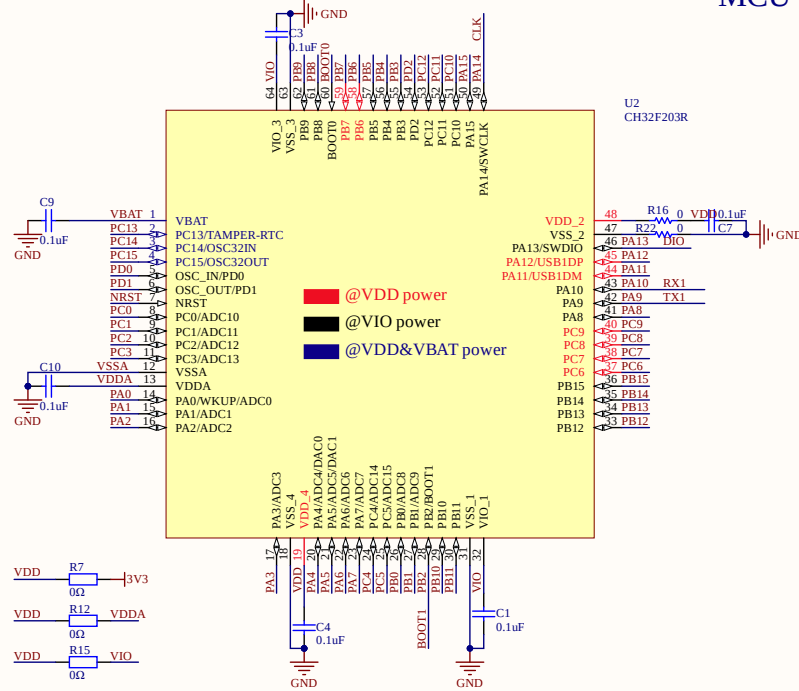


RST





POWER





USB




CH32xx0xV_EVT MCU

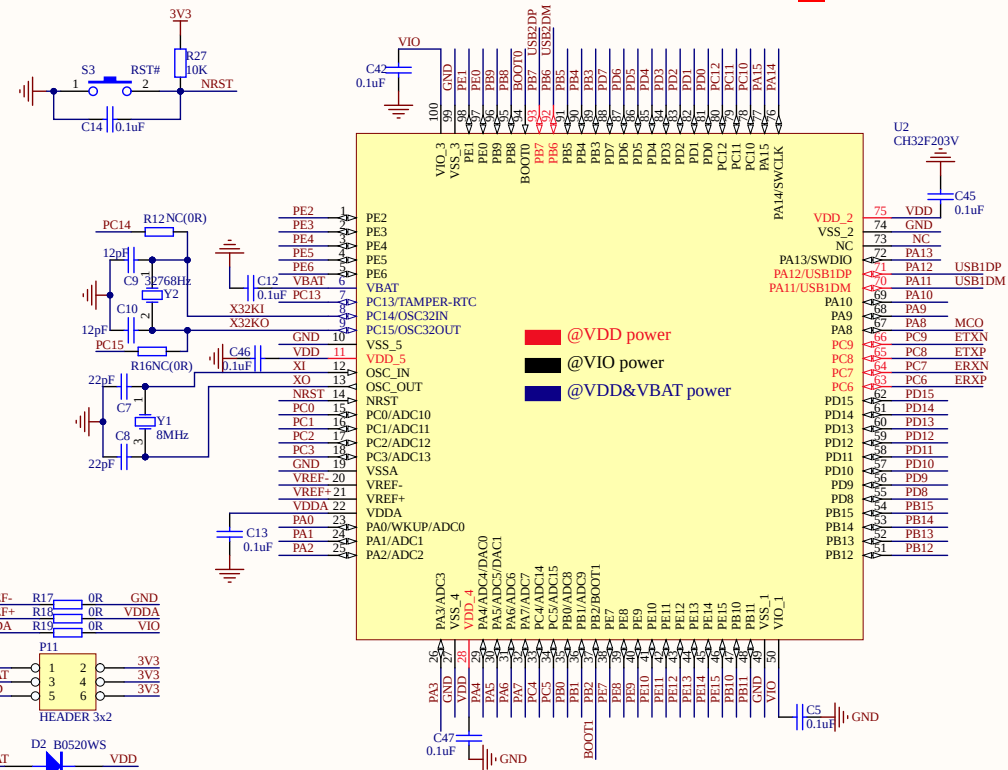


PIN






DEBUG




PAD






DOWNLOAD



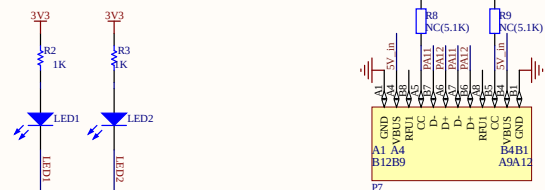


WCH_LinkE


MCU

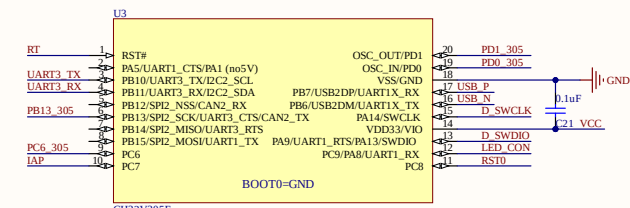


XTAL




KEY




RST

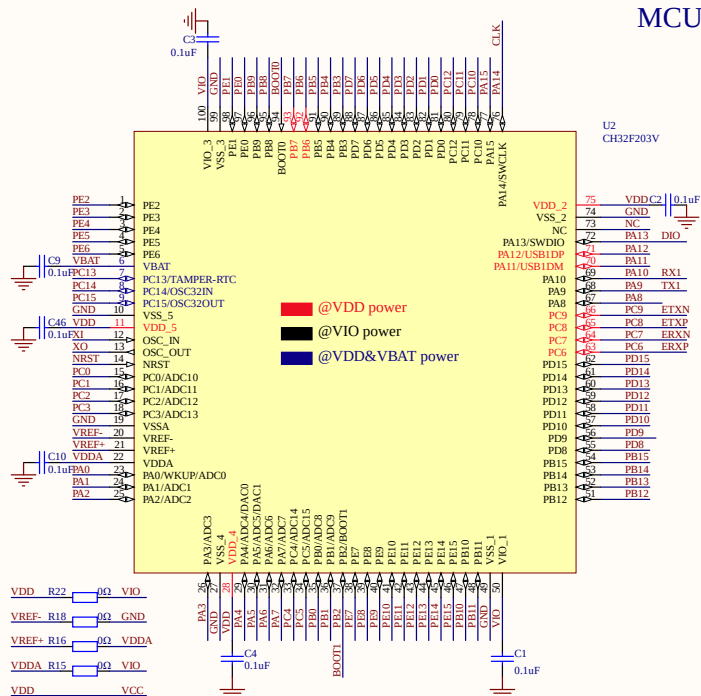


MCU





IAP




LED

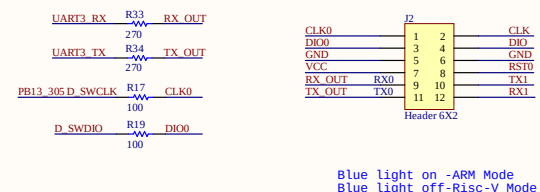

SWD&UART

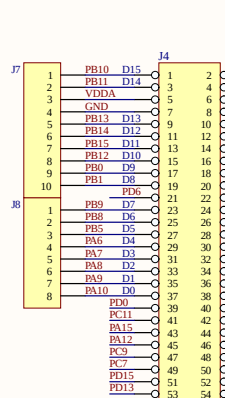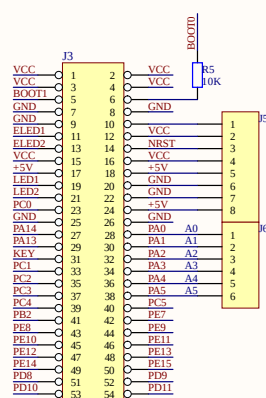


ARDUINO




POWER&USB


POWER

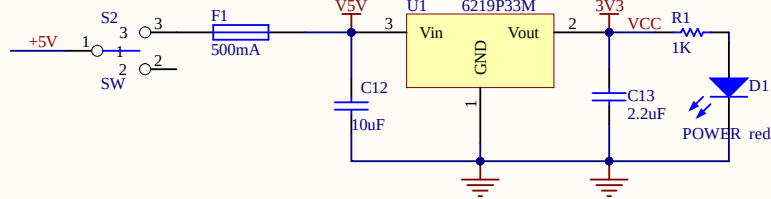

LED




USB

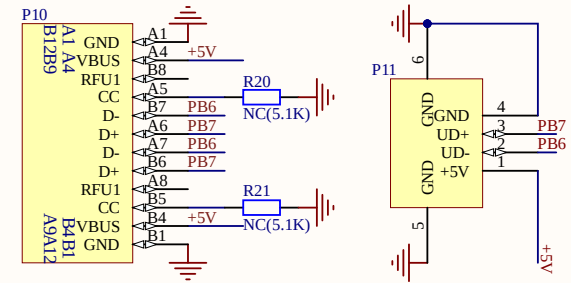


MCU

CH32F20xR_MINI

XTAL

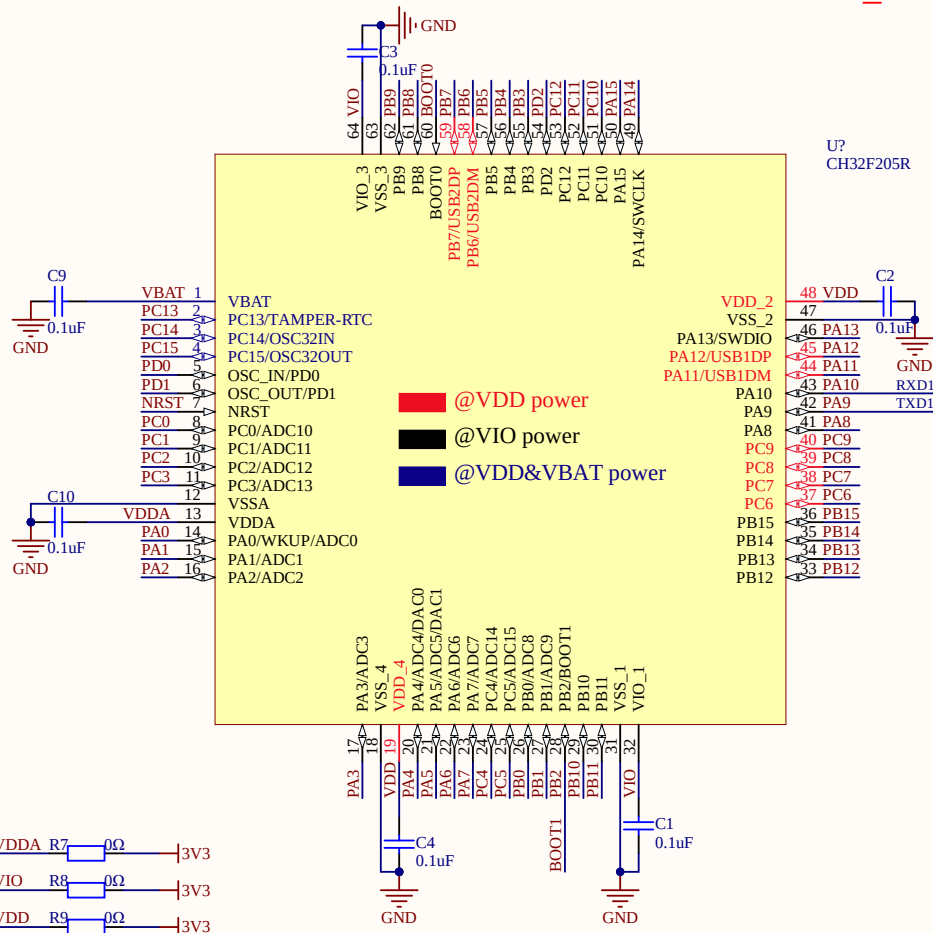


POWER&USB

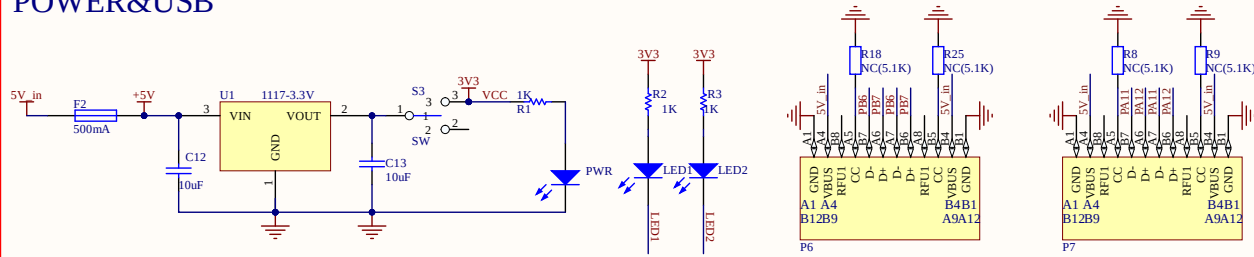


WCH_LinkE


MCU

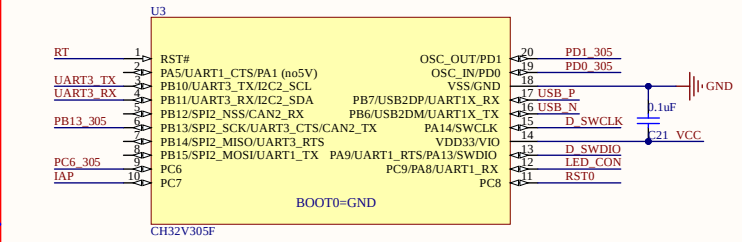


XTAL




MCU

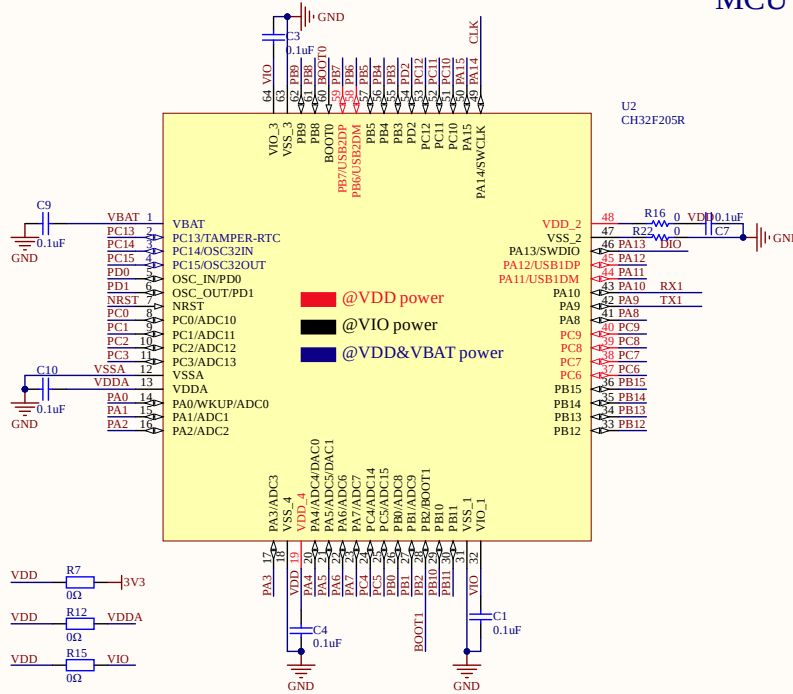


RST




KEY




IAP



LED




SWD&UART

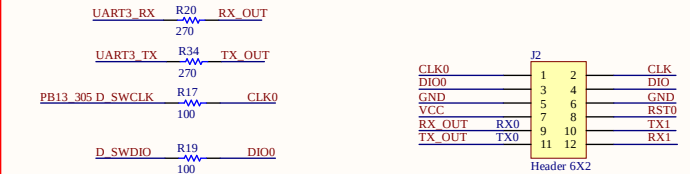






Blue light on -ARM Mode
Blue light off-Risc-V Mode

ARDUINO


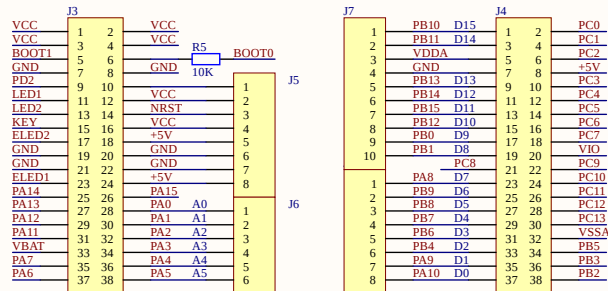


POWER&USB




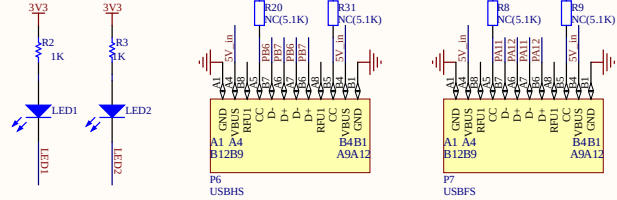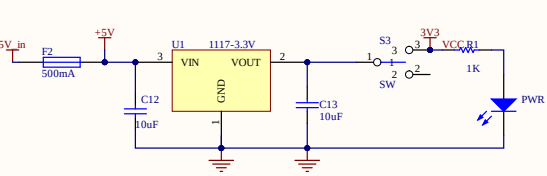

ARDUINO

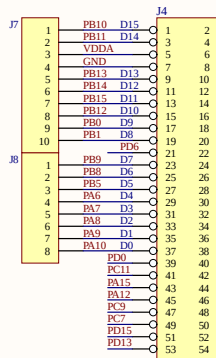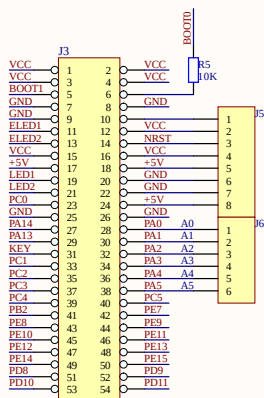





When using ETH PC6 PC7 PC8 PC9 polling up

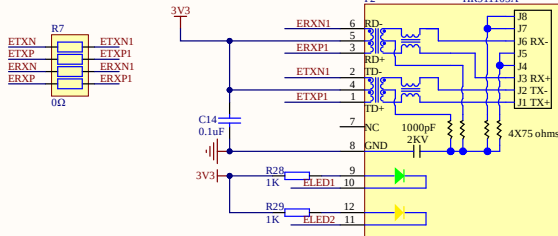

POWER&USB

WCH_LinkE

MCU

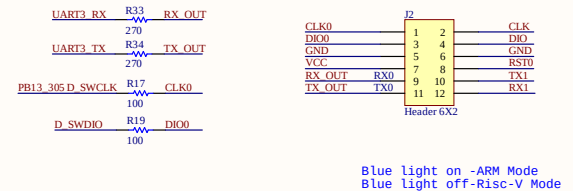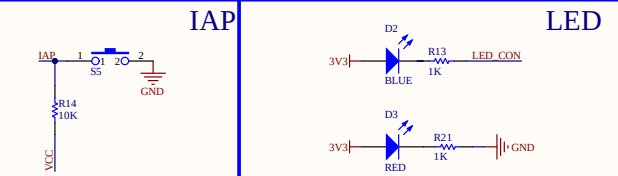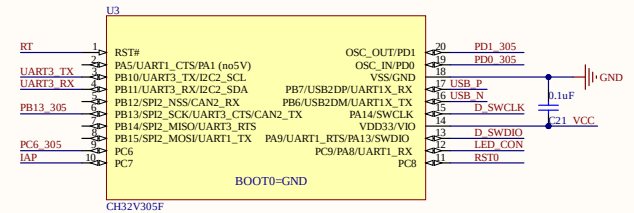

ETH

POWER&USB

