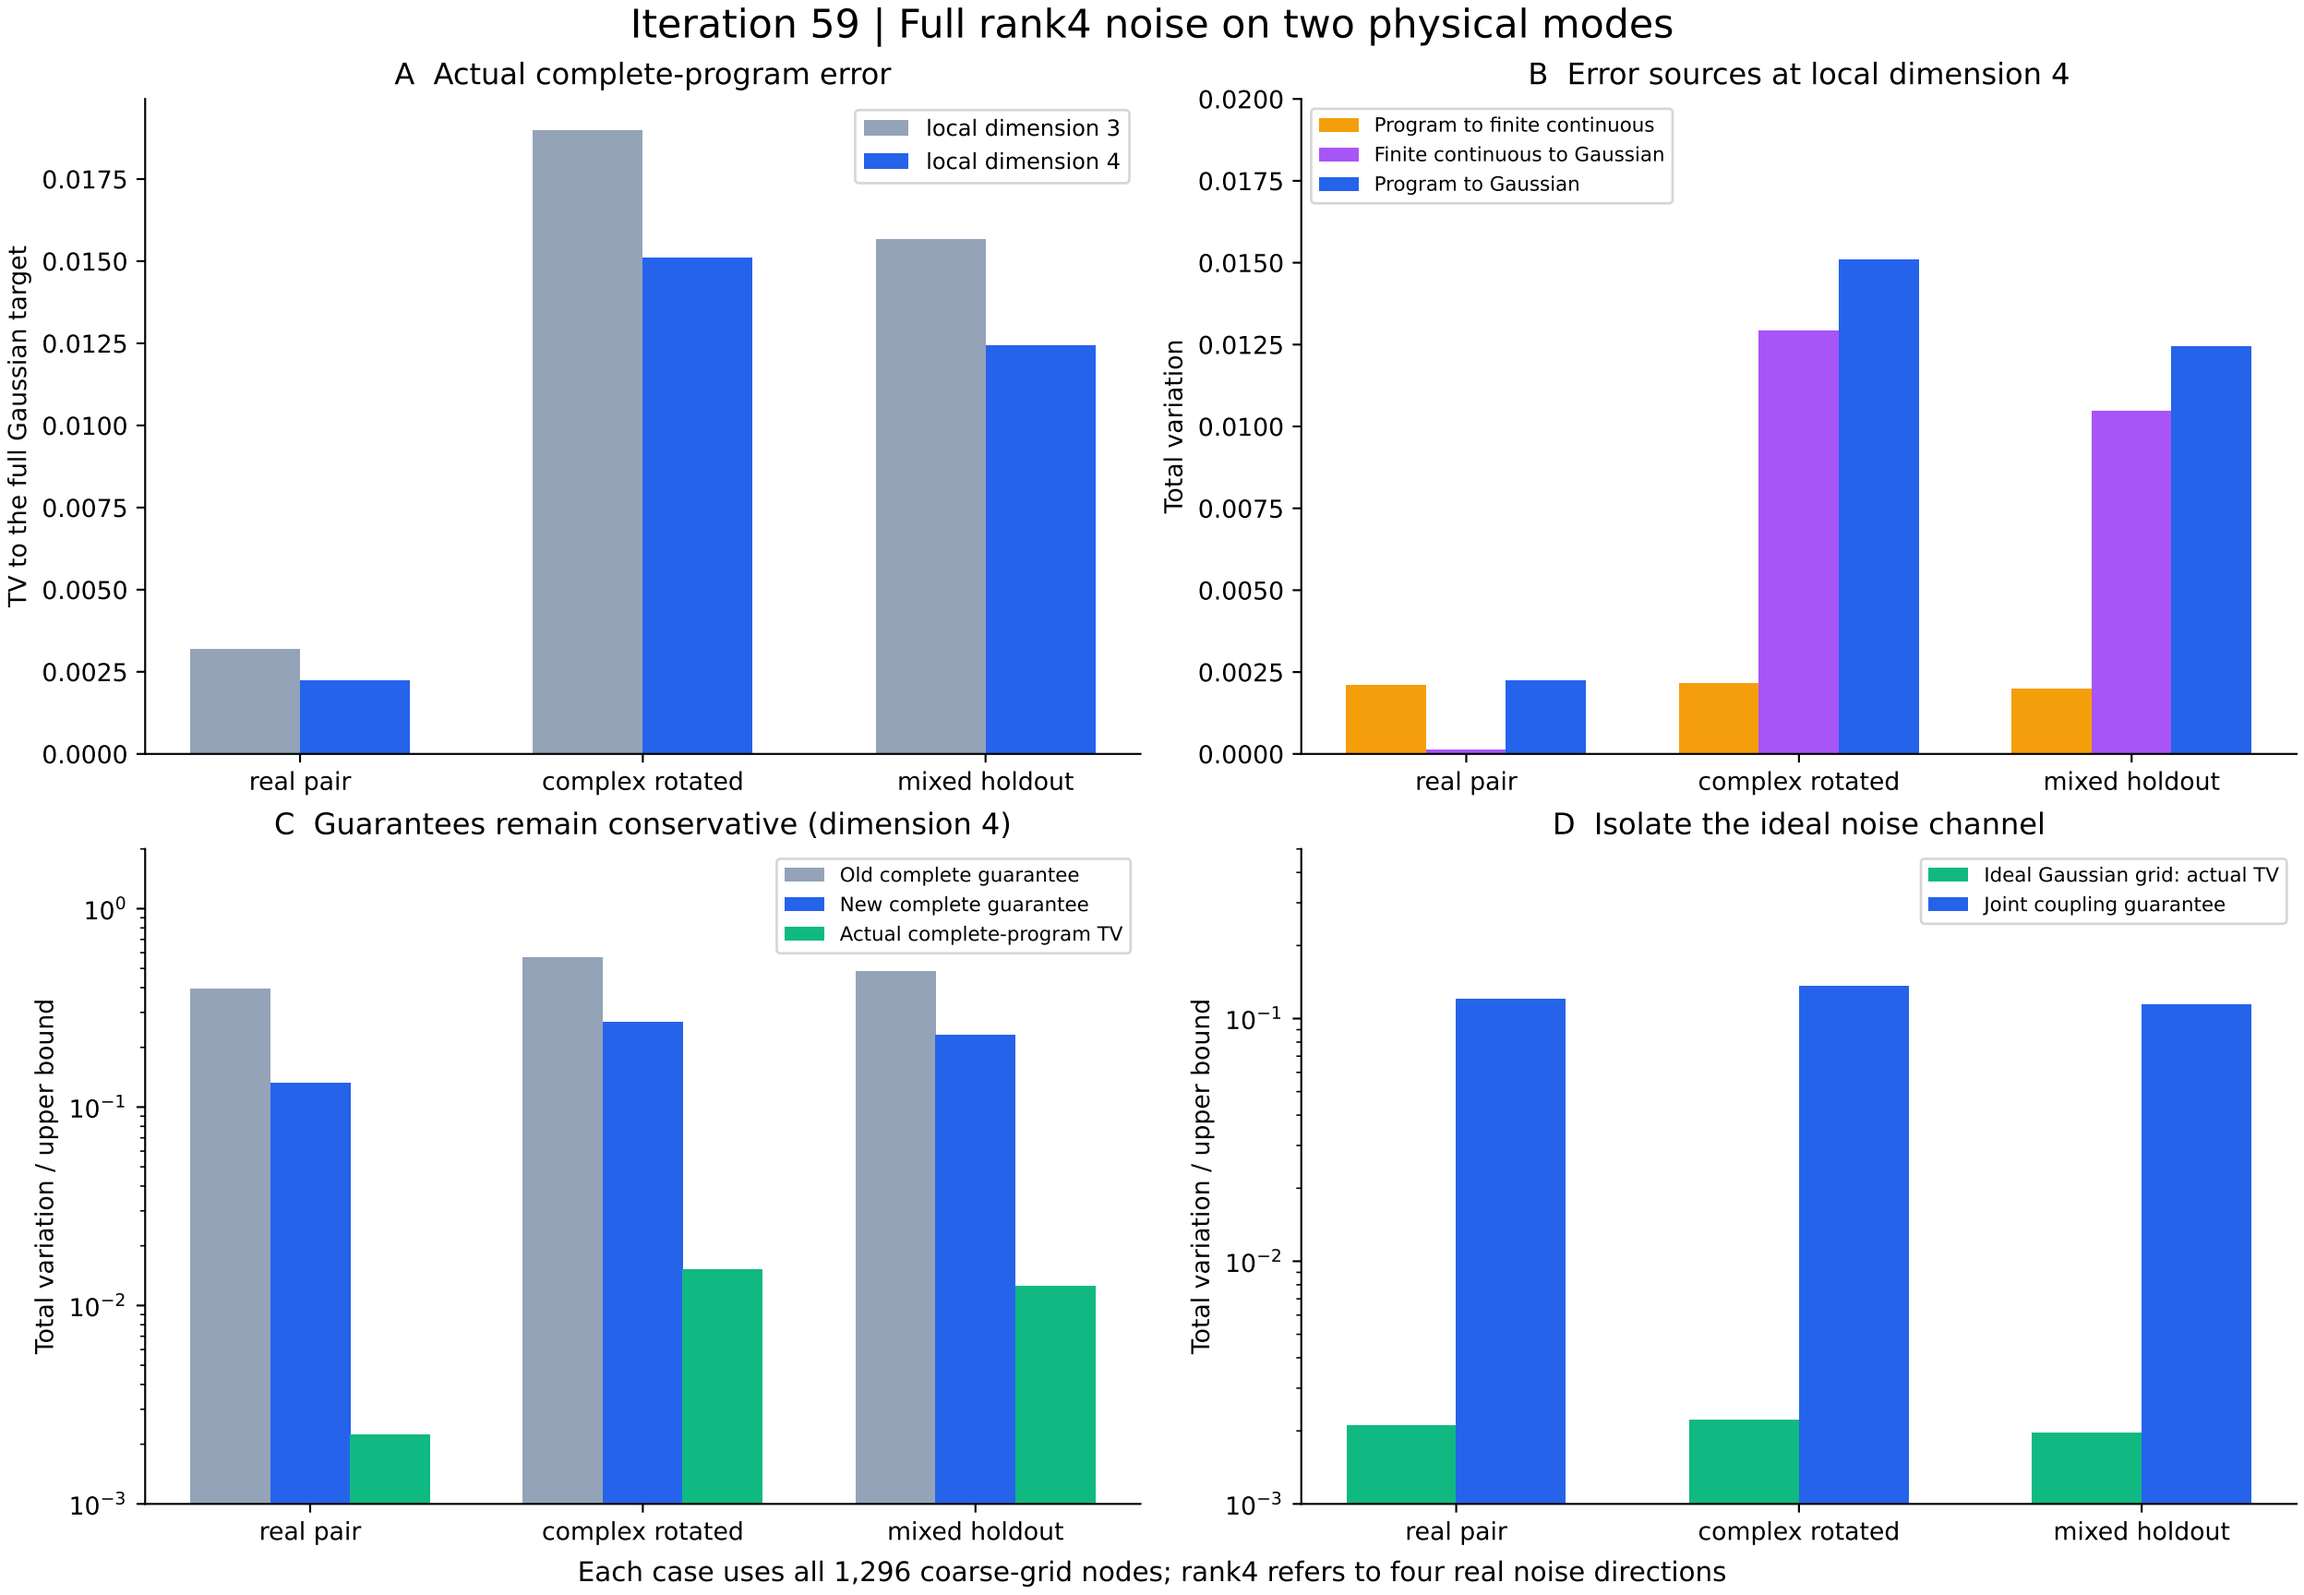
Iteration 59 | Full rank4 noise on two physical modes
A Actual complete-program error
local dimension 3
local dimension 4
TV to the full Gaussian target
0.0000
0.0025
0.0050
0.0075
0.0100
0.0125
0.0150
0.0175
real pair
complex rotated
mixed holdout
B Error sources at local dimension 4
Program to finite continuous
Finite continuous to Gaussian
Program to Gaussian
Total variation
0.0000
0.0025
0.0050
0.0075
0.0100
0.0125
0.0150
0.0175
0.0200
real pair
complex rotated
mixed holdout
C Guarantees remain conservative (dimension 4)
Old complete guarantee
New complete guarantee
Actual complete-program TV
Total variation / upper bound
10^{0}
10^{-1}
10^{-2}
10^{-3}
real pair
complex rotated
mixed holdout
D Isolate the ideal noise channel
Ideal Gaussian grid: actual TV
Joint coupling guarantee
Total variation / upper bound
10^{-1}
10^{-2}
10^{-3}
real pair
complex rotated
mixed holdout
Each case uses all 1,296 coarse-grid nodes; rank4 refers to four real noise directions