

1. Description


1.1. Project

Project Name	ADC_SingleModeConversion
Board Name	STM32F411E-DISCO
Generated with:	STM32CubeMX 5.5.0
Date	09/23/2020

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F411
MCU name	STM32F411VETx
MCU Package	LQFP100
MCU Pin number	100


2. Pinout Configuration

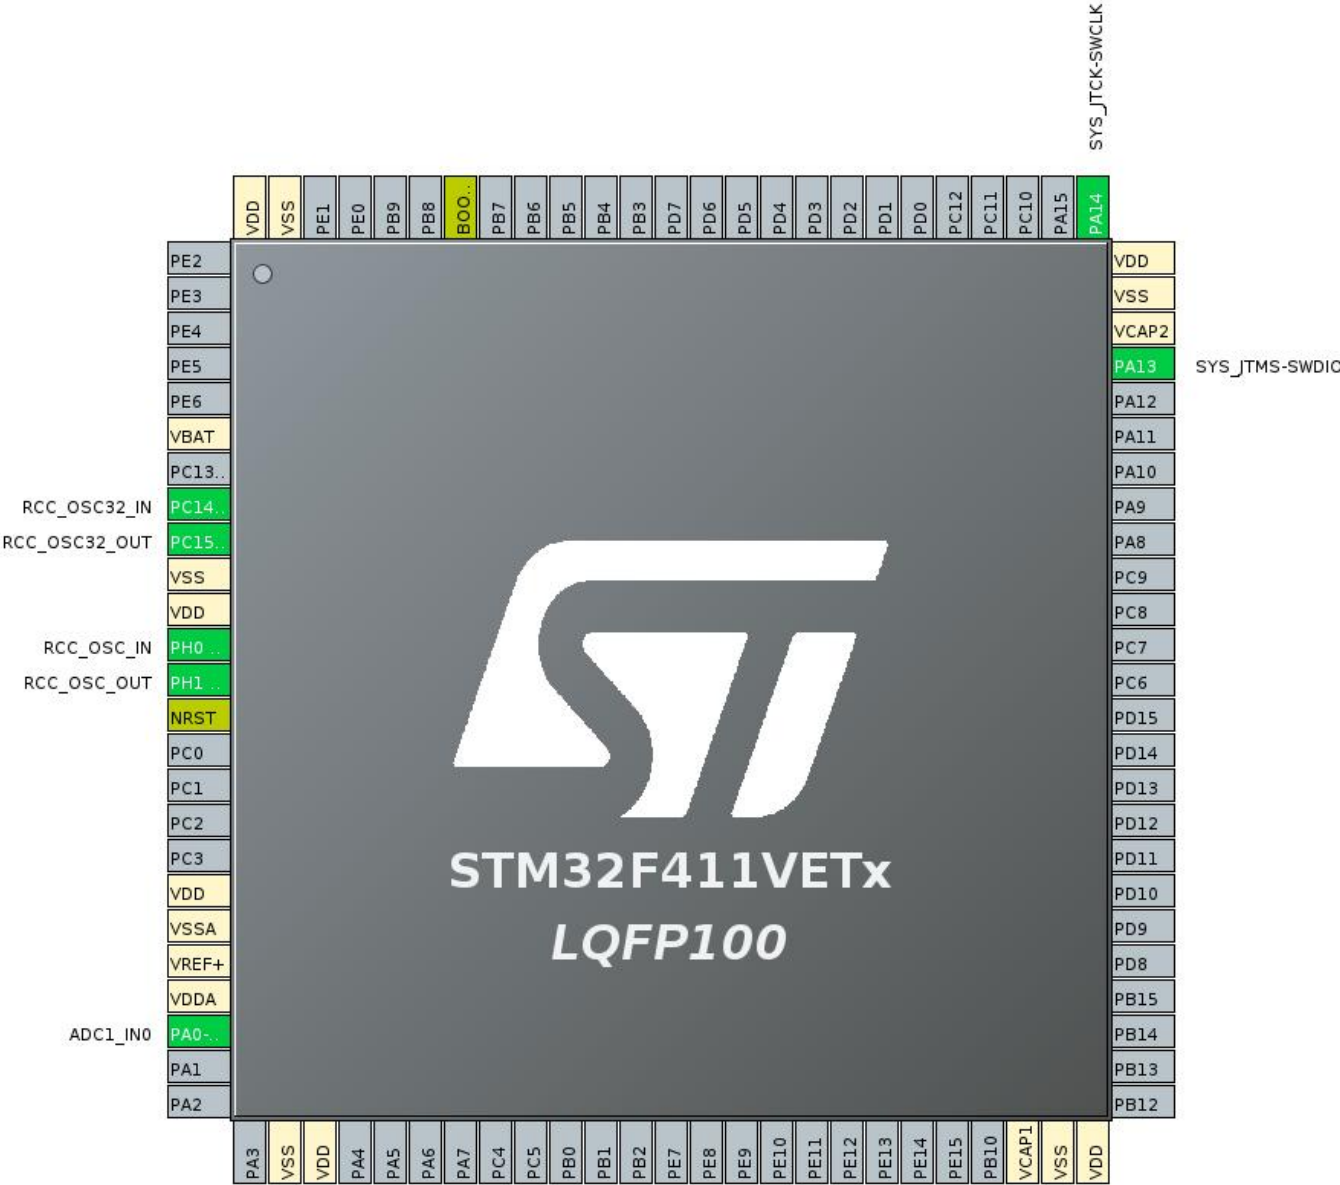

3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
8	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
9	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
10	VSS	Power		
11	VDD	Power		
12	PH0 - OSC_IN	I/O	RCC_OSC_IN	
13	PH1 - OSC_OUT	I/O	RCC_OSC_OUT	
14	NRST	Reset		
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0-WKUP	I/O	ADC1_IN0	
27	VSS	Power		
28	VDD	Power		
48	VCAP1	Power		
49	VSS	Power		
50	VDD	Power		
72	PA13	I/O	SYS_JTMS-SWDIO	
73	VCAP2	Power		
74	VSS	Power		
75	VDD	Power		
76	PA14	I/O	SYS_JTCK-SWCLK	
94	BOOT0	Boot		
99	VSS	Power		
100	VDD	Power		

4. Clock Tree Configuration

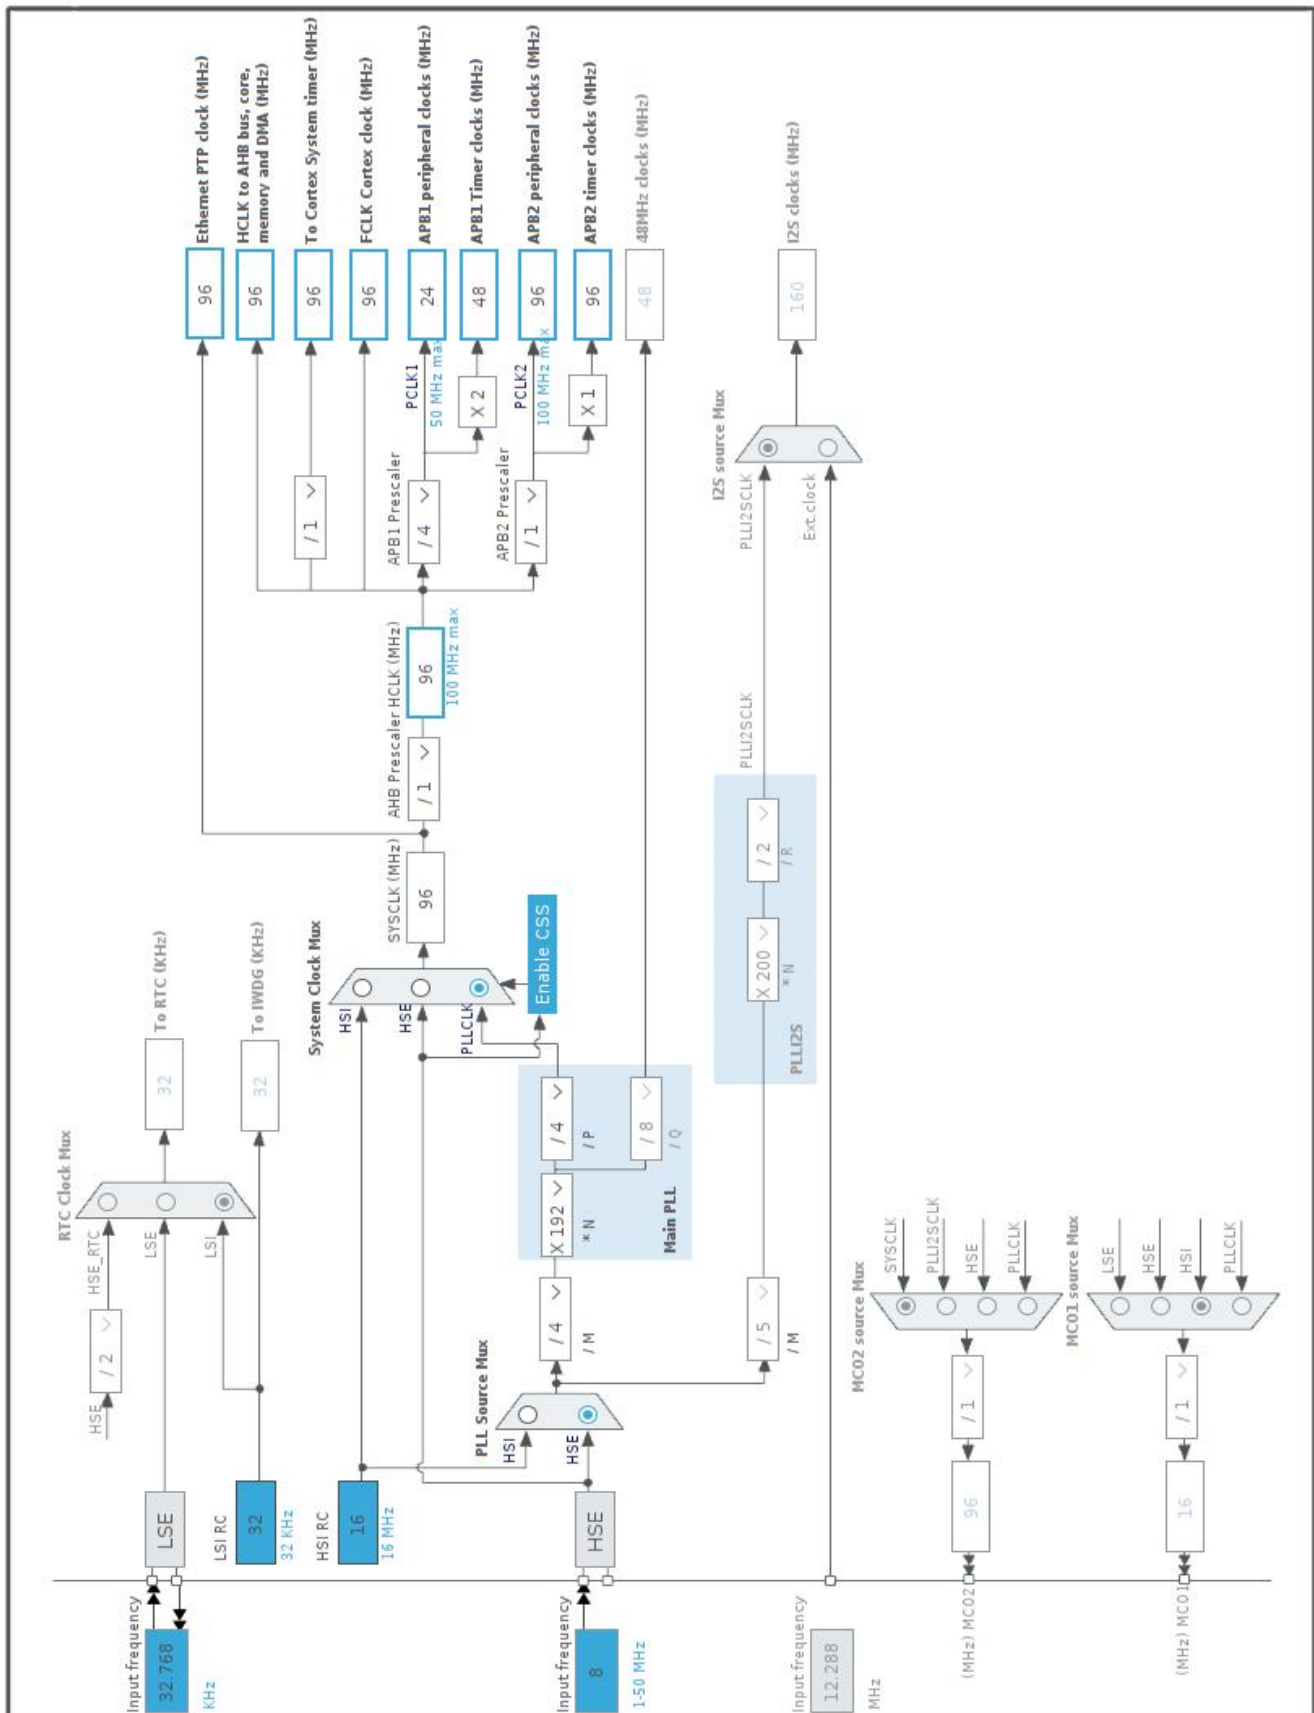

5. Software Project

5.1. Project Settings

Name	Value
Project Name	ADC_SingleModeConversion
Project Folder	/home/quang/Desktop/Mastering-STM32/ADC_SingleModeConversion
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F4 V1.24.2

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F411
MCU	STM32F411VETx
Datasheet	026289_Rev6

6.2. Parameter Selection

Temperature	25
Vdd	null

7. IPs and Middleware Configuration

7.1. ADC1

mode: IN0

7.1.1. Parameter Settings:

ADC_Settings:

Clock Prescaler	PCLK2 divided by 4
Resolution	12 bits (15 ADC Clock cycles)
Data Alignment	Right alignment
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	EOC flag at the end of single channel conversion

ADC_Regular_ConversionMode:

Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
Rank	1
Channel	Channel 0
Sampling Time	3 Cycles

ADC_Injected_ConversionMode:

Number Of Conversions	0
-----------------------	---

WatchDog:

Enable Analog WatchDog Mode	false
-----------------------------	-------

7.2. GPIO

7.3. RCC

High Speed Clock (HSE): BYPASS Clock Source

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled

Data Cache	Enabled
Flash Latency(WS)	3 WS (4 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

7.4. SYS

Debug: Serial Wire

Timebase Source: SysTick

* User modified value

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0-WKUP	ADC1_IN0	Analog mode	No pull-up and no pull-down	n/a	
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0 - OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1 - OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 global interrupt	unused		
FPU global interrupt	unused		

* User modified value

9. Software Pack Report