

# Cambridge Part III Maths

Michaelmas 2020

## Non-Newtonian Fluid Mechanics

based on a course given by  
Eric Lauga

written up by  
Charles Powell

Notes created using Josh Kirklin's packages & classes. Please send errors and suggestions to  
[cwp29@cam.ac.uk](mailto:cwp29@cam.ac.uk).

### Contents

<b>1</b>	<b>Introduction to Non-Newtonian Fluids</b>	<b>2</b>
<b>2</b>	<b>Summary of Newtonian Fluid Mechanics</b>	<b>2</b>
2.1	Continuum approximation . . . . .	2
2.2	Conservation of mass . . . . .	2
2.3	Mechanical equilibrium . . . . .	3
2.4	Constitutive modelling . . . . .	3
<b>3</b>	<b>Phenomenology</b>	<b>5</b>
3.1	Shear-dependent viscosity . . . . .	5
3.2	Fluid memory . . . . .	6
3.3	Normal stress differences . . . . .	7
3.4	Extensional Viscosity . . . . .	8
<b>4</b>	<b>Generalised Newtonian Fluids</b>	<b>9</b>
4.1	Power-law fluids . . . . .	10
4.1.1	Pipe flow of a power-law fluid . . . . .	11
4.2	Other models & problems . . . . .	13
4.2.1	Carreau-Yasuda model . . . . .	13
4.2.2	Powell-Eyring & Ellis models . . . . .	13
4.3	Rheometry . . . . .	14
4.4	Variational approach . . . . .	16
4.4.1	Calculus of variations . . . . .	16
4.4.2	Variational solution . . . . .	17
<b>5</b>	<b>Yield-Stress Fluids</b>	<b>18</b>
5.1	Pressure-driven flow of a Bingham fluid in a pipe . . . . .	19
5.2	Unsteady dynamics of yield surface . . . . .	20

<b>6 Linear Viscoelastic Fluids</b>	<b>22</b>
6.1 Viscous vs. elastic . . . . .	23
6.2 Maxwell fluids . . . . .	23
6.3 Kelvin-Voigt fluid . . . . .	24
6.4 Jeffreys fluid . . . . .	25
6.5 General framework . . . . .	26
6.6 Interpretation of relaxation modulus . . . . .	27
6.7 Stokes' 1 <sup>st</sup> problem . . . . .	28

## 1 Introduction to Non-Newtonian Fluids

Lecture 1  
08/10/20

Newtonian fluids are typically characterised by 2 material properties: viscosity and density. We may also refer to Newtonian fluids as 'simple fluids'.

Non-Newtonian fluids may have many other material properties, for example intrinsic time, length and stress scales, and an intrinsic orientation. They often exhibit a mix of fluid and solid behaviour. We may also refer to non-Newtonian fluids as 'complex fluids'.

There are many examples of complex fluids readily apparent in our everyday lives, for example sand (wet or dry) and mud; lava and glass, both of which experience phase changes; ketchup; foam; paint; emulsions such as milk; liquid crystals used in screens; blood on very small scales.

The goal of this course is to cover three main areas.

- Phenomenology of non-Newtonian fluids – how do they behave?
- Mathematical modelling – how do we quantify the behaviour?
- Predictions (and limits) of models

## 2 Summary of Newtonian Fluid Mechanics

### 2.1 Continuum approximation

We describe fluids in terms of two main fields: density  $\rho(\mathbf{x}, t)$  and velocity  $\mathbf{u}(\mathbf{x}, t)$ . We use the continuum approximation whereby the fluid is assumed to be a continuum rather than made up of discrete fluid particles. Under this assumption, the macroscopic properties of density and velocity are well-defined as 'averages' of infinitesimal volume elements.

The velocity field is Eulerian, meaning it is measured at a specific point in space and time, as opposed to following a material element (Lagrangian).

### 2.2 Conservation of mass

Conservation of mass can be expressed in the classical form of a conservation equation as:

$$\frac{\partial \rho}{\partial t} + \nabla \cdot [\rho \mathbf{u}] = 0$$

Expanding the flux term, this may be expressed in a form which relates the rate of change of density of a fluid element with the divergence of the flow:

$$\frac{D\rho}{Dt} = -\rho \nabla \cdot \mathbf{u}$$

In this course we will assume that all fluids are incompressible, which is expressed mathematically as:

$$\frac{D\rho}{Dt} = 0 \iff \nabla \cdot \mathbf{u} = 0$$

### 2.3 Mechanical equilibrium


Newton's second law, i.e. conservation of momentum is expressed for a fluid using the Cauchy momentum equation:

$$\rho \frac{D\mathbf{u}}{Dt} = \rho \left[ \frac{\partial \mathbf{u}}{\partial t} + \mathbf{u} \cdot \nabla \mathbf{u} \right] = \nabla \cdot \boldsymbol{\sigma} + \mathbf{F}$$

where  $\nabla \cdot \boldsymbol{\sigma}$  are the surface forces acting on the fluid and  $\mathbf{F}$  are body forces which we will assume to be negligible unless otherwise stated.

The Cauchy momentum equation is valid for all continuum fluids. To close the equation, we require an expression for  $\boldsymbol{\sigma}$ .

**Definition.** The stress tensor  $\boldsymbol{\sigma}$  is a symmetric second-rank tensor.




Physically,  $\sigma_{ij}n_j$  is the  $i^{\text{th}}$  component of the force per unit area from the motion of fluid 1 on fluid 2, where  $\mathbf{n}$  is the surface normal pointing into fluid 1.

### 2.4 Constitutive modelling

The stress tensor is specified in terms of the deformation via constitutive modelling.

**Example.** Newton's experiment

Consider two parallel plates of area  $A$  separated a distance  $h$  by a fluid. We consider the force  $F$  required on the top plate to induce motion at speed  $U$ . Note that there is no force perpendicular to the plates if the fluid is Newtonian. This is not necessarily true for complex fluids.

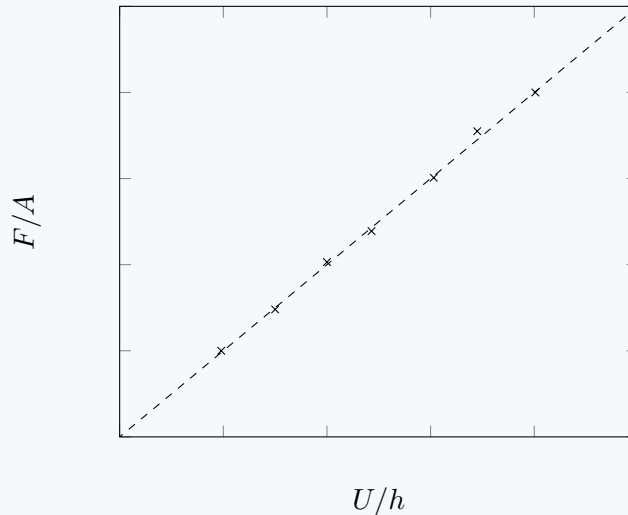

From experiment, we find  $\sigma = F/A \propto U/h$ . Note that  $U/h$  has dimensions of  $\text{time}^{-1}$ . We define the shear rate  $\dot{\gamma} = U/h$  and the viscosity  $\eta$  via  $\sigma = \eta \dot{\gamma}$ . Viscosity is a constant material property, for example in water  $\eta = 10^{-3} \text{ Pa} \cdot \text{s}$ .

We can now generalise for all Newtonian flows. We start by separating out an isotropic component of the shear tensor:

$$\sigma_{ij} = -p\delta_{ij} + \tau_{ij}$$

where  $p$  is the dynamic pressure and  $\tau$  is the deviatoric stress. The deviatoric stress may be a function of  $u_i, \frac{\partial u_i}{\partial x_j}, \dots$ ; local or non-local in time or space; or a function of other material properties and parameters. For Newtonian fluids, we make five assumptions.

1. Galilean invariance: the deviatoric stress cannot depend on  $u_i$
2. Instantaneous response: there is no dependence on the history of deformation
3. Locality: no dependence on second or higher spatial derivatives
4. Linearity:  $\tau_{ij}$  is linearly related to  $\frac{\partial u_m}{\partial x_n}$
5. Isotropy: the relationship is independent of reference frame, i.e. isotropic

We can satisfy 1, 2, 3, and 4 by writing

$$\tau_{ij} = A_{ijkl} \frac{\partial u_k}{\partial x_l}$$

where  $A_{ijkl}$  is a fourth rank tensor. Using the form of the most general isotropic fourth rank tensor we may enforce isotropy.

$$A_{ijkl} = A\delta_{ij}\delta_{kl} + B\delta_{ik}\delta_{jl} + C\delta_{il}\delta_{jk}$$

Since  $\sigma$  is symmetric,  $\tau$  is symmetric, therefore  $A_{ijkl} = A_{jikl}$ . This requires  $B = C \equiv \eta$ . Thus

$$\begin{aligned} \tau_{ij} &= A\delta_{ij} \frac{\partial u_k}{\partial x_k} + \eta \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right) \\ &= \eta \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right) \\ &= 2\eta e_{ij} \end{aligned}$$

since  $\frac{\partial u_k}{\partial x_k} = \nabla \cdot \mathbf{u} = 0$ . Note  $e = \frac{1}{2} \left( \nabla \mathbf{u} + (\nabla \mathbf{u})^T \right)$  is the rate of strain tensor. This is the Newtonian constitutive relationship.

**Definition.** To exclude the factors of 2 we define the shear rate  $\dot{\gamma}_{ij} = 2e_{ij}$  so that  $\tau_{ij} = \eta \dot{\gamma}_{ij}$ .

Combining the Cauchy momentum equation and Newtonian constitutive relationship yields the Navier-Stokes equations

$$\rho \frac{D\mathbf{u}}{Dt} = -\nabla p + \eta \nabla^2 \mathbf{u}$$

Consider a general body with intrinsic length scale  $L$ , velocity length scale  $U$  and unsteady motion frequency scale  $\omega$ . Two dimensionless numbers are used to quantify the importance of inertia:

$$\text{Re} = \frac{\rho UL}{\eta}, \quad \text{Re}_\omega = \frac{\rho \omega L^2}{\eta}$$

We will assume throughout this course that  $\text{Re} \ll 1$  and  $\text{Re}_\omega \ll 1$  unless otherwise stated. In this no-inertia limit, the Navier-Stokes equations simplify to the Stokes equations. For a general fluid these are:


$$\nabla \cdot \sigma = 0$$

Using the Newtonian constitutive relationship, the Stokes equations are:

$$\mathbf{0} = -\nabla p + \eta \nabla^2 \mathbf{u}$$

**Example.** Newton's experiment revisited

We will apply the above theory to Newton's experiment and show the same results are obtained.

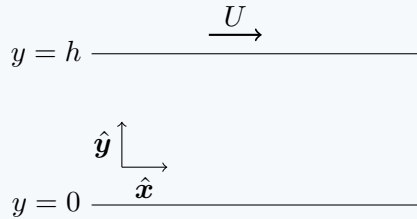

Assume the flow is unidirectional:  $\mathbf{u} = u(y)\hat{\mathbf{x}}$ . The Stokes equations become

$$\begin{cases} \frac{\partial p}{\partial x} = \eta \frac{\partial^2 u}{\partial y^2} & = \text{const.} \\ \frac{\partial p}{\partial y} = 0 & \implies p = p(x) \end{cases}$$

Assuming there is no net pressure drop,  $p = p(x) \equiv 0$ . Applying the boundary conditions we find

$$u(y) = Uy/h \implies \dot{\gamma} = U/h$$

as before. This is a shear or Couette flow.

### 3 Phenomenology


There are four distinguishing properties of non-Newtonian fluids which differ to Newtonian fluids.

#### 3.1 Shear-dependent viscosity

Newtonian fluids have a constant viscosity  $\eta$  which is a constant of proportionality between shear stress  $\sigma$  and shear rate  $\dot{\gamma}$ . For a complex fluid,  $\eta$  is not constant. We re-define viscosity as an implicit function of shear rate.

**Definition.** Viscosity is defined via  $\eta \equiv \frac{\sigma}{\dot{\gamma}} = \eta(\dot{\gamma})$ .

We can broadly categorise complex fluids into two types: shear thinning and shear thickening fluids.

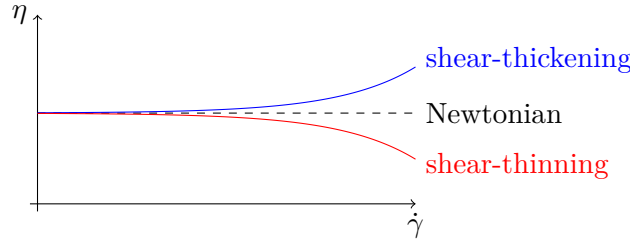

Examples of shear-thinning fluids are polymer suspensions; paint; blood. These complex fluids have  $\frac{\partial \eta}{\partial \dot{\gamma}} < 0$ .


Examples of shear-thickening fluids are: cornstarch in water; suspensions of colloidal particles. These complex fluids have  $\frac{\partial \eta}{\partial \dot{\gamma}} > 0$ .

**Definition.** The zero-shear rate viscosity is  $\eta_0 = \lim_{\dot{\gamma} \rightarrow 0} \eta$ .


Note that some complex fluids have approximately constant viscosity (Boger fluids).

### 3.2 Fluid memory

Consider a step-shear flow, that is, Newton's experiment where the top plate impulsively starts motion at  $t = 0^+$ . The response of a Newtonian fluid is on an inertial timescale  $\tau \sim h^2/\nu$  which is almost instantaneous, whilst a non-Newtonian fluid takes time to respond to adjust to the change in deformation: the jump occurs over some relaxation timescale  $\lambda$ .

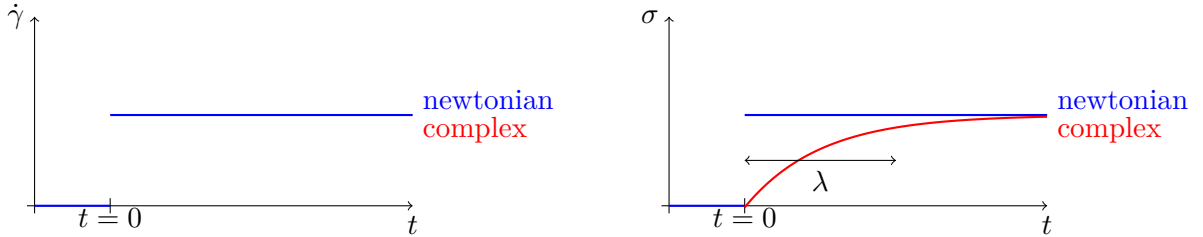

The relationship between stress and deformation is history dependent. Impulsively removing the applied shear (i.e. the plate impulsively comes to rest) results in stress relaxation with  $\sigma \sim e^{-t/\lambda}$ .

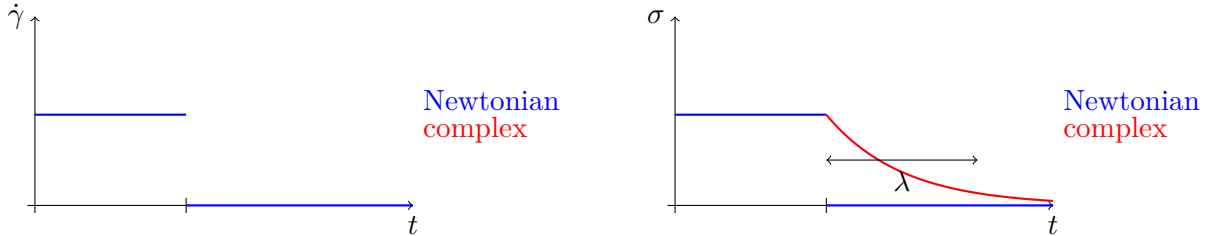

The reverse is also true. Imposing a stress  $\sigma$  and measuring the deformation  $\dot{\gamma}$ , complex fluids in general will have a history-dependent response. This is called strain retardation and  $\lambda'$  is the retardation timescale.

### 3.3 Normal stress differences

In Newton's experiment, a Newtonian fluid exerts no normal force  $F_N$  on the moving plate, since linearity and reversibility ( $U \rightarrow -U$ ) implies  $F_N = -F_N \equiv 0$ . We previously calculated

$$\mathbf{u} = \frac{Uy}{h}\hat{\mathbf{x}}, \quad \dot{\gamma} = \frac{U}{h}$$

Thus in the Newtonian case the stress tensor has the form

$$\sigma = \begin{pmatrix} -p_0 & \eta\dot{\gamma} & 0 \\ \eta\dot{\gamma} & -p_0 & 0 \\ 0 & 0 & -p_0 \end{pmatrix}$$

where  $p_0$  is the external pressure. Note that the normal stresses are equal and constant. In the non-Newtonian case we have

$$\sigma = \begin{pmatrix} \sigma_{xx} & \eta(\dot{\gamma})\dot{\gamma} & 0 \\ \eta(\dot{\gamma})\dot{\gamma} & \sigma_{yy} & 0 \\ 0 & 0 & \sigma_{zz} \end{pmatrix}$$

where in general normal stresses are not equal and not constant. Normal stresses include the external pressure, so the relevant quantity is the difference between normal stresses.

**Definition.** The first and second normal stress differences are

$$N_1 = \sigma_{xx} - \sigma_{yy}, \quad N_2 = \sigma_{yy} - \sigma_{zz}$$

Note the following.

- For a Newtonian fluid,  $N_1 = N_2 = 0$
- Polymeric fluids (for example) have  $N_1 > 0, N_2 < 0, |N_2/N_1| \sim 0.1$
- $N_1$  and  $N_2$  are defined only for steady shear flow
- $N_1$  and  $N_2$  will, in general, depend on  $\dot{\gamma}$
- Boger fluids have constant viscosity but they have non-zero  $N_1$  and  $N_2$

Reversibility implies  $N_1$  and  $N_2$  have to be even functions of  $\dot{\gamma}$ . In the limit  $\dot{\gamma} \rightarrow 0$ , i.e. the Newtonian limit, we should have  $N_1 \rightarrow 0, N_2 \rightarrow 0$ . Thus the Taylor expansion of  $N_1, N_2$  near  $\dot{\gamma} = 0$  is

$$N_{1,2} = A_{1,2}\dot{\gamma}^2 + B_{1,2}\dot{\gamma}^4 + \dots$$

**Definition.** The normal stress coefficients are


$$\Psi_1 = \frac{N_1}{\dot{\gamma}^2}, \quad \Psi_2 = \frac{N_2}{\dot{\gamma}^2}$$

The physical consequence of having normal stress differences is the introduction of elastic tension along flow streamlines.

Suppose  $\sigma_{xx} = -p$ . Thus compression  $p > 0 \implies \sigma_{xx} < 0$  and  $N_1 > 0 \implies \sigma_{xx} > 0$  which can be thought of as ‘negative pressure’ which acts as tension. An intuitive example is stretching of polymer molecules. This has many consequences on experiments and flow behaviour.

**Example.** Two examples of the consequences of normal stress differences are as follows.


1. Rod-climbing (Weissenberg effect).



Consider a vertical rod rotating at a constant rate  $\Omega$  placed into a fluid. In a Newtonian fluid, viscous enough for Stokes equations to apply, there is no change in the position of the interface (blue).

In a non-Newtonian fluid, the interface climbs up the rod (red). This is due to elastic tension: rotation creates circular streamlines. Tension along circles creates hoop stress which ‘squeezes’ the fluid and thus climbs up the rod.

2. Particle migration in a pipe flow.

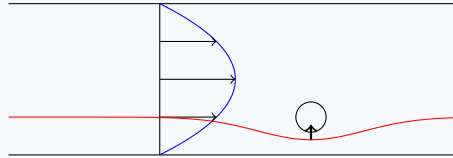

In the case of Newtonian Stokes flow, the flow has no component perpendicular to the walls so a particle remains the same distance from the wall as it moves along the pipe. In the non-Newtonian case, hoop stress caused by curved streamlines lifts the particle away from the wall.

### 3.4 Extensional Viscosity

A shear flow is a weak flow: there is algebraic growth of distances between particles. In a strong flow, distances grow exponentially.

Consider a fluid with extension in the  $x$  and  $y$  directions and compression in the  $z$  direction:  $\mathbf{u} + \dot{\epsilon} \left( \frac{1}{2}x, \frac{1}{2}y, -z \right)$ . We call  $\dot{\epsilon}$  the extension rate. Note that this flow is incompressible. The shear rate tensor is

$$\underline{\underline{\dot{\gamma}}} = \dot{\epsilon} \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & -2 \end{pmatrix}$$



In the Newtonian case, the shear rate tensor is

$$\underline{\underline{\sigma}} = \begin{pmatrix} -p_0 + \eta\dot{\epsilon} & 0 & 0 \\ 0 & -p_0 + \eta\dot{\epsilon} & 0 \\ 0 & 0 & -p_0 - 2\eta\dot{\epsilon} \end{pmatrix}$$

**Definition.** The extensional viscosity is

$$\eta_{\text{ext}} = \frac{\sigma_{xx} - \sigma_{zz}}{\dot{\epsilon}}$$


which has units of viscosity.

Thus for the Newtonian fluid,  $\eta_{\text{ext}} = 3\eta$  which is constant.

**Definition.** The Troutou ratio is

$$\text{Tr} = \frac{\eta_{\text{ext}}}{\eta}$$

By the above calculations, Newtonian fluids have  $\text{Tr} = 3$ . Non-Newtonian fluids tend to have  $\text{Tr} \gg 1$  in some range of shear rates. Thus complex fluids have a very different response to strong flows compared with weak flows.

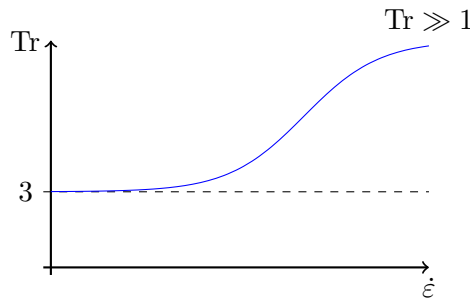

Lecture 3  
15/10/20

## 4 Generalised Newtonian Fluids

We will focus on steady flows and fluids which are inelastic. We will find how to incorporate shear-dependent viscosity into the constitutive relationship. One way is to generalise the Newtonian constitutive relationship to

$$\underline{\underline{\sigma}} = -p\underline{\underline{1}} + \eta(\dot{\underline{\underline{\gamma}}})\dot{\underline{\underline{\gamma}}}$$

where  $\eta(\dot{\underline{\underline{\gamma}}})$  is found empirically. These are called generalised Newtonian fluids (GNF).

We have a scalar function  $\eta$  of a tensor  $\dot{\underline{\underline{\gamma}}}$ , which is not in general coordinate invariant. Thus  $\eta$  must be a function of the invariants of  $\dot{\underline{\underline{\gamma}}}$ . A rank 2 tensor in 3 dimensions has 3 invariants. These are combinations of trace, determinants, and eigenvalues. We choose as the three invariants:

$$\text{tr}(\dot{\underline{\underline{\gamma}}}), \quad \text{tr}(\dot{\underline{\underline{\gamma}}} \cdot \dot{\underline{\underline{\gamma}}}), \quad \text{tr}(\dot{\underline{\underline{\gamma}}} \cdot \dot{\underline{\underline{\gamma}}} \cdot \dot{\underline{\underline{\gamma}}})$$

We always have  $\text{tr}(\underline{\dot{\gamma}}) = 0$  because the flow is incompressible:

$$\text{tr}(\underline{\dot{\gamma}}) = \dot{\gamma}_{ii} = \frac{\partial u_i}{\partial x_i} + \frac{\partial u_i}{\partial x_i} = 2\nabla \cdot \mathbf{u} = 0$$

Consider a simple shear flow  $\mathbf{u} = \dot{\gamma}y\hat{\mathbf{x}}$ . Then

$$\begin{aligned}\underline{\dot{\gamma}} &= \begin{pmatrix} 0 & \dot{\gamma} & 0 \\ \dot{\gamma} & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix} \\ \underline{\dot{\gamma}} \cdot \underline{\dot{\gamma}} &= \begin{pmatrix} \dot{\gamma}^2 & 0 & 0 \\ 0 & \dot{\gamma}^2 & 0 \\ 0 & 0 & 0 \end{pmatrix} \\ \underline{\dot{\gamma}} \cdot \underline{\dot{\gamma}} \cdot \underline{\dot{\gamma}} &= \begin{pmatrix} 0 & \dot{\gamma}^3 & 0 \\ \dot{\gamma}^3 & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix}\end{aligned}$$

Thus  $\text{tr}(\underline{\dot{\gamma}} \cdot \underline{\dot{\gamma}} \cdot \underline{\dot{\gamma}}) = 0$  and  $\text{tr}(\underline{\dot{\gamma}} \cdot \underline{\dot{\gamma}}) = 2\dot{\gamma}^2$ . We assume all flows are approximately steady shear flow. Then  $\text{tr}(\underline{\dot{\gamma}} \cdot \underline{\dot{\gamma}})$  is the only non-zero invariant and  $\eta(\underline{\dot{\gamma}}) = \eta(\text{tr}(\underline{\dot{\gamma}} \cdot \underline{\dot{\gamma}}))$ .

**Definition.** The magnitude of shear rate is

$$\dot{\gamma} \equiv \left( \frac{\text{tr}(\underline{\dot{\gamma}} \cdot \underline{\dot{\gamma}})}{2} \right)^{1/2} = \left( \frac{\underline{\dot{\gamma}} : \underline{\dot{\gamma}}}{2} \right)^{1/2}$$

Note that  $\dot{\gamma} \geq 0$  and for a simple shear flow the magnitude of shear rate  $\dot{\gamma} = |\dot{\gamma}|$  which is the shear rate from steady shear flow. Thus the definitions coincide.

Note the second invariant  $\text{tr}(\underline{\dot{\gamma}} \cdot \underline{\dot{\gamma}}) = \underline{\dot{\gamma}} : \underline{\dot{\gamma}} \geq 0$  and is zero only when there is no deformation (since  $\underline{\dot{\gamma}} : \underline{\dot{\gamma}}$  is proportional to viscous dissipation), i.e. rigid body motion.


Recall for a simple shear flow, the shear stress is  $\sigma = \eta(\dot{\gamma})\dot{\gamma}$ , thus the above definitions agree with measurements of shear-dependent viscosity.

## 4.1 Power-law fluids

There are many choices for the function  $\eta(\dot{\gamma})$  for a generalised Newtonian fluid. Here, we choose a power-law

$$\eta(\dot{\gamma}) \equiv \kappa \dot{\gamma}^{n-1}$$

where  $\kappa > 0$  and  $n \in \mathbb{Z}$  is the power-index of the fluid. Note  $n = 1$  for a Newtonian fluid. For dimensional consistency, we require  $[\kappa] = \text{Pa} \cdot \text{s}^n$ .

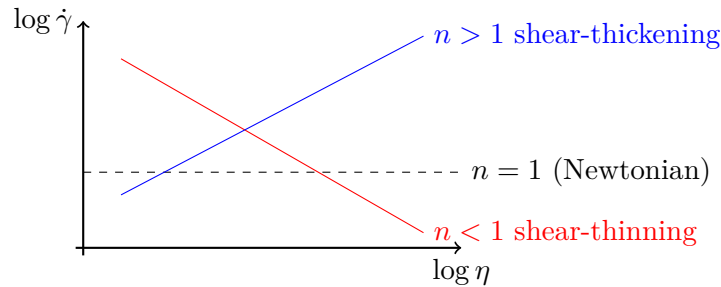

Note that in the limit  $\dot{\gamma} \rightarrow 0$ , we cannot define a zero-shear rate viscosity  $\eta_0$  unless  $n = 1$ . Thus the model is problematic at small shear rates. The model is appropriate only for a finite range of shear rates.

**Example.** Newton's experiment with a power-law fluid. We assume there are no external pressures, and the flow is unidirectional:  $\mathbf{u} = u(y)\hat{\mathbf{x}}$ . We have

$$\underline{\underline{\dot{\gamma}}} = \begin{pmatrix} 0 & \frac{\partial u}{\partial y} & 0 \\ \frac{\partial u}{\partial y} & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix}$$

Then the magnitude of shear rate  $\dot{\gamma} = \left| \frac{\partial u}{\partial y} \right|$ . To find the flow, we use the Cauchy equation in 2D:

$$\begin{aligned} \frac{\partial p}{\partial y} &= 0 \\ \frac{\partial p}{\partial x} &= \frac{\partial \sigma_{xy}}{\partial y} \end{aligned}$$

since  $\sigma_{xy}$  is the only non-zero component of the shear stress. The first equation implies  $p = p(x)$  only, which combined with the second implies  $\sigma_{xy} = \text{const.}$ . Note we have not used the constitutive relationship yet: this is true for all GNFs. We have

$$\sigma_{xy} = \kappa \dot{\gamma}^{n-1} \dot{\gamma} = \kappa \dot{\gamma}^n = \kappa \left| \frac{\partial u}{\partial y} \right|^n = \text{const.}$$

Thus  $u_y$  is constant, i.e.  $u$  is linear in  $y$ , as with a Newtonian fluid.


If  $\eta(\dot{\gamma})\dot{\gamma} = \sigma$  is a one-to-one function of  $\dot{\gamma}$  then the result is the same:  $u$  varies linearly. A Couette flow  $\mathbf{u} = Uy/h\hat{\mathbf{x}}$  is a viscometric flow: this flow is realised for all constitutive relationships provided  $\sigma$  is indeed a one-to-one function of  $\dot{\gamma}$ .

How do experimentally measure  $\eta(\dot{\gamma})$ ? One method is a shear flow rheometer:

1. Impose  $\dot{\gamma}$ , measure  $\sigma$  (or vice versa)
2. Measure  $\eta = \sigma/\dot{\gamma}$
3. Repeat varying  $\dot{\gamma}$  or  $\sigma$

#### 4.1.1 Pipe flow of a power-law fluid

Consider axisymmetric pressure-driven flow in a pipe of a power-law GNF. If the fluid was Newtonian, we would get Poiseuille flow with a parabolic flow profile.

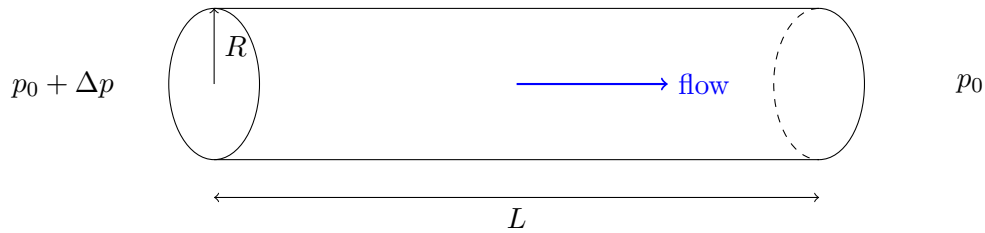

We will use cylindrical coordinates  $(r, \theta, z)$  and assume the flow is unidirectional:  $\mathbf{u} = u(r)\hat{\mathbf{z}}$ . Then

$$\underline{\dot{\gamma}} = \begin{pmatrix} 0 & 0 & \frac{\partial u}{\partial r} \\ 0 & 0 & 0 \\ \frac{\partial u}{\partial r} & 0 & 0 \end{pmatrix}$$

The magnitude of shear rate  $\dot{\gamma} = \left| \frac{\partial u}{\partial r} \right|$ . The Cauchy equations in cylindrical coordinates are

$$\begin{aligned} \frac{\partial p}{\partial r} &= 0 \\ \frac{\partial p}{\partial \theta} &= 0 \\ \frac{\partial p}{\partial z} &= \frac{1}{r} \frac{\partial}{\partial r} (r \sigma_{rz}) \end{aligned}$$

since  $\sigma_{rz}$  is the only non-zero component of shear stress. The first two equations imply  $p = p(z)$ . Then  $\frac{\partial p}{\partial z}$  is a function of  $z$  only, but the RHS is a function of  $r$  only. Thus each must be constant. Then

$$\frac{\partial p}{\partial z} = -\frac{\Delta p}{L} \implies \sigma_{rz} = -\frac{\Delta p}{2L} r + \frac{A}{r}$$

The  $A/r$  term is singular at  $r = 0$  thus  $A \equiv 0$ . Note these results are true for all fluids - we have not yet used the fact this is a power-law fluid.

Denote the magnitude of wall shear stress as  $\sigma_w$ . In this case,  $\sigma_w = \frac{\Delta p}{2L} R$ . To find the flow field, we need the constitutive relationship. For a GNF we have

$$\sigma_{rz} = \eta \left( \left| \frac{\partial u}{\partial r} \right| \right) \frac{\partial u}{\partial r} = -\frac{\Delta p}{2L} r$$

We expect  $u$  to be at maximum when  $r = 0$ , so expect  $\frac{\partial u}{\partial r} < 0$ . Thus  $|u_r| = -u_r$ . For a power-law fluid,  $\sigma = \kappa \dot{\gamma}^n$ , thus

$$\begin{aligned} \kappa \left| \frac{\partial u}{\partial r} \right|^n &= \frac{\Delta p}{2L} r \\ \implies \left| \frac{\partial u}{\partial r} \right| &= \left( \frac{\Delta p}{2L\kappa} \right)^{1/n} r^{1/n} = -\frac{\partial u}{\partial r} \\ \implies u(r) &= C - \left( \frac{\Delta p}{2L\kappa} \right)^{1/n} \frac{n}{n+1} r^{\frac{n+1}{n}} \end{aligned}$$

Enforcing no-slip boundary conditions on the pipe wall  $u(R) = 0$  and re-writing in terms of the wall shear stress we have


$$u(r) = \left( \frac{\sigma_w}{\kappa R} \right)^{1/n} \frac{n}{n+1} \left( R^{\frac{n+1}{n}} - r^{\frac{n+1}{n}} \right)$$

We can calculate the mean flow speed  $\bar{U}$ :

$$\bar{U} \equiv \frac{1}{\pi R^2} \iint u \, dS = \frac{2}{R^2} \int_0^R r u(r) \, dr = \left( \frac{\sigma_w}{\kappa} \right)^{1/n} \frac{nR}{3n+1}$$

Finally, we can rewrite the solution as flow relative to the mean flow speed:

$$\frac{u(r)}{\bar{U}} = \frac{3n+1}{n+1} \left[ 1 - \left( \frac{r}{R} \right)^{\frac{n+1}{n}} \right]$$

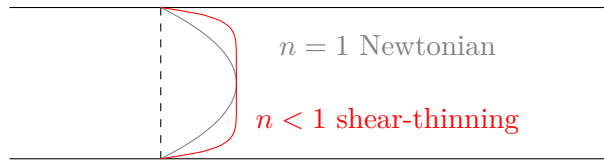

Physically, we have high shear near the pipe walls, so low viscosity in a shear-thinning complex fluid. The flow rate is

$$Q = \iint u \, dS = \frac{\pi n}{3n+1} \left( \frac{\Delta p}{2L\kappa} \right)^{1/n} R^{3+\frac{1}{n}}$$

For a Newtonian fluid,  $Q \sim \Delta p R^4$  whereas for a power-law fluid  $Q \sim \Delta p^{1/n} R^{3+\frac{1}{n}}$ . For a shear-thinning fluid with  $n < 1$ , we thus have a very strong dependence on  $\Delta p$  and  $R$ . In a device with  $Q$  fixed,  $\Delta p^{1/n} R^{3+\frac{1}{n}} = \text{const.}$  so  $\Delta p \sim R^{-(3n+1)}$ . For  $n < 1$ , it is therefore easier to push fluid through a pipe than with a Newtonian fluid.

Lecture 4  
20/10/20


## 4.2 Other models & problems

### 4.2.1 Carreau-Yasuda model

The Carreau-Yasuda model can be written

$$\frac{\eta(\dot{\gamma}) - \eta_\infty}{\eta_0 - \eta_\infty} = [1 + (\lambda\dot{\gamma})^a]^{n-1} a$$

for  $n \leq 1$ . In this model,  $\eta$  transitions smoothly from  $\eta_0$  to  $\eta_\infty$ . In some finite range of shear rates, the model resembles a power-law fluid. In fact, a power-law fluid can be thought of as a ‘subset’ of Carreau-Yasuda. The constant parameter  $a$  is related to the curvature of the  $\eta$  vs.  $\dot{\gamma}$  curve, whilst  $n$  is related to the steepness of the curve.

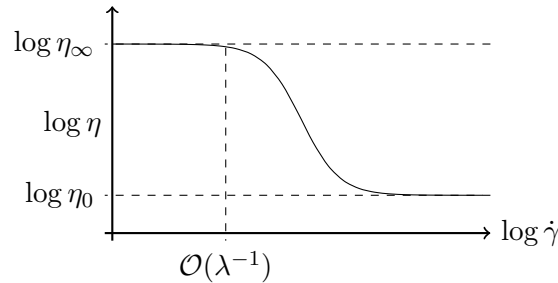

### 4.2.2 Powell-Eyring & Ellis models

The Powell-Eyring model is given by

$$\frac{\eta(\dot{\gamma}) - \eta_\infty}{\eta_0 - \eta_\infty} = \frac{\sinh^{-1}(\lambda\dot{\gamma})}{\lambda\dot{\gamma}}$$

Some models specify  $\eta(\sigma)$  instead of  $\eta(\dot{\gamma})$ , for example the Ellis model.

$$\eta = \eta_0 \left[ 1 + \left| \frac{\sigma}{\sigma_0} \right|^{1-n} \right]^{-1}$$

There are several properties and issues associated with generalised Newtonian fluids.


1. Empirical: GNFs are based on experiments rather than derived.

2. Instantaneous: GNFs have no memory (recall the step shear experiment), so are not suitable for modelling unsteady flows. This also means GNFs are instantaneously reversible which is undesired.
3. No normal stress differences.
4. Under extension, the Trouton ratio is  $\text{Tr} = 3$  for GNFs, i.e. there is no increase in extensional viscosity.
5. The behaviour of stress when  $\dot{\gamma} \rightarrow 0$  is important. If  $\eta_0$  can be defined, then  $\sigma \rightarrow 0$ . If not, such as with a power-law fluid, there is problematic behaviour near 0. The limit  $\dot{\gamma} \rightarrow 0$  is often used to recover Newtonian behaviour.

### 4.3 Rheometry

Rheometry is the science and engineering of measuring material properties of fluids. For generalised Newtonian fluids, we need to measure  $\eta(\dot{\gamma})$ . The ‘easy’ method is to use a steady shear flow, which is simple in principle. However, we can only use a finite volume of fluid. A common solution is the parallel plate rheometer, also known as a parallel disc rheometer.

Consider two coaxial rigid circular discs of radius  $a$  held at a constant separation  $h$ . The bottom plate is held stationary whilst the upper plate rotates at a prescribed angular velocity  $\Omega$ . The variable  $\dot{\gamma}$  is controlled in this experiment.

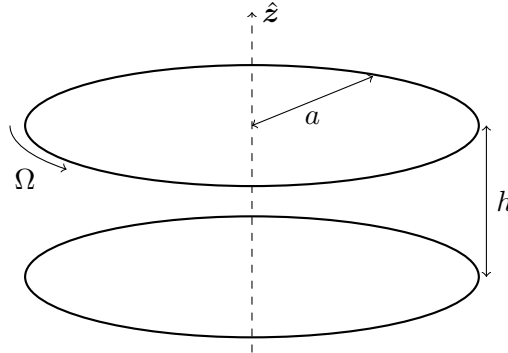

The input-output relationship can be inverted to infer  $\eta(\dot{\gamma})$ . Use cylindrical coordinates  $(r, \theta, z)$  and look for an axisymmetric flow field  $\mathbf{u} = u(r, z)\hat{\theta}$ . The shear rate tensor is

$$\dot{\underline{\underline{\gamma}}} = \begin{pmatrix} 0 & r \frac{\partial}{\partial r} \left( \frac{u}{r} \right) & 0 \\ r \frac{\partial}{\partial r} \left( \frac{u}{r} \right) & 0 & \frac{\partial u}{\partial z} \\ 0 & \frac{\partial u}{\partial z} & 0 \end{pmatrix}$$

Consider the steady Cauchy equation in cylindrical coordinates:

$$\begin{aligned} \frac{\partial p}{\partial \theta} &= 0 = \frac{1}{r^2} \frac{\partial}{\partial r} \left( r^2 \tau_{r\theta} \right) + \frac{\partial}{\partial z} (\tau_{\theta z}) \\ \frac{\partial p}{\partial r} &= 0 \\ \frac{\partial p}{\partial z} &= 0 \end{aligned}$$

We wish to find a viscometric flow solution. In the Newtonian case, we have

$$0 = \frac{1}{r^2} \frac{\partial}{\partial r} \left( r^3 \frac{\partial}{\partial r} \left( \frac{u}{r} \right) \right) + \frac{\partial^2 u}{\partial z^2}$$

To find a solution we require both terms vanish. Thus  $u = A(r)z + B(r)$ . The no-slip boundary condition  $u = 0$  at  $z = 0$  and  $u = \Omega r$  at  $z = h$  gives

$$u(r, z) = \Omega r \frac{z}{h}$$

Given this flow, the shear rate tensor becomes

$$\dot{\gamma} = \begin{pmatrix} 0 & 0 & 0 \\ 0 & 0 & \frac{r\Omega}{h} \\ 0 & \frac{r\Omega}{h} & 0 \end{pmatrix}$$

Assume  $\Omega > 0$ , so the magnitude of the shear rate is  $\dot{\gamma} = |r\Omega/h|$ . This solution is also a solution for a GNF: we have  $\tau_{r\theta} = 0$  and

$$\tau_{\theta z} = \eta(\dot{\gamma})\dot{\gamma} = \eta\left(\frac{r\Omega}{h}\right)\frac{r\Omega}{h} = \tau_{\theta z}(r)$$

The torque exerted to rotate the top plate is  $\mathbf{T} = T\hat{\mathbf{z}}$  where

$$T = \int r\tau_{\theta z} dS = 2\pi \int_0^a r^2 \eta(\dot{\gamma}) \dot{\gamma} dr$$

This relationship can be used to infer  $\eta(\dot{\gamma})$  by a change of variable. Let  $\dot{\gamma}_a = a\Omega/h$  be the shear rate at the edge of the disc. Substitute  $r = a\dot{\gamma}/\dot{\gamma}_a$ :


$$T = 2\pi \int_0^{\dot{\gamma}_a} \frac{a^2}{\dot{\gamma}_a^2} \dot{\gamma}^2 \eta(\dot{\gamma}) \dot{\gamma} \frac{a}{\dot{\gamma}_a} d\dot{\gamma} = 2\pi \frac{a^3}{\dot{\gamma}_a^3} \int_0^{\dot{\gamma}_a} \eta(\dot{\gamma}) \dot{\gamma}^3 d\dot{\gamma}$$

This is valid for all values of  $\dot{\gamma}_a$ . Rearranging and differentiating with respect to  $\dot{\gamma}_a$  we have


$$\eta(\dot{\gamma}_a) = \frac{1}{\dot{\gamma}_a^3} \frac{d}{d\dot{\gamma}_a} \left[ \frac{T\dot{\gamma}_a^3}{2\pi a^3} \right]$$

In an experiment, we control  $\dot{\gamma}_a$ , measure  $T$ , slightly change  $\dot{\gamma}_a$ , and repeat. Application of the above result then yields  $\eta(\dot{\gamma}_a)$ . Other geometries can also be used:

- Taylor-Couette.



- Cone and plate. Useful since  $\alpha$  small implies the shear rate  $\dot{\gamma}$  is uniform.

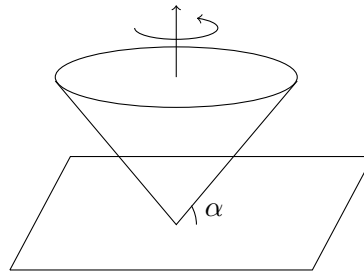

#### 4.4 Variational approach

So far, we have found exact solutions only. For many GNF, no exact solutions are available so we must find approximate solutions. Here we consider a method relying on a form of energy minimisation. Consider a fluid volume  $V$ , bounded by a surface  $S$ , in the Stokes flow limit (no inertia). Assume  $\mathbf{u} = \mathbf{u}_0$  is prescribed on  $S$ . The total rate of energy dissipation is

$$P = \int_V \frac{1}{2} \underline{\underline{\sigma}} : \underline{\underline{\dot{\gamma}}} dV = \int_V \frac{\eta}{2} \underline{\underline{\dot{\gamma}}} : \underline{\underline{\dot{\gamma}}} dV \geq 0$$

Recall the minimum dissipation theorem: solutions to Stokes equations minimise  $P$  over all incompressible flows satisfying the same boundary conditions. The inequality  $P_{\text{Stokes}} \leq P$  can be shown directly, or we can use the calculus of variations. Define a Lagrangian

$$\mathcal{L} \equiv P + \int_V \lambda \nabla \cdot \mathbf{u} dV$$

Variations with respect to  $\lambda$  give  $\nabla \cdot \mathbf{u} = 0$ , and variations with respect to  $\mathbf{u}$  give Stokes equations with pressure  $p \propto \lambda$ . To generalise this to GNF, consider the power density  $f = \frac{1}{2} \eta \dot{\gamma}^2$  for a Newtonian fluid. Analogously, for a GNF we define

$$f = \int_0^{\dot{\gamma}} \eta(x) x dx$$

and a new Lagrangian

$$\mathcal{L} \equiv \mathcal{L}[\mathbf{u}, \lambda] = \int_V f dV + \int_V \lambda \nabla \cdot \mathbf{u} dV$$

##### 4.4.1 Calculus of variations

Consider a functional  $J$  of a vector field  $\mathbf{y}(\mathbf{x})$  and its spatial derivatives  $y_{m,n} \equiv \frac{\partial y_m}{\partial x_n}$ ;

$$J[\mathbf{y}] = \int_V F(x_i, y_j, y_{m,n}) dV$$

where  $V$  is the total domain. The first variation of  $J$  is  $\delta J$  where

$$J + \delta J = J[\mathbf{y} + \delta \mathbf{y}] = \int_V F(\mathbf{x}, \mathbf{y} + \delta \mathbf{y}) dV$$

To determine an explicit expression for the first variation, first Taylor expand the integrand:

$$F(\mathbf{x}, \mathbf{y} + \delta \mathbf{y}) = F + \delta y_j \frac{\partial F}{\partial y_j} + \delta y_{m,n} \frac{\partial F}{\partial y_{m,n}} + \dots$$

Using integration by parts and writing  $\delta y_{m,n} = \frac{\partial}{\partial x_n} \delta y_m$  we have

$$\delta y_{m,n} \frac{\partial F}{\partial y_{m,n}} = \frac{\partial}{\partial x_n} \left( \delta y_m \frac{\partial F}{\partial y_{m,n}} \right) - \delta y_m \frac{\partial}{\partial x_n} \left( \frac{\partial F}{\partial y_{m,n}} \right)$$

The first term becomes a surface integral via Stokes' theorem, which may or may not vanish depending on boundary conditions. The first variation of  $F$  is thus

$$\delta F = \delta y_j \left[ \frac{\partial F}{\partial y_j} - \frac{\partial}{\partial x_n} \left( \frac{\partial F}{\partial y_{j,n}} \right) \right] + \text{boundary terms}$$

Now requiring  $\delta J = 0$  for all  $\delta \mathbf{y}$  is equivalent to requiring  $\delta F = 0$  for all  $\delta \mathbf{y}$ , giving the Euler-Lagrange equation.

$$\frac{\partial F}{\partial y_j} - \frac{\partial}{\partial x_n} \left( \frac{\partial F}{\partial y_{j,n}} \right) = 0$$



#### 4.4.2 Variational solution

Returning to our original set-up, denote  $F_2 = \lambda \nabla \cdot \mathbf{u}$ ,  $F_1 = \int_0^{\dot{\gamma}} \eta(x) x \, dx$ , so

$$\mathcal{L}[\mathbf{u}, \lambda] = \int_V F_1 + F_2 \, dV$$

Note that we are using  $\mathbf{y} \equiv \mathbf{u}$  here. The Euler-Lagrange equation for  $\lambda$  gives

$$\frac{\partial}{\partial \lambda} (F_1 + F_2) = 0 \implies \nabla \cdot \mathbf{u} = 0$$

For variations with respect to  $\mathbf{u}$ , we have boundary terms involving  $\delta \mathbf{u}$ . Since  $\delta \mathbf{u} = \mathbf{0}$  on  $S$ , the boundary terms vanish in this case. There is no explicit dependence on  $\mathbf{u}$  in  $F_1, F_2$  so the Euler-Lagrange equation becomes

$$\frac{\partial}{\partial x_n} \left( \frac{\partial F}{\partial u_{j,n}} \right) = 0$$

where  $F \equiv F_1 + F_2$ . By chain rule,

$$\frac{\partial F_1}{\partial u_{j,n}} = \frac{\partial \dot{\gamma}}{\partial u_{j,n}} \frac{\partial F_1}{\partial \dot{\gamma}}$$

We have  $\frac{\partial F_1}{\partial \dot{\gamma}} = \eta(\dot{\gamma}) \dot{\gamma}$  and

$$\begin{aligned} \frac{\partial \dot{\gamma}}{\partial u_{j,n}} &= \frac{1}{2\dot{\gamma}} \frac{\partial}{\partial u_{j,n}} \left( \frac{1}{2} \dot{\gamma} : \dot{\gamma} \right) \\ &= \frac{1}{2\dot{\gamma}} \frac{\partial}{\partial u_{j,n}} \left( \frac{1}{2} \dot{\gamma}_{pq} \dot{\gamma}_{pq} \right) \\ &= \frac{1}{4\dot{\gamma}} \frac{\partial}{\partial u_{j,n}} (u_{p,q} u_{p,q} + 2u_{p,q} u_{q,p} + u_{q,p} u_{q,p}) \\ &= \frac{1}{2\dot{\gamma}} (2u_{j,n} + 2u_{n,j}) \\ &= \frac{\dot{\gamma}_{jn}}{\dot{\gamma}} \end{aligned}$$

Now for  $F_2 = \lambda \nabla \cdot \mathbf{u}$  we have

$$\begin{aligned} \frac{\partial}{\partial x_n} \left( \frac{\partial F_2}{\partial u_{j,n}} \right) &= \frac{\partial}{\partial x_n} \left( \lambda \frac{\partial u_{i,i}}{\partial u_{j,n}} \right) \\ &= \frac{\partial}{\partial x_n} (\lambda \delta_{ij} \delta_{in}) \\ &= \frac{\partial \lambda}{\partial x_j} \end{aligned}$$

Thus the full Euler-Lagrange equation for  $\mathbf{u}$  is

$$\frac{\partial}{\partial x_n} [\eta(\dot{\gamma}) \dot{\gamma}_{jn}] + \frac{\partial \lambda}{\partial x_j} = 0$$

for  $j = 1, 2, 3$ . Given  $\lambda = -p$ , this becomes the Cauchy equation for a GNF.

$$-\nabla p + \nabla \cdot [\eta(\dot{\gamma}) \underline{\dot{\gamma}}] = \mathbf{0}$$

Pressure is used as a Lagrange multiplier to enforce incompressibility. Note: if the boundary conditions are different, e.g.  $\underline{\sigma} \cdot \underline{n}$  is prescribed, we must distinguish surfaces where  $\underline{u}$  is described and surfaces where  $\underline{\sigma} \cdot \underline{n}$  is prescribed, and add a surface integral to the Lagrangian (see Example Sheet 1).

To generate approximate solutions to the Cauchy GNF equations, we note that the closer the value of  $\mathcal{L}$  to its minimum, the better the approximation. Thus

1. Use incompressible test functions  $\underline{u}_\alpha$  where  $\alpha$  is a parameter
2. Substitute into Lagrangian, minimise with respect to  $\alpha$
3. If the minimum of  $\mathcal{L}$  is at  $\alpha = \alpha^*$  then  $\underline{u}_{\alpha^*}$  is an approximate solution

Integrals involved in  $\mathcal{L}$  in general have to be evaluated numerically. Choice of test functions comes from physical intuition, computation, or experiment.

Lecture 6  
27/10/20

## 5 Yield-Stress Fluids


Some fluids only flow when subject to stress above some threshold. We call this threshold the yield-stress, denoted by  $\sigma_y$ . Fluids with such a property are called yield-stress fluids or viscoplastic fluids. Examples are mayonnaise; jelly; peanut butter; mud; and hair gel. Graphically,  $\sigma_y$  is the non-zero  $\dot{\gamma}$ -intercept of  $\sigma(\dot{\gamma})$ . Beyond the yield-stress, the fluid may have Newtonian, shear-thinning, shear-thickening, or some other behaviour.

The simplest model of a yield-stress fluid is a Bingham fluid where the behaviour is Newtonian beyond the yield-stress. For  $-\infty < \dot{\gamma} < \infty$  we have

$$\begin{cases} \dot{\gamma} = 0 & |\sigma| < \sigma_y \\ \sigma = \text{sgn}(\dot{\gamma})\sigma_y + \eta\dot{\gamma} & |\sigma| > \sigma_y \end{cases}$$

Alternatively, non-linear behaviour after yield is described by the Herschel-Bulkley model where the fluid has power-law behaviour after yield.

$$\begin{cases} \dot{\gamma} = 0 & |\sigma| < \sigma_y \\ \sigma = \text{sgn}(\dot{\gamma})\sigma_y + \kappa|\dot{\gamma}|^{n-1}\dot{\gamma} & |\sigma| > \sigma_y \end{cases}$$

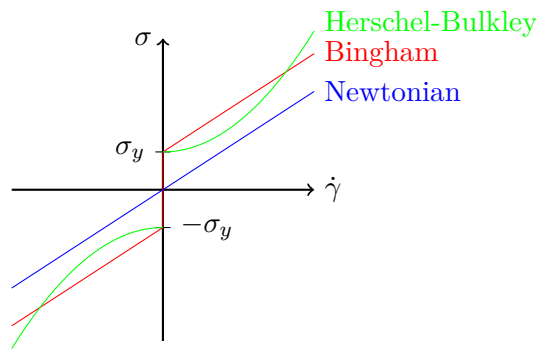


A typical flow problem of yield-stress fluids separates the domain into two regions.

1. Yielded domain: the fluid flows in regions where  $|\sigma| > \sigma_y$
2. Unyielded domain: where  $|\sigma| < \sigma_y$ , there is no deformation i.e. rigid body motion only

The surface separating the yielded and unyielded regions is the yield surface. On this surface,  $\sigma = \sigma_y$  by definition, which implicitly defines the surface. Physically, we expect high shear at boundaries, and thus expect the yield surface is close to these boundaries.

### 5.1 Pressure-driven flow of a Bingham fluid in a pipe

This problem illustrates a steady flow problem and the location of the yield surface. We will use cylindrical coordinates, and assume the flow is unidirectional with  $\mathbf{u} = u(r)\hat{\mathbf{z}}$ .

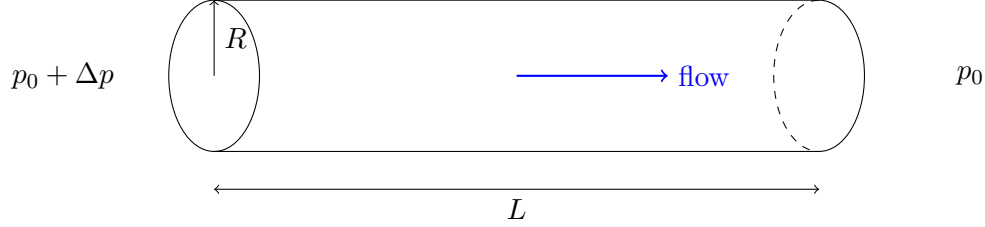

The Cauchy equation in cylindrical polars (as seen in section 4.1.1) gives

$$\frac{\partial p}{\partial z} = \frac{1}{r} \frac{\partial}{\partial r} (r \sigma_{rz}) = -\frac{\Delta p}{L}$$

thus as before we find

$$\sigma_{rz} = -\frac{\Delta p}{2L} r$$

We wish to find the yield surface. Clearly near  $r = 0$  the stress is small so the fluid is unyielded. The yield surface is defined by  $|\sigma| = \sigma_y$  thus we have

$$r = r_y = \frac{2L}{\Delta p} \sigma_y$$

Recall  $R$  is the radius of the pipe. Comparing  $R$  with  $r_y$ ,

1. if  $r_y \geq R$  the shear stress is below yield stress throughout the pipe, thus there is no flow. Equivalently, this occurs for pressure differences  $\Delta p \leq \frac{2L}{R} \sigma_y$ .
2. if  $r_y < R$  (equivalently  $\Delta p > \frac{2L}{R} \sigma_y$ ) the fluid yields in  $r_y \leq r \leq R$ , and is unyielded in  $0 \leq r \leq r_y$ .

We solve case 2 exactly. Flow in the yielded region has  $\dot{\gamma} = \frac{\partial u}{\partial r} < 0$ . For a Bingham fluid  $\sigma = \text{sgn}(\dot{\gamma})\sigma_y + \eta\dot{\gamma}$ . Therefore we have

$$\sigma_{rz} = -\sigma_y + \eta \frac{\partial u}{\partial r}$$

Now  $\sigma_{rz} = -\frac{\Delta p}{2L} r$  can be rewritten in terms of the yield surface as  $\sigma_{rz} = -\sigma_y \frac{r}{r_y}$ . Thus we must solve

$$\frac{\partial u}{\partial r} = \frac{\sigma_y}{\eta} \left( 1 - \frac{r}{r_y} \right)$$

Note  $r = r_y$  implies  $\frac{\partial u}{\partial r} = 0$  which gives  $|\sigma| = \sigma_y$  as expected. We have

$$u(r) = \frac{\sigma_y}{\eta} \left( r - \frac{r^2}{2r_y} \right) + c$$


The constant of integration is determined by the no-slip boundary condition on  $r = R$ ,  $u(R) = 0$ . Finally we have for  $r_y \leq r \leq R$

$$u(r) = \frac{\sigma_y}{\eta} \left( r - \frac{r^2}{2r_y} - R + \frac{R^2}{2r_y} \right)$$

In the unyielded region we have plug flow  $u = \text{constant}$ . For  $0 \leq r \leq r_y$ , the rigid body velocity  $u = U_y = u_{\text{yielded}}(r_y)$  by continuity.

$$\Rightarrow U_y = \frac{\sigma_y}{\eta} \left( \frac{r_y}{2} - R + \frac{R^2}{2r_y} \right) \geq 0$$

The flow profile in the pipe is a combination of parabolic and constant velocity.

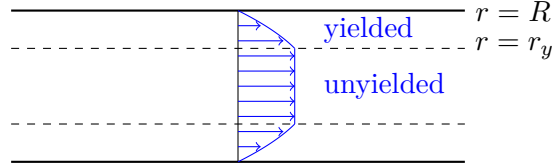

The flow rate  $Q$  vanishes if  $r_y \geq R$ . For  $r_y < R$ ,

$$\begin{aligned} Q &= 2\pi \int_0^R r u(r) dr \\ &= 2\pi \int_0^{r_y} r U_y dr + 2\pi \int_{r_y}^R r u(r) dr \\ &= \dots \\ &= \frac{\Delta p \pi R^4}{8\mu L} \left[ 1 - \frac{4}{3} \frac{r_y}{R} + \frac{1}{3} \left( \frac{r_y}{R} \right)^3 \right] \end{aligned}$$

The constant factor outside the brackets is the Hagen-Poiseuille flow rate for a Newtonian fluid.

- If  $r_y = 0$  the fluid is yielded everywhere and we have the Newtonian solution for Poiseuille flow in a pipe.
- If  $r_y = R$  the fluid is unyielded everywhere and  $Q = 0$ .
- The term in brackets is always smaller than 1, thus  $Q_{\text{yield-stress}} \leq Q_{\text{Newtonian}}$


This problem is doable because it is a steady problem. It is much more difficult in the unsteady case since the yield surface has unsteady motion, in which case inertia is needed.

Lecture 7  
29/10/20

## 5.2 Unsteady dynamics of yield surface

Here we include inertia to allow the yield surface to go from one steady state to another. Specifically, we consider a problem similar to Stokes' 1st problem, to illustrate the complexity of solving for the yield surface. In Stokes' 1st problem, a rigid plate at  $y = 0$  impulsively starts to move at  $t = 0$ . The momentum 'diffuses' into the fluid as  $y \sim \sqrt{\nu t}$ .

Consider a Bingham fluid in  $y > 0$  with yield stress  $\sigma_y$ , viscosity  $\eta$ , density  $\rho$  and a rigid plate at  $y = 0$ . For  $t < 0$ , we have a semi-infinite shear flow  $\mathbf{u} = \dot{\gamma} y \hat{\mathbf{x}}$ . Note: we require  $\sigma = \eta \dot{\gamma} > \sigma_y$  to ensure there is flow everywhere. At  $t = 0$ , the plate starts to move with the flow such that the stress exerted on the plate suddenly changes to  $\sigma_0 < \sigma_y$ .

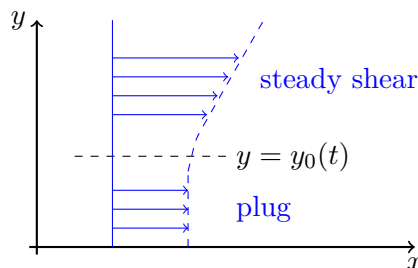

Physically, the unyielded domain appears near  $y = 0$  and propagates into the yielded region. Let  $y = y_0(t)$  be the yielded surface, so that  $0 \leq y \leq y_0$  is the yielded region and  $y > y_0$  is the unyielded region. On the yield surface, we require  $|\sigma| = \sigma_y$  by definition, and also require the velocity to be continuous across the yield surface.

Assuming the flow is unidirectional with  $\mathbf{u} = u(y, t)\hat{\mathbf{x}}$ , the Cauchy equation with inertia is valid in both the yielded and unyielded domain:

$$\rho \frac{\partial u}{\partial t} = \frac{\partial \sigma}{\partial y}$$

**Yielded region.** We have  $\sigma = \sigma_{xy} = \sigma_y + \eta \frac{\partial u}{\partial y}$ , since  $\dot{\gamma} = \frac{\partial u}{\partial y} \geq 0$ . Thus the Cauchy equation becomes

$$\frac{\partial u}{\partial t} = \nu \frac{\partial^2 u}{\partial y^2}$$

where  $\nu = \eta/\rho$  is the kinematic viscosity. This is a diffusion equation; as in Stokes' 1st problem, the yield surface has diffusive dynamics  $y_0 \sim \sqrt{\nu t}$ . Look for a similarity solution with dimensionless variable  $s \equiv \frac{y}{\sqrt{\nu t}}$ . Then

$$\begin{aligned} u(y, t) &= \dot{\gamma} y f(s) \\ \frac{\partial u}{\partial t} &= -\frac{1}{2} \frac{s}{t} \dot{\gamma} y \frac{df}{ds} \\ \frac{\partial u}{\partial y} &= \dot{\gamma} f + \dot{\gamma} s \frac{df}{ds} \\ \frac{\partial^2 u}{\partial y^2} &= 2 \frac{\dot{\gamma} s}{y} \frac{df}{ds} + \dot{\gamma} \frac{s^2}{y} \frac{d^2 f}{ds^2} \end{aligned}$$

The Cauchy equation is now

$$-\frac{1}{2} \frac{s}{t} \dot{\gamma} y \frac{df}{ds} = \nu \left[ 2 \frac{\dot{\gamma} s}{y} \frac{df}{ds} + \frac{\dot{\gamma} s^2}{y} \frac{d^2 f}{ds^2} \right]$$

Dividing by  $\nu \dot{\gamma} s/y$  and rearranging we have the ODE

$$\left( 2 + \frac{s^2}{2} \right) \frac{df}{ds} + \frac{d^2 f}{ds^2} = 0$$

Since the ODE is second order, we require two boundary conditions:

1. Match steady shear as  $y \rightarrow \infty$ , i.e.  $f(s) \rightarrow 1$ .
2. At yield surface,  $\sigma(y_0^+) = \sigma(y_0^-) = \sigma_y$ . Equivalently,  $u_y = 0$  at  $y = y_0$ . Thus we require

$$\dot{\gamma} f + \dot{\gamma} s \frac{df}{ds} = 0$$

at  $y = y_0$ . Writing the location of the yield surface as  $y_0 = \theta \sqrt{\nu t}$  with  $\theta$  unknown we have

$$f(\theta) + \theta f'(\theta) = 0$$

**Unyielded region.** The same Cauchy equation holds,  $\rho \partial_t u = \partial_y \sigma$ . The flow in this region is a plug, so  $u$  does not depend on  $y$ . Thus  $\partial_y \sigma$  is constant, i.e.  $\sigma$  is linear in  $y$  in this region. Now note at  $y = y_0, \sigma = \sigma_y$  and at  $y = 0, \sigma = \sigma_0$ . So

$$\frac{\partial \sigma}{\partial y} = \frac{\sigma_y - \sigma_0}{y_0} = \frac{\sigma_y - \sigma_0}{\theta \sqrt{\nu t}}$$

Thus the Cauchy equation becomes

$$\rho \frac{\partial u}{\partial t} = \frac{\sigma_y - \sigma_0}{\theta \sqrt{\nu t}}$$

Integrating from  $t' = 0$  to  $t' = t$ , we have

$$\rho u_{\text{unyielded}} = 2 \frac{\sigma_y - \sigma_0}{\theta \nu^{1/2}} t^{1/2}$$

Note  $u_{\text{unyielded}} = u_{\text{yielded}}(y_0) = \dot{\gamma} y_0 f(\theta) = \dot{\gamma} \theta \sqrt{\nu t} f(\theta)$ , so

$$\begin{aligned} \rho \dot{\gamma} \theta \sqrt{\nu t} f(\theta) &= 2 \frac{\sigma_y - \sigma_0}{\theta \nu^{1/2}} t^{1/2} \\ \implies \theta^2 f(\theta) &= 2\xi \end{aligned}$$

where  $\xi = \frac{\sigma_y - \sigma_0}{\eta \dot{\gamma}}$  is a dimensionless control parameter, i.e. it is imposed on the system. This equation implicitly defines  $\theta$ .

**Yield surface.** Now the ODE for  $f$  gives

$$\frac{df}{ds} = \frac{B}{s^2} e^{-\frac{s^2}{4}}$$

Integrating and using  $f(s \rightarrow \infty) = 1$  we have

$$f(s) = 1 + \frac{C}{s} e^{-s^2/4} - \frac{\sqrt{\pi}}{2} C \text{erfc}(s/2)$$

where  $\text{erfc}(x) \equiv \frac{2}{\sqrt{\pi}} \int_x^\infty e^{-u^2} du$  is the complementary error function. To determine  $C$ , we apply the BC  $u_y = 0$  at the yield surface, i.e.  $f(\theta) + \theta f'(\theta) = 0$

$$\begin{aligned} \implies C &= \frac{2}{\sqrt{\pi} \text{erfc}(\theta/2)} \\ \implies f(s) &= 1 + \frac{\frac{2}{s} e^{-s^2/4} - \sqrt{\pi} \text{erfc}(s/2)}{\sqrt{\pi} \text{erfc}(\theta/2)} \end{aligned}$$

The only remaining unknown is  $\theta$ . Applying the condition  $\theta^2 f(\theta) = 2\xi$ , we have

$$\frac{\theta e^{-\theta^2/4}}{\sqrt{\pi} \text{erfc}(\theta/2)} = \xi = \frac{\sigma_y - \sigma_0}{\eta \dot{\gamma}}$$

which is an implicit one-to-one equation for  $\theta$ , so  $\theta$  can be found numerically. Thus we have a full analytic solution up to an implicit equation for  $\theta$ .


## 6 Linear Viscoelastic Fluids

Recall from phenomenology that some complex fluids have stresses which depend on the history of deformation. Generalised Newtonian fluids and yield-stress fluids have no such memory.

### 6.1 Viscous vs. elastic

Consider fluids that have both a viscous and elastic response to deformation. Viscous response means that stress is proportional to rate of deformation, whilst an elastic response means stress is proportional to deformation. For example, polymer molecules are sheared and stretched by the flow, and provide an elastic response.

Recall Newton's experiment. Consider two points marked at the same  $x$  on the top and bottom plate at the same time, and the change in the mark as time passes. The change in position is  $d$ , the shear displacement.

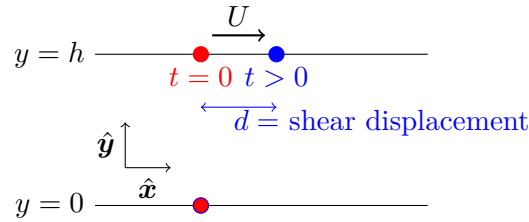


We then define shear strain  $\gamma = \frac{d}{h}$ , dimensionless, and as usual have shear rate  $\dot{\gamma} = \frac{U}{h} = \frac{d\gamma}{dt}$ . The viscous response (Newtonian) is  $\sigma = \frac{F}{A} = \eta\dot{\gamma}$  where  $\eta$  is the viscosity. The elastic response, in analogy with a spring  $F \propto kx$ , we have  $\sigma = G\gamma$  where  $G$  is the shear modulus and has units of stress.

Physically, a dashpot simulates viscous response, whilst a spring simulates elastic response. The simplest viscoelastic materials can be thought of as a linear combination of dashpots and springs.

### 6.2 Maxwell fluids

The most famous linear viscoelastic fluid (LVF) is a Maxwell fluid; modelled by a dashpot and a spring in series. We expect elastic behaviour on short timescales and viscous on long timescales. An example of a Maxwell fluid is a fluid with elastic inclusions such as droplets or vesicles.



We can derive the constitutive relationship from this model. We have

$$\begin{aligned}\sigma_1 &= G\gamma_1 && \text{spring} \\ \sigma_2 &= \eta\dot{\gamma}_2 && \text{dashpot}\end{aligned}$$

The total stress and strain follow by analogy with circuits (cf. Kirchhoff's laws). Strain is analogous to potential difference and stress is analogous to current. Therefore

$$\begin{aligned}\text{total strain} \quad \gamma &= \gamma_1 + \gamma_2 \\ \text{total stress} \quad \sigma &= \sigma_1 = \sigma_2\end{aligned}$$

The total rate of strain is

$$\begin{aligned}\dot{\gamma} &= \dot{\gamma}_1 + \dot{\gamma}_2 = \frac{\dot{\sigma}_1}{G} + \frac{\sigma_2}{\eta} = \frac{\dot{\sigma}}{G} + \frac{\sigma}{\eta} \\ \implies \sigma + \frac{\eta}{G}\dot{\sigma} &= \eta\dot{\gamma}\end{aligned}$$

This is the constitutive relationship for a Maxwell fluid.  $\lambda \equiv \frac{\eta}{G}$  is the relaxation timescale for stress.

**Intepretation of  $\lambda$ .** Consider a sudden cessation of deformation, that is

$$\begin{cases} \dot{\gamma} = 0 & t \geq 0 \\ \sigma = \sigma_0 & t < 0 \end{cases}$$

Thus for  $t > 0$  we have  $\sigma + \lambda\dot{\sigma} = 0$  with boundary conditions  $\sigma(t=0) = \sigma_0$ . Thus

$$\sigma(t) = \sigma_0 e^{-\frac{t}{\lambda}}$$


Hence we have exponential relaxation of stress on timescale  $\lambda$ . Note  $\lambda$  is the timescale for adjustments in stress to changes in deformation, whilst deformation adjusts instantaneously to changes in stress.

**Behaviour at short vs. long timescales.** Consider a Maxwell fluid for  $t \ll \lambda$  and  $t \gg \lambda$ .

- On short timescales  $t \ll \lambda$ , we have  $\lambda\dot{\sigma} \gg \sigma$  hence the Maxwell fluid has  $\lambda\dot{\sigma} \sim \eta\dot{\gamma}$ . This is an elastic response.
- On long timescales  $t \gg \lambda$ , we have  $\lambda\dot{\sigma} \ll \sigma$  so the Maxwell fluid has  $\sigma \sim \eta\dot{\gamma}$  which is a viscous response.

### 6.3 Kelvin-Voigt fluid

Here we consider a similar idea to introduce a fluid with the opposite behaviour to a Maxwell fluid. Consider a spring and dashpot in parallel.

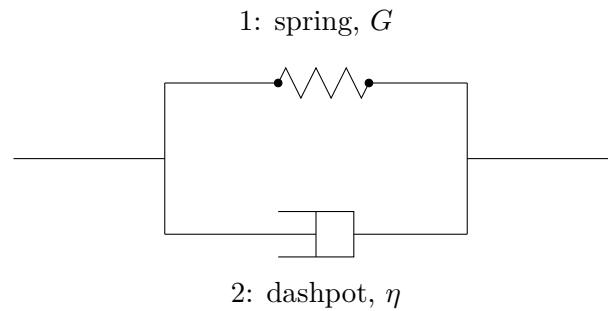

We have individual stresses

$$\begin{aligned} \sigma_1 &= G\gamma_1 && \text{spring} \\ \sigma_2 &= \eta\dot{\gamma}_2 && \text{dashpot} \end{aligned}$$

as before. In parallel, the total strain is  $\gamma = \gamma_1 + \gamma_2$  and the total stress is

$$\sigma = \sigma_1 + \sigma_2 = G\gamma_2 + \eta\dot{\gamma}_2 = G \left[ \gamma + \frac{\eta}{G} \dot{\gamma} \right]$$

Hence the constitutive relationship for a Kelvin-Voigt fluid is

$$\sigma = G \left[ \gamma + \hat{\lambda} \dot{\gamma} \right]$$

where  $\hat{\lambda}$  is the retardation timescale, the timescale for deformation to adjust to changes in stress. Note: stress adjusts instantaneously to changes in deformation in this case.




- On short timescales, we have  $\hat{\lambda}\dot{\gamma} \gg \gamma$  so  $\sigma \sim G\hat{\lambda}\dot{\gamma}$  is a viscous response.
- On long timescales, we have  $\hat{\lambda}\dot{\gamma} \ll \gamma$  so  $\sigma \sim G\gamma$  which is an elastic response.

The properties of Kelvin-Voigt fluids are opposite to those of a Maxwell fluid. Since a Kelvin-Voigt fluid behaves as an elastic material at long times, it is also referred to as a viscoelastic material or solid.

### 6.4 Jeffreys fluid

We wish to construct a LVF that has a viscous response at both short and long timescales. Thus we require two distinct timescales. A Jeffreys fluid has a dashpot and Kelvin-Voigt fluid in series.

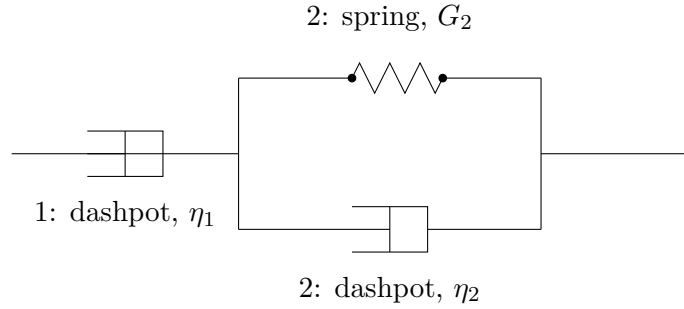

The total strain is  $\gamma = \gamma_1 + \gamma_2$  where  $\gamma_1$  is the strain of the lone dashpot and  $\gamma_2$  is the total strain of the Kelvin-Voigt fluid. The total stress is  $\sigma = \sigma_1 = \sigma_2$ . We have

$$\begin{aligned}\sigma &= \sigma_1 = \eta_1 \dot{\gamma}_1 \\ \sigma &= \sigma_2 = G_2 \gamma_2 + \eta_2 \dot{\gamma}_2 = \left[ G_2 + \eta_2 \frac{\partial}{\partial t} \right] \gamma_2\end{aligned}$$

To find the constitutive relationship, first differentiate the total strain:

$$\dot{\gamma} = \dot{\gamma}_1 + \dot{\gamma}_2 = \frac{\sigma}{\eta_1} + \dot{\gamma}_2$$

Now apply the operator  $\left[ G_2 + \eta_2 \frac{\partial}{\partial t} \right]$ .

$$\begin{aligned}\left[ G_2 + \eta_2 \frac{\partial}{\partial t} \right] \dot{\gamma} &= \frac{1}{\eta_1} \left[ G_2 + \eta_2 \frac{\partial}{\partial t} \right] \sigma + \frac{\partial}{\partial t} \left[ (G_2 + \eta_2 \frac{\partial}{\partial t}) \gamma_2 \right] \\ &= \frac{G_2}{\eta_1} \sigma + \left( \frac{\eta_2}{\eta_1} + 1 \right) \dot{\sigma}\end{aligned}$$

Thus the constitutive relationship for a Jeffreys fluid is

$$\left( 1 + \lambda_1 \frac{\partial}{\partial t} \right) \sigma = \eta_1 \left( 1 + \lambda_2 \frac{\partial}{\partial t} \right) \dot{\gamma}$$

where the timescales are

$$\begin{aligned}\text{relaxation timescale } \lambda_1 &= \frac{\eta_1 + \eta_2}{G_2} \\ \text{retardation timescale } \lambda_2 &= \frac{\eta_2}{G_2}\end{aligned}$$

The fluid has both relaxation and retardation, with  $\lambda_1 \geq \lambda_2$ . Typically,  $\lambda_1/\lambda_2$  could be large. If  $\lambda_2 = 0$  we have a Maxwell fluid.

- On short timescales  $t \ll \lambda_1, \lambda_2$  we have  $\lambda_1 \dot{\sigma} \sim \eta_1 \lambda_2 \partial_t \dot{\gamma} \implies \sigma \sim \eta_1 \frac{\lambda_2}{\lambda_1} \dot{\gamma}$  which is a viscous response.
- On long timescales  $t \gg \lambda_1, \lambda_2$  we have  $\sigma \sim \eta_1 \dot{\gamma}$  which is a viscous response.
- On intermediate timescales  $\lambda_2 \ll t \ll \lambda_1$  we have  $\lambda_1 \dot{\sigma} \sim \eta_1 \dot{\gamma} \implies \sigma \sim \frac{\eta_1}{\lambda_1} \dot{\gamma}$  which is an elastic response.

Lecture 9  
5/11/20

## 6.5 General framework

What is the most general constitutive relationship for a linear viscoelastic fluid? The constitutive relationship for a general linear viscoelastic fluid (GLVF) can be written as

$$\sigma(t) = \int_{-\infty}^t G(t-t') \dot{\gamma}(t') dt'$$

where  $G(s)$  is the relaxation modulus of the fluid.  $G$  is a positive function which is decreasing in  $s$ , reflecting the fact memory fades over time.  $G$  has dimensions of stress. By causality,  $G(s) = 0$  so that future changes in shear rate do not influence the present stress.

- A Newtonian fluid has  $G_N(s) = 2\eta\delta(s)$ , using the convention that

$$\int_{-\infty}^t \delta(t-t') dt' = \frac{1}{2}$$

- A Maxwell fluid's relaxation modulus can be calculated from its constitutive relationship.

$$\begin{aligned} \sigma + \lambda \dot{\sigma} &= \eta \dot{\gamma} \\ \implies \lambda \frac{d}{dt} [\sigma e^{t/\lambda}] &= \eta \dot{\gamma} e^{t/\lambda} \\ \sigma(t) &= \int_{-\infty}^t \frac{\eta}{\lambda} \dot{\gamma}(t') e^{\frac{t'-t}{\lambda}} dt' \end{aligned}$$

This is the Maxwell fluid constitutive relationship in integral form. Hence

$$G_M(s) = \frac{\eta}{\lambda} e^{-s/\lambda}$$

which shows a Maxwell fluid has an exponential loss of memory. Note that  $\eta$  has units of stress  $\times$  time, and  $\lambda$  has units of time. Thus  $G$  has units of stress as expected.

- A generalised Maxwell fluid has relaxation modulus

$$G_{GMF}(s) = \sum_{i=1}^N \frac{\eta_i}{\lambda_i} e^{-\frac{s}{\lambda_i}}$$

Generalising the scalar relationship, we get a tensorial relationship for deviatoric stress

$$\underline{\underline{\tau}}(t) = \int_{-\infty}^t G(t-t') \underline{\underline{\dot{\gamma}}}(t') dt'$$

Note that  $G$  is still a scalar.

**Steady flow.** Consider a steady flow with  $\dot{\underline{\gamma}}(t') = \dot{\underline{\gamma}}$  a constant tensor. Then

$$\underline{\tau}(t) = \dot{\underline{\gamma}} \int_{-\infty}^t G(t-t') dt' = \left[ \int_0^{\infty} G(s) ds \right] \dot{\underline{\gamma}}$$

which is the Newtonian constitutive relationship. Thus if the flow is steady, stress is Newtonian with  $\underline{\tau} = \eta \dot{\underline{\gamma}}$  and  $\eta = \int_0^{\infty} G(s) ds$ . Hence Newtonian solutions to previous problems are the same for a GLVF if the flow is steady. To see the consequence of viscoelastic behaviour, we require unsteady motion where unsteady boundary conditions and inertia are involved.


## 6.6 Interpretation of relaxation modulus

All experiments (shear flows and others) with a sudden start/stop require consideration of inertia. We wish to find a limit in which we can neglect inertia. Consider a simple shear flow setup, with sudden motion of one of the plates. The steady state is reached on a timescale  $\tau \sim \frac{h^2}{\nu}$  where  $h$  is the gap between the plates and  $\nu = \frac{\eta}{\rho}$  is the kinematic viscosity. Typical values of  $\nu$  are  $\nu \sim 10^{-6} m^2 s^{-1}$  for water and  $\nu \sim 10^{-3} m^2 s^{-1}$  for glycerol. If  $\tau$  is much smaller than any of the elastic timescales (e.g. relaxation or retardation times) then we can neglect inertia.

### Example.

- Consider glycerol in a setup with  $h \sim 100 \mu m$ ,  $\tau \sim 10^{-5} s$ . Then we can neglect inertia if  $10^{-5} s \ll \lambda$ .
- Consider a cone and plate geometry with small angle  $\beta$ . Typically  $R \sim 1 cm$ ,  $h \sim 100 \mu m$ . Water has  $\nu \sim 10^{-6} m^2 s^{-1}$  so  $\tau \sim 10^{-2} s$  and we can neglect inertia if  $10^{-2} s \ll \lambda$ .

Within this assumption, we can interpret  $G(s)$ . Consider stress relaxation after a sudden (short) shearing displacement.

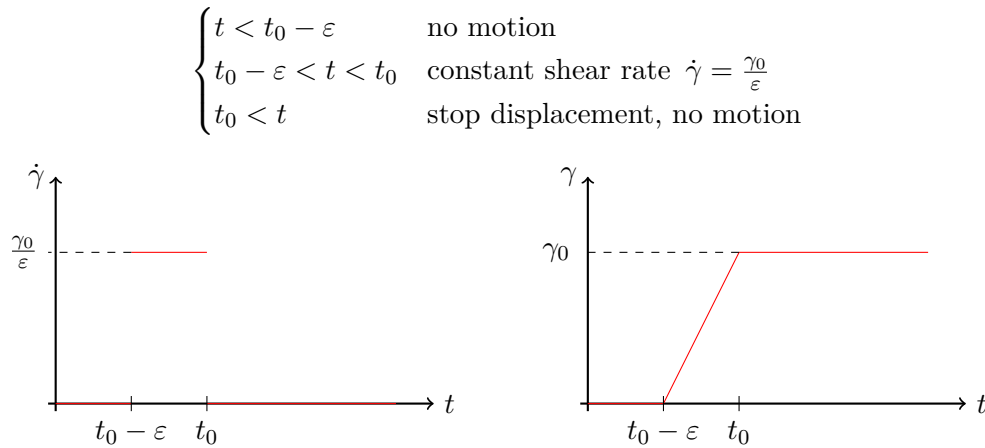

The shear stress is

$$\begin{aligned} \sigma &= \sigma(t) = \int_{-\infty}^t G(t-t') \dot{\gamma}(t') dt' \\ &= \int_{t_0-\varepsilon}^{t_0} G(t-t') \dot{\gamma}(t') dt' \\ &= \frac{\gamma_0}{\varepsilon} \int_{t_0-\varepsilon}^{t_0} G(t-t') dt' \end{aligned}$$

In the limit  $\varepsilon \rightarrow 0$  we get

$$\sigma(t) \rightarrow \gamma_0 G(t - t_0) \text{ as } \varepsilon \rightarrow 0$$


Thus the interpretation is that  $G$  is the (scaled) stress response to instantaneous shear displacement.

## 6.7 Stokes' 1<sup>st</sup> problem

Consider an impulsively started plate in a semi-infinite fluid. In the Newtonian case, this problem is classically used to gain intuition about diffusion of vorticity and momentum. Suppose the flow is unidirectional with  $\mathbf{u} = u(y)\hat{\mathbf{x}}$ . Then from the Cauchy equation we have

$$\rho \frac{\partial u}{\partial t} = \eta \frac{\partial^2 u}{\partial y^2}$$

The solution is a similarity solution with  $u = U f(y, \nu, t) = U f(\frac{y}{\sqrt{\nu t}})$ . Thus the diffusion dynamics reach  $y \sim \sqrt{\nu t}$  at time  $t$ .

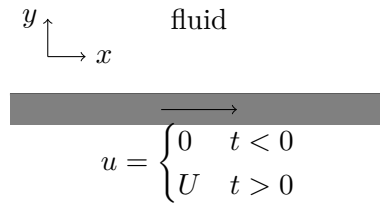

$$u = \begin{cases} 0 & t < 0 \\ U & t > 0 \end{cases}$$

A Maxwell fluid with relaxation timescale instead has similarity solution

$$u = U f(y, \nu, t, \lambda) = U f\left(\frac{y}{\sqrt{\nu t}}, \frac{t}{\lambda}\right)$$

This is in fact significantly more complicated. Equations satisfied by  $u(y, t)$  are now

$$\begin{aligned} \sigma + \lambda \frac{\partial \sigma}{\partial t} &= \eta \dot{\gamma} = \eta \frac{\partial u}{\partial y} && \text{constitutive relationship} \\ \rho \frac{\partial u}{\partial t} &= \frac{\partial \sigma}{\partial y} && \text{Cauchy equation} \end{aligned}$$

Applying the operator  $[1 + \lambda \partial_t]$  to the Cauchy equation gives

$$\frac{\partial u}{\partial t} + \lambda \frac{\partial^2 u}{\partial t^2} = \nu \frac{\partial^2 u}{\partial y^2}$$

This can be solved explicitly via Fourier transforms. Instead, we will consider short and long timescales.

- Short times  $t \ll \lambda$  give  $\lambda \ddot{u} \gg \dot{u}$ , hence

$$\lambda \frac{\partial^2 u}{\partial t^2} \approx \nu \frac{\partial^2 u}{\partial y^2}$$

This is a wave equation for  $u$  with wavespeed  $c = \sqrt{\nu/\lambda}$ . For glycerol,  $\nu \sim 10^{-3} \text{m}^2 \text{s}^{-1}$  and  $\lambda \sim 1 \text{s}$  so  $c \sim 1 \text{cm s}^{-1}$ .

- Long times  $t \gg \lambda$  give  $\lambda \ddot{u} \ll \dot{u}$  hence

$$\frac{\partial u}{\partial t} = \nu \frac{\partial^2 u}{\partial y^2}$$

This is a diffusion equation for  $u$  as in the Newtonian case.

- Transition times  $t \sim \lambda$ : there is a finite extent  $\Delta$  of fluid subject to wave dynamics, with

$$\Delta \sim ct \sim c\lambda = \sqrt{\nu\lambda}$$

For glycerol,  $\Delta \sim 1\text{cm}$ .  $\Delta$  increases with  $\lambda$  and  $\eta$ , and is independent of  $U$  as expected by linearity.

Suppose instead we have a GLVF. In this case,  $u$  satisfies

$$\sigma = \sigma(y, t) = \int_{-\infty}^t G(t-t') \dot{\gamma}(y, t') dt' = \int_{-\infty}^t G(t-t') \frac{\partial u}{\partial y}(y, t') dt'$$

Then the Cauchy equation  $\rho u_t = \sigma_y$  gives

$$\rho \frac{\partial u}{\partial t} = \int_{-\infty}^t G(t-t') \frac{\partial^2 u}{\partial y^2}(y, t') dt'$$