



Arm[®] Cortex[®]-A77 Core

Revision: r1p1

Technical Reference Manual

Non-Confidential

Copyright © 2018–2019, 2023 Arm Limited (or its affiliates).
All rights reserved.

Issue 05

101111_0101_05_en



Arm® Cortex®-A77 Core Technical Reference Manual

Copyright © 2018–2019, 2023 Arm Limited (or its affiliates). All rights reserved.

Release Information

Document history

Issue	Date	Confidentiality	Change
0000-01	27 April 2018	Confidential	First release for r0p0
0100-00	14 September 2018	Confidential	First release for r1p0
0101-00	26 May 2019	Non-Confidential	First release for r1p1
0101-01	23 August 2019	Non-Confidential	Second release for r1p1
0101-02	17 September 2019	Non-Confidential	Third release for r1p1
0101-03	25 October 2019	Non-Confidential	Fourth release for r1p1
0101-04	31 October 2019	Non-Confidential	Fifth release for r1p1
0101-05	30 June 2023	Non-Confidential	Sixth release for r1p1

Proprietary Notice

This document is protected by copyright and other related rights and the practice or implementation of the information contained in this document may be protected by one or more patents or pending patent applications. No part of this document may be reproduced in any form by any means without the express prior written permission of Arm. No license, express or implied, by estoppel or otherwise to any intellectual property rights is granted by this document unless specifically stated.

Your access to the information in this document is conditional upon your acceptance that you will not use or permit others to use the information for the purposes of determining whether implementations infringe any third party patents.

THIS DOCUMENT IS PROVIDED “AS IS”. ARM PROVIDES NO REPRESENTATIONS AND NO WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, SATISFACTORY QUALITY, NON-INFRINGEMENT OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE DOCUMENT. For the avoidance of doubt, Arm makes no representation with respect to, and has

undertaken no analysis to identify or understand the scope and content of, patents, copyrights, trade secrets, or other rights.

This document may include technical inaccuracies or typographical errors.

TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT WILL ARM BE LIABLE FOR ANY DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, ARISING OUT OF ANY USE OF THIS DOCUMENT, EVEN IF ARM HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

This document consists solely of commercial items. You shall be responsible for ensuring that any use, duplication or disclosure of this document complies fully with any relevant export laws and regulations to assure that this document or any portion thereof is not exported, directly or indirectly, in violation of such export laws. Use of the word “partner” in reference to Arm’s customers is not intended to create or refer to any partnership relationship with any other company. Arm may make changes to this document at any time and without notice.

This document may be translated into other languages for convenience, and you agree that if there is any conflict between the English version of this document and any translation, the terms of the English version of the Agreement shall prevail.

The Arm corporate logo and words marked with ® or ™ are registered trademarks or trademarks of Arm Limited (or its affiliates) in the US and/or elsewhere. All rights reserved. Other brands and names mentioned in this document may be the trademarks of their respective owners. Please follow Arm’s trademark usage guidelines at <https://www.arm.com/company/policies/trademarks>.

Copyright © 2018–2019, 2023 Arm Limited (or its affiliates). All rights reserved.

Arm Limited. Company 02557590 registered in England.

110 Fulbourn Road, Cambridge, England CB1 9NJ.

(LES-PRE-20349|version 21.0)

Confidentiality Status

This document is Non-Confidential. The right to use, copy and disclose this document may be subject to license restrictions in accordance with the terms of the agreement entered into by Arm and the party that Arm delivered this document to.

Unrestricted Access is an Arm internal classification.

Product Status

The information in this document is Final, that is for a developed product.

Feedback

Arm welcomes feedback on this product and its documentation. To provide feedback on the product, create a ticket on <https://support.developer.arm.com>.

To provide feedback on the document, fill the following survey: <https://developer.arm.com/documentation-feedback-survey>.

Inclusive language commitment

Arm values inclusive communities. Arm recognizes that we and our industry have used language that can be offensive. Arm strives to lead the industry and create change.

This document includes language that can be offensive. We will replace this language in a future issue of this document.

To report offensive language in this document, email terms@arm.com.

Contents

1. Introduction.....	19
1.1 Product revision status.....	19
1.2 Intended audience.....	19
1.3 Conventions.....	19
1.4 Useful resources.....	21
2. Introduction to the Cortex®-A77 core.....	23
2.1 About the core.....	23
2.2 Features.....	24
2.3 Implementation options.....	25
2.4 Supported standards and specifications.....	26
2.5 Test features.....	26
2.6 Design tasks.....	27
2.7 Product revisions.....	27
3. Technical overview.....	29
3.1 Components.....	29
3.1.1 Instruction fetch.....	31
3.1.2 Instruction decode.....	31
3.1.3 Register rename.....	31
3.1.4 Instruction issue.....	31
3.1.5 Execution pipeline.....	32
3.1.6 L1 data memory system.....	32
3.1.7 L2 memory system.....	32
3.2 Interfaces.....	32
3.3 About system control.....	32
3.4 About the Generic Timer.....	33
4. Clocks, resets, and input synchronization.....	34
4.1 About clocks, resets, and input synchronization.....	34
4.2 Asynchronous interface.....	34
5. Power management.....	35

5.1 About power management.....	35
5.2 Voltage domains.....	35
5.3 Power domains.....	36
5.4 Architectural clock gating modes.....	38
5.4.1 Core Wait for Interrupt.....	38
5.4.2 Core Wait for Event.....	39
5.5 Power control.....	40
5.6 Core power modes.....	40
5.6.1 On mode.....	41
5.6.2 Off mode.....	41
5.6.3 Emulated off mode.....	41
5.6.4 Core dynamic retention mode.....	42
5.6.5 Debug recovery mode.....	42
5.7 Encoding for power modes.....	43
5.8 Power domain states for power modes.....	43
5.9 Core powerup and powerdown sequences.....	44
5.10 Debug over powerdown.....	45
6. Memory Management Unit.....	46
6.1 About the MMU.....	46
6.1.1 Main functions.....	46
6.1.2 AArch64 behavior.....	47
6.2 TLB organization.....	47
6.2.1 Instruction L1 TLB.....	47
6.2.2 Data L1 TLB.....	48
6.2.3 L2 TLB.....	48
6.3 TLB match process.....	48
6.4 Translation table walks.....	49
6.4.1 AArch64 behavior.....	50
6.5 MMU memory accesses.....	50
6.5.1 Configuring MMU accesses.....	50
6.5.2 Descriptor hardware update.....	51
6.6 Specific behaviors on aborts and memory attributes.....	51
6.6.1 External aborts.....	52
6.6.2 Mis-programming contiguous hints.....	52
6.6.3 Memory attributes.....	52

6.7 Page-based hardware attributes.....	53
7. L1 memory system.....	55
7.1 About the L1 memory system.....	55
7.1.1 L1 instruction side memory system.....	55
7.1.2 L1 data side memory system.....	55
7.2 Cache behavior.....	56
7.2.1 Instruction cache disabled behavior.....	56
7.2.2 Instruction cache speculative memory accesses.....	56
7.2.3 Data cache disabled behavior.....	57
7.2.4 Data cache maintenance considerations.....	57
7.2.5 Data cache coherency.....	57
7.2.6 Write streaming mode.....	57
7.3 L1 instruction memory system.....	58
7.3.1 Program flow prediction.....	58
7.4 L1 data memory system.....	60
7.4.1 Memory system implementation.....	60
7.4.2 Internal exclusive monitor.....	61
7.5 Data prefetching.....	62
7.6 Direct access to internal memory.....	63
7.6.1 Encoding for L1 instruction cache tag, L1 instruction cache data, L1 BTB, L1 GHB, L1 BIM, L1 TLB instruction, and LO macro-op cache data.....	63
7.6.2 Encoding for L1 data cache tag, L1 data cache data, and L1 TLB data.....	68
7.6.3 Encoding for the L2 unified cache.....	72
7.6.4 Encoding for the L2 TLB.....	76
8. L2 memory system.....	79
8.1 About the L2 memory system.....	79
8.2 About the L2 cache.....	79
8.3 Support for memory types.....	79
9. Reliability, Availability, and Serviceability (RAS).....	81
9.1 Cache ECC and parity.....	81
9.2 Cache protection behavior.....	82
9.3 Uncorrected errors and data poisoning.....	84
9.4 RAS error types.....	84
9.5 Error Synchronization Barrier.....	84

9.6 Error recording.....	86
9.7 Error injection.....	86
10. Generic Interrupt Controller CPU interface.....	89
10.1 About the Generic Interrupt Controller CPU interface.....	89
10.2 Bypassing the CPU interface.....	90
11. Advanced SIMD and floating-point support.....	91
11.1 About the Advanced SIMD and floating-point support.....	91
11.2 Accessing the feature identification registers.....	91
12. AArch32 System registers.....	93
12.1 AArch32 architectural System register summary.....	93
13. AArch64 System registers.....	94
13.1 AArch64 registers.....	94
13.2 AArch64 architectural System register summary.....	94
13.3 AArch64 implementation defined register summary.....	100
13.4 AArch64 registers by functional group.....	101
13.5 ACTLR_EL1, Auxiliary Control Register, EL1.....	107
13.6 ACTLR_EL2, Auxiliary Control Register, EL2.....	108
13.7 ACTLR_EL3, Auxiliary Control Register, EL3.....	111
13.8 AFSRO_EL1, Auxiliary Fault Status Register 0, EL1.....	113
13.9 AFSRO_EL2, Auxiliary Fault Status Register 0, EL2.....	114
13.10 AFSRO_EL3, Auxiliary Fault Status Register 0, EL3.....	115
13.11 AFSR1_EL1, Auxiliary Fault Status Register 1, EL1.....	115
13.12 AFSR1_EL2, Auxiliary Fault Status Register 1, EL2.....	116
13.13 AFSR1_EL3, Auxiliary Fault Status Register 1, EL3.....	117
13.14 AIDR_EL1, Auxiliary ID Register, EL1.....	118
13.15 AMAIR_EL1, Auxiliary Memory Attribute Indirection Register, EL1.....	119
13.16 AMAIR_EL2, Auxiliary Memory Attribute Indirection Register, EL2.....	120
13.17 AMAIR_EL3, Auxiliary Memory Attribute Indirection Register, EL3.....	120
13.18 ATCR_EL1, Auxiliary Translation Control Register, EL1.....	121
13.19 ATCR_EL2, Auxiliary Translation Control Register, EL2.....	124
13.20 ATCR_EL12, Alias to Auxiliary Translation Control Register EL1.....	126
13.21 ATCR_EL3, Auxiliary Translation Control Register, EL3.....	127
13.22 AVTCR_EL2, Auxiliary Virtualized Translation Control Register, EL2.....	128

13.23 CCSIDR_EL1, Cache Size ID Register, EL1.....	130
13.24 CLIDR_EL1, Cache Level ID Register, EL1.....	132
13.25 CPACR_EL1, Architectural Feature Access Control Register, EL1.....	134
13.26 CPTR_EL2, Architectural Feature Trap Register, EL2.....	135
13.27 CPTR_EL3, Architectural Feature Trap Register, EL3.....	136
13.28 CPUACTLR_EL1, CPU Auxiliary Control Register, EL1.....	137
13.29 CPUACTLR2_EL1, CPU Auxiliary Control Register 2, EL1.....	138
13.30 CPUACTLR3_EL1, CPU Auxiliary Control Register 3, EL1.....	140
13.31 CPUCFR_EL1, CPU Configuration Register, EL1.....	141
13.32 CPUECTLR_EL1, CPU Extended Control Register, EL1.....	143
13.33 CPUECTLR2_EL1, CPU Extended Control Register2, EL1.....	153
13.34 CPUPCR_EL3, CPU Private Control Register, EL3.....	155
13.35 CPUPMR_EL3, CPU Private Mask Register, EL3.....	157
13.36 CPUPMR2_EL3, CPU Private Mask Register 2, EL3.....	158
13.37 CPUPOR_EL3, CPU Private Operation Register, EL3.....	160
13.38 CPUPOR2_EL3, CPU Private Operation Register 2, EL3.....	161
13.39 CPUPSELR_EL3, CPU Private Selection Register, EL3.....	163
13.40 CPUPWRCTLR_EL1, Power Control Register, EL1.....	164
13.41 CSSELR_EL1, Cache Size Selection Register, EL1.....	166
13.42 CTR_ELO, Cache Type Register, ELO.....	168
13.43 DCZID_ELO, Data Cache Zero ID Register, ELO.....	170
13.44 DISR_EL1, Deferred Interrupt Status Register, EL1.....	171
13.45 ERRIDR_EL1, Error ID Register, EL1.....	172
13.46 ERRSELR_EL1, Error Record Select Register, EL1.....	173
13.47 ERXADDR_EL1, Selected Error Record Address Register, EL1.....	174
13.48 ERXCTLR_EL1, Selected Error Record Control Register, EL1.....	174
13.49 ERXFR_EL1, Selected Error Record Feature Register, EL1.....	175
13.50 ERXMISCO_EL1, Selected Error Record Miscellaneous Register 0, EL1.....	175
13.51 ERXMISC1_EL1, Selected Error Record Miscellaneous Register 1, EL1.....	175
13.52 ERXPFGCDN_EL1, Selected Error Pseudo Fault Generation Count Down Register, EL1....	176
13.53 ERXPFGCTL_EL1, Selected Error Pseudo Fault Generation Control Register, EL1.....	177
13.54 ERXPFGF_EL1, Selected Pseudo Fault Generation Feature Register, EL1.....	178
13.55 ERXSTATUS_EL1, Selected Error Record Primary Status Register, EL1.....	180
13.56 ESR_EL1, Exception Syndrome Register, EL1.....	180
13.57 ESR_EL2, Exception Syndrome Register, EL2.....	181
13.58 ESR_EL3, Exception Syndrome Register, EL3.....	183

13.59 HACR_EL2, Hyp Auxiliary Configuration Register, EL2.....	184
13.60 HCR_EL2, Hypervisor Configuration Register, EL2.....	185
13.61 ID_AA64AFR0_EL1, AArch64 Auxiliary Feature Register 0.....	186
13.62 ID_AA64AFR1_EL1, AArch64 Auxiliary Feature Register 1.....	187
13.63 ID_AA64DFR0_EL1, AArch64 Debug Feature Register 0, EL1.....	187
13.64 ID_AA64DFR1_EL1, AArch64 Debug Feature Register 1, EL1.....	188
13.65 ID_AA64ISAR0_EL1, AArch64 Instruction Set Attribute Register 0, EL1.....	189
13.66 ID_AA64ISAR1_EL1, AArch64 Instruction Set Attribute Register 1, EL1.....	191
13.67 ID_AA64MMFR0_EL1, AArch64 Memory Model Feature Register 0, EL1.....	192
13.68 ID_AA64MMFR1_EL1, AArch64 Memory Model Feature Register 1, EL1.....	194
13.69 ID_AA64MMFR2_EL1, AArch64 Memory Model Feature Register 2, EL1.....	195
13.70 ID_AA64PFR0_EL1, AArch64 Processor Feature Register 0, EL1.....	197
13.71 ID_AA64PFR1_EL1, AArch64 Processor Feature Register 1, EL1.....	199
13.72 ID_AFR0_EL1, AArch32 Auxiliary Feature Register 0, EL1.....	200
13.73 ID_DFR0_EL1, AArch32 Debug Feature Register 0, EL1.....	201
13.74 ID_ISAR0_EL1, AArch32 Instruction Set Attribute Register 0, EL1.....	202
13.75 ID_ISAR1_EL1, AArch32 Instruction Set Attribute Register 1, EL1.....	204
13.76 ID_ISAR2_EL1, AArch32 Instruction Set Attribute Register 2, EL1.....	207
13.77 ID_ISAR3_EL1, AArch32 Instruction Set Attribute Register 3, EL1.....	209
13.78 ID_ISAR4_EL1, AArch32 Instruction Set Attribute Register 4, EL1.....	211
13.79 ID_ISAR5_EL1, AArch32 Instruction Set Attribute Register 5, EL1.....	213
13.80 ID_ISAR6_EL1, AArch32 Instruction Set Attribute Register 6, EL1.....	215
13.81 ID_MMFR0_EL1, AArch32 Memory Model Feature Register 0, EL1.....	216
13.82 ID_MMFR1_EL1, AArch32 Memory Model Feature Register 1, EL1.....	218
13.83 ID_MMFR2_EL1, AArch32 Memory Model Feature Register 2, EL1.....	220
13.84 ID_MMFR3_EL1, AArch32 Memory Model Feature Register 3, EL1.....	222
13.85 ID_MMFR4_EL1, AArch32 Memory Model Feature Register 4, EL1.....	225
13.86 ID_PFR0_EL1, AArch32 Processor Feature Register 0, EL1.....	226
13.87 ID_PFR1_EL1, AArch32 Processor Feature Register 1, EL1.....	228
13.88 ID_PFR2_EL1, AArch32 Processor Feature Register 2, EL1.....	230
13.89 LORC_EL1, LORegion Control Register, EL1.....	231
13.90 LORID_EL1, LORegion ID Register, EL1.....	232
13.91 LORN_EL1, LORegion Number Register, EL1.....	233
13.92 MDCR_EL3, Monitor Debug Configuration Register, EL3.....	233
13.93 MIDR_EL1, Main ID Register, EL1.....	235
13.94 MPIDR_EL1, Multiprocessor Affinity Register, EL1.....	237

13.95 PAR_EL1, Physical Address Register, EL1.....	239
13.96 REVIDR_EL1, Revision ID Register, EL1.....	239
13.97 RMR_EL3, Reset Management Register.....	240
13.98 RVBAR_EL3, Reset Vector Base Address Register, EL3.....	241
13.99 SCTLR_EL1, System Control Register, EL1.....	242
13.100 SCTLR_EL2, System Control Register, EL2.....	244
13.101 SCTLR_EL3, System Control Register, EL3.....	245
13.102 TCR_EL1, Translation Control Register, EL1.....	246
13.103 TCR_EL2, Translation Control Register, EL2.....	248
13.104 TCR_EL3, Translation Control Register, EL3.....	249
13.105 TTBR0_EL1, Translation Table Base Register 0, EL1.....	250
13.106 TTBR0_EL2, Translation Table Base Register 0, EL2.....	251
13.107 TTBR0_EL3, Translation Table Base Register 0, EL3.....	252
13.108 TTBR1_EL1, Translation Table Base Register 1, EL1.....	253
13.109 TTBR1_EL2, Translation Table Base Register 1, EL2.....	254
13.110 VDISR_EL2, Virtual Deferred Interrupt Status Register, EL2.....	255
13.110.1 VDISR_EL2 at EL1 using AArch64.....	255
13.111 VESER_EL2, Virtual SError Exception Syndrome Register.....	256
13.112 VTCR_EL2, Virtualization Translation Control Register, EL2.....	257
13.113 VTTBR_EL2, Virtualization Translation Table Base Register, EL2.....	258
14. Error System registers.....	259
14.1 Error System register summary.....	259
14.2 ERROADDR, Error Record Address Register.....	260
14.3 ERROCTL, Error Record Control Register.....	260
14.4 ERROFR, Error Record Feature Register.....	262
14.5 ERROMISC0, Error Record Miscellaneous Register 0.....	264
14.6 ERROMISC1, Error Record Miscellaneous Register 1.....	268
14.7 ERROPFGCDN, Error Pseudo Fault Generation Count Down Register.....	268
14.8 ERROPFGCTL, Error Pseudo Fault Generation Control Register.....	269
14.9 ERROPFGF, Error Pseudo Fault Generation Feature Register.....	270
14.10 ERROSTATUS, Error Record Primary Status Register.....	272
15. GIC registers.....	276
15.1 CPU interface registers.....	276
15.2 AArch64 physical GIC CPU interface System register summary.....	276
15.3 ICC_APOR0_EL1, Interrupt Controller Active Priorities Group 0 Register 0, EL1.....	277

15.4 ICC_AP1R0_EL1, Interrupt Controller Active Priorities Group 1 Register 0 EL1.....	278
15.5 ICC_BPR0_EL1, Interrupt Controller Binary Point Register 0, EL1.....	278
15.6 ICC_BPR1_EL1, Interrupt Controller Binary Point Register 1, EL1.....	279
15.7 ICC_CTLR_EL1, Interrupt Controller Control Register, EL1.....	280
15.8 ICC_CTLR_EL3, Interrupt Controller Control Register, EL3.....	282
15.9 ICC_SRE_EL1, Interrupt Controller System Register Enable Register, EL1.....	285
15.10 ICC_SRE_EL2, Interrupt Controller System Register Enable register, EL2.....	286
15.11 ICC_SRE_EL3, Interrupt Controller System Register Enable register, EL3.....	287
15.12 AArch64 virtual GIC CPU interface register summary.....	289
15.13 ICV_AP0R0_EL1, Interrupt Controller Virtual Active Priorities Group 0 Register 0, EL1.....	289
15.14 ICV_AP1R0_EL1, Interrupt Controller Virtual Active Priorities Group 1 Register 0, EL1.....	290
15.15 ICV_BPR0_EL1, Interrupt Controller Virtual Binary Point Register 0, EL1.....	290
15.16 ICV_BPR1_EL1, Interrupt Controller Virtual Binary Point Register 1, EL1.....	291
15.17 ICV_CTLR_EL1, Interrupt Controller Virtual Control Register, EL1.....	292
15.18 AArch64 virtual interface control System register summary.....	294
15.19 ICH_AP0R0_EL2, Interrupt Controller Hyp Active Priorities Group 0 Register 0, EL2.....	295
15.20 ICH_AP1R0_EL2, Interrupt Controller Hyp Active Priorities Group 1 Register 0, EL2.....	295
15.21 ICH_HCR_EL2, Interrupt Controller Hyp Control Register, EL2.....	296
15.22 ICH_VMCR_EL2, Interrupt Controller Virtual Machine Control Register, EL2.....	298
15.23 ICH_VTR_EL2, Interrupt Controller VGIC Type Register, EL2.....	300
16. Advanced SIMD and floating-point registers.....	303
16.1 AArch64 register summary.....	303
16.2 FPCR, Floating-point Control Register.....	303
16.3 FPSR, Floating-point Status Register.....	306
16.4 MVFR0_EL1, Media, and VFP Feature Register 0, EL1.....	308
16.5 MVFR1_EL1, Media, and VFP Feature Register 1, EL1.....	310
16.6 MVFR2_EL1, Media, and VFP Feature Register 2, EL1.....	312
16.7 AArch32 register summary.....	313
16.8 FPSCR, Floating-Point Status and Control Register.....	313
17. Debug.....	318
17.1 About debug methods.....	318
17.2 Debug register interfaces.....	319
17.2.1 Core interfaces.....	319
17.2.2 Breakpoints and watchpoints.....	320
17.2.3 Effects of resets on Debug registers.....	320

17.2.4 External access permissions to Debug registers.....	320
17.3 Debug events.....	321
17.3.1 Watchpoint debug events.....	321
17.3.2 Debug OS Lock.....	322
17.4 External debug interface.....	322
18. Performance Monitoring Unit.....	323
18.1 About the PMU.....	323
18.2 PMU functional description.....	323
18.2.1 External register access permissions.....	323
18.3 PMU events.....	324
18.4 PMU interrupts.....	331
18.5 Exporting PMU events.....	331
19. Activity Monitor Unit.....	332
19.1 About the AMU.....	332
19.2 Accessing the activity monitors.....	332
19.2.1 Access enable bit.....	332
19.2.2 System register access.....	333
19.2.3 External memory-mapped access.....	333
19.3 AMU counters.....	333
19.4 AMU events.....	333
20. Embedded Trace Macrocell.....	335
20.1 About the ETM.....	335
20.2 ETM trace unit generation options and resources.....	335
20.3 ETM trace unit functional description.....	336
20.4 Resetting the ETM.....	338
20.5 Programming and reading ETM trace unit registers.....	338
20.6 ETM trace unit register interfaces.....	339
20.7 Interaction with the PMU and Debug.....	340
21. AArch32 debug registers.....	341
21.1 AArch32 Debug register summary.....	341
22. AArch64 Debug registers.....	342
22.1 AArch64 Debug register summary.....	342
22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1.....	343

22.3 DBGCLAIMSET_EL1, Debug Claim Tag Set Register, EL1.....	347
22.4 DBGWCRn_EL1, Debug Watchpoint Control Registers, EL1.....	348
23. Memory-mapped Debug registers.....	351
23.1 Memory-mapped Debug register summary.....	351
23.2 EDCIDR0, External Debug Component Identification Register 0.....	354
23.3 EDCIDR1, External Debug Component Identification Register 1.....	354
23.4 EDCIDR2, External Debug Component Identification Register 2.....	355
23.5 EDCIDR3, External Debug Component Identification Register 3.....	356
23.6 EDDEVID, External Debug Device ID Register 0.....	357
23.7 EDDEVID1, External Debug Device ID Register 1.....	358
23.8 EDPIDR0, External Debug Peripheral Identification Register 0.....	359
23.9 EDPIDR1, External Debug Peripheral Identification Register 1.....	360
23.10 EDPIDR2, External Debug Peripheral Identification Register 2.....	361
23.11 EDPIDR3, External Debug Peripheral Identification Register 3.....	362
23.12 EDPIDR4, External Debug Peripheral Identification Register 4.....	363
23.13 EDPIDRn, External Debug Peripheral Identification Registers 5-7.....	364
23.14 EDRCCR, External Debug Reserve Control Register.....	364
24. AArch32 PMU registers.....	366
24.1 AArch32 PMU register summary.....	366
24.2 PMCEID0, Performance Monitors Common Event Identification Register 0.....	367
24.3 PMCEID1, Performance Monitors Common Event Identification Register 1.....	370
24.4 PMCR, Performance Monitors Control Register.....	372
25. AArch64 PMU registers.....	376
25.1 AArch64 PMU register summary.....	376
25.2 PMCEID0_ELO, Performance Monitors Common Event Identification Register 0, ELO.....	378
25.3 PMCEID1_ELO, Performance Monitors Common Event Identification Register 1, ELO.....	381
25.4 PMCR_ELO, Performance Monitors Control Register, ELO.....	383
26. Memory-mapped PMU registers.....	386
26.1 Memory-mapped PMU register summary.....	386
26.2 PMCFGR, Performance Monitors Configuration Register.....	389
26.3 PMCIDR0, Performance Monitors Component Identification Register 0.....	390
26.4 PMCIDR1, Performance Monitors Component Identification Register 1.....	391
26.5 PMCIDR2, Performance Monitors Component Identification Register 2.....	392

26.6 PMCIDR3, Performance Monitors Component Identification Register 3.....	392
26.7 PMPIDR0, Performance Monitors Peripheral Identification Register 0.....	393
26.8 PMPIDR1, Performance Monitors Peripheral Identification Register 1.....	394
26.9 PMPIDR2, Performance Monitors Peripheral Identification Register 2.....	395
26.10 PMPIDR3, Performance Monitors Peripheral Identification Register 3.....	396
26.11 PMPIDR4, Performance Monitors Peripheral Identification Register 4.....	396
26.12 PMPIDRn, Performance Monitors Peripheral Identification Register 5-7.....	397
27. PMU snapshot registers.....	398
27.1 PMU snapshot register summary.....	398
27.2 PMPCSSR, PMU Snapshot Program Counter Sample Register.....	398
27.3 PMCIDSSR, PMU Snapshot CONTEXTIDR_EL1 Sample Register.....	399
27.4 PMCID2SSR, PMU Snapshot CONTEXTIDR_EL2 Sample Register.....	400
27.5 PMSSSR, PMU Snapshot Status Register.....	400
27.6 PMOVSSR, PMU Snapshot Overflow Status Register.....	401
27.7 PMCCNTSR, PMU Snapshot Cycle Counter Register.....	401
27.8 PMEVCNTRn, PMU Snapshot Cycle Counter Registers 0-5.....	402
27.9 PMSSCR, PMU Snapshot Capture Register.....	402
28. AArch64 AMU registers.....	404
28.1 AArch64 AMU register summary.....	404
28.2 AMCNTENCLR_ELO, Activity Monitors Count Enable Clear Register, ELO.....	404
28.3 AMCNTENSET_ELO, Activity Monitors Count Enable Set Register, ELO.....	406
28.4 AMCFGR_ELO, Activity Monitors Configuration Register, ELO.....	407
28.5 AMUSERENR_ELO, Activity Monitor ELO Enable access, ELO.....	408
28.6 AMEVCNTRn_ELO, Activity Monitor Event Counter Register, ELO.....	410
28.7 AMEVTYPERN_ELO, Activity Monitor Event Type Register, ELO.....	411
29. Memory-mapped AMU registers.....	413
29.1 Memory-mapped AMU register summary.....	413
30. ETM registers.....	414
30.1 ETM register summary.....	414
30.2 TRCACATRN, Address Comparator Access Type Registers 0-7.....	416
30.3 TRCACVRN, Address Comparator Value Registers 0-7.....	418
30.4 TRCAUTHSTATUS, Authentication Status Register.....	419
30.5 TRCAUXCTLR, Auxiliary Control Register.....	420

30.6 TRCBBCTLR, Branch Broadcast Control Register.....	422
30.7 TRCCCCTLR, Cycle Count Control Register.....	423
30.8 TRCCIDCCTLR0, Context ID Comparator Control Register 0.....	424
30.9 TRCCIDCVR0, Context ID Comparator Value Register 0.....	425
30.10 TRCCIDR0, ETM Component Identification Register 0.....	425
30.11 TRCCIDR1, ETM Component Identification Register 1.....	426
30.12 TRCCIDR2, ETM Component Identification Register 2.....	427
30.13 TRCCIDR3, ETM Component Identification Register 3.....	428
30.14 TRCCLAIMCLR, Claim Tag Clear Register.....	428
30.15 TRCCLAIMSET, Claim Tag Set Register.....	429
30.16 TRCCNTCTLR0, Counter Control Register 0.....	430
30.17 TRCCNTCTLR1, Counter Control Register 1.....	432
30.18 TRCCNTRLDVRn, Counter Reload Value Registers 0-1.....	433
30.19 TRCCNTRVRn, Counter Value Registers 0-1.....	434
30.20 TRCCONFIGR, Trace Configuration Register.....	435
30.21 TRCDEVAFF0, Device Affinity Register 0.....	438
30.22 TRCDEVAFF1, Device Affinity Register 1.....	438
30.23 TRCDEVARCH, Device Architecture Register.....	438
30.24 TRCDEVID, Device ID Register.....	439
30.25 TRCDEVTYPE, Device Type Register.....	439
30.26 TRCEVENTCTL0R, Event Control 0 Register.....	440
30.27 TRCEVENTCTL1R, Event Control 1 Register.....	442
30.28 TRCEXTINSEL, External Input Select Register.....	443
30.29 TRCIDR0, ID Register 0.....	444
30.30 TRCIDR1, ID Register 1.....	446
30.31 TRCIDR2, ID Register 2.....	447
30.32 TRCIDR3, ID Register 3.....	449
30.33 TRCIDR4, ID Register 4.....	451
30.34 TRCIDR5, ID Register 5.....	452
30.35 TRCIDR8, ID Register 8.....	454
30.36 TRCIDR9, ID Register 9.....	454
30.37 TRCIDR10, ID Register 10.....	455
30.38 TRCIDR11, ID Register 11.....	455
30.39 TRCIDR12, ID Register 12.....	456
30.40 TRCIDR13, ID Register 13.....	456
30.41 TRCIMSPEC0, IMPLEMENTATION SPECIFIC Register 0.....	457

30.42 TRCITATBCTR0, Trace Integration Test ATB Control Register 0.....	458
30.43 TRCITATBCTR1, Trace Integration Test ATB Control Register 1.....	459
30.44 TRCITATBCTR2, Trace Integration Test ATB Control Register 2.....	459
30.45 TRCITATBDATA0, Trace Integration Test ATB Data Register 0.....	460
30.46 TRCITCTRL, Trace Integration Mode Control register.....	461
30.47 TRCITMISCIN, Trace Integration Miscellaneous Input Register.....	462
30.48 TRCITMISCOUT, Trace Integration Miscellaneous Outputs Register.....	462
30.49 TRCLAR, Software Lock Access Register.....	463
30.50 TRCLSR, Software Lock Status Register.....	464
30.51 TRCOSLAR, OS Lock Access Register.....	464
30.52 TRCOSLSR, OS Lock Status Register.....	465
30.53 TRCPDCR, Power Down Control Register.....	466
30.54 TRCPDSR, Power Down Status Register.....	467
30.55 TRCPIDR0, ETM Peripheral Identification Register 0.....	468
30.56 TRCPIDR1, ETM Peripheral Identification Register 1.....	469
30.57 TRCPIDR2, ETM Peripheral Identification Register 2.....	469
30.58 TRCPIDR3, ETM Peripheral Identification Register 3.....	470
30.59 TRCPIDR4, ETM Peripheral Identification Register 4.....	471
30.60 TRCPIDRn, ETM Peripheral Identification Registers 5-7.....	472
30.61 TRCPRGCTLR, Programming Control Register.....	472
30.62 TRCRSCTLRn, Resource Selection Control Registers 2-15.....	473
30.63 TRCSEQEVRn, Sequencer State Transition Control Registers 0-2.....	474
30.64 TRCSEQRSTEV, Sequencer Reset Control Register.....	475
30.65 TRCSEQSTR, Sequencer State Register.....	476
30.66 TRCSSCCR0, Single-Shot Comparator Control Register 0.....	477
30.67 TRCSSCSR0, Single-Shot Comparator Status Register 0.....	478
30.68 TRCSTATR, Status Register.....	480
30.69 TRCSYNCP, Synchronization Period Register.....	480
30.70 TRCTRACEIDR, Trace ID Register.....	481
30.71 TRCTSCTLR, Global Timestamp Control Register.....	482
30.72 TRCVICTLR, ViewInst Main Control Register.....	483
30.73 TRCVIIECTLR, ViewInst Include-Exclude Control Register.....	485
30.74 TRCVISSCTLR, ViewInst Start-Stop Control Register.....	486
30.75 TRCVMIDCVR0, VMID Comparator Value Register 0.....	487
30.76 TRCVMIDCCTLR0, Virtual context identifier Comparator Control Register 0.....	487

A. Cortex®-A77 Core AArch32 unpredictable behaviors.....489

A.1 Use of R15 by Instruction.....489

A.2 Load/Store accesses crossing page boundaries.....489

A.3 Armv8 Debug unpredictable behaviors.....490

A.4 Other **UNPREDICTABLE** behaviors..... 492

B. Revisions..... 494

B.1 Revisions.....494

1. Introduction

1.1 Product revision status

The *r_xp_y* identifier indicates the revision status of the product described in this manual, for example, *r1p2*, where:

- r_x** Identifies the major revision of the product, for example, r1.
- p_y** Identifies the minor revision or modification status of the product, for example, p2.

1.2 Intended audience

This manual is for system designers, system integrators, and programmers who are designing or programming a *System on Chip* (SoC) that uses an Arm core.

1.3 Conventions

The following subsections describe conventions used in Arm documents.

Glossary

The Arm® Glossary is a list of terms used in Arm documentation, together with definitions for those terms. The Arm Glossary does not contain terms that are industry standard unless the Arm meaning differs from the generally accepted meaning.

See the Arm Glossary for more information: developer.arm.com/glossary.

Convention	Use
<i>italic</i>	Citations.
bold	Terms in descriptive lists, where appropriate.
monospace	Text that you can enter at the keyboard, such as commands, file and program names, and source code.
monospace <u>underline</u>	A permitted abbreviation for a command or option. You can enter the underlined text instead of the full command or option name.
<and>	Encloses replaceable terms for assembler syntax where they appear in code or code fragments. For example: <div>MRC p15, 0, <Rd>, <CRn>, <CRm>, <Opcode_2></div>

Convention	Use
SMALL CAPITALS	Terms that have specific technical meanings as defined in the <i>Arm® Glossary</i> . For example, IMPLEMENTATION DEFINED , IMPLEMENTATION SPECIFIC , UNKNOWN , and UNPREDICTABLE .



Recommendations. Not following these recommendations might lead to system failure or damage.



Requirements for the system. Not following these requirements might result in system failure or damage.



Requirements for the system. Not following these requirements will result in system failure or damage.



An important piece of information that needs your attention.



A useful tip that might make it easier, better or faster to perform a task.




A reminder of something important that relates to the information you are reading.

Timing diagrams

The following figure explains the components used in timing diagrams. Variations, when they occur, have clear labels. You must not assume any timing information that is not explicit in the diagrams.

Shaded bus and signal areas are undefined, so the bus or signal can assume any value within the shaded area at that time. The actual level is unimportant and does not affect normal operation.

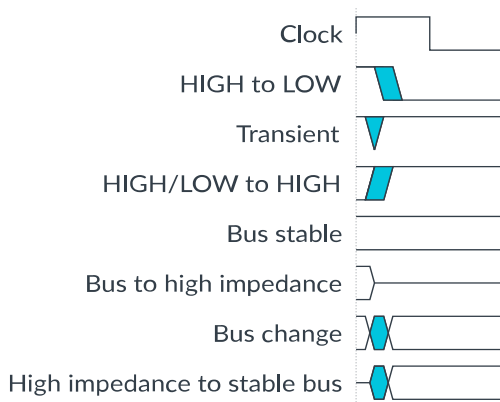Figure 1-1: Key to timing diagram conventions

Signals

The signal conventions are:

Signal level

The level of an asserted signal depends on whether the signal is active-HIGH or active-LOW. Asserted means:

- HIGH for active-HIGH signals.
- LOW for active-LOW signals.

Lowercase n

At the start or end of a signal name, n denotes an active-LOW signal.

1.4 Useful resources

This document contains information that is specific to this product. See the following resources for other useful information.

Access to Arm documents depends on their confidentiality:

- Non-Confidential documents are available at developer.arm.com/documentation. Each document link in the following tables goes to the online version of the document.
- Confidential documents are available to licensees only through the product package.

Arm product resources	Document ID	Confidentiality
Arm® CoreSight™ ELA-500 Embedded Logic Analyzer Technical Reference Manual	100127	Non-Confidential
Arm® Cortex®-A77 Core Configuration and Integration Manual	101112	Confidential
Arm® Cortex®-A77 Core Cryptographic Extension Technical Reference Manual	101113	Non-Confidential
Arm® DynamIQ™ Shared Unit Configuration and Sign-off Guide	100454	Confidential
Arm® DynamIQ™ Shared Unit Technical Reference Manual	100453	Non-Confidential
Arm® DynamIQ™ Shared Unit Integration Manual	100455	Confidential

Arm architecture and specifications	Document ID	Confidentiality
AMBA® 5 CHI Architecture Specification	IHI 0050	Non-Confidential
AMBA® APB Protocol Specification	IHI 0024	Non-Confidential
AMBA® ATB Protocol Specification	IHI 0032	Non-Confidential
AMBA® AXI and ACE Protocol Specification	IHI 0022	Non-Confidential
AMBA® Low Power Interface Specification	IHI 0068	Non-Confidential
Arm® Architecture Reference Manual for A-profile architecture	DDI 0487	Non-Confidential
Arm® CoreSight™ Architecture Specification v3.0	IHI 0029	Non-Confidential
Arm® Debug Interface Architecture Specification, ADIv5.0 to ADIv5.2	IHI 0031	Non-Confidential
Arm® Embedded Trace Macrocell Architecture Specification ETMv4	IHI 0064	Non-Confidential
Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4	IHI 0069	Non-Confidential
Arm® Architecture Reference Manual Supplement, Reliability, Availability, and Serviceability (RAS), for A-profile architecture	DDI 0587	Non-Confidential

Non-Arm resources	Document ID	Organization
IEEE Standard for Binary Floating-Point Arithmetic	ANSI/IEEE Std 754-2008	ANSI/IEEE www.ieee.org



Note

Arm tests its PDFs only in Adobe Acrobat and Acrobat Reader. Arm cannot guarantee the quality of its documents when used with any other PDF reader.

Adobe PDF reader products can be downloaded at <http://www.adobe.com>.

2. Introduction to the Cortex®-A77 core

This chapter provides an overview of the Cortex®-A77 core and its features.

2.1 About the core

The Cortex®-A77 core is a high-performance and low-power Arm product that implements the Arm®v8-A architecture.

The Cortex®-A77 core supports:


- The Arm®v8.2-A extension.
- The *Reliability, Availability, and Serviceability* (RAS) extension.
- The Load acquire (LDAR) instructions introduced in the Arm®v8.3-A extension
- The Dot Product support instructions introduced in the Arm®v8.4-A extension.
- The PSTATE *Speculative Store Bypass Safe* (SSBS) bit introduced in the Arm®v8.5-A extension.

The Cortex®-A77 core has a L1 memory system and a private, integrated L2 cache. It also includes a superscalar, variable-length, out-of-order pipeline.

The Cortex®-A77 core is implemented inside the *DynamiQ™ Shared Unit* (DSU) cluster. For more information, see the [Arm® DynamiQ™ Shared Unit Technical Reference Manual](#).

The following figure shows an example of a configuration with four Cortex®-A77 cores.

Figure 2-1: Example Cortex®-A77 configuration

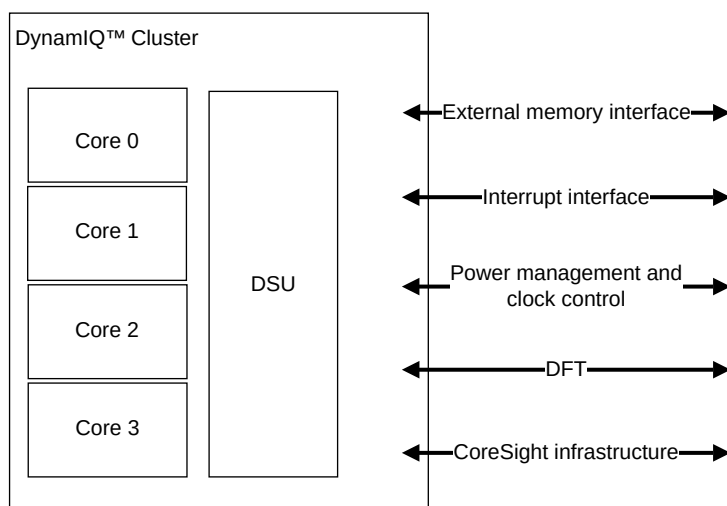

2.2 Features

The Cortex®-A77 core includes the following features:

Core features

- 40-bit *Physical Address* (PA).
- A *Memory Management Unit* (MMU).
- Optional Cryptographic Extension.
- Armv8.4 Dot Product support instruction.
- Superscalar, variable-length, out-of-order pipeline.
- Support for Arm TrustZone® technology.
- Support for *Page-Based Hardware Attributes* (PBHA).
- *Reliability, Availability, and Serviceability* (RAS) Extension.
- Full implementation of the Armv8.2-A A64, A32, and T32 instruction sets.
- *Generic Interrupt Controller* (GICv4) CPU interface to connect to an external distributor.
- Generic Timers interface supporting 64-bit count input from an external system counter.
- An integrated execution unit that implements the Advanced SIMD and floating-point architecture support.
- AArch32 Execution state at Exception level EL0 only. AArch64 Execution state at all Exception levels (EL0 to EL3).

Cache features

- Separate L1 data and instruction caches.
- Private, unified data and instruction L2 cache.
- Optional L1 and L2 memory protection in the form of *Error Correcting Code* (ECC) or parity on RAM instances which affect functionality.

Debug features

- Armv8.2 debug logic.
- *Activity Monitor Unit* (AMU).
- *Performance Monitoring Unit* (PMU).
- Optional *CoreSight Embedded Logic Analyzer* (ELA).
- *Embedded Trace Macrocell* (ETM) that supports instruction trace only.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information.

2.3 Implementation options

All Cortex®-A77 cores in the cluster must have the same build-time configuration options, except for the L2 cache size.

The following table lists the implementation options for a core.

Table 2-1: Core implementation options

Feature	Range of options	Notes
L2 cache size	<ul style="list-style-type: none"> 128KB 256KB 512KB 	-
L2 transaction queue size	<ul style="list-style-type: none"> 36 entries 48 entries 56 entries 	There are two identical L2 banks in the Cortex®-A77 core that can be configured with 18, 24 or 28 L2 transaction queue entries per L2 bank.
L1 and L2 ECC or parity protection	Can be included or not included.	L1 and L2 error protection can only be enabled if L3 cache error protection is enabled.
Cryptographic Extension	Can be included or not included.	The Cryptographic Extension is a separately licensable product.
Core bus width	128-bit, 256-bit	<p>This specifies the bus width between the core and the DSU CPU bridge. The legal core bus width and master bus width combinations are:</p> <ul style="list-style-type: none"> If the core bus width is 128 bits, the master bus interface can be any of the following options. <ul style="list-style-type: none"> Single 128-bit wide ACE interface. Dual 128-bit wide ACE interfaces. Single 128-bit wide CHI interface. Single 256-bit wide CHI interface. Dual 256-bit wide CHI interface. If the core bus width is 256 bits, the master bus interface is a single or dual 256-bit wide CHI interface.
CoreSight <i>Embedded Logic Analyzer</i> (ELA)	Optional support	Support for integrating CoreSight ELA-500. CoreSight ELA-500 is a separately licensable product.
ELA RAM Address size	See the Arm® CoreSight™ ELA-500 Embedded Logic Analyzer Technical Reference Manual for the full supported range.	-

2.4 Supported standards and specifications

The Cortex®-A77 core implements the Arm®v8-A architecture and some architecture extensions. It also supports interconnect, interrupt, timer, debug, and trace architectures.

Table 2-2: Compliance with standards and specifications

Architecture specification or standard	Version	Notes
Arm architecture	Arm®v8-A	<ul style="list-style-type: none"> AArch32 Execution state at Exception level EL0 only. AArch64 Execution state at all Exception levels (EL0-EL3). A64, A32, and T32 instruction sets.
Arm architecture extensions	<ul style="list-style-type: none"> Arm®v8.1-A extensions Arm®v8.2-A extensions Cryptographic Extension Reliability, Availability, and Serviceability (RAS) extension Arm®v8.3-A extensions Arm®v8.4-A Dot Product support instructions Arm®v8.5-A extensions 	<ul style="list-style-type: none"> The Cortex®-A77 core implements the <i>LDAPR</i> instructions that are introduced in the Arm®v8.3-A extensions. The Cortex®-A77 core implements the <i>SDOT</i> and <i>UDOT</i> instructions that are introduced in the Arm®v8.4-A extensions. The Cortex®-A77 core implements the <i>PSTATE Speculative Store Bypass Safe</i> (SSBS) bit that is introduced in the Arm®v8.5-A extension.
Generic Interrupt Controller	GICv4	-
Generic Timer	Arm®v8-A	64-bit external system counter with timers within each core.
Performance Monitoring Unit	PMUv3	-
Debug	Arm®v8-A	With support for the debug features that are added by the Arm®v8.2-A extensions.
CoreSight	CoreSightv3	-
Embedded Trace Macrocell	ETMv4.2	Instruction trace only.

See [1.4 Useful resources](#) on page 21 for a list of architectural references.

2.5 Test features

The Cortex®-A77 core provides test signals that enable the use of both *Automatic Test Pattern Generation* (ATPG) and *Memory Built-In Self Test* (MBIST) to test the core processing logic and memory arrays.

For more information, see the *Arm® Cortex®-A77 Core Configuration and Integration Manual*.

2.6 Design tasks

The Cortex®-A77 core is delivered as a synthesizable *Register Transfer Level* (RTL) description in Verilog HDL. Before you can use the Cortex®-A77 core, you must implement it, integrate it, and program it.

A different party can perform each of the following tasks. Each task can include implementation and integration choices that affect the behavior and features of the core.

Implementation

The implementer configures and synthesizes the RTL to produce a hard macrocell. This task includes integrating RAMs into the design.

Integration

The integrator connects the macrocell into a SoC. This task includes connecting it to a memory system and peripherals.

Programming

In the final task, the system programmer develops the software to configure and initialize the core and tests the application software.

The operation of the final device depends on the following:

Build configuration

The implementer chooses the options that affect how the RTL source files are pre-processed. These options usually include or exclude logic that affects one or more of the area, maximum frequency, and features of the resulting macrocell.

Configuration inputs

The integrator configures some features of the core by tying inputs to specific values. These configuration settings affect the start-up behavior before any software configuration is made. They can also limit the options available to the software.

Software configuration

The programmer configures the core by programming particular values into registers. The configuration choices affect the behavior of the core.

2.7 Product revisions

This section indicates the first release and, in subsequent releases, describes the differences in functionality between product revisions.

r0p0	First release.
r1p0	First release. Support for Speculative Store Bypass Safe (SSBS) bit enabling software to indicate whether hardware is permitted to load or store speculatively.
r1p1	First release. Addition of PBHA support.
r1p1	Second release. For more information, see B.1 Revisions on page 494.
r1p1	Third release. For more information, see B.1 Revisions on page 494.

r1p1 Fourth release. Changed AMEVTYPER4_ELO to RW. For more information, see [B.1 Revisions](#) on page 494.

r1p1 Fifth release. For more information, see [B.1 Revisions](#) on page 494.

r1p1 Sixth release. For more information, see [B.1 Revisions](#) on page 494.

3. Technical overview

This chapter describes the structure of the Cortex®-A77 core.

3.1 Components


In a standalone configuration, there can be up to four Cortex®-A77 cores and a *DynamIQ Shared Unit* (DSU) that connects the cores to an external memory system.

For more information about the DSU, see the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#).

The main components of the Cortex®-A77 core are:

- Instruction fetch
- Instruction decode
- Register rename
- Instruction issue
- Execution pipelines
- L1 data memory system
- L2 memory system

The following figure is an overview of the Cortex®-A77 core.

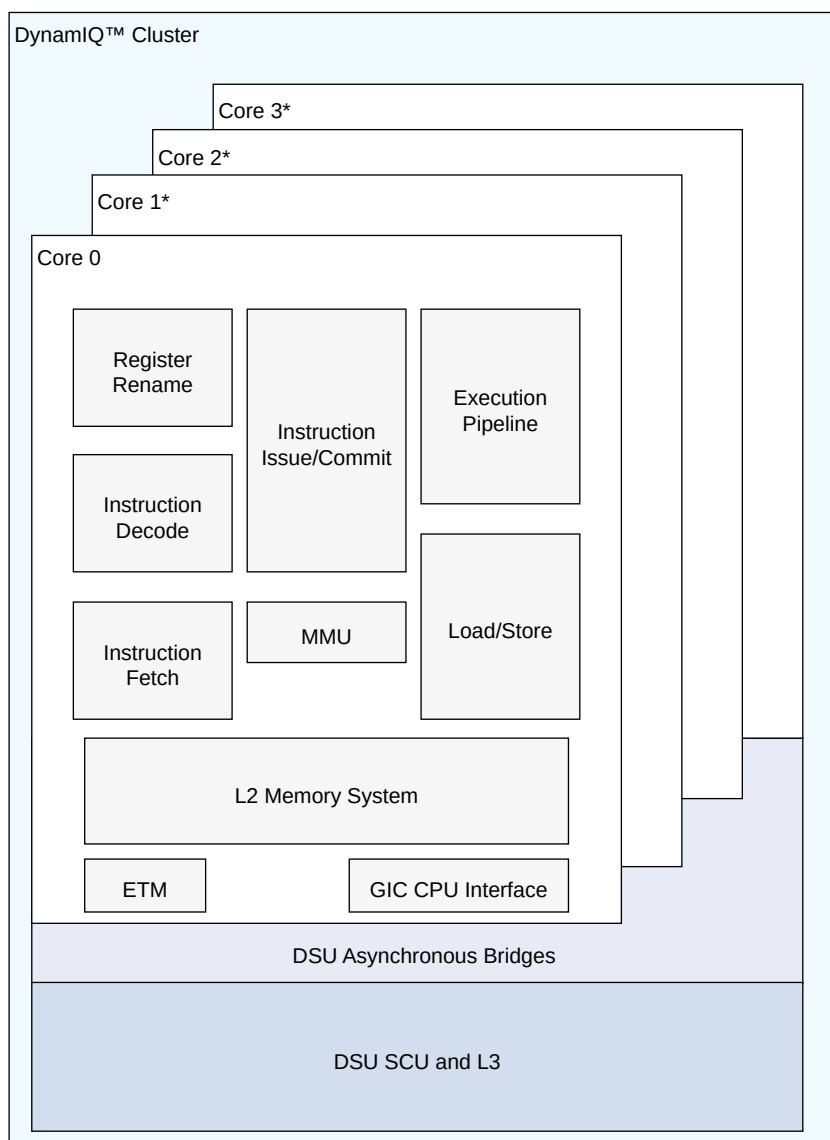Figure 3-1: Cortex®-A77 core overview

* This core is optional



There are multiple asynchronous bridges between the Cortex®-A77 core and the DSU. Only the coherent interface between the Cortex®-A77 core and the DSU can be configured to run synchronously, however it does not affect the other interfaces such as debug, trace, and *Generic Interrupt Controller (GIC)* which are always asynchronous. For more information on how to set the coherent interface to run either synchronously or asynchronously, see *Configuration Guidelines* in the *Arm® DynamIQ™ Shared Unit Configuration and Sign-off Guide*.

Related information

[Memory Management Unit](#) on page 46

[L1 memory system](#) on page 55

[L2 memory system](#) on page 79

[Generic Interrupt Controller CPU interface](#) on page 89

[Debug](#) on page 318

[Performance Monitoring Unit](#) on page 323

[Embedded Trace Macrocell](#) on page 335

3.1.1 Instruction fetch

The instruction fetch unit fetches instructions from the L1 instruction cache and delivers the instruction stream to the instruction decode unit.

The instruction fetch unit includes:

- A 64KB, 4-way, set associative L1 instruction cache with 64-byte cache lines and optional parity protection.
- A fully associative L1 instruction TLB with native support for 4KB, 16KB, 64KB, 2MB, and 32MB page sizes.
- A 1.5K entry, 4-way skewed associative L0 Macro-OP (MOP) cache with optional parity, which contains decoded and optimized instructions for higher performance.
- A dynamic branch predictor.

3.1.2 Instruction decode

The instruction decode unit supports the A32, T32, and A64 instruction sets. It also supports Advanced SIMD and floating-point instructions in each instruction set.

3.1.3 Register rename

The register rename unit performs register renaming to facilitate out-of-order execution and dispatches decoded instructions to various issue queues.

3.1.4 Instruction issue

The instruction issue unit controls when the decoded instructions are dispatched to the execution pipelines. It includes issue queues for storing instruction pending dispatch to execution pipelines.

3.1.5 Execution pipeline

The execution pipeline includes:

- Integer execute unit that performs arithmetic and logical data processing operations.
- Vector execute unit that performs Advanced SIMD and floating-point operations. Optionally, it can execute the cryptographic instructions.

3.1.6 L1 data memory system

The L1 data memory system executes load and store instructions and encompasses the L1 data side memory system. It also services memory coherency requests.

The load/store unit includes:

- A 64KB, 4-way, set associative L1 data cache with 64-byte cache lines and optional ECC protection per 32 bits.
- A fully associative L1 data TLB with native support for 4KB, 16KB, 64KB, 2MB, and 512MB page sizes.

3.1.7 L2 memory system

The L2 memory system services L1 instruction and data cache misses in the Cortex®-A77 core.

The L2 memory system includes:

- An 8-way set associative L2 cache with data ECC protection per 64 bits. The L2 cache is configurable with sizes of 128KB, 256KB, or 512KB.
- An interface with the *DynamiQ Shared Unit* (DSU) configurable at implementation time for synchronous or asynchronous operation.

3.2 Interfaces

The Cortex®-A77 core has several interfaces to connect it to a SoC. The *DynamiQ Shared Unit* (DSU) manages all interfaces.

For information on the interfaces, see the [Arm® DynamiQ™ Shared Unit Technical Reference Manual](#).

3.3 About system control

The System registers control and provide status information for the functions that the core implements.

The main functions of the System registers are:

- Overall system control and configuration
- *Memory Management Unit* (MMU) configuration and management

- Cache configuration and management
- System performance monitoring
- *Generic Interrupt Controller (GIC)* configuration and management

The System registers are accessible in the AArch64 EL0-EL3 and AArch32 EL0 Execution state. Some of the System registers are accessible through the external debug interface.

3.4 About the Generic Timer

The Generic Timer can schedule events and trigger interrupts that are based on an incrementing counter value. It generates timer events as active-LOW interrupt outputs and event streams.

The Cortex®-A77 core provides a set of timer registers. The timers are:

- An EL1 Non-secure physical timer
- An EL2 Hypervisor physical timer
- An EL3 Secure physical timer
- A virtual timer
- A Hypervisor virtual timer

The Cortex®-A77 core does not include the system counter. The system counter resides in the SoC, and its value is distributed to the core over a 64-bit bus.

For more information on the Generic Timer, see the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#) and the [Arm® Architecture Reference Manual for A-profile architecture](#).

4. Clocks, resets, and input synchronization

This chapter describes the clocks, resets, and input synchronization of the Cortex®-A77 core.

4.1 About clocks, resets, and input synchronization

The Cortex®-A77 core supports hierarchical clock gating.

The Cortex®-A77 core contains several interfaces that connect to other components in the system. These interfaces can be in the same clock domain or in other clock domains.

For information about clocks, resets, and input synchronization, see the *Arm® DynamIQ™ Shared Unit Technical Reference Manual*.

4.2 Asynchronous interface

Your implementation can include an optional asynchronous interface between the core and the *DynamIQ Shared Unit* (DSU) top level.

See the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#) for more information.

5. Power management

This chapter describes the power domains and the power modes in the Cortex®-A77 core.

5.1 About power management

The Cortex®-A77 core provides mechanisms to control both dynamic and static power dissipation.

Dynamic power management includes the following features:

- Architectural clock gating.
- Per-core *Dynamic Voltage and Frequency Scaling* (DVFS).

Static power management includes the following features:

- Dynamic retention.
- Powerdown.

Related information

[Power domain states for power modes](#) on page 43

[Power control](#) on page 39


[Power domains](#) on page 36

[Core powerup and powerdown sequences](#) on page 44

5.2 Voltage domains

The Cortex®-A77 core supports a VCPU voltage domain and a VSYS voltage domain.

The following figure shows the VCPU and VSYS voltage domains in each Cortex®-A77 core and in the DSU. The example shows a configuration with four Cortex®-A77 cores.

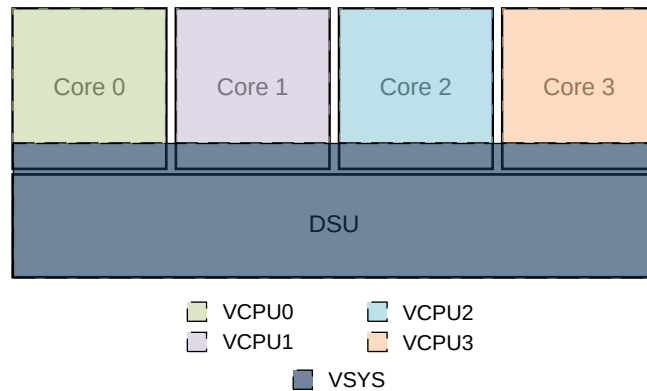Figure 5-1: Cortex®-A77 voltage domains

Asynchronous bridge logic exists between the voltage domains. The Cortex®-A77 core processing logic and core clock domain of the asynchronous bridge are in the VCPU voltage domain. The DSU clock domain of the asynchronous bridge is in the VSYS voltage domain.

**Note**

You can tie VCPU and VSYS to the same supply if the core is not required to support *Dynamic Voltage and Frequency Scaling* (DVFS). If it is in its own power domain with proper isolation, the core can still be powered down independently.

5.3 Power domains

The Cortex®-A77 core contains a core power domain (PDCPU) and a core top-level SYS power domain (PDSYS) where all the Cortex®-A77 core I/O signals go through.

PDCPU power domain

The PDCPU power domain contains all core processing logic excluding the cluster clock domain side of the bridge.

PDSYS power domain


The PDSYS power domain contains the cluster clock domain side of the bridge.

**Note**

There are additional system power domains in the DSU. See the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#) for information.

The following figure shows an example of how the voltage and power domains are organized.

Figure 5-2: Cortex®-A77 core power domain diagram

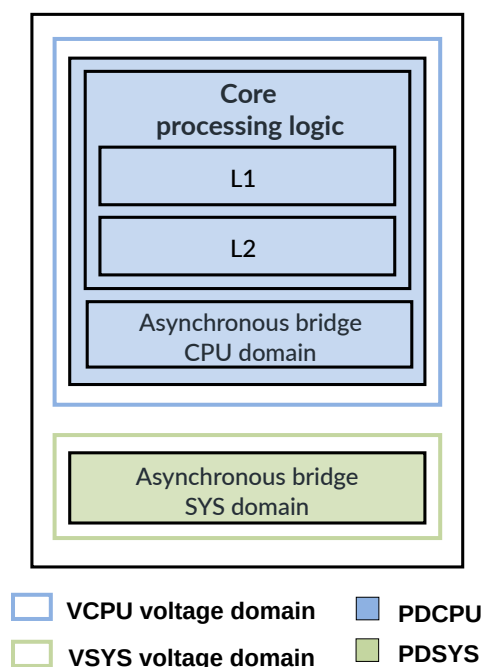

The following table describes the power domains that the Cortex®-A77 core supports.

Table 5-1: Power domain description


Power domain	Description
PDCPU<n>	The domain includes the Advanced SIMD and floating-point block, the L1 and L2 TLBs, L1 and L2 cache RAMs, and Debug registers that are associated with the Cortex®-A77 core. <n> is the core number in the range 0-3. The number represents core 0, core 1, core 2, and core 3. If a core is not present, then the corresponding power domain is not present.
PDSYS	The domain is the interface between Cortex®-A77 and the DSU. It contains the cluster clock domain logic of the CPU bridge. The CPU Bridge contains all asynchronous bridges for crossing clock domains, and is split with one half of each bridge in the core clock domain and the other half in the relevant cluster domain. All core I/O signals go through the CPU bridge and the SYS power domain.

Clamping cells between power domains are inferred through power intent files rather than instantiated in the RTL.

The following figure shows the power domains in the DSU cluster, where everything in the same color is part of the same power domain. The number of Cortex®-A77 cores can vary, and the

number of domains increases based on the number of Cortex®-A77 cores present. This example only shows four Cortex®-A77 cores and the power domains that are associated with them. Other power domains are required for a DSU cluster and are not shown in this example.

Figure 5-3: Cortex®-A77 power domains

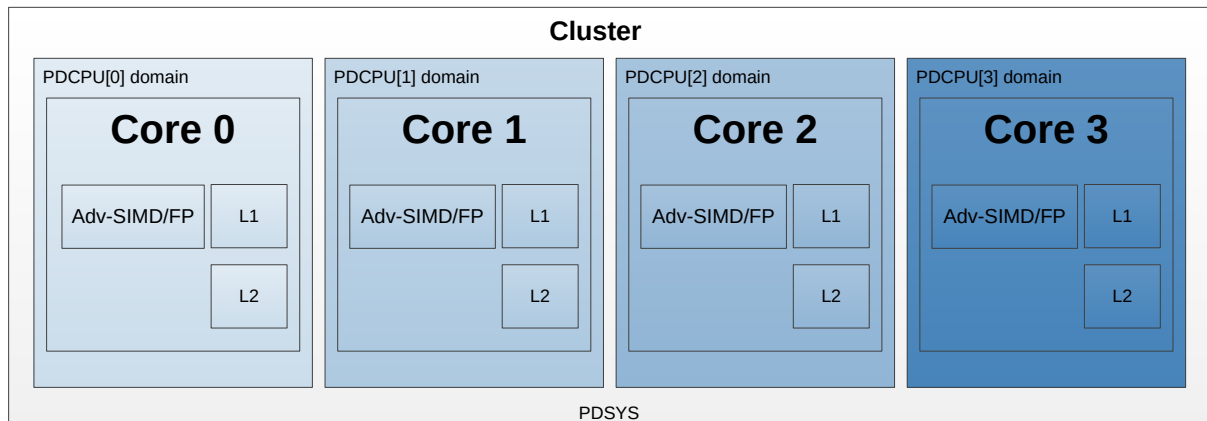

5.4 Architectural clock gating modes

When the Cortex®-A77 core is in standby mode, it is architecturally clock gated at the top of the clock tree.

Wait for Interrupt (WFI) and *Wait for Event* (WFE) are features of Arm®v8-A architecture that put the core in a low-power standby mode by architecturally disabling the clock at the top of the clock tree. The core is fully powered and retains all the state in standby mode.

There is a small dynamic power overhead from the logic that is required to wake up the core from WFI low-power state. Other than this, the power that is drawn is reduced to static leakage current only.

5.4.1 Core Wait for Interrupt

WFI uses a locking mechanism, based on events, to put the core in a low-power state by disabling most of the clocks in the core, while keeping the core powered up.

When the core executes the `WFI` instruction, the core waits for all instructions in the core, including explicit memory accesses, to retire before it enters a low-power state. The `WFI` instruction also ensures that store instructions have updated the cache or have been issued to the L3 memory system.

While the core is in WFI low-power state, the clocks in the core are temporarily enabled without causing the core to exit WFI low-power state when any of the following events are detected:

- An L3 snoop request that must be serviced by the core data caches.

- A cache or TLB maintenance operation that must be serviced by the core L1 instruction cache, data cache, TLB, or L2 cache.
- An APB access to the debug or trace registers residing in the core power domain.
- A GIC CPU access through the AXI4 stream channel.

Exit from WFI low-power state occurs when one of the following occurs:

- The core detects one of the WFI wake-up events.
- The core detects a reset.

For more information, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

5.4.2 Core Wait for Event

Wait For Event (WFE) uses a locking mechanism, based on events, to put the core in a low-power state by disabling most of the clocks in the core, while keeping the core powered up.

When the core executes the `WFE` instruction, the core waits for all instructions in the core, including explicit memory accesses, to retire before it enters a low-power state. The `WFE` instruction also ensures that store instructions have updated the cache or have been issued to the L3 memory system.

If the event register is set, execution of WFE does not cause entry into standby state, but clears the event register.

While the core is in WFE low-power state, the clocks in the core are temporarily enabled without causing the core to exit WFE low-power state when any of the following events are detected:

- An L3 snoop request that must be serviced by the core data caches.
- A cache or TLB maintenance operation that must be serviced by the core L1 instruction cache, data cache, TLB, or L2 cache.
- An APB access to the debug or trace registers residing in the core power domain.
- A GIC CPU access through the AXI4 stream channel.

Exit from WFE low-power state occurs when one of the following occurs:

- The core detects one of the WFE wake-up events.
- The `EVENTI` input signal is asserted.
- The core detects a reset.

For more information, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

5.5 Power control

All power mode transitions are performed at the request of the power controller, using a P-Channel interface to communicate with the Cortex®-A77 core.


There is one P-Channel per core, plus one P-Channel for the cluster. The Cortex®-A77 core provides the current requirements on the PACTIVE signals, so that the power controller can make decisions and request any change with PREQ and PSTATE. The Cortex®-A77 core then performs any actions necessary to reach the requested power mode, such as gating clocks, flushing caches, or disabling coherency, before accepting the request.

If the request is not valid, either because of an incorrect transition or because the status has changed so that state is no longer appropriate, then the request is denied. The power mode of each core can be independent of other cores in the cluster, however the cluster power mode is linked to the mode of the cores.

5.6 Core power modes

The following figure shows the supported modes for each core domain P-Channel, and the legal transitions between them.

Figure 5-4: Cortex®-A77 core power domain mode transitions

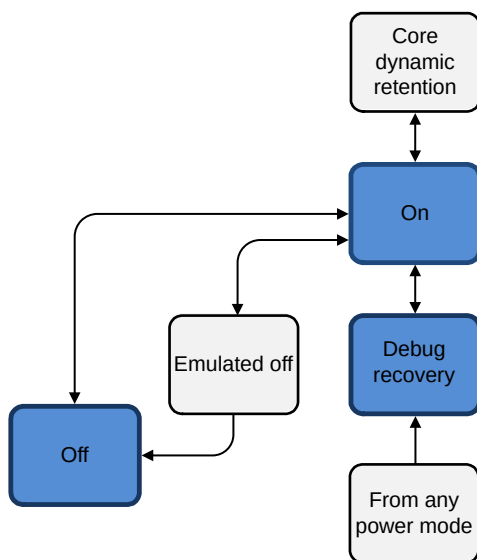

The blue modes indicate the modes that the channel can be initialized into.

5.6.1 On mode

In this mode, the core is on and fully operational.

The core can be initialized into the On mode. If the core does not use P-Channel, you can tie the core in the On mode by tying PREQ LOW.

When a transition to the On mode completes, all caches are accessible and coherent. Other than the normal architectural steps to enable caches, no additional software configuration is required.

When the core domain P-Channel is initialized into the On mode, either as a shortcut for entering that mode or as a tie-off for an unused P-Channel, it is an assumed transition from the Off mode. This includes an invalidation of any cache RAM within the core domain.

5.6.2 Off mode

The Cortex®-A77 core supports a full Shutdown mode where power can be removed completely and no state is retained.

The shutdown can be for either the whole cluster or just for an individual core, which allows other cores in the cluster to continue operating.

In this mode, all core processing logic and RAMs are off. The domain is inoperable and all core state is lost. The L1 and L2 caches are disabled, flushed and the core is removed from coherency automatically on transition to Off mode.

A Cold reset can reset the core in this mode.

The core P-Channel can be initialized into this mode.

An attempted debug access when the core domain is off returns an error response on the internal debug interface indicating the core is not available.

5.6.3 Emulated off mode

In this mode, all Core domain logic and RAMs are kept on. However, core Warm reset can be asserted externally to emulate a powerdown scenario while keeping core debug state and allowing debug access.

All Debug registers must retain their mode and be accessible from the external debug interface. All other functional interfaces behave as if the core was in Off mode.

5.6.4 Core dynamic retention mode

In this mode, all core processing logic and RAMs are in retention and the core domain is inoperable. The core can be entered into this power mode when it is in *Wait For Interrupt* (WFI) or *Wait For Event* (WFE) mode.

The Core dynamic retention mode can be enabled and disabled separately for WFI and WFE by software running on the core. Separate timeout values can be programmed for entry into this mode from WFI and WFE mode:

- Use the CPUPWRCTLR.WFI_RET_CTRL register bits to program timeout values for entry into Core dynamic retention mode from WFI mode.
- Use the CPUPWRCTLR.WFE_RET_CTRL register bits to program timeout values for entry into Core dynamic retention mode from WFE mode.

The clock to the core is automatically gated outside of the domain when the core is in Core dynamic retention mode and is running synchronously to the cluster. However, if the core is running asynchronously to the cluster, the system integrator must gate the clock externally during Core dynamic retention mode. For more information, see the *Arm® DynamIQ™ Shared Unit Configuration and Sign-off Guide*.

The outputs of the domain must be isolated to prevent buffers without power from propagating **UNKNOWN** values to any operational parts of the system.

When the core is in Core dynamic retention mode there is support for snoop, GIC, and debug access, so the core appears as if it were in WFI or WFE mode. When an incoming access occurs, it stalls, and the On PACTIVE bit is set HIGH. The incoming access proceeds when the domain is returned to the On mode using P-Channel.

When the incoming access completes, and if the core has not exited WFI or WFE mode, then the On PACTIVE bit is set LOW after the programmed retention timeout. The power controller can then request to reenter the Core dynamic retention mode.

5.6.5 Debug recovery mode

The Debug recovery mode assists with debugging external watchdog-triggered reset events.

It allows contents of the core L1 instruction, L1 data and L2 caches that were present before the reset to be observable after the reset. The contents of the caches are retained and are not altered on the transition back to the On mode.

By default, the core invalidates its caches when Cold reset (nCPUPORESET) is deasserted. If the P-Channel is initialized to the Debug recovery mode, and the core is cycled through power-on reset along with the system power-on reset, then the cache invalidation is disabled. Initializing the P-Channel to the Debug recovery mode ensures that the cache contents are preserved when the core is transitioned to the On mode.

Debug recovery mode also supports preserving the RAS state, in addition to the cache contents. In this case, a transition to the Debug recovery mode is made from any of the current states. When in Debug recovery mode, the core is cycled through a Warm reset with the system Warm reset. The RAS and cache state are preserved when the core is transitioned to the On mode.

This mode is strictly for debug purposes. It must not be used for functional purposes, because the correct operation of the L1 cache is not guaranteed when entering this mode.



Note

This mode can occur at any time with no guarantee of the state of the core. A P-Channel request of this type is accepted immediately, therefore its effects on the core, cluster, or the wider system are **UNPREDICTABLE**, and a wider system reset might be required. For example, if there were outstanding memory system transactions at the time of the reset, then these transactions might complete after the reset when the core is not expecting them and cause a system deadlock.

5.7 Encoding for power modes

The following table shows the encodings for the supported modes for each core domain P-Channel.

Table 5-2: Core power modes COREPSTATE encoding

Power mode	Short name	PACTIVE bit number	PSTATE value	Power mode description
Core debug recovery mode	DEBUG_RECOV	-	0b001010	Logic is off (or in reset), RAM state is retained and not invalidated when transitioning to On mode.
On mode	ON	8	0b001000	All powerup.
Core dynamic retention mode	FULL_RET	5	0b000101	Logic and RAM state are inoperable but retained.
Emulated off mode	OFF_EMU	1	0b000001	On with Warm reset asserted, debug state is retained and accessible.
Off mode	OFF	0 (implicit) ¹	0b000000	All powerdown.

5.8 Power domain states for power modes

The power domains can be controlled independently to give different combinations when powered up and powered down.

However, only some powered up and powered down domain combinations are valid and supported.

The PDCPU power domain supports the power states that are described in the following table.

¹ It is tied off to 0 and should be inferred when all other PACTIVE bits are LOW. For more information, see the [AMBA® Low Power Interface Specification](#).

Table 5-3: PDCPU power state description

Power state	Description
Off	Core off. Power to the block is gated.
Ret	Core retention. Logic and RAM retention power only.
On	Core on. Block is active.



States that are not shown in the following tables are unsupported and must not occur.

The following table describes the power modes, and the corresponding power domain states for individual cores. The power mode of each core is independent of all other cores in the cluster.

Table 5-4: Supported core power domain states

Power mode	Power domain state	Description
Debug recovery	On	Core on
On	On	Core on
Core dynamic retention	Ret	Core in retention
Emulated off	On	Core on
Off	Off	Core off

Deviating from the legal power modes can lead to **UNPREDICTABLE** results. You must comply with the dynamic power management and powerup and powerdown sequences described in the following sections.

5.9 Core powerup and powerdown sequences

There are specific steps that you must perform when taking the Cortex®-A77 cores in the cluster in and out of coherence.

Core powerdown

To take a core out of coherence ready for core powerdown, complete the following steps:

1. Save all architectural states.
2. Configure the GIC distributor to disable or reroute interrupts away from this core.
3. Set the CPUPWRCTLR.CORE_PWRDN_EN bit to 1 to indicate to the power controller that a powerdown is requested.
4. Execute an `ISB` instruction.
5. Execute a `WFI` instruction.

All L1 and L2 cache disabling, L1 and L2 cache flushing, and communication with the L3 memory system is performed in hardware after the `WFI` is executed, under the direction of the power controller.



Executing any `WFI` instruction when the `CPUPWRCTLR.CORE_PWRDN_EN` bit is set automatically masks out all interrupts and wake-up events in the core. If executed when the `CPUPWRCTLR.CORE_PWRDN_EN` bit is set, the `WFI` never wakes up and the core needs to be reset to restart.

For information about cluster powerdown, see the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#).

Core powerup

To bring a core into coherence after reset, no software steps are required.

Related information

[CPUPWRCTLR_EL1, Power Control Register, EL1](#) on page 164

5.10 Debug over powerdown

The Cortex®-A77 core supports debug over powerdown, which allows a debugger to retain its connection with the core even when powered down. This enables debug to continue through powerdown scenarios, rather than having to re-establish a connection each time the core is powered up.

The debug over powerdown logic is part of the DebugBlock, which is external to the cluster and can be implemented in a separate power domain. If the DebugBlock is in the same power domain as the core, then debug over powerdown is not supported.

For more information on the DebugBlock, see the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#).

6. Memory Management Unit

This chapter describes the *Memory Management Unit* (MMU) of the Cortex®-A77 core.

6.1 About the MMU

The *Memory Management Unit* (MMU) is responsible for translating addresses of code and data *Virtual Addresses* (VAs) to *Physical Addresses* (PAs) in the real system. The MMU also controls memory access permissions, memory ordering, and cache policies for each region of memory.

6.1.1 Main functions

The three main functions of the MMU are to:

- Control the table walk hardware that accesses translation tables in main memory.
- Translate *Virtual Addresses* (VAs) to *Physical Addresses* (PAs).
- Provide fine-grained memory system control through a set of virtual-to-physical address mappings and memory attributes that are held in translation tables.

Each stage of address translation uses a set of address translations and associated memory properties that are held in memory mapped tables that are called translation tables. Translation table entries can be cached into a *Translation Lookaside Buffer* (TLB).

The following table describes the components that are included in the MMU.

Table 6-1: TLBs and TLB caches in the MMU

Component	Description
Instruction L1 TLB	48 entries, fully associative.
Data L1 TLB	48 entries, fully associative.
L2 TLB	1280 entries, 5-way set associative.
Translation table prefetcher	Detects an access to contiguous translation tables and prefetches the next one. This prefetcher can be disabled in the ECTLR register.

The TLB entries contain either one or both of a global indicator and an *Address Space Identifier* (ASID) to permit context switches without requiring the TLB to be invalidated.

The TLB entries contain a *Virtual Machine Identifier* (VMID) to permit virtual machine switches by the hypervisor without requiring the TLB to be invalidated.

6.1.2 AArch64 behavior

The Cortex®-A77 core is an Armv8 compliant core that supports execution in AArch64 state.

The following table shows the AArch64 behavior.

Table 6-2: AArch64 behavior

	AArch64
Address translation system	The Armv8 address translation system resembles an extension to the Long descriptor format address translation system to support the expanded virtual and physical address space.
Translation granule	4KB, 16KB, or 64KB for Armv8 AArch64 <i>Virtual Memory System Architecture</i> (VMSAv8-64) Using a larger granule size can reduce the maximum required number of levels of address lookup.
Address Space Identifier (ASID) size	8 bits or 16 bits depending on the value of TCR_ELx.AS
Virtual Machine Identifier (VMID) size	8 bits or 16 bits depending on the value of VTCR_EL2.VS
Physical Address (PA) size	Maximum 40 bits Any configuration of TCR_ELx.IPS over 40 bits is considered as 40 bits. You can enable or disable each stage of the address translation independently.

The Cortex®-A77 core also supports the *Virtualization Host Extension* (VHE), including ASID space for EL2. When VHE is implemented and enabled, EL2 has the same behavior as EL1.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information on concatenated translation tables and for address translation formats.

6.2 TLB organization

The TLB is a cache of recently executed page translations within the *Memory Management Unit* (MMU). The Cortex®-A77 core implements a two-level TLB structure. The TLB stores all page sizes and is responsible for breaking these down in to smaller pages when required for the data or instruction L1 TLB.

6.2.1 Instruction L1 TLB

The instruction L1 TLB is implemented as a 48-entry fully associative structure. This TLB caches entries at the 4KB, 16KB, 64KB, 2MB, and 32MB granularity of *Virtual Address* (VA) to *Physical Address* (PA) mapping only.

A hit in the instruction L1 TLB provides a single CLK cycle access to the translation, and returns the PA to the instruction cache for comparison. It also checks the access permissions to signal an Instruction Abort.

6.2.2 Data L1 TLB

The data L1 TLB is a 48-entry fully associative TLB that is used by load and store operations. The cache entries have 4KB, 16KB, 64KB, 2MB, and 512MB granularity of *Virtual Address* (VA) to *Physical Address* (PA) mappings only.

A hit in the data L1 TLB provides a single CLK cycle access to the translation, and returns the PA to the data cache for comparison. It also checks the access permissions to signal a Data Abort.

6.2.3 L2 TLB

The L2 TLB structure is shared by instruction and data. It handles misses from the instruction and data L1 TLBs.

The following table describes the L2 TLB characteristics.

Table 6-3: L2 TLB characteristics

Characteristic	Note
5-way, set associative, 1280-entry cache	<p>Stores:</p> <ul style="list-style-type: none"> <i>Virtual Address</i> (VA) to <i>Physical Address</i> (PA) mappings for 4KB, 16KB, 64KB, 2MB, 32MB, 512MB, and 1GB block sizes. <i>Intermediate physical address</i> (IPA) to PA mappings for 2MB and 1GB (in a 4KB translation granule), 32MB (in a 16K translation granule), and 512MB (in a 64K granule) block sizes. Only Non-secure EL1 and EL0 stage 2 translations are cached. Intermediate PAs obtained during a translation table walk.

Access to the L2 TLB usually takes three cycles. If a different page or block size mapping is used, then this access can take longer.

The L2 TLB supports four translation table walks in parallel (four TLB misses), and can service two TLB lookups while the translation table walks are in progress. If there are six successive misses, the L2 TLB stalls.



Note

Caches in the core are invalidated automatically at reset deassertion unless the core power mode is initialized to Debug recovery mode. See the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#) for more information.

6.3 TLB match process

The Armv8-A architecture provides support for multiple maps from the *Virtual Address* (VA) space that are translated differently.

TLB entries store the context information that is required to facilitate a match and avoid the need for a TLB flush on a context or virtual machine switch.

Each TLB entry contains a:

- VA
- *Physical Address* (PA)
- Set of memory properties that includes type and access permissions

Each entry is either a global entry, or it is associated with a particular *Address Space Identifier* (ASID). In addition, each TLB entry contains a field to store the *Virtual Machine Identifier* (VMID) in the entry applicable to accesses from Non-secure EL0 and EL1 Exception levels.

Each entry is associated with a particular translation regime:

- EL3 in Secure state in AArch64 state only.
- EL2, EL1, or EL0 in Non-secure state.
- EL1 or EL0 in Secure state.

A TLB match entry occurs when the following conditions are met:

- A VA, moderated by the page size such as the VA bits[48:N], where N is \log_2 of the block size for that translation that is stored in the TLB entry, matches the requested address.
- Entry translation regime matches the current translation regime.
- The ASID matches the current ASID held in the CONTEXTIDR, TTBR0, or TTBR1 register, or the entry is marked global.
- The VMID matches the current VMID held in the VTTBR_EL2 register.
- The ASID and VMID matches are **IGNORED** when ASID and VMID are not relevant. ASID is relevant when the translation regime is:
 - EL2 in Non-secure state with HCR_EL2.E2H and HCR_EL2.TGE set to 1
 - EL1 or EL0 in Secure state
 - EL1 or EL0 in Non-secure state

VMID is relevant for EL1 or EL0 in Non-secure state.

6.4 Translation table walks

When an access is requested at an address, the *Memory Management Unit* (MMU) searches for the requested *Virtual Address* (VA) in the *Translation Lookaside Buffers* (TLBs). If it is not present, then it is a miss and the translation proceeds by looking up the translation table during a translation table walk.

When the Cortex®-A77 core generates a memory access, the following process occurs:

1. The MMU performs a lookup for the requested VA, current *Address Space Identifier* (ASID), current *Virtual Machine Identifier* (VMID), and current translation regime in the relevant instruction or data L1 TLB.

2. If there is a miss in the relevant L1 TLB, the MMU performs a lookup for the requested VA, current ASID, current VMID, and translation regime in the L2 TLB.
3. If there is a miss in the L2 TLB, the MMU performs a hardware translation table walk.

If an L2 TLB miss, the hardware does a translation table walk as long as the MMU is enabled, and the translation using the base register has not been disabled.

If the translation table walk is disabled for a particular base register, the core returns a translation fault. If the TLB finds a matching entry, it uses the information in the entry as follows.

The access permission bits determine whether the access is permitted. If the matching entry does not pass the permission checks, the MMU signals a Permission fault. See the [Arm® Architecture Reference Manual for A-profile architecture](#) for details of Permission faults.

6.4.1 AArch64 behavior

When executing in AArch64 state at a particular Exception level, you can configure the hardware translation table walk to use either the 4KB, 16KB, or 64KB translation granule.

Program the Translation Granule bit, TGO, in the appropriate translation control register:

- TCR_EL1
- TCR_EL2
- TCR_EL3
- VTCR_EL2

For TCR_EL1, you can program the Translation Granule bits TGO and TG1 to configure the translation granule respectively for TTBR0_EL1 and TTBR1_EL1, or TCR_EL2 when *Virtualization Host Extension* (VHE) is enabled.

6.5 MMU memory accesses

During a translation table walk, the *Memory Management Unit* (MMU) generates memory accesses. The Cortex®-A77 core has specific behaviors for MMU memory accesses.

6.5.1 Configuring MMU accesses

By programming the IRGN and ORGN bits, you can configure the MMU to perform translation table walks in Cacheable or Non-cacheable regions:

AArch64 Appropriate TCR_ELx register.

If the encoding of both the ORGN and IRGN bits is Write-Back, the data cache lookup is performed and data is read from the data cache. External memory is accessed, if the ORGN and

IRGN bit contain different attributes, or if the encoding of the ORGN and IRGN bits is Write-Through or Non-cacheable.

6.5.2 Descriptor hardware update

The core supports hardware update in AArch64 state using hardware management of the Access flag and hardware management of dirty state.

These features are enabled in registers TCR_ELx and VTCR_EL2.

Hardware management of the Access flag is enabled by the following configuration fields:

- TCR_ELx.HA for stage 1 translations.
- VTCR_EL2.HA for stage 2 translations.

Hardware management of dirty state is enabled by the following configuration fields:

- TCR_ELx.HD for stage 1 translations.
- VTCR_EL2.HD for stage 2 translations.



Hardware management of dirty state can only be enabled if hardware management of the Access flag is enabled.

To support the hardware management of dirty state, the DBM field is added to the translation table descriptors as part of Armv8.1 architecture.

The core supports hardware update only in outer Write-Back and inner Write-Back memory regions.

If software requests a hardware update in a memory region that is not inner Write-Back or not outer Write-Back, then the core returns an abort with the following encoding:

- ESR_ELx.DFSC = 0b110001 for Data Aborts in AArch64.
- ESR_ELx.IFSC = 0b110001 for Instruction Aborts in AArch64.

6.6 Specific behaviors on aborts and memory attributes

This section describes specific behaviors that are caused by aborts and also describes memory attributes.

MMU responses

The MMU generates a response to the requester, when one of the following translations is completed:

- A L1 TLB hit.
- A L2 TLB hit.
- A translation table walk.

The response from the MMU contains the following information:

- The PA corresponding to the translation.
- A set of permissions.
- Secure or Non-secure.
- All the information that is required to report aborts. See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more details.

6.6.1 External aborts

External aborts are defined as those that occur in the memory system rather than those that the *Memory Management Unit* (MMU) detects. Normally, external memory aborts are rare. External aborts are caused by errors that are flagged to the external interface.

When an external abort to the external interface occurs on an access for a translation table walk access, the MMU returns a synchronous external abort. For a load multiple or a store multiple operation, the address that is captured in the fault address register is that of the address that generated the synchronous external abort.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information.

6.6.2 Mis-programming contiguous hints

In the case of a mis-programming contiguous hint, when there is a descriptor that contains a set CH bit, all contiguous virtual addresses that are contained in the block must be included in the input *Virtual Address* (VA) space that is defined for stage 1 by TxSZ for TTBx, or for stage 2 by {SLO, TOSZ}.

The Cortex®-A77 core treats such a block as not causing a translation fault.

Conflict aborts

The Cortex®-A77 core does not generate Conflict aborts.

6.6.3 Memory attributes

The memory region attributes specified in the TLB entry, or in the descriptor in case of translation table walk, determine if the access is:

- Normal Memory or Device type.

- One of the four different device memory types that are defined for Armv8:

Device-nGnRnE	Device non-Gathering, non-Reordering, No Early Write Acknowledgement.
Device-nGnRE	Device non-Gathering, non-Reordering, Early Write Acknowledgement.
Device-nGRE	Device non-Gathering, Reordering, Early Write Acknowledgement.
Device-GRE	Device Gathering, Reordering, Early Write Acknowledgement.

In the Cortex®-A77 core, a page is cacheable only if the Inner and Outer memory attributes are Write-Back. In all other cases, all pages are downgraded to Non-cacheable Normal memory.

When the *Memory Management Unit* (MMU) is disabled at stage 1 and stage 2, and SCTLR.I is set to 1, instruction prefetches are cached in the instruction cache but not in the unified cache. In all other cases, normal behavior on memory attribute applies.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information on translation table formats.

6.7 Page-based hardware attributes

Page-Based Hardware Attributes (PBHA) is an optional, **IMPLEMENTATION DEFINED** feature.

It allows software to set up to two bits in the translation tables, which are then propagated through the memory system with transactions, and can be used in the system to control system components. The meaning of the bits is specific to the system design.

For information on how to set and enable the PBHA bits in the translation tables, see the [Arm® Architecture Reference Manual for A-profile architecture](#). When disabled, the PBHA value that is propagated on the bus is 0.

For memory accesses caused by a translation table walk, the AHTCR, ATTBCR, and AVTCR registers control the PBHA values.

PBHA combination between stage 1 and stage 2 on memory accesses

PBHA should always be considered as an attribute of the physical address.

When stage 1 and stage 2 are enabled:

- If both stage 1 PBHA and stage 2 PBHA are enabled, the final PBHA is stage 2 PBHA.
- If stage 1 PBHA is enabled and stage 2 PBHA is disabled, the final PBHA is stage 1 PBHA.
- If stage 1 PBHA is disabled and stage 2 PBHA is enabled, the final PBHA is stage 2 PBHA.
- If both stage 1 PBHA and stage 2 PBHA are disabled, the final PBHA is defined to 0.

Enable of PBHA has a granularity of 1 bit, so this property is applied independently on each PBHA bit.

Mismatched aliases

If the same physical address is accessed through more than one virtual address mapping, and the PBHA bits are different in the mappings, then the results are **UNPREDICTABLE**. The PBHA value sent on the bus could be for either mapping.

7. L1 memory system

This chapter describes the L1 instruction cache and data cache that make up the L1 memory system.

7.1 About the L1 memory system

The Cortex®-A77 L1 memory system is designed to enhance core performance and save power.

The L1 memory system consists of separate instruction and data caches. Both have a fixed size of 64KB.

7.1.1 L1 instruction side memory system

The L1 instruction memory system has the following key features:

- *Virtually Indexed, Physically Tagged* (VIPT) 4-way set-associative L1 instruction cache, which behaves as a *Physically Indexed, Physically Tagged* (PIPT) cache.
- Fixed cache line length of 64 bytes.
- Pseudo-LRU cache replacement policy.
- 256-bit read interface from the L2 memory system.

The Cortex®-A77 core also has a *Virtually Indexed, Virtually Tagged* (VIVT) 4-way set-associative, *Macro-OP* (MOP) cache, which behaves as a *Physically Indexed, Physically Tagged* (PIPT) cache.

7.1.2 L1 data side memory system

The L1 data memory system has the following features:

- *Virtually Indexed, Physically Tagged* (VIPT), which behaves as a *Physically Indexed, Physically Tagged* (PIPT) 4-way set-associative L1 data cache.
- Fixed cache line length of 64 bytes.
- Pseudo-LRU cache replacement policy.
- 256-bit write interface from the L2 memory system.
- 256-bit read interface from the L2 memory system.
- Two 128-bit read paths from the data L1 memory system to the datapath.
- 256-bit write path from the datapath to the L1 memory system.

7.2 Cache behavior

The **IMPLEMENTATION SPECIFIC** features of the instruction and data caches include:

- At reset the instruction and data caches are disabled and both caches are automatically invalidated.



Caches in the core are invalidated automatically at reset deassertion unless the core power mode is initialized to Debug recovery mode. See the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#) for more information.

- You can enable or disable each cache independently.
- Cache lockdown is not supported.
- On a cache miss, data for the cache linefill is requested in critical word-first order.

7.2.1 Instruction cache disabled behavior

If the instruction cache is disabled, fetches cannot access any of the instruction cache arrays. An exception is the instruction cache maintenance operations. If the instruction cache is disabled, the instruction cache maintenance operations can still execute normally.

If the instruction cache is disabled, all instruction fetches to cacheable memory are treated as if they were Non-cacheable. This treatment means that instruction fetches might not be coherent with caches in other cores, and software must take account of this.

7.2.2 Instruction cache speculative memory accesses

Instruction fetches are speculative. Execution is not guaranteed, because there can be several unresolved branches in the pipeline.

A branch instruction or exception in the code stream can cause a pipeline flush, discarding the currently fetched instructions. On instruction fetch accesses, pages with Device memory type attributes are treated as Non-Cacheable Normal Memory.

Device memory pages must be marked with the translation table descriptor attribute bit *Execute Never* (XN). The device and code address spaces must be separated in the physical memory map. This separation prevents speculative fetches to read-sensitive devices when address translation is disabled.

If the instruction cache is enabled, and if the instruction fetches miss in the L1 instruction cache, they can still look up in the L1 data caches. However, a new line is not allocated in the data cache unless the data cache is enabled.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information.

7.2.3 Data cache disabled behavior

If the data cache is disabled, load and store instructions do not access any of the L1 data, L2 cache, and, if present, the *DynamiQ Shared Unit* (DSU) L3 cache arrays.

When the data cache is disabled, instructions and operations are affected as follows:

- An instruction fetch does not allocate a new line in the L2 or L3 caches.
- All load and store instructions to cacheable memory are treated as if they were Non-cacheable and are incoherent with the caches in both this core and other cores in the cluster. Software must take this into account.
- Data cache maintenance operations are an exception and will execute normally.



The L2 and L1 data caches cannot be disabled independently.

7.2.4 Data cache maintenance considerations

DC IVAC operations in AArch64 state are treated as DC CIVAC except for permission checking and watchpoint matching.

DC ISW operations in AArch64 state, perform both a clean and invalidate of the target set/way. The values of HCR.SWIO and HCR_EL2.SWIO have no effect.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information.

7.2.5 Data cache coherency

To maintain data coherency between multiple cores, the Cortex®-A77 core uses the *Modified Exclusive Shared Invalid* (MESI) protocol.

7.2.6 Write streaming mode

A cache line is allocated to the L1 on either a read miss or a write miss.

However, there are some situations where allocating on writes is not required. For example, when executing the C standard library `memset()` function to clear a large block of memory to a known value. Writes of large blocks of data can pollute the cache with unnecessary data. It can also waste power and performance if a linefill must be performed only to discard the linefill data because the entire line was subsequently written by the `memset()`.

To counter this, the L1 memory system includes logic to detect when the core has stores pending to a full cache line when it is waiting for a linefill to complete, or when it detects a `DCZVA` (full cache line write to zero). If this situation is detected, then it switches into write streaming mode.

When in write streaming mode, loads behave as normal, and can still cause linefills, and writes still lookup in the cache, but if they miss then they write out to L2 (or possibly L3, system cache, or DRAM) rather than starting a linefill.

The L1 memory system continues in write streaming mode until it can no longer create a full cacheline of store (for example because of a lack of resource in the L1 memory system) or has detected a high proportion of store hitting in the cache.



The L1 memory system is monitoring transaction traffic through L1 and, depending on different thresholds, can set a stream to go out to L2, L3, and system cache and DRAM.

The following register controls the different thresholds:

AArch64 state

`CPUECTLR_EL1` configure the L2, L3, and system cache write streaming mode threshold. See [13.32 CPUECTLR_EL1, CPU Extended Control Register, EL1](#) on page 143.

7.3 L1 instruction memory system

The L1 instruction side memory system provides an instruction stream to the decoder.

To increase overall performance and to reduce power consumption, it uses:

- Dynamic branch prediction.
- Instruction caching.

7.3.1 Program flow prediction

The Cortex®-A77 core contains program flow prediction hardware, also known as branch prediction.

Branch prediction increases overall performance and reduces power consumption. With program flow prediction disabled, all taken branches incur a penalty that is associated with flushing the pipeline.

To avoid this penalty, the branch prediction hardware predicts if a conditional or unconditional branch is to be taken. For conditional branches, the hardware predicts if the branch is to be taken. It also predicts the address that the branch goes to, known as the branch target address. For unconditional branches, only the target is predicted.

The hardware contains the following functionality:

- A *Branch Target Buffer* (BTB) holding the branch target address of previously taken branches.
- A branch direction predictor using previous branch history.
- The return stack, a stack of nested subroutine return addresses.
- A static branch predictor.
- An indirect branch predictor.

Predicted and non-predicted instructions

Unless otherwise specified, the following list applies to A64, A32, and T32 instructions. As a rule the flow prediction hardware predicts all branch instructions regardless of the addressing mode, and includes:

- Conditional branches.
- Unconditional branches.
- Indirect branches that are associated with procedure call and return instructions.
- Branches that switch between A32 and T32 states.

The following branch instructions are not predicted:

- Exception return instructions.

T32 state conditional branches

A T32 unconditional branch instruction can be made conditional by inclusion in an *If-Then* (IT) block. It is then treated as a conditional branch.

Return stack

The return stack stores the address and instruction set state.

This address is equal to the link register value stored in R14 in AArch32 state or X30 in AArch64 state.

The following instructions cause a return stack push if predicted:

- `BL r14`
- `BLX (immediate)` in AArch32 state
- `BLX (register)` in AArch32 state
- `BLR` in AArch64 state
- `MOV pc, r14`

In AArch32 state, the following instructions cause a return stack pop if predicted:

- `BX`
- `LDR pc, [r13], #imm`
- `LDM r13, {...pc}`

- `LDM r13, {...pc}`

In AArch64 state, the `RET` instruction causes a return stack pop.

As exception return instructions can change core privilege mode and Security state, they are not predicted. These include:

- `ERET`

7.4 L1 data memory system

The L1 data cache is organized as a *Virtually Indexed, Physically Tagged* (VIPT) cache featuring four ways.

Data cache invalidate on reset

The Armv8-A architecture does not support an operation to invalidate the entire data cache. If software requires this function, it must be constructed by iterating over the cache geometry and executing a series of individual invalidate by set/way instructions.

7.4.1 Memory system implementation

This section describes the implementation of the L1 memory system.

Limited Order Regions

The core offers support for four limited ordering region descriptors, as introduced by the Armv8.1 Limited Ordering Regions.

Atomic instructions

The Cortex®-A77 core supports the atomic instructions that are added in Armv8.1 architecture.

Atomic instructions to cacheable memory can be performed as either near atomics or far atomics, depending on where the cache line containing the data resides.

When an instruction hits in the L1 data cache in a unique state, then it is performed as a near atomic in the L1 memory system. If the atomic operation misses in the L1 cache, or the line is shared with another core, then the atomic is sent as a far atomic on the core CHI interface.

If the operation misses everywhere within the cluster, and the interconnect supports far atomics, then the atomic is passed on to the interconnect to perform the operation.

When the operation hits anywhere inside the cluster, or when an interconnect does not support atomics, the L3 memory system performs the atomic operation. If the line it is not already there, it allocates the line into the L3 cache. This depends on whether the *DynamiQ Shared Unit* (DSU) is configured with an L3 cache.

Therefore, if software prefers that the atomic is performed as a near atomic, precede the atomic instruction with a `PLDW` or `PRFM PSTL1KEEP` instruction.

Alternatively, the `CPUECTLR` can be programmed such that different types of atomic instructions attempt to execute as a near atomic. One cache fill is made on an atomic. If the cache line is lost before the atomic operation can be made, it is sent as a far atomic.

The Cortex®-A77 core supports atomics to device or non-cacheable memory, however this relies on the interconnect also supporting atomics. If such an atomic instruction is executed when the interconnect does not support them, it results in an abort.

For more information on the `CPUECTLR` register, see [13.32 CPUECTLR_EL1, CPU Extended Control Register, EL1](#) on page 143.

LDAPR instructions

The core supports Load acquire instructions adhering to the RCpc consistency semantic introduced in the Armv8.3 extensions for A profile. This is reflected in register `ID_AA64ISAR1_EL1` where bits[23:20] are set to `0b0001` to indicate that the core supports `LDAPRB`, `LDAPRH`, and `LDAPR` instructions implemented in AArch64.

Transient memory region

The core has a specific behavior for memory regions that are marked as write-back cacheable and transient, as defined in the Armv8.0 architecture.

For any load or store that is targeted at a memory region that is marked as transient, the following occurs:

- If the memory access misses in the L1 data cache, the returned cache line is allocated in the L1 data cache but is marked as transient.
- When the line is evicted from the L1 data cache, the transient hint is passed to the L2 cache so that the replacement policy will not attempt to retain the line. When the line is subsequently evicted from the L2 cache, it will bypass the next level cache entirely.

Non-temporal loads

Non-temporal loads indicate to the caches that the data is likely to be used for only short periods. For example, when streaming single-use read data that is then discarded. In addition to non-temporal loads, there are also prefetch-memory (`PRFM`) hint instructions with the `STRM` qualifier.

Non-temporal loads to memory which are designated as Write-Back are treated the same as loads to Transient memory.

7.4.2 Internal exclusive monitor

The Cortex®-A77 core L1 memory system has an internal exclusive monitor.

This monitor is a 2-state, open and exclusive, state machine that manages Load-Exclusive or Store-Exclusive accesses and Clear-Exclusive (`CLREX`) instructions. You can use these instructions to

construct semaphores, ensuring synchronization between different processes running on the core, and also between different cores that are using the same coherent memory locations for the semaphore. A Load-Exclusive instruction tags a small block of memory for exclusive access. CTR.ERG defines the size of the tagged block as 16 words, one cache line.



Note

A load/store exclusive instruction is any one of the following:

- In the A64 instruction set, any instruction that has a mnemonic starting with LDX, LDAX, STX, or STLX.
- In the A32 and T32 instruction sets, any instruction that has a mnemonic starting with LDREX, STREX, LDAEX, or STLEX.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information about these instructions.

7.5 Data prefetching

This section describes the data prefetching behavior for the Cortex®-A77 core.

Preload instructions

The Cortex®-A77 core supports the AArch64 *Prefetch Memory* (PRFM) instructions and the AArch32 *Prefetch Data* (PLD) and *Preload Data With Intent To Write* (PLDW) instructions. These instructions signal to the memory system that memory accesses from a specified address are likely to occur soon. The memory system acts by taking actions that aim to reduce the latency of the memory access when they occur. PRFM instructions perform a lookup in the cache, and if they miss and are to a cacheable address, a linefill starts. However, the PRFM instruction retires when its linefill is started, rather than waiting for the linefill to complete. This enables other instructions to execute while the linefill continues in the background.

The *Preload Instruction* (PLI) memory system hint performs preloading in the L2 cache for cacheable accesses if they miss in both the L1 instruction cache and L2 cache. Instruction preloading is performed in the background.

For more information about prefetch memory and preloading caches, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

Data prefetching and monitoring

The load-store unit includes a hardware prefetcher that is responsible for generating prefetches targeting both the L1 and the L2 cache. The load side prefetcher uses the virtual address to prefetch to both the L1 and L2 Cache. The store side prefetcher uses the physical address, and only prefetches to the L2 Cache.

The CPUECTLR register allows you to have some control over the prefetcher. See [13.32 CPUECTLR_EL1, CPU Extended Control Register, EL1](#) on page 143 for more information on the control of the prefetcher.

Use the prefetch memory system instructions for data prefetching where short sequences or irregular pattern fetches are required.

Data cache zero

The Armv8-A architecture introduces a *Data Cache Zero by Virtual Address* (DC ZVA) instruction.

In the Cortex®-A77 core, this enables a block of 64 bytes in memory, which is aligned to 64 bytes in size, to be set to zero.

For more information, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

7.6 Direct access to internal memory

The Cortex®-A77 core provides a mechanism to read the internal memory that is used by the L1 caches, L2 cache, and TLB structures through **IMPLEMENTATION DEFINED** System registers. This functionality can be useful when debugging software or hardware issues.

When the core executes in AArch64 state, there are six read-only registers that are used to access the contents of the internal memory. The internal memory is selected by programming the **IMPLEMENTATION DEFINED** RAMINDEX register (using SYS #6, c15, c0, #0 instruction). These operations are available only in EL3. In all other modes, executing these instructions results in an Undefined Instruction exception. The data is read from read-only registers as shown in the following table. After accessing the cache, a *Data Synchronization Barrier* (DSB) is required prior to reading the data register.

Table 7-1: AArch64 registers used to access internal memory

Register name	Function	Access	Operation	Rd Data
IDATA0_EL3	Instruction Register 0	Read-only	S3_6_c15_c0_0	Data
IDATA1_EL3	Instruction Register 1	Read-only	S3_6_c15_c0_1	Data
IDATA2_EL3	Instruction Register 2	Read-only	S3_6_c15_c0_2	Data
DDATA0_EL3	Data Register 0	Read-only	S3_6_c15_c1_0	Data
DDATA1_EL3	Data Register 1	Read-only	S3_6_c15_c1_1	Data
DDATA2_EL3	Data Register 2	Read-only	S3_6_c15_c1_2	Data

7.6.1 Encoding for L1 instruction cache tag, L1 instruction cache data, L1 BTB, L1 GHB, L1 BIM, L1 TLB instruction, and L0 macro-op cache data

The following tables show the encoding required to select a given cache line.

Table 7-2: L1 instruction cache tag location encoding

Bit fields of Rd	Description
[31:24]	RAMID = 0x00

Bit fields of Rd	Description
[23:20]	Reserved
[19:18]	Way
[17:14]	Reserved
[13:6]	Index [13:6]
[5:0]	Reserved

Table 7-3: L1 instruction cache data location encoding

Bit fields of Rd	Description
[31:24]	RAMID = 0x01
[23:20]	Reserved
[19:18]	Way
[17:14]	Reserved
[13:3]	Index [13:3]
[2:0]	Reserved

Table 7-4: L1 BTB data location encoding

Bit fields of Rd	Description
[31:24]	RAMID = 0x02
[23:16]	Reserved
[15:4]	Index [15:4]
[3:0]	Reserved

Table 7-5: L1 GHB data location encoding

Bit fields of Rd	Description
[31:24]	RAMID = 0x03
[23:15]	Reserved
[14:5]	Index [14:5]
[4:0]	Reserved

Table 7-6: BIM data location encoding

Bit fields of Rd	Description
[31:24]	RAMID = 0x05
[23:14]	Reserved
[13:4]	Index [13:4]
[3:0]	Reserved

Table 7-7: L1 instruction TLB data location encoding

Bit fields of Rd	Description
[31:24]	RAMID = 0x04
[23:8]	Reserved
[7:0]	TLB Entry (->47)

Table 7-8: L0 Macro-op cache data location encoding

Bit fields of Rd	Description
[31:24]	RAMID = 0x06
[23:10]	Reserved
[9:0]	Index [9:0]

L1 instruction tag RAM

The following tables show the data that is returned from accessing the L1 instruction tag RAM.

Table 7-9: L1 instruction cache tag format for instruction register 0

Bit field	Description
[31]	Non-secure identifier for the physical address
[30:3]	Physical address [39:12]
[2:1]	Instruction state [1:0]
	00 Invalid 01 T32 10 A32 11 A64
[0]	Parity

Table 7-10: L1 instruction cache tag format for instruction register 1

Bit field	Description
[63:0]	0

Table 7-11: L1 instruction cache tag format for instruction register 2

Bit field	Description
[63:0]	0

L1 instruction data RAM

The following tables show the data that is returned from accessing the L1 instruction data RAM.

Table 7-12: L1 instruction cache data format for instruction register 0

Bit field	Description
[63:0]	Data [63:0]

Table 7-13: L1 instruction cache data format for instruction register 1

Bit field	Description
[63:9]	0
[8]	Parity
[7:0]	Data [71:64]

Table 7-14: L1 instruction cache data format for instruction register 2

Bit field	Description
[63:0]	0

L1 BTB RAM

The following tables show the data that is returned from accessing the L1 BTB RAM.

Table 7-15: L1 BTB cache format for instruction register 0

Bit field	Description
[63:0]	Data [63:0]

Table 7-16: L1 BTB cache format for instruction register 1

Bit field	Description
[63:18]	0
[17:0]	Data [81:64]

Table 7-17: L1 BTB cache format for instruction register 2

Bit field	Description
[63:0]	0

L1 GHB RAM

The following tables show the data that is returned from accessing the L1 GHB RAM.

Table 7-18: L1 GHB cache format for instruction register 0

Bit field	Description
[63:0]	Data [63:0]

Table 7-19: L1 GHB cache format for instruction register 1

Bit field	Description
[63:32]	0
[31:0]	Data [95:64]

Table 7-20: L1 GHB cache format for instruction register 2

Bit field	Description
[63:0]	0

L1 BIM RAM

The following tables show the data that is returned from accessing the L1 BIM RAM.

Table 7-21: L1 BIM cache format for instruction register 0

Bit field	Description
[63:16]	0
[15:0]	Data [15:0]

Table 7-22: L1 BIM cache format for instruction register 1

Bit field	Description
[63:0]	0

Table 7-23: L1 BIM cache format for instruction register 2

Bit field	Description
[63:0]	0

L1 instruction TLB RAM

The following tables show the data that is returned from accessing the L1 instruction TLB RAM.

Table 7-24: L1 instruction TLB cache format for instruction register 0

Bit field	Description
[63:60]	Virtual address [15:12]
[59:58]	PBHA
[57]	RESERVED
[56:54]	Memory attributes: 000 Device nGnRnE 001 Device nGnRE 010 Device nGRE 011 Device GRE 100 Non-cacheable 101 Write-Back No-Allocate 110 Write-Back Transient 111 Write-Back Read-Allocate and Write-Allocate
[53:51]	Page size: 000 4KB 001 16KB 010 64KB 011 256KB 100 2MB 101 32MB 11x Reserved
[50:47]	RESERVED
[46]	Outer-shared
[45]	Inner-shared
[44:39]	RESERVED
[38:23]	ASID
[22:7]	VMID
[6:5]	Translation regime: 00 Secure EL1/EL0 01 Secure EL3 10 Non-secure EL1/EL0 11 Non-secure EL2

Bit field	Description
[4:1]	RESERVED
[0]	Valid

Table 7-25: L1 instruction TLB cache format for instruction register 1

Bit field	Description
[61]	Non-secure
[60:33]	Physical address [39:12]
[32:0]	Virtual address [48:16]

L0 macro-op RAM

The following tables show the data that is returned from accessing the L0 macro-op RAM.

Table 7-26: L0 Macro-op cache format for instruction register 0

Bit field	Description
[63:0]	Macro-op data [63:0]

Table 7-27: L0 Macro-op cache format for instruction register 1

Bit field	Description
[63:34]	0
[33:0]	Macro-op data [97:64]

Table 7-28: L0 Macro-op cache format for instruction register 2

Bit field	Description
[63:0]	0

7.6.2 Encoding for L1 data cache tag, L1 data cache data, and L1 TLB data

The core data cache consists of a 4-way set-associative structure.

The encoding, which is set in `rd` in the appropriate `mcrr` instruction, used to locate the required cache data entry for tag, data, and TLB memory is shown in the following tables. It is similar for both the tag RAM, data RAM, and TLB access. Data RAM access includes an additional field to locate the appropriate doubleword in the cache line.

Tag RAM encoding includes an additional field to select which one of the two cache channels must be used to perform any access.

Table 7-29: L1 data cache tag location encoding

Bit fields of Rd	Description
[31:24]	RAMID = 0x08
[23:20]	Reserved
[19:18]	Way

Bit fields of Rd	Description
[17]	Copy 0 Tag RAM associated with Pipe 0 1 Tag RAM associated with Pipe 1
[16:14]	Reserved
[13:6]	Index [13:6]
[5:0]	Reserved

Table 7-30: L1 data cache data location encoding

Bit fields of Rd	Description
[31:24]	RAMID = 0x09
[23:20]	Reserved
[19:18]	Way
[17:16]	BankSel
[15:14]	Unused
[13:6]	Index [13:6]
[5:0]	Reserved

Table 7-31: L1 data TLB location encoding

Bit fields of Rd	Description
[31:24]	RAMID = 0x0A
[23:6]	Reserved
	TLB Entry (0->47)

Data cache reads return 64 bits of data in Data Register 0, Data Register 1, and Data Register 2. If cache protection is supported, Data Register 2 is used to report ECC information using the format shown in the following tables.

L1 data cache tag RAM with ECC

The following tables show the data that is returned from accessing the L1 data cache tag RAM with ECC.

Table 7-32: L1 data cache tag format with ECC for data register 0

Bit field	Description
[63:41]	0
[40:34]	ECC
[33]	Non-secure identifier for the physical address
[32:5]	Physical address [39:12]
[4:3]	Reserved
[2]	Transient/WBNA

Bit field	Description
[1:0]	MESI
	00 Invalid 01 Shared 10 Exclusive 11 Modified with respect to the L2 cache

Table 7-33: L1 data cache tag format with ECC for data register 1

Bit field	Description
[63:0]	0

Table 7-34: L1 data cache tag format with ECC for data register 2

Bit field	Description
[63:0]	0

L1 data cache tag RAM without ECC

The following tables show the data that is returned from accessing the L1 data cache tag RAM without ECC.

Table 7-35: L1 data cache tag format without ECC for data register 0

Bit field	Description
[63:34]	0
[33]	Non-secure identifier for the physical address
[32:5]	Physical address [39:12]
[4:3]	Reserved
[2]	Transient/WBNA
[1:0]	MESI
	00 Invalid 01 Shared 10 Exclusive 11 Modified

Table 7-36: L1 data cache tag format without ECC for data register 1

Bit field	Description
[63:0]	0

Table 7-37: L1 data cache tag format without ECC for data register 2

Bit field	Description
[63:0]	0

L1 data cache data RAM with ECC

The following tables show the data that is returned from accessing the L1 data cache data RAM with ECC.

Table 7-38: L1 data cache data format with ECC for data register 0

Bit field	Description
[63:0]	Word1_data [31:0], Word0_data [31:0]

Table 7-39: L1 data cache data format with ECC for data register 1

Bit field	Description
[63:0]	Word3_data [31:0], Word2_data [31:0]

Table 7-40: L1 data cache data format with ECC for data register 2

Bit field	Description
[63:32]	0
[31:0]	Word3_ecc[6:0], Word3_poison, Word2_ecc[6:0], Word2_poison, Word1_ecc[6:0], Word1_poison, Word0_ecc[6:0], Word0_poison

L1 data cache data RAM without ECC

The following tables show the data that is returned from accessing the L1 data cache data RAM without ECC.

Table 7-41: L1 data cache data format without ECC for data register 0

Bit field	Description
[63:0]	Word1_data [31:0], Word0_data [31:0]

Table 7-42: L1 data cache data format without ECC for data register 1

Bit field	Description
[63:0]	Word3_data [31:0], Word2_data [31:0]

Table 7-43: L1 data cache data format without ECC for data register 2

Bit field	Description
[63:0]	0

L1 data TLB RAM

The following tables show the data that is returned from accessing the L1 data TLB RAM.

Table 7-44: L1 data TLB cache format for data register 0

Bit field	Description
[63:62]	Virtual address [13:12]
[58]	Outer-shared
[57]	Inner-shared

Bit field	Description
[52:50]	Memory attributes: 000 Device nGnRnE 001 Device nGnRE 010 Device nGRE 011 Device GRE 100 Non-cacheable 101 Write-Back No-Allocate 110 Write-Back Transient 111 Write-Back Read-Allocate and Write-Allocate
[38:36]	Page size: 000 4KB 001 16KB 010 64KB 011 256KB 100 2MB 101 Reserved 110 512MB 111 Reserved
[35]	Non-secure
[34:33]	Translation regime: 00 Secure EL1/ELO 01 Secure EL3 10 Non-secure EL1/ELO 11 Non-secure EL2
[32:17]	ASID
[16:1]	VMID
[0]	Valid

Table 7-45: L1 data TLB cache format for data register 1

Bit field	Description
[63]	PBHA [0]
[62:35]	Physical address [39:12]
[34:0]	Virtual address[48:14]

7.6.3 Encoding for the L2 unified cache

The following tables show the encoding required to select a given cache line.

Table 7-46: L2 tag location encoding

Bit fields of Rd	Description
[31:24]	RAMID = 0x10
[23:21]	Reserved
[20:18]	Way (0->7)

Bit fields of Rd	Description
[17:16]	Reserved
[15:6]	Index[15:6]
[5:0]	Reserved

Table 7-47: L2 data location encoding

Bit fields of Rd	Description
[31:24]	RAMID = 0x11
[23:21]	Reserved
[20:18]	Way (0->7)
[17:16]	Reserved
[15:4]	Index[15:4]
[3:0]	Reserved

Table 7-48: L2 victim location encoding

Bit fields of Rd	Description
[31:24]	RAMID = 0x12
[23:16]	Reserved
[15:6]	Index[15:6]
[5:0]	Reserved

L2 tag RAM when L2 is configured with a 128KB cache size

The following tables show the data that is returned from accessing the L2 tag RAM when L2 is configured with a 128KB cache size.

Table 7-49: L2 tag format with a 128KB L2 cache size for data register 0

Bit field	Description
[63:47]	0
[46:40]	ECC [6:0] if configured with ECC for a 128KB L2 cache size, otherwise 0
[39:38]	PBHA [1:0]
[37:12]	Physical address [39:14]
[11]	Non-secure identifier for the physical address
[10:9]	Virtual index [13:12]
[8:6]	Reserved
[5]	Shareable
[4]	Outer allocation hint
[3]	L1 data cache valid

Bit field	Description
[2:0]	L2 State
101	Modified
001	Exclusive
x11	Shared
xx0	Invalid

Table 7-50: L2 tag format with a 128KB L2 cache size for data register 1

Bit field	Description
[63:0]	0

Table 7-51: L2 tag format with a 128KB L2 cache size for data register 2

Bit field	Description
[63:0]	0

L2 tag RAM when L2 is configured with a 256KB cache size

The following tables show the data that is returned from accessing the L2 tag RAM when L2 is configured with a 256KB cache size.

Table 7-52: L2 tag format with a 256KB L2 cache size for data register 0

Bit field	Description
[63:46]	0
[45:39]	ECC [6:0] if configured with ECC for a 256KB L2 cache size, otherwise 0
[38:37]	PBHA [1:0]
[36:12]	Physical address [39:15]
[11]	Non-secure identifier for the physical address
[10:9]	Virtual index [13:12]
[8:6]	Reserved
[5]	Shareable
[4]	Outer allocation hint
[3]	L1 data cache valid
[2:0]	L2 State
101	Modified
001	Exclusive
x11	Shared
xx0	Invalid

Table 7-53: L2 tag format with a 256KB L2 cache size for data register 1

Bit field	Description
[63:0]	0

Table 7-54: L2 tag format with a 256KB L2 cache size for data register 2

Bit field	Description
[63:0]	0

L2 tag RAM when L2 is configured with a 512KB cache size

The following tables show the data that is returned from accessing the L2 tag RAM when L2 is configured with a 512KB cache size.

Table 7-55: L2 tag format with a 512KB L2 cache size for data register 0

Bit field	Description
[63:45]	0
[44:38]	ECC [6:0] if configured with ECC for a 512KB L2 cache size, otherwise 0
[37:36]	PBHA [1:0]. PBHA is always present and has no dependency on ECC or non-ECC.
[35:12]	Physical address [39:16]
[11]	Non-secure identifier for the physical address
[10:9]	Virtual index [13:12]
[8:6]	Reserved
[5]	Shareable
[4]	Outer allocation hint
[3]	L1 data cache valid
[2:0]	L2 State <div> <div>101</div> <div>001</div> <div>x11</div> <div>xx0</div> </div> <div> <div>Modified</div> <div>Exclusive</div> <div>Shared</div> <div>Invalid</div> </div>

Table 7-56: L2 tag format with a 512KB L2 cache size for data register 1

Bit field	Description
[63:0]	0

Table 7-57: L2 tag format with a 512KB L2 cache size for data register 2

Bit field	Description
[63:0]	0

L2 data RAM

The following tables show the data that is returned from accessing the L2 data RAM.

Table 7-58: L2 data format for data register 0

Bit field	Description
[63:0]	Data [63:0]

Table 7-59: L2 data format for data register 1

Bit field	Description
[63:0]	Data [127:64]

Table 7-60: L2 data format for data register 2

Bit field	Description
[63:16]	0
[15:8]	ECC for Data [127:64] if configured with ECC
[7:0]	ECC for Data [63:0] if configured with ECC

L2 victim RAM

The following tables show the data that is returned from accessing the L2 victim RAM.

Table 7-61: L2 victim format for data register 0

Bit field	Description
[63:16]	0
[15:0]	Replacement [15:0]

Table 7-62: L2 victim format for data register 1

Bit field	Description
[63:0]	0

Table 7-63: L2 victim format for data register 2

Bit field	Description
[63:0]	0

7.6.4 Encoding for the L2 TLB

The following section describes the encoding for L2 TLB direct accesses.

The following table shows the encoding that is required to select a given TLB entry.

Table 7-64: L2 TLB encoding

Bit fields of Rd	Description										
[31:24]	RAMID = 0x18										
[23:21]	Reserved										
[20:18]	Way <table> <tr> <td>0b000</td><td>way0</td></tr> <tr> <td>0b001</td><td>way1</td></tr> <tr> <td>0b010</td><td>way2</td></tr> <tr> <td>0b011</td><td>way3</td></tr> <tr> <td>0b100</td><td>way4</td></tr> </table>	0b000	way0	0b001	way1	0b010	way2	0b011	way3	0b100	way4
0b000	way0										
0b001	way1										
0b010	way2										
0b011	way3										
0b100	way4										

Bit fields of Rd	Description
[17:8]	Reserved
[7:0]	Index

L2 TLB

The following tables show the data that is returned from accessing the L2 TLB.

Table 7-65: L2 TLB format for instruction register 0

Bit field	Description
[63]	Outer-shared
[62]	Inner-shared
[61]	Reserved
[60:58]	Memory attributes: 0b000 Device nGnRnE 0b001 Device nGnRE 0b010 Device nGRE 0b011 Device GRE 0b100 Non-cacheable 0b101 Write-Back No-Allocate 0b110 Write-Back Transient 0b111 Write-Back Read-Allocate and Write-Allocate
[57:54]	Reserved
[53:20]	Physical address When bit[6] is 0: <ul style="list-style-type: none"> [53:26] = PA[39:12] [25:20] = Don't care When bit[6] is 1: <ul style="list-style-type: none"> [53:28] = PA[39:14] [27:26] = PA[13:12] for page 3 (highest memory address) [25:24] = PA[13:12] for page 2 [23:22] = PA[13:12] for page 1 [21:20] = PA[13:12] for page 0 (lowest memory address)
[19:17]	Page size: 0b000 4KB 0b001 16KB 0b010 64KB 0b011 256KB 0b100 2MB 0b101 32MB 0b110 512MB 0b111 1GB
[16:7]	Reserved

Bit field	Description
[6]	Indicates that the entry is coalesced and holds translations for up to four contiguous pages
[5:2]	This bit field contains the valid bits for four contiguous pages. If the entry is non-coalesced, then 0b0001 indicates a valid entry.
[1:0]	Reserved

Table 7-66: L2 TLB format for instruction register 1

Bit field	Description
[63:62]	VMID [1:0]
[61:46]	ASID [15:0]
[45:44]	PBHA [1:0]
[43]	Walk cache entry
[42]	Prefetched translation
[41:13]	Virtual address [48:20]
[12]	Non-secure
[11:1]	Reserved
[0]	Non-global

Table 7-67: L2 TLB format for instruction register 2

Bit field	Description
[63:16]	Reserved
[15:14]	Translation regime: <div> <div>0b00</div> <div>0b01</div> <div>0b10</div> <div>0b11</div> </div> <div> <div>Secure EL1</div> <div>EL3</div> <div>Non-secure EL1</div> <div>EL2</div> </div>
[13:0]	VMID [15:2]

8. L2 memory system

This chapter describes the L2 memory system.

8.1 About the L2 memory system

The L2 memory subsystem consists of:

- An 8-way set associative L2 cache with a configurable size of 128KB, 256KB or 512KB. Cache lines have a fixed length of 64 bytes.
- Optional ECC protection for all RAM structures except victim array.
- Strictly inclusive with L1 data cache. Weakly inclusive with L1 instruction cache.
- Configurable CHI interface to the *DynamiQ Shared Unit* (DSU) or CHI compliant system with support for 128-bit and 256-bit data widths.
- Dynamic biased replacement policy.
- *Modified Exclusive Shared Invalid* (MESI) coherency.

8.2 About the L2 cache

The integrated L2 cache is the Point of Unification for the Cortex®-A77 core. It handles both instruction and data requests from the instruction side and data side of each core respectively.

When fetched from the system, instructions are allocated to the L2 cache and can be invalidated during maintenance operations.



Caches in the core are invalidated automatically at reset deassertion unless the core power mode is initialized to Debug recovery mode. See the [Arm® DynamiQ™ Shared Unit Technical Reference Manual](#) for more information.

8.3 Support for memory types

The Cortex®-A77 core simplifies the coherency logic by downgrading some memory types.

- Memory that is marked as both Inner Write-Back Cacheable and Outer Write-Back Cacheable is cached in the L1 data cache and the L2 cache.
- Memory that is marked Inner Write-Through is downgraded to Non-cacheable.
- Memory that is marked Outer Write-Through or Outer Non-cacheable is downgraded to Non-cacheable, even if the inner attributes are Write-Back cacheable.

The following table shows the transaction capabilities of the Cortex®-A77 core. It lists the maximum possible values for read, write, DVM issuing, and snoop capabilities of the private L2 cache.

Table 8-1: Cortex®-A77 Transaction Capabilities

Attribute	Value	Description
Write issuing capability	34/46/54	Maximum number of outstanding write transactions. Dependent on the configured TQ size. (36/48/56)
Read issuing capability	34/46/54	Maximum number of outstanding read transactions. Dependent on the configured TQ size. (36/48/56)
Snoop acceptance capability	23/29/33	Maximum number of outstanding snoops and stashes accepted. Dependent on the TQ size. (36/48/56)
DVM issuing capability	34/46/54	Maximum number of outstanding DVMOp transactions. Dependent on the configured TQ size. (36/48/56)

9. Reliability, Availability, and Serviceability (RAS)

This chapter describes the RAS features implemented in the Cortex®-A77 core.

9.1 Cache ECC and parity

The Cortex®-A77 core implements the *Reliability, Availability, and Serviceability* (RAS) extension to the Arm®v8-A architecture which provides mechanisms for standardized reporting of the errors that are generated by cache protection mechanisms.

When configured with core cache protection, the Cortex®-A77 core can detect and correct a 1-bit error in any RAM and detect 2-bit errors in some RAMs.



For information about SCU-L3 cache protection, see the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#).

The RAS extension improves the system by reducing unplanned outages:

- Transient errors can be detected and corrected before they cause application or system failure.
- Failing components can be identified and replaced.
- Failure can be predicted ahead of time to allow replacement during planned maintenance.

Errors that are present but not detected are known as latent or undetected errors. A transaction carrying a latent error is corrupted. In a system with no error detection, all errors are latent errors and are silently propagated by components until either:

- They are masked and do not affect the outcome of the system. These are benign or false errors.
- They affect the service interface of the system and cause failure. These are silent data corruptions.

The severity of a failure can range from minor to catastrophic. In many systems, data or service loss is regarded as more of a minor failure than data corruption, as long as backup data is available.

The RAS extension focuses on errors that are produced from hardware faults, which fall into two main categories:

- Transient faults.
- Persistent faults.

The RAS extension describes data corruption faults, which mostly occur in memories and on data links. RAS concepts can also be used for the management of other types of physical faults that are

found in systems, such as lock-step errors, thermal trip, and mechanical failure. The RAS extension provides a common programmers model and mechanisms for fault handling and error recovery.

9.2 Cache protection behavior

The configuration of the RAS extension that is implemented in the Cortex®-A77 core includes cache protection.

In this case, the Cortex®-A77 core protects against errors that result in a RAM bitcell holding the incorrect value.

The RAMs in the Cortex®-A77 core have the following capability:

SED

Single Error Detect. One bit of parity is applicable to the entire word. The word size is specific for each RAM and depends on the protection granule.

Interleaved parity

One bit of parity is applicable to the even bits of the word, and one bit of parity is applicable to the odd bits of the word.

SECDED

Single Error Correct, Double Error Detect.

[Table 9-1: Cache protection behavior](#) on page 83 indicates which protection type is applied to each RAM.

The core can progress and remain functionally correct when there is a single bit error in any RAM.

If there are multiple single bit errors in different RAMs, or within different protection granules within the same RAM, then the core also remains functionally correct.

If there is a double bit error in a single RAM within the same protection granule, then the behavior depends on the RAM:

- For RAMs with SECDED capability, the core detects and either reports or defers the error. If the error is in a cache line containing dirty data, then that data might be lost.
- For RAMs with only SED, the core does not detect a double bit error. This might cause data corruption.

If there are three or more bit errors within the same protection granule, then depending on the RAM and the position of the errors within the RAM, the core might or might not detect the errors.

The cache protection feature of the core has a minimal performance impact when no errors are present.

Table 9-1: Cache protection behavior

RAM	Protection type	Protection granule	Correction behavior
L0 macro-op cache	SED	48 bits	The line that contains the error is invalidated from the macro-op cache and fetched again from the L1 instruction cache.
L1 instruction cache tag	1 parity bit	31 bits	The line that contains the error is invalidated from the L1 instruction cache and fetched again from the subsequent memory system.
L1 instruction cache data	SED	72 bits	The line that contains the error is invalidated from the L1 instruction cache and fetched again from the subsequent memory system.
L1 BTB	None	-	-
L1 GHB	None	-	-
L1 BIM	None	-	-
L1 data cache tag	SECDED	34 bits + 7 bits for ECC attached to the word.	The cache line that contains the error gets evicted, corrected in line, updating the L2 cache, and then refilled to the L1 data cache.
L1 data cache data	SECDED	32 bits of data + 1 poison bit + 7 bits for ECC attached to the word.	The cache line that contains the error gets evicted, corrected in line, and refilled to the core.
MMU translation cache	2 interleaved parity bits	71 bits	Entry invalidated, new pagewalk started to refetch it. Note: The L1 TLBs are implemented with flops, so there is no cache protection for L1 TLBs.
MMU replacement policy	None	-	-
MMU biased replacement	None	-	-
L2 cache tag	SECDED	128KB L2 - 7 ECC bits for 38 tag bits 256KB L2 - 7 ECC bits for 37 tag bits 512KB L2 - 7 ECC bits for 36 tag bits	Tag is corrected inline.
L2 cache data	SECDED	8 ECC bits for 64 data bits	Data is corrected inline and the L2 cache is updated with the corrected data.
L2 victim	None	-	-

To ensure that progress is guaranteed even in case of hard error, the core returns corrected data to the core, and no cache access is required after data correction.

9.3 Uncorrected errors and data poisoning

When an error is detected, the correction mechanism is triggered. However, if the error is a 2-bit error in a RAM protected by ECC, then the error is not correctable.

The behavior on an uncorrected error depends on the type of RAM.

Uncorrected error detected in a data RAM

When an uncorrected error is detected in a data RAM, the chunk of data with the error is marked as poisoned. This poison information is then transferred with the data and stored in the cache if the data is allocated into another cache. The poisoned information is stored per 64 bits of data, except in the L1 data cache where it is stored per 32 bits of data.

Uncorrected error detected in a tag RAM

When an uncorrected error is detected in a tag RAM, either the address or coherency state of the line is not known, and the corresponding data cannot be poisoned. In this case, the line is invalidated and an error recovery interrupt is generated to notify software that data has potentially been lost.

9.4 RAS error types

This section describes the RAS error types that are introduced by the RAS extension and supported in the Cortex®-A77 core.

When a component accesses memory, an error might be detected in that memory and then be corrected, deferred, or detected but silently propagated. The following table lists the types of RAS errors that are supported in the Cortex®-A77 core.

Table 9-2: RAS error types supported in the Cortex®-A77 core

RAS error type	Definition
Corrected	A <i>Corrected Error</i> (CE) is reported for a single-bit ECC error on any protected RAM.
Deferred	A <i>Deferred Error</i> (DE) is reported for a double-bit ECC error that affects the data RAM on either the L1 data cache or the L2 cache.
Uncorrected	An <i>Uncorrected Error</i> (UE) is reported for a double-bit ECC error that affects the tag RAM of either the L1 data cache or the L2 cache. An Uncorrected Error is also reported for external aborts that are received in response to a store, data cache maintenance, instruction cache maintenance, TLBI maintenance, or cache copyback of dirty data.

9.5 Error Synchronization Barrier

The *Error Synchronization Barrier* (ESB) instruction synchronizes unrecoverable system errors.

In the Cortex®-A77 core, the ESB instruction allows efficient isolation of errors:

- The `ESB` instruction does not wait for completion of accesses that cannot generate an asynchronous external abort. For example, if all external aborts are handled synchronously or it is known that no such accesses are outstanding.
- The `ESB` instruction does not order accesses and does not guarantee a pipeline flush.

All system errors must be synchronized by an `ESB` instruction, which guarantees the following:

- All system errors that are generated before the `ESB` instruction have pended a *System Error Interrupts* (SEI) exception.
- If a physical SEI is pended by or was pending before the `ESB` instruction executes, then:
 - It is taken before completion of the `ESB` instruction, if the physical SEI exception is unmasked at the current Exception level.
 - The pending SEI is cleared, the SEI status is recorded in `DISR_EL1`, and `DISR_EL1.A` is set to 1 if the physical SEI exception is masked at the current Exception level. It indicates that the SEI exception was generated before the `ESB` instruction by instructions that occur in program order.
- If a virtual SEI is pended by or was pending before the `ESB` instruction executes, then:
 - It is taken before completion of the `ESB` instruction, if the virtual SEI exception is unmasked.
 - The pending virtual SEI is cleared and the SEI status is recorded in `VDISR_EL2` using the information that is provided by software in `VSESR_EL2`, if the virtual SEI exception is masked.

After the `ESB` instruction, one of the following scenarios occurs:

- SEIs pended by errors are taken and their status is recorded in `ESR_ELn`.
- SEIs pended by errors are deferred and their status is recorded in `DISR_EL1` or `VDISR_EL2`.

This includes unrecoverable SEIs that are generated by instructions, translation table walks, and instruction fetches on the same core.

`DISR_EL1` can only be accessed at EL1 and above. If EL2 is implemented and `HCR_EL2.AMO` is set to 1, then reads and writes of `DISR_EL1` at Non-secure EL1 access `VDISR_EL2`.



See the following registers:

- [13.44 DISR_EL1, Deferred Interrupt Status Register, EL1](#) on page 170.
 - [13.60 HCR_EL2, Hypervisor Configuration Register, EL2](#) on page 185.
 - [13.110 VDISR_EL2, Virtual Deferred Interrupt Status Register, EL2](#) on page 254.
-

9.6 Error recording

The component that detects an error is called a node. The Cortex®-A77 core is a node that interacts with the DynamIQ™ Shared Unit node. There is one record per node for the errors detected.

For more information on error recording that is generated by cache protection, see the [Arm® Architecture Reference Manual Supplement, Reliability, Availability, and Serviceability \(RAS\), for A-profile architecture](#). The following points apply specifically to the Cortex®-A77 core:

- Error recording is only available when the core cache protection is implemented.
- In the Cortex®-A77 core, any error that is detected is reported and recorded in the error record registers:
 - [13.46 ERRSELR_EL1, Error Record Select Register, EL1](#) on page 173
 - [13.47 ERXADDR_EL1, Selected Error Record Address Register, EL1](#) on page 174
 - [13.48 ERXCTLR_EL1, Selected Error Record Control Register, EL1](#) on page 174
 - [13.49 ERXFR_EL1, Selected Error Record Feature Register, EL1](#) on page 174
 - [13.50 ERXMISC0_EL1, Selected Error Record Miscellaneous Register 0, EL1](#) on page 175
 - [13.51 ERXMISC1_EL1, Selected Error Record Miscellaneous Register 1, EL1](#) on page 175
 - [13.52 ERXPFGCDN_EL1, Selected Error Pseudo Fault Generation Count Down Register, EL1](#) on page 175
 - [13.53 ERXPFGCTL_EL1, Selected Error Pseudo Fault Generation Control Register, EL1](#) on page 177
 - [13.54 ERXPFGF_EL1, Selected Pseudo Fault Generation Feature Register, EL1](#) on page 178
 - [13.55 ERXSTATUS_EL1, Selected Error Record Primary Status Register, EL1](#) on page 179
- There are two error records provided, which can be selected with the ERRSELR_EL1 register:
 - Record 0 is private to the core, and is updated on any error in the core RAMs including L1 caches, TLB, and L2 cache.
 - Record 1 records any error in the L3 and snoop filter RAMs and is shared between all cores in the cluster.
- The fault handling interrupt is generated on the nFAULTIRQ[0] pin for L3 and snoop filter errors, or on the nFAULTIRQ[n+1] pin for core *n* L1 and L2 errors.

9.7 Error injection

The Cortex®-A77 core supports fault injection for the purpose of testing fault handling software.

The core is programmable to inject an error for any of the possible error types (corrected error, deferred error, uncontainable error, and recoverable error) on a future memory access. When that access is performed, the core responds as if an error was detected on that access by asserting error

interrupts, logging information in the error records, and taking aborts as appropriate for the type of error. Injecting an error will not affect the data in the RAM or the checking process itself. When a real error is detected on an access for which an injected error is programmed, the injected error will not prevent the core from handling the real error. The RAS register might log the injected error or the real error in this case.

To get the error injection to work:

- Program the Error Record Select Register (ERRSELR_EL1) to select Error record 0.
- Program the Error Record Control Register (ERROCTLR) to enable error detection/recovery and fault detection.
- Program the Error Pseudo Fault Generation Control Register (ERROPFGCTL) to allow error injection.



Cacheable code must also be executed, which will cause cacheable transactions that can be injected with errors.

The following table describes all the possible types of error that the core can encounter and therefore inject.

Table 9-3: Errors injected in the Cortex®-A77 core

Error type	Description
Corrected errors	A corrected error is generated for a single-bit ECC error on L1 data caches and L2 caches, both on data and tag RAMs.
Deferred errors	A deferred error is generated for a double-bit ECC error on L1 data caches and L2 caches, but only on data RAM.
Uncontainable errors	An uncontainable error is generated for a double-bit ECC error on L1 data caches and L2 caches, but only on tag RAM.

The following table describes the registers that handle error injection in the Cortex®-A77 core.

Table 9-4: Error injection registers

Register name	Description
ERROPFGF	The ERR Pseudo Fault Generation Feature register defines which errors can be injected.
ERROPFGCTL	The ERR Pseudo Fault Generation Control register controls the errors that are injected.
ERROPFGCDN	The ERR Pseudo Fault Generation Count Down register controls the fault injection timing.



This mechanism simulates the corruption of any RAM but the data is not actually corrupted.

See also:

- [14.7 ERROPFGCDN, Error Pseudo Fault Generation Count Down Register](#) on page 268.

- [14.8 ERROPFGCTL, Error Pseudo Fault Generation Control Register](#) on page 268.
- [14.9 ERROPFGF, Error Pseudo Fault Generation Feature Register](#) on page 270.

10. Generic Interrupt Controller CPU interface

This chapter describes the Cortex®-A77 core implementation of the Arm *Generic Interrupt Controller* (GIC) CPU interface.

10.1 About the Generic Interrupt Controller CPU interface

The Cortex®-A77 core implements the GIC CPU interface as described in the Arm® *Generic Interrupt Controller Architecture Specification*.

This interfaces with an external GICv4 distributor component within the cluster system and is a resource for supporting and managing interrupts. The GIC CPU interface hosts registers to mask, identify, and control states of interrupts forwarded to that core. Each core in the cluster system has a GIC CPU interface component and connects to a common external distributor component.



This chapter describes only features that are specific to the Cortex®-A77 core implementation. Additional information specific to the cluster can be found in [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#).

The GICv4 architecture supports:

- Two Security states.
- Interrupt virtualization.
- *Software-generated Interrupts* (SGIs).
- Message-Based Interrupts.
- System register access for the CPU interface.
- Interrupt masking and prioritization.
- Cluster environments, including systems that contain more than eight cores.
- Wake-up events in power management environments.

The GIC includes interrupt grouping functionality that supports:

- Configuring each interrupt to belong to an interrupt group.
- Signaling Group 1 interrupts to the target core using either the IRQ or the FIQ exception request. Group 1 interrupts can be Secure or Non-secure.
- Signaling Group 0 interrupts to the target core using the FIQ exception request only.
- A unified scheme for handling the priority of Group 0 and Group 1 interrupts.

This chapter describes only features that are specific to the Cortex®-A77 core implementation.

Related information

[GIC registers](#) on page 276

10.2 Bypassing the CPU interface

The GIC CPU interface is always implemented within the Cortex®-A77 core.

However, you can disable it if you assert the GICCDISABLE signal HIGH at reset. If you disable the GIC CPU interface, the input pins nVIRQ and nVFIQ can be driven by an external GIC in the SoC. GIC System register access generates **UNDEFINED** instruction exceptions when the GICCDISABLE signal is HIGH.

If the GIC is enabled, the input pins nVIRQ and nVFIQ must be tied off to HIGH. This is because the internal GIC CPU interface generates the virtual interrupt signals to the cores. The nIRQ and nFIQ signals are controlled by software, therefore there is no requirement to tie them HIGH.

11. Advanced SIMD and floating-point support

This chapter describes the Advanced SIMD and floating-point features and registers in the Cortex®-A77 core. The unit in charge of handling the Advanced SIMD and floating-point features is also referred to as the data engine in this manual.

11.1 About the Advanced SIMD and floating-point support

The Cortex®-A77 core supports the Advanced SIMD and scalar floating-point instructions in the A64 instruction set and the Advanced SIMD and floating-point instructions in the A32 and T32 instruction sets.

The Cortex®-A77 floating-point implementation:

- Does not generate floating-point exceptions.
- Implements all scalar operations in hardware with support for all combinations of:
 - Rounding modes.
 - Flush-to-zero.
 - Default *Not a Number* (NaN) modes.

The Arm®v8-A architecture does not define a separate version number for its Advanced SIMD and floating-point support in the AArch64 Execution state because the instructions are always implicitly present.

11.2 Accessing the feature identification registers

Software can identify the Advanced SIMD and floating-point features using the feature identification registers in the AArch64 Execution state only.

The Cortex®-A77 core only supports AArch32 in EL0, therefore none of the feature identification registers are accessible in the AArch32 Execution state.

You can access the feature identification registers in the AArch64 Execution state using the `MRS` instruction, for example:

```
MRS <Xt>, ID_AA64PFR0_EL1 ; Read ID_AA64PFR0_EL1 into Xt
MRS <Xt>, MVFR0_EL1       ; Read MVFR0_EL1 into Xt
MRS <Xt>, MVFR1_EL1       ; Read MVFR1_EL1 into Xt
MRS <Xt>, MVFR2_EL1       ; Read MVFR2_EL1 into Xt
```

Table 11-1: AArch64 Advanced SIMD and scalar floating-point feature identification registers

Register name	Description
ID_AA64PFR0_EL1	See 13.70 ID_AA64PFR0_EL1, AArch64 Processor Feature Register 0, EL1 on page 197.
MVFR0_EL1	See 16.4 MVFR0_EL1, Media, and VFP Feature Register 0, EL1 on page 308.
MVFR1_EL1	See 16.5 MVFR1_EL1, Media, and VFP Feature Register 1, EL1 on page 309.
MVFR2_EL1	See 16.6 MVFR2_EL1, Media, and VFP Feature Register 2, EL1 on page 311.

12. AArch32 System registers

This chapter describes the System registers in the AArch32 state.

12.1 AArch32 architectural System register summary

This chapter identifies the AArch32 architectural System registers implemented in the Cortex®-A77 core.

The following table identifies the architecturally defined registers that are implemented in the Cortex®-A77 core. For a description of these registers, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

For the registers listed in the following table, coproc==0b1111.

Table 12-1: Architecturally defined registers

Name	CRn	Opc1	CRm	Opc2	Width	Description
CNTFRQ	c14	0	c0	0	32	Timer Clock Ticks per Second
CNTP_CTL	c14	0	c2	1	32	Counter-timer Physical Timer Control register
CNTP_CVAL	-	2	c14	-	64	Counter-timer Physical Timer CompareValue register
CNTP_TVAL	c14	0	c2	0	32	Counter-timer Physical Timer TimerValue register
CNTPCT	-	0	c14	-	64	Counter-timer Physical Count register
CNTV_CTL	c14	0	c3	1	32	Counter-timer Virtual Timer Control register
CNTV_CVAL	-	3	c14	-	64	Counter-timer Virtual Timer CompareValue register
CNTV_TVAL	c14	0	c3	0	32	Counter-timer Virtual Timer TimerValue register
CNTVCT	-	1	c14	-	64	Counter-timer Virtual Count register
CP15ISB	c7	0	c5	4	32	Instruction Synchronization Barrier System instruction
CP15DSB	c7	0	c10	4	32	Data Synchronization Barrier System instruction
CP15DMB	c7	0	c10	5	32	Data Memory Barrier System instruction
DLR	c4	3	c5	1	32	Debug Link Register
DSPSR	c4	3	c5	0	32	Debug Saved Program Status Register
TPIDRURO	c13	0	c0	3	32	User read-only Thread ID Register
TPIDRURW	c13	0	c0	2	32	User read/write Thread ID Register

13. AArch64 System registers

This chapter describes the System registers in the AArch64 state.

13.1 AArch64 registers

This chapter provides information about the AArch64 System registers with **IMPLEMENTATION DEFINED** bit fields and **IMPLEMENTATION DEFINED** registers associated with the core.

The chapter provides **IMPLEMENTATION SPECIFIC** information, for a complete description of the registers, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

The chapter is presented as follows:

AArch64 architectural System register summary

This section identifies the AArch64 architectural System registers implemented in the Cortex®-A77 core that have **IMPLEMENTATION DEFINED** bit fields. The register descriptions for these registers only contain information about the **IMPLEMENTATION DEFINED** bits.

AArch64 IMPLEMENTATION DEFINED register summary

This section identifies the AArch64 architectural registers that are implemented in the Cortex®-A77 core that are **IMPLEMENTATION DEFINED**.

AArch64 registers by functional group

This section groups the **IMPLEMENTATION DEFINED** registers and architectural System registers with **IMPLEMENTATION DEFINED** bit fields, as identified previously, by function. It also provides reset details for key register types.

Register descriptions

The remainder of the chapter provides register descriptions of the **IMPLEMENTATION DEFINED** registers and architectural system registers with **IMPLEMENTATION DEFINED** bit fields, as identified previously. These are listed in alphabetic order.

13.2 AArch64 architectural System register summary

This section describes the AArch64 architectural System registers implemented in the Cortex®-A77 core.

The section contains two tables:

Registers with IMPLEMENTATION DEFINED bit fields

This table identifies the architecturally defined registers in Cortex®-A77 that have **IMPLEMENTATION DEFINED** bit fields. The register descriptions for these registers only contain information about the **IMPLEMENTATION DEFINED** bits.

See [Table 13-1: Registers with implementation defined bit fields](#) on page 95.

Other architecturally defined registers

This table identifies the other architecturally defined registers that are implemented in the Cortex®-A77 core. These registers are described in the [Arm® Architecture Reference Manual for A-profile architecture](#).

See [Table 13-2: Other architecturally defined registers](#) on page 98.

Table 13-1: Registers with implementation defined bit fields

Name	Op0	CRn	Op1	CRm	Op2	Width	Description
ACTLR_EL1	3	c1	0	c0	1	64	13.5 ACTLR_EL1, Auxiliary Control Register, EL1 on page 107
ACTLR_EL2	3	c1	4	c0	1	64	13.6 ACTLR_EL2, Auxiliary Control Register, EL2 on page 108
ACTLR_EL3	3	c1	6	c0	1	64	13.7 ACTLR_EL3, Auxiliary Control Register, EL3 on page 111
AFSRO_EL1	3	c5	0	c1	0	64	13.8 AFSRO_EL1, Auxiliary Fault Status Register 0, EL1 on page 113
AFSRO_EL2	3	c5	4	c1	0	64	13.9 AFSRO_EL2, Auxiliary Fault Status Register 0, EL2 on page 114
AFSRO_EL3	3	c5	6	c1	0	64	13.10 AFSRO_EL3, Auxiliary Fault Status Register 0, EL3 on page 115
AFSR1_EL1	3	c5	0	c1	1	64	13.11 AFSR1_EL1, Auxiliary Fault Status Register 1, EL1 on page 115
AFSR1_EL2	3	c5	4	c1	1	64	13.12 AFSR1_EL2, Auxiliary Fault Status Register 1, EL2 on page 116
AFSR1_EL3	3	c5	6	c1	1	64	13.13 AFSR1_EL3, Auxiliary Fault Status Register 1, EL3 on page 117
AIDR_EL1	3	c0	1	c0	7	64	13.14 AIDR_EL1, Auxiliary ID Register, EL1 on page 118
AMAIR_EL1	3	c10	0	c3	0	64	13.15 AMAIR_EL1, Auxiliary Memory Attribute Indirection Register, EL1 on page 119
AMAIR_EL2	3	c10	4	c3	0	64	13.16 AMAIR_EL2, Auxiliary Memory Attribute Indirection Register, EL2 on page 119
AMAIR_EL3	3	c10	6	c3	0	64	13.17 AMAIR_EL3, Auxiliary Memory Attribute Indirection Register, EL3 on page 120
CCSIDR_EL1	3	c0	1	c0	0	64	13.23 CCSIDR_EL1, Cache Size ID Register, EL1 on page 130
CLIDR_EL1	3	c0	1	c0	1	64	13.24 CLIDR_EL1, Cache Level ID Register, EL1 on page 132
CPACR_EL1	3	c1	0	c0	2	64	13.25 CPACR_EL1, Architectural Feature Access Control Register, EL1 on page 134
CPTR_EL2	3	c1	4	c1	2	64	13.26 CPTR_EL2, Architectural Feature Trap Register, EL2 on page 135
CPTR_EL3	3	c1	6	c1	2	64	13.27 CPTR_EL3, Architectural Feature Trap Register, EL3 on page 136
CSSELR_EL1	3	c0	2	c0	0	64	13.41 CSSELR_EL1, Cache Size Selection Register, EL1 on page 166
CTR_ELO	3	c0	3	c0	1	64	13.42 CTR_ELO, Cache Type Register, ELO on page 168
DISR_EL1	3	c12	0	c1	1	64	13.44 DISR_EL1, Deferred Interrupt Status Register, EL1 on page 170
ERRIDR_EL1	3	c5	0	c3	0	64	13.45 ERRIDR_EL1, Error ID Register, EL1 on page 172
ERRSELR_EL1	3	c5	0	c3	1	64	13.46 ERRSELR_EL1, Error Record Select Register, EL1 on page 173
ERXADDR_EL1	3	c5	0	c4	3	64	13.47 ERXADDR_EL1, Selected Error Record Address Register, EL1 on page 174
ERXCTLR_EL1	3	c5	0	c4	1	64	13.48 ERXCTLR_EL1, Selected Error Record Control Register, EL1 on page 174
ERXFR_EL1	3	c5	0	c4	0	64	13.49 ERXFR_EL1, Selected Error Record Feature Register, EL1 on page 174
ERXMISCO_EL1	3	c5	0	c5	0	64	13.50 ERXMISCO_EL1, Selected Error Record Miscellaneous Register 0, EL1 on page 175

Name	Op0	CRn	Op1	CRm	Op2	Width	Description
ERXMISC1_EL1	3	c5	0	c5	1	64	13.51 ERXMISC1_EL1 , Selected Error Record Miscellaneous Register 1, EL1 on page 175
ERXSTATUS_EL1	3	c5	0	c4	2	64	13.55 ERXSTATUS_EL1 , Selected Error Record Primary Status Register, EL1 on page 179
ESR_EL1	3	c5	0	c2	0	64	13.56 ESR_EL1 , Exception Syndrome Register, EL1 on page 180
ESR_EL2	3	c5	4	c2	0	64	13.57 ESR_EL2 , Exception Syndrome Register, EL2 on page 181
ESR_EL3	3	c5	6	c2	0	64	13.58 ESR_EL3 , Exception Syndrome Register, EL3 on page 183
HACR_EL2	3	c1	4	c1	7	64	13.59 HACR_EL2 , Hyp Auxiliary Configuration Register, EL2 on page 184
HCR_EL2	3	c1	4	c1	0	64	13.60 HCR_EL2 , Hypervisor Configuration Register, EL2 on page 185
ID_AA64DFR0_EL1	3	c0	0	c5	0	64	13.63 ID_AA64DFR0_EL1 , AArch64 Debug Feature Register 0, EL1 on page 187
ID_AA64ISAR0_EL1	3	c0	0	c6	0	64	13.65 ID_AA64ISAR0_EL1 , AArch64 Instruction Set Attribute Register 0, EL1 on page 188
ID_AA64ISAR1_EL1	3	c0	0	c6	1	64	13.66 ID_AA64ISAR1_EL1 , AArch64 Instruction Set Attribute Register 1, EL1 on page 190
ID_AA64MMFR0_EL1	3	c0	0	c7	0	64	13.67 ID_AA64MMFR0_EL1 , AArch64 Memory Model Feature Register 0, EL1 on page 192
ID_AA64MMFR1_EL1	3	c0	0	c7	1	64	13.68 ID_AA64MMFR1_EL1 , AArch64 Memory Model Feature Register 1, EL1 on page 193
ID_AA64MMFR2_EL1	3	c0	0	c7	2	64	13.69 ID_AA64MMFR2_EL1 , AArch64 Memory Model Feature Register 2, EL1 on page 195
ID_AA64PFR0_EL1	3	c0	0	c4	0	64	13.70 ID_AA64PFR0_EL1 , AArch64 Processor Feature Register 0, EL1 on page 197
ID_AFR0_EL1	3	c0	0	c1	3	64	13.72 ID_AFR0_EL1 , AArch32 Auxiliary Feature Register 0, EL1 on page 200
ID_DFR0_EL1	3	c0	0	c1	2	64	13.73 ID_DFR0_EL1 , AArch32 Debug Feature Register 0, EL1 on page 201
ID_ISAR0_EL1	3	c0	0	c2	0	64	13.74 ID_ISAR0_EL1 , AArch32 Instruction Set Attribute Register 0, EL1 on page 202
ID_ISAR1_EL1	3	c0	0	c2	1	64	13.75 ID_ISAR1_EL1 , AArch32 Instruction Set Attribute Register 1, EL1 on page 204
ID_ISAR2_EL1	3	c0	0	c2	2	64	13.76 ID_ISAR2_EL1 , AArch32 Instruction Set Attribute Register 2, EL1 on page 206
ID_ISAR3_EL1	3	c0	0	c2	3	64	13.77 ID_ISAR3_EL1 , AArch32 Instruction Set Attribute Register 3, EL1 on page 209
ID_ISAR4_EL1	3	c0	0	c2	4	64	13.78 ID_ISAR4_EL1 , AArch32 Instruction Set Attribute Register 4, EL1 on page 211
ID_ISAR5_EL1	3	c0	0	c2	5	64	13.79 ID_ISAR5_EL1 , AArch32 Instruction Set Attribute Register 5, EL1 on page 213
ID_ISAR6_EL1	3	c0	0	c2	7	64	13.80 ID_ISAR6_EL1 , AArch32 Instruction Set Attribute Register 6, EL1 on page 215
ID_MMFR0_EL1	3	c0	0	c1	4	64	13.81 ID_MMFR0_EL1 , AArch32 Memory Model Feature Register 0, EL1 on page 216
ID_MMFR1_EL1	3	c0	0	c1	5	64	13.82 ID_MMFR1_EL1 , AArch32 Memory Model Feature Register 1, EL1 on page 218

Name	Op0	CRn	Op1	CRm	Op2	Width	Description
ID_MMFR2_EL1	3	c0	0	c1	6	64	13.83 ID_MMFR2_EL1, AArch32 Memory Model Feature Register 2, EL1 on page 220
ID_MMFR3_EL1	3	c0	0	c1	7	64	13.84 ID_MMFR3_EL1, AArch32 Memory Model Feature Register 3, EL1 on page 222
ID_MMFR4_EL1	3	c0	0	c2	6	64	13.85 ID_MMFR4_EL1, AArch32 Memory Model Feature Register 4, EL1 on page 224
ID_PFR0_EL1	3	c0	0	c1	0	64	13.86 ID_PFR0_EL1, AArch32 Processor Feature Register 0, EL1 on page 226
ID_PFR1_EL1	3	c0	0	c1	1	64	13.87 ID_PFR1_EL1, AArch32 Processor Feature Register 1, EL1 on page 228
ID_PFR2_EL1	3	c0	0	c3	4	64	13.88 ID_PFR2_EL1, AArch32 Processor Feature Register 2, EL1 on page 230
LORC_EL1	3	c10	0	c4	3	64	13.89 LORC_EL1, LORegion Control Register, EL1 on page 231
LORID_EL1	3	c10	0	c4	7	64	13.90 LORID_EL1, LORegion ID Register, EL1 on page 231
LORN_EL1	3	c10	0	c4	2	64	13.91 LORN_EL1, LORegion Number Register, EL1 on page 232
MDCR_EL3	3	c1	6	c3	1	64	13.92 MDCR_EL3, Monitor Debug Configuration Register, EL3 on page 233
MIDR_EL1	3	c0	0	c0	0	64	13.93 MIDR_EL1, Main ID Register, EL1 on page 235
MPIDR_EL1	3	c0	0	c0	5	64	13.94 MPIDR_EL1, Multiprocessor Affinity Register, EL1 on page 237
PAR_EL1	3	c7	0	c4	0	64	13.95 PAR_EL1, Physical Address Register, EL1 on page 238
REVIDR_EL1	3	c0	0	c0	6	64	13.96 REVIDR_EL1, Revision ID Register, EL1 on page 239
RVBAR_EL3	3	c12	6	c0	1	64	13.98 RVBAR_EL3, Reset Vector Base Address Register, EL3 on page 241
SCTLR_EL1	3	c1	0	c0	0	64	13.99 SCTLR_EL1, System Control Register, EL1 on page 242
SCTLR_EL12	3	c1	5	c0	0	64	13.99 SCTLR_EL1, System Control Register, EL1 on page 242
SCTLR_EL2	3	c1	4	c0	0	64	13.100 SCTLR_EL2, System Control Register, EL2 on page 243
SCTLR_EL3	3	c1	6	c0	0	64	13.101 SCTLR_EL3, System Control Register, EL3 on page 244
TCR_EL1	3	c2	0	c0	2	64	13.102 TCR_EL1, Translation Control Register, EL1 on page 246
TCR_EL2	3	c2	4	c0	2	64	13.103 TCR_EL2, Translation Control Register, EL2 on page 248
TCR_EL3	3	c2	6	c0	2	64	13.104 TCR_EL3, Translation Control Register, EL3 on page 249
TTBR0_EL1	3	c2	0	c0	0	64	13.105 TTBR0_EL1, Translation Table Base Register 0, EL1 on page 250
TTBR0_EL2	3	c2	4	c0	0	64	13.106 TTBR0_EL2, Translation Table Base Register 0, EL2 on page 251
TTBR0_EL3	3	c2	6	c0	0	64	13.107 TTBR0_EL3, Translation Table Base Register 0, EL3 on page 252
TTBR1_EL1	3	c2	0	c0	1	64	13.108 TTBR1_EL1, Translation Table Base Register 1, EL1 on page 253
TTBR1_EL2	3	c2	4	c0	1	64	13.109 TTBR1_EL2, Translation Table Base Register 1, EL2 on page 254
VDISR_EL2	3	c12	4	c1	1	64	13.110 VDISR_EL2, Virtual Deferred Interrupt Status Register, EL2 on page 254
VSESR_EL2	3	c5	4	c2	3	64	13.111 VSESR_EL2, Virtual SError Exception Syndrome Register on page 256
VTCR_EL2	3	c2	4	c1	2	64	13.112 VTCR_EL2, Virtualization Translation Control Register, EL2 on page 257
VTTBR_EL2	3	c2	4	c1	0	64	13.113 VTTBR_EL2, Virtualization Translation Table Base Register, EL2 on page 258

Table 13-2: Other architecturally defined registers

Name	Op0	CRn	Op1	CRm	Op2	Width	Description
AFSR0_EL12	3	c5	5	1	0	64	Auxiliary Fault Status Register 0
AFSR1_EL12	3	c5	5	1	1	64	Auxiliary Fault Status Register 1
AMAIR_EL12	3	c10	5	c3	0	64	Auxiliary Memory Attribute Indirection Register
CNTFRQ_ELO	3	c14	3	0	0	64	Counter-timer Frequency register
CNTHCTL_EL2	3	c14	4	c1	0	64	Counter-timer Hypervisor Control register
CNTHP_CTL_EL2	3	c14	4	c2	1	64	Counter-timer Hypervisor Physical Timer Control register
CNTHP_CVAL_EL2	3	c14	4	c2	2	64	Counter-timer Hyp Physical CompareValue register
CNTHP_TVAL_EL2	3	c14	4	c2	0	64	Counter-timer Hyp Physical Timer TimerValue register
CNTHV_CTL_EL2	3	c14	4	c3	1	64	Counter-timer Virtual Timer Control register
CNTHV_CVAL_EL2	3	c14	4	c3	2	64	Counter-timer Virtual Timer CompareValue register
CNTHV_TVAL_EL2	3	c14	4	c3	0	64	Counter-timer Virtual Timer TimerValue register
CNTKCTL_EL1	3	c14	0	c1	0	64	Counter-timer Kernel Control register
CNTKCTL_EL12	3	c14	5	c1	0	64	Counter-timer Kernel Control register
CNTP_CTL_ELO	3	c14	3	c2	1	64	Counter-timer Physical Timer Control register
CNTP_CTL_ELO2	3	c14	5	c2	1	64	Counter-timer Physical Timer Control register
CNTP_CVAL_ELO	3	c14	3	c2	2	64	Counter-timer Physical Timer CompareValue register
CNTP_CVAL_ELO2	3	c14	5	c2	2	64	Counter-timer Physical Timer CompareValue register
CNTP_TVAL_ELO	3	c14	3	c2	0	64	Counter-timer Physical Timer TimerValue register
CNTP_TVAL_ELO2	3	c14	5	c2	0	64	Counter-timer Physical Timer TimerValue register
CNTPCT_ELO	3	c14	3	c0	1	64	Counter-timer Physical Count register
CNTPS_CTL_EL1	3	c14	7	c2	1	64	Counter-timer Physical Secure Timer Control register
CNTPS_CVAL_EL1	3	c14	7	c2	2	64	Counter-timer Physical Secure Timer CompareValue register
CNTPS_TVAL_EL1	3	c14	7	c2	0	64	Counter-timer Physical Secure Timer TimerValue register
CNTV_CTL_ELO	3	c14	3	c3	1	64	Counter-timer Virtual Timer Control register
CNTV_CTL_ELO2	3	c14	5	c3	1	64	Counter-timer Virtual Timer Control register
CNTV_CVAL_ELO	3	c14	3	c3	2	64	Counter-timer Virtual Timer CompareValue register
CNTV_CVAL_ELO2	3	c14	5	c3	2	64	Counter-timer Virtual Timer CompareValue register
CNTV_TVAL_ELO	3	c14	3	c3	0	64	Counter-timer Virtual Timer TimerValue register
CNTV_TVAL_ELO2	3	c14	5	c3	0	64	Counter-timer Virtual Timer TimerValue register
CNTVCT_ELO	3	c14	3	c0	2	64	Counter-timer Virtual Count register
CNTVOFF_EL2	3	c14	4	c0	3	64	Counter-timer Virtual Offset register
CONTEXTIDR_EL1	3	c13	0	c0	1	64	Context ID Register (EL1)
CONTEXTIDR_EL12	3	c13	5	c0	1	64	Context ID Register (EL12)
CONTEXTIDR_EL2	3	c13	4	c0	1	64	Context ID Register (EL2)
CPACR_EL12	3	c1	5	c0	2	64	Architectural Feature Access Control Register
CPTR_EL3	3	c1	6	c1	2	64	Architectural Feature Trap Register (EL3)
ESR_EL12	3	c5	5	c2	0	64	Exception Syndrome Register (EL12)
FAR_EL1	3	c6	0	c0	0	64	Fault Address Register (EL1)
FAR_EL12	3	c6	5	c0	0	64	Fault Address Register (EL12)

Name	Op0	CRn	Op1	CRm	Op2	Width	Description
FAR_EL2	3	c6	4	c0	0	64	Fault Address Register (EL2)
FAR_EL3	3	c6	6	c0	0	64	Fault Address Register (EL3)
HPFAR_EL2	3	c6	4	c0	4	64	Hypervisor IPA Fault Address Register
HSTR_EL2	3	c1	4	c1	3	64	Hypervisor System Trap Register
ID_AA64AFR0_EL1	3	c0	0	c5	4	64	AArch64 Auxiliary Feature Register 0
ID_AA64AFR1_EL1	3	c0	0	c5	5	64	AArch64 Auxiliary Feature Register 1
ID_AA64DFR1_EL1	3	c0	0	c5	1	64	AArch64 Debug Feature Register 1
ID_AA64PFR1_EL1	3	c0	0	c4	1	64	AArch64 Core Feature Register 1
ISR_EL1	3	c12	0	c1	0	64	Interrupt Status Register
LOREA_EL1	3	c10	0	c4	1	64	LORegion End Address Register
LORSA_EL1	3	c10	0	c4	0	64	LORegion Start Address Register
MAIR_EL1	3	c10	0	c2	0	64	Memory Attribute Indirection Register (EL1)
MAIR_EL12	3	c10	5	c2	0	64	Memory Attribute Indirection Register (EL12)
MAIR_EL2	3	c10	4	c2	0	64	Memory Attribute Indirection Register (EL2)
MAIR_EL3	3	c10	6	c2	0	64	Memory Attribute Indirection Register (EL3)
MDCR_EL2	3	c1	4	c1	1	64	Monitor Debug Configuration Register
MVFR0_EL1	3	c0	0	c3	0	64	AArch32 Media and VFP Feature Register 0
MVFR1_EL1	3	c0	0	c3	1	64	AArch32 Media and VFP Feature Register 1
MVFR2_EL1	3	c0	0	c3	2	64	AArch32 Media and VFP Feature Register 2
RMR_EL3	3	c12	6	c0	2	64	Reset Management Register
SCR_EL3	3	c1	6	c1	0	64	Secure Configuration Register
TCR_EL12	3	c2	5	c0	2	64	Translation Control Register (EL12)
TPIDR_ELO	3	c13	3	c0	2	64	ELO read/write Software Thread ID Register
TPIDR_EL1	3	c13	0	c0	4	64	EL1 Software Thread ID Register
TPIDR_EL2	3	c13	4	c0	2	64	EL2 Software Thread ID Register
TPIDR_EL3	3	c13	6	c0	2	64	EL3 Software Thread ID Register
TPIDRRO_ELO	3	c13	3	c0	3	64	ELO read-only Software Thread ID Register
TTBR0_EL12	3	c2	5	c0	0	64	Translation Table Base Register 0 (EL12)
TTBR1_EL12	3	c2	5	c0	1	64	Translation Table Base Register 1 (EL12)
VBAR_EL1	3	c12	0	c0	0	64	Vector Base Address Register (EL1)
VBAR_EL12	3	c12	5	c0	0	64	Vector Base Address Register (EL12)
VBAR_EL2	3	c12	4	c0	0	64	Vector Base Address Register (EL2)
VBAR_EL3	3	c12	6	c0	0	64	Vector Base Address Register (EL3)
VMPIDR_EL2	3	c0	4	c0	5	64	Virtualization Multiprocessor ID Register
VPIDR_EL2	3	c0	4	c0	0	64	Virtualization Core ID Register

13.3 AArch64 implementation defined register summary

This section describes the AArch64 registers in the Cortex®-A77 core that are **IMPLEMENTATION DEFINED**.

The following tables list the AArch 64 **IMPLEMENTATION DEFINED** registers, which are sorted by opcode.

Table 13-3: AArch64 IMPLEMENTATION DEFINED registers

Name	Copro	CRn	Op1	CRm	Op2	Width	Description
ATCR_EL1	3	c15	0	c7	0	64	13.18 ATCR_EL1, Auxiliary Translation Control Register, EL1 on page 121
ATCR_EL2	3	c15	4	c7	0	64	13.19 ATCR_EL2, Auxiliary Translation Control Register, EL2 on page 124
ATCR_EL12	3	c15	5	c7	0	64	13.20 ATCR_EL12, Alias to Auxiliary Translation Control Register EL1 on page 126
ATCR_EL3	3	c15	6	c7	0	64	13.21 ATCR_EL3, Auxiliary Translation Control Register, EL3 on page 127
AVTCR_EL2	3	c15	4	c7	1	64	13.22 AVTCR_EL2, Auxiliary Virtualized Translation Control Register, EL2 on page 128
CPUACTLR_EL1	3	c15	0	c1	0	64	13.28 CPUACTLR_EL1, CPU Auxiliary Control Register, EL1 on page 137
CPUACTLR2_EL1	3	c15	0	c1	1	64	13.29 CPUACTLR2_EL1, CPU Auxiliary Control Register 2, EL1 on page 138
CPUACTLR3_EL1	3	c15	0	c1	2	64	13.30 CPUACTLR3_EL1, CPU Auxiliary Control Register 3, EL1 on page 140
CPUCFR_EL1	3	c15	0	c0	0	64	13.31 CPUCFR_EL1, CPU Configuration Register, EL1 on page 141
CPUECTLR_EL1	3	c15	0	c1	4	64	13.32 CPUECTLR_EL1, CPU Extended Control Register, EL1 on page 143
CPUECTLR2_EL1	3	c15	0	c1	5	64	13.33 CPUECTLR2_EL1, CPU Extended Control Register2, EL1 on page 152
CPUPCR_EL3	3	c15	6	c8	1	64	13.34 CPUPCR_EL3, CPU Private Control Register, EL3 on page 155
CPUPMR_EL3	3	c15	6	c8	3	64	13.35 CPUPMR_EL3, CPU Private Mask Register, EL3 on page 157
CPUPOR_EL3	3	c15	6	c8	2	64	13.37 CPUPOR_EL3, CPU Private Operation Register, EL3 on page 160
CPUPSELR_EL3	3	c15	6	c8	0	64	13.39 CPUPSELR_EL3, CPU Private Selection Register, EL3 on page 162
CPUPWRCTLR_EL1	3	c15	0	c2	7	64	13.40 CPUPWRCTLR_EL1, Power Control Register, EL1 on page 164
ERXPFPGCDN_EL1	3	c15	0	c2	2	64	13.52 ERXPFPGCDN_EL1, Selected Error Pseudo Fault Generation Count Down Register, EL1 on page 175
ERXPFPGCTL_EL1	3	c15	0	c2	1	64	13.53 ERXPFPGCTL_EL1, Selected Error Pseudo Fault Generation Control Register, EL1 on page 177
ERXPFPGF_EL1	3	c15	0	c2	0	64	13.54 ERXPFPGF_EL1, Selected Pseudo Fault Generation Feature Register, EL1 on page 178

The following table shows the 32-bit wide **IMPLEMENTATION DEFINED** Cluster registers. Details of these registers can be found in [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#)

Table 13-4: Cluster registers

Name	Copro	CRn	Opc1	CRm	Opc2	Width	Description
CLUSTERCFR_EL1	3	c15	0	c3	0	32-bit	Cluster configuration register.
CLUSTERIDR_EL1	3	c15	0	c3	1	32-bit	Cluster main revision ID.

Name	Copro	CRn	Opc1	CRm	Opc2	Width	Description
CLUSTEREVIDR_EL1	3	c15	0	c3	2	32-bit	Cluster ECO ID.
CLUSTERACTLR_EL1	3	c15	0	c3	3	32-bit	Cluster auxiliary control register.
CLUSTERECTLR_EL1	3	c15	0	c3	4	32-bit	Cluster extended control register.
CLUSTERPWRCTLR_EL1	3	c15	0	c3	5	32-bit	Cluster power control register.
CLUSTERPWRDN_EL1	3	c15	0	c3	6	32-bit	Cluster power down register.
CLUSTERPWRSTAT_EL1	3	c15	0	c3	7	32-bit	Cluster power status register.
CLUSTERTHREADSID_EL1	3	c15	0	c4	0	32-bit	Cluster thread scheme ID register.
CLUSTERACPSID_EL1	3	c15	0	c4	1	32-bit	Cluster ACP scheme ID register.
CLUSTERSTASHID_EL1	3	c15	0	c4	2	32-bit	Cluster stash scheme ID register.
CLUSTERPARTCR_EL1	3	c15	0	c4	3	32-bit	Cluster partition control register.
CLUSTERBUSQOS_EL1	3	c15	0	c4	4	32-bit	Cluster bus QoS control register.
CLUSTERL3HIT_EL1	3	c15	0	c4	5	32-bit	Cluster L3 hit counter register.
CLUSTERL3MISS_EL1	3	c15	0	c4	6	32-bit	Cluster L3 miss counter register.
CLUSTERTHREADSIDOVR_EL1	3	c15	0	c4	7	32-bit	Cluster thread scheme ID override register
CLUSTERPMCR_EL1	3	c15	0	c5	0	32-bit	Cluster Performance Monitors Control Register
CLUSTERPMCNTENSET_EL1	3	c15	0	c5	1	32-bit	Cluster Count Enable Set Register
CLUSTERPMCNTENCLR_EL1	3	c15	0	c5	2	32-bit	Cluster Count Enable Clear Register
CLUSTERPMOVSSET_EL1	3	c15	0	c5	3	32-bit	Cluster Overflow Flag Status Set
CLUSTERPMOVSCCLR_EL1	3	c15	0	c5	4	32-bit	Cluster Overflow Flag Status Clear
CLUSTERPMSELR_EL1	3	c15	0	c5	5	32-bit	Cluster Event Counter Selection Register
CLUSTERPMINTENSET_EL1	3	c15	0	c5	6	32-bit	Cluster Interrupt Enable Set Register
CLUSTERPMINTENCLR_EL1	3	c15	0	c5	7	32-bit	Cluster Interrupt Enable Clear Register
CLUSTERPMXEVTYPER_EL1	3	c15	0	c6	1	32-bit	Cluster Selected Event Type and Filter Register
CLUSTERPMXVCNTR_EL1	3	c15	0	c6	2	32-bit	Cluster Selected Event Counter Register
Reserved/RAZ	3	c15	0	c6	3	32-bit	Cluster Monitor Debug Configuration Register
CLUSTERPMCEID0_EL1	3	c15	0	c6	4	32-bit	Cluster Common Event Identification ID0 Register
CLUSTERPMCEID1_EL1	3	c15	0	c6	5	32-bit	Cluster Common Event Identification ID1 Register
CLUSTERPMCLAIMSET_EL1	3	c15	0	c6	6	32-bit	Cluster Performance Monitor Claim Tag Set Register
CLUSTERPMCLAIMCLR_EL1	3	c15	0	c6	7	32-bit	Cluster Performance Monitor Claim Tag Clear Register

13.4 AArch64 registers by functional group

This section identifies the AArch64 registers by their functional groups and applies to the registers in the core that are **IMPLEMENTATION DEFINED** or have micro-architectural bit fields. Reset values are provided for these registers.

Identification registers

Name	Type	Reset	Description
AIDR_EL1	RO	0x00000000	13.14 AIDR_EL1, Auxiliary ID Register, EL1 on page 118

Name	Type	Reset	Description
CCSIDR_EL1	RO	-	13.23 CCSIDR_EL1, Cache Size ID Register, EL1 on page 130
CLIDR_EL1	RO	<ul style="list-style-type: none"> 0xC3000123 if L3 cache present. 0x82000023 if no L3 cache. 	13.24 CLIDR_EL1, Cache Level ID Register, EL1 on page 132
CSSELR_EL1	RW	UNK	13.41 CSSELR_EL1, Cache Size Selection Register, EL1 on page 166
CTR_ELO	RO	0x8444C004	13.42 CTR_ELO, Cache Type Register, ELO on page 168
DCZID_ELO	RO	0x00000004	13.43 DCZID_ELO, Data Cache Zero ID Register, ELO on page 170
ERRIDR_EL1	RO	0x00000002	13.45 ERRIDR_EL1, Error ID Register, EL1 on page 172
ID_AA64AFR0_EL1	RO	0x00000000	13.61 ID_AA64AFR0_EL1, AArch64 Auxiliary Feature Register 0 on page 186
ID_AA64AFR1_EL1	RO	0x00000000	13.62 ID_AA64AFR1_EL1, AArch64 Auxiliary Feature Register 1 on page 186
ID_AA64DFR0_EL1	RO	0x0000000010305408	13.63 ID_AA64DFR0_EL1, AArch64 Debug Feature Register 0, EL1 on page 187
ID_AA64DFR1_EL1	RO	0x00000000	13.64 ID_AA64DFR1_EL1, AArch64 Debug Feature Register 1, EL1 on page 188
ID_AA64ISAR0_EL1	RO	<ul style="list-style-type: none"> 0x0000100010211120 if the Cryptographic Extension is implemented. 0x0000100010210000 if the Cryptographic Extension is not implemented. 	13.65 ID_AA64ISAR0_EL1, AArch64 Instruction Set Attribute Register 0, EL1 on page 188
ID_AA64ISAR1_EL1	RO	0x0000000000100001	13.66 ID_AA64ISAR1_EL1, AArch64 Instruction Set Attribute Register 1, EL1 on page 190
ID_AA64MMFR0_EL1	RO	0x0000000000101122	13.67 ID_AA64MMFR0_EL1, AArch64 Memory Model Feature Register 0, EL1 on page 192
ID_AA64MMFR1_EL1	RO	0x0000000010212122	13.68 ID_AA64MMFR1_EL1, AArch64 Memory Model Feature Register 1, EL1 on page 193
ID_AA64MMFR2_EL1	RO	0x00000000000001011	13.69 ID_AA64MMFR2_EL1, AArch64 Memory Model Feature Register 2, EL1 on page 195
ID_AA64PFR0_EL1	RO	<ul style="list-style-type: none"> 0x1100000010111112 if the GICv4 interface is disabled. 0x1100000011111112 if the GICv4 interface is enabled. 	13.70 ID_AA64PFR0_EL1, AArch64 Processor Feature Register 0, EL1 on page 197
ID_AA64PFR1_EL1	RO	0x00000000000000010	13.71 ID_AA64PFR1_EL1, AArch64 Processor Feature Register 1, EL1 on page 199
ID_AFR0_EL1	RO	0x00000000	13.72 ID_AFR0_EL1, AArch32 Auxiliary Feature Register 0, EL1 on page 200
ID_DFR0_EL1	RO	0x04010088	13.73 ID_DFR0_EL1, AArch32 Debug Feature Register 0, EL1 on page 201
ID_ISAR0_EL1	RO	0x02101110	13.74 ID_ISAR0_EL1, AArch32 Instruction Set Attribute Register 0, EL1 on page 202
ID_ISAR1_EL1	RO	0x13112111	13.75 ID_ISAR1_EL1, AArch32 Instruction Set Attribute Register 1, EL1 on page 204

Name	Type	Reset	Description
ID_ISAR2_EL1	RO	0x21232042	13.76 ID_ISAR2_EL1, AArch32 Instruction Set Attribute Register 2, EL1 on page 206
ID_ISAR3_EL1	RO	0x01112131	13.77 ID_ISAR3_EL1, AArch32 Instruction Set Attribute Register 3, EL1 on page 209
ID_ISAR4_EL1	RO	0x00010142	13.78 ID_ISAR4_EL1, AArch32 Instruction Set Attribute Register 4, EL1 on page 211
ID_ISAR5_EL1	RO	0x01011121 ID_ISAR5 has the value 0x01010001 if the Cryptographic Extension is not implemented and enabled.	13.79 ID_ISAR5_EL1, AArch32 Instruction Set Attribute Register 5, EL1 on page 213
ID_ISAR6_EL1	RO	0x00000010	13.80 ID_ISAR6_EL1, AArch32 Instruction Set Attribute Register 6, EL1 on page 215
ID_MMFR0_EL1	RO	0x10201105	13.81 ID_MMFR0_EL1, AArch32 Memory Model Feature Register 0, EL1 on page 216
ID_MMFR1_EL1	RO	0x40000000	13.82 ID_MMFR1_EL1, AArch32 Memory Model Feature Register 1, EL1 on page 218
ID_MMFR2_EL1	RO	0x01260000	13.83 ID_MMFR2_EL1, AArch32 Memory Model Feature Register 2, EL1 on page 220
ID_MMFR3_EL1	RO	0x02122211	13.84 ID_MMFR3_EL1, AArch32 Memory Model Feature Register 3, EL1 on page 222
ID_MMFR4_EL1	RO	0x00021110	13.85 ID_MMFR4_EL1, AArch32 Memory Model Feature Register 4, EL1 on page 224
ID_PFR0_EL1	RO	0x10010131	13.86 ID_PFR0_EL1, AArch32 Processor Feature Register 0, EL1 on page 226
ID_PFR1_EL1	RO	0x10010000 Bits [31:28] are 0x1 if the GIC CPU interface is implemented and enabled, and 0x0 otherwise.	13.87 ID_PFR1_EL1, AArch32 Processor Feature Register 1, EL1 on page 228
LORID_EL1	RO	0x00000000000040004	13.90 LORID_EL1, LORegion ID Register, EL1 on page 231
MIDR_EL1	RO	0x410FD0D1	13.93 MIDR_EL1, Main ID Register, EL1 on page 235
MPIDR_EL1	RO	The reset value depends on CLUSTERIDAFF2[7:0] and CLUSTERIDAFF3[7:0]. See register description for details.	13.94 MPIDR_EL1, Multiprocessor Affinity Register, EL1 on page 237
REVIDR_EL1	RO	0x00000000	13.96 REVIDR_EL1, Revision ID Register, EL1 on page 239
VMPIDR_EL2	RW	The reset value is the value of MPIDR_EL1.	Virtualization Multiprocessor ID Register EL2
VPIDR_EL2	RW	The reset value is the value of MIDR_EL1.	Virtualization Core ID Register EL2

Other system control registers

Name	Type	Description
ACTLR_EL1	RW	13.5 ACTLR_EL1, Auxiliary Control Register, EL1 on page 107
ACTLR_EL2	RW	13.6 ACTLR_EL2, Auxiliary Control Register, EL2 on page 108
ACTLR_EL3	RW	13.7 ACTLR_EL3, Auxiliary Control Register, EL3 on page 111
CPACR_EL1	RW	13.25 CPACR_EL1, Architectural Feature Access Control Register, EL1 on page 134
SCTLR_EL1	RW	13.99 SCTLR_EL1, System Control Register, EL1 on page 242

Name	Type	Description
SCTLR_EL2	RW	13.100 SCTLR_EL2, System Control Register, EL2 on page 243
SCTLR_EL3	RW	13.101 SCTLR_EL3, System Control Register, EL3 on page 244
SCTLR_EL12	RW	13.99 SCTLR_EL1, System Control Register, EL1 on page 242

Reliability, Availability, Serviceability (RAS) registers

Name	Type	Description
DISR_EL1	RW	13.44 DISR_EL1, Deferred Interrupt Status Register, EL1 on page 170
ERRIDR_EL1	RW	13.45 ERRIDR_EL1, Error ID Register, EL1 on page 172
ERRSELR_EL1	RW	13.46 ERRSELR_EL1, Error Record Select Register, EL1 on page 173
ERXADDR_EL1	RW	13.47 ERXADDR_EL1, Selected Error Record Address Register, EL1 on page 174
ERXCTLR_EL1	RW	13.48 ERXCTLR_EL1, Selected Error Record Control Register, EL1 on page 174
ERXFR_EL1	RO	13.49 ERXFR_EL1, Selected Error Record Feature Register, EL1 on page 174
ERXMISCO_EL1	RW	13.50 ERXMISCO_EL1, Selected Error Record Miscellaneous Register 0, EL1 on page 175
ERXMISC1_EL1	RW	13.51 ERXMISC1_EL1, Selected Error Record Miscellaneous Register 1, EL1 on page 175
ERXSTATUS_EL1	RW	13.55 ERXSTATUS_EL1, Selected Error Record Primary Status Register, EL1 on page 179
ERXPFGCDN_EL1	RW	13.52 ERXPFGCDN_EL1, Selected Error Pseudo Fault Generation Count Down Register, EL1 on page 175
ERXPFGCTL_EL1	RW	13.53 ERXPFGCTL_EL1, Selected Error Pseudo Fault Generation Control Register, EL1 on page 177
ERXPFGF_EL1	RO	13.54 ERXPFGF_EL1, Selected Pseudo Fault Generation Feature Register, EL1 on page 178
HCR_EL2	RW	13.60 HCR_EL2, Hypervisor Configuration Register, EL2 on page 185
VDISR_EL2	RW	13.110 VDISR_EL2, Virtual Deferred Interrupt Status Register, EL2 on page 254
VSESR_EL2	RW	13.111 VSESR_EL2, Virtual SError Exception Syndrome Register on page 256

Virtual Memory control registers

Name	Type	Description
AMAIR_EL1	RW	13.15 AMAIR_EL1, Auxiliary Memory Attribute Indirection Register, EL1 on page 119
AMAIR_EL2	RW	13.16 AMAIR_EL2, Auxiliary Memory Attribute Indirection Register, EL2 on page 119
AMAIR_EL3	RW	13.17 AMAIR_EL3, Auxiliary Memory Attribute Indirection Register, EL3 on page 120
ATCR_EL1	RW	13.18 ATCR_EL1, Auxiliary Translation Control Register, EL1 on page 121
ATCR_EL2	RW	13.19 ATCR_EL2, Auxiliary Translation Control Register, EL2 on page 124
ATCR_EL12	RW	13.20 ATCR_EL12, Alias to Auxiliary Translation Control Register EL1 on page 126
ATCR_EL3	RW	13.21 ATCR_EL3, Auxiliary Translation Control Register, EL3 on page 127
AVTCR_EL2	RW	13.22 AVTCR_EL2, Auxiliary Virtualized Translation Control Register, EL2 on page 128
LORC_EL1	RW	13.89 LORC_EL1, LORegion Control Register, EL1 on page 231
LOREA_EL1	RW	LORegion End Address Register EL1
LORID_EL1	RO	13.90 LORID_EL1, LORegion ID Register, EL1 on page 231
LORN_EL1	RW	13.91 LORN_EL1, LORegion Number Register, EL1 on page 232
LORSA_EL1	RW	LORegion Start Address Register EL1
TCR_EL1	RW	13.102 TCR_EL1, Translation Control Register, EL1 on page 246
TCR_EL2	RW	13.103 TCR_EL2, Translation Control Register, EL2 on page 248
TCR_EL3	RW	13.104 TCR_EL3, Translation Control Register, EL3 on page 249

Name	Type	Description
TTBRO_EL1	RW	13.105 TTBRO_EL1, Translation Table Base Register 0, EL1 on page 250
TTBRO_EL2	RW	13.106 TTBRO_EL2, Translation Table Base Register 0, EL2 on page 251
TTBRO_EL3	RW	13.107 TTBRO_EL3, Translation Table Base Register 0, EL3 on page 252
TTBR1_EL1	RW	13.108 TTBR1_EL1, Translation Table Base Register 1, EL1 on page 253
TTBR1_EL2	RW	13.109 TTBR1_EL2, Translation Table Base Register 1, EL2 on page 254
VTTBR_EL2	RW	13.113 VTTBR_EL2, Virtualization Translation Table Base Register, EL2 on page 258

Virtualization registers

Name	Type	Description
ACTLR_EL2	RW	13.6 ACTLR_EL2, Auxiliary Control Register, EL2 on page 108
AFSRO_EL2	RW	13.9 AFSRO_EL2, Auxiliary Fault Status Register 0, EL2 on page 114
AFSR1_EL2	RW	13.12 AFSR1_EL2, Auxiliary Fault Status Register 1, EL2 on page 116
AMAIR_EL2	RW	13.16 AMAIR_EL2, Auxiliary Memory Attribute Indirection Register, EL2 on page 119
CPTR_EL2	RW	13.26 CPTLR_EL2, Architectural Feature Trap Register, EL2 on page 135
ESR_EL2	RW	13.57 ESR_EL2, Exception Syndrome Register, EL2 on page 181
HACR_EL2	RW	13.59 HACR_EL2, Hyp Auxiliary Configuration Register, EL2 on page 184
HCR_EL2	RW	13.60 HCR_EL2, Hypervisor Configuration Register, EL2 on page 185
HPFAR_EL2	RW	Hypervisor IPA Fault Address Register EL2
TCR_EL2	RW	13.103 TCR_EL2, Translation Control Register, EL2 on page 248
VMPIDR_EL2	RW	Virtualization Multiprocessor ID Register EL2
VPIDR_EL2	RW	Virtualization Core ID Register EL2
VSESR_EL2	RW	13.111 VSESR_EL2, Virtual SError Exception Syndrome Register on page 256
VTCCR_EL2	RW	13.112 VTCCR_EL2, Virtualization Translation Control Register, EL2 on page 257
VTTBR_EL2	RW	13.113 VTTBR_EL2, Virtualization Translation Table Base Register, EL2 on page 258

Exception and fault handling registers

Name	Type	Description
AFSRO_EL1	RW	13.8 AFSRO_EL1, Auxiliary Fault Status Register 0, EL1 on page 113
AFSRO_EL2	RW	13.9 AFSRO_EL2, Auxiliary Fault Status Register 0, EL2 on page 114
AFSRO_EL3	RW	13.10 AFSRO_EL3, Auxiliary Fault Status Register 0, EL3 on page 115
AFSR1_EL1	RW	13.11 AFSR1_EL1, Auxiliary Fault Status Register 1, EL1 on page 115
AFSR1_EL2	RW	13.12 AFSR1_EL2, Auxiliary Fault Status Register 1, EL2 on page 116
AFSR1_EL3	RW	13.13 AFSR1_EL3, Auxiliary Fault Status Register 1, EL3 on page 117
DISR_EL1	RW	13.44 DISR_EL1, Deferred Interrupt Status Register, EL1 on page 170
ESR_EL1	RW	13.56 ESR_EL1, Exception Syndrome Register, EL1 on page 180
ESR_EL2	RW	13.57 ESR_EL2, Exception Syndrome Register, EL2 on page 181
ESR_EL3	RW	13.58 ESR_EL3, Exception Syndrome Register, EL3 on page 183
HPFAR_EL2	RW	Hypervisor IPA Fault Address Register EL2
VDISR_EL2	RW	13.110 VDISR_EL2, Virtual Deferred Interrupt Status Register, EL2 on page 254
VSESR_EL2	RW	13.111 VSESR_EL2, Virtual SError Exception Syndrome Register on page 256

Implementation defined registers

Name	Type	Description
ATCR_EL1	RW	13.18 ATCR_EL1, Auxiliary Translation Control Register, EL1 on page 121
ATCR_EL2	RW	13.19 ATCR_EL2, Auxiliary Translation Control Register, EL2 on page 124
ATCR_EL12	RW	13.20 ATCR_EL12, Alias to Auxiliary Translation Control Register EL1 on page 126
ATCR_EL3	RW	13.21 ATCR_EL3, Auxiliary Translation Control Register, EL3 on page 127
AVTCR_EL2	RW	13.22 AVTCR_EL2, Auxiliary Virtualized Translation Control Register, EL2 on page 128
CPUACTLR_EL1	RW	13.28 CPUACTLR_EL1, CPU Auxiliary Control Register, EL1 on page 137
CPUACTLR2_EL1	RW	13.29 CPUACTLR2_EL1, CPU Auxiliary Control Register 2, EL1 on page 138
CPUACTLR3_EL1	RW	13.30 CPUACTLR3_EL1, CPU Auxiliary Control Register 3, EL1 on page 140
CPUCFR_EL1	RO	13.31 CPUCFR_EL1, CPU Configuration Register, EL1 on page 141
CPUECTLR_EL1	RW	13.32 CPUECTLR_EL1, CPU Extended Control Register, EL1 on page 143
CPUECTLR2_EL1	RW	13.33 CPUECTLR2_EL1, CPU Extended Control Register2, EL1 on page 152
CPUPWRCTLR_EL1	RW	13.40 CPUPWRCTLR_EL1, Power Control Register, EL1 on page 164
ERXPFPGCDN_EL1	RW	13.52 ERXPFPGCDN_EL1, Selected Error Pseudo Fault Generation Count Down Register, EL1 on page 175
ERXPFPGCTL_EL1	RW	13.53 ERXPFPGCTL_EL1, Selected Error Pseudo Fault Generation Control Register, EL1 on page 177
ERXPFPGF_EL1	RW	13.54 ERXPFPGF_EL1, Selected Pseudo Fault Generation Feature Register, EL1 on page 178

The following table shows the 32-bit wide **IMPLEMENTATION DEFINED** Cluster registers. Details of these registers can be found in [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#)

Table 13-12: Cluster registers

Name	Copro	CRn	Opc1	CRm	Opc2	Width	Description
CLUSTERCFR_EL1	3	c15	0	c3	0	32-bit	Cluster configuration register.
CLUSTERIDR_EL1	3	c15	0	c3	1	32-bit	Cluster main revision ID.
CLUSTEREVIDR_EL1	3	c15	0	c3	2	32-bit	Cluster ECO ID.
CLUSTERACTLR_EL1	3	c15	0	c3	3	32-bit	Cluster auxiliary control register.
CLUSTERECTLR_EL1	3	c15	0	c3	4	32-bit	Cluster extended control register.
CLUSTERPWRCTLR_EL1	3	c15	0	c3	5	32-bit	Cluster power control register.
CLUSTERPWRDN_EL1	3	c15	0	c3	6	32-bit	Cluster power down register.
CLUSTERPWRSTAT_EL1	3	c15	0	c3	7	32-bit	Cluster power status register.
CLUSTERTHREADSID_EL1	3	c15	0	c4	0	32-bit	Cluster thread scheme ID register.
CLUSTERACPSID_EL1	3	c15	0	c4	1	32-bit	Cluster ACP scheme ID register.
CLUSTERSTASHID_EL1	3	c15	0	c4	2	32-bit	Cluster stash scheme ID register.
CLUSTERPARTCR_EL1	3	c15	0	c4	3	32-bit	Cluster partition control register.
CLUSTERBUSQOS_EL1	3	c15	0	c4	4	32-bit	Cluster bus QoS control register.
CLUSTERL3HIT_EL1	3	c15	0	c4	5	32-bit	Cluster L3 hit counter register.
CLUSTERL3MISS_EL1	3	c15	0	c4	6	32-bit	Cluster L3 miss counter register.
CLUSTERTHREADSIDOVR_EL1	3	c15	0	c4	7	32-bit	Cluster thread scheme ID override register
CLUSTERPMCR_EL1	3	c15	0	c5	0	32-bit	Cluster Performance Monitors Control Register
CLUSTERPMCNTENSET_EL1	3	c15	0	c5	1	32-bit	Cluster Count Enable Set Register
CLUSTERPMCNTENCLR_EL1	3	c15	0	c5	2	32-bit	Cluster Count Enable Clear Register

Name	Copro	CRn	Opc1	CRm	Opc2	Width	Description
CLUSTERPMOVSSET_EL1	3	c15	0	c5	3	32-bit	Cluster Overflow Flag Status Set
CLUSTERPMOVSCLR_EL1	3	c15	0	c5	4	32-bit	Cluster Overflow Flag Status Clear
CLUSTERPMSELR_EL1	3	c15	0	c5	5	32-bit	Cluster Event Counter Selection Register
CLUSTERPMINTENSET_EL1	3	c15	0	c5	6	32-bit	Cluster Interrupt Enable Set Register
CLUSTERPMINTENCLR_EL1	3	c15	0	c5	7	32-bit	Cluster Interrupt Enable Clear Register
CLUSTERPMXEVTYPER_EL1	3	c15	0	c6	1	32-bit	Cluster Selected Event Type and Filter Register
CLUSTERPMXVCNTR_EL1	3	c15	0	c6	2	32-bit	Cluster Selected Event Counter Register
Reserved/RAZ	3	c15	0	c6	3	32-bit	Cluster Monitor Debug Configuration Register
CLUSTERPMCEID0_EL1	3	c15	0	c6	4	32-bit	Cluster Common Event Identification ID0 Register
CLUSTERPMCEID1_EL1	3	c15	0	c6	5	32-bit	Cluster Common Event Identification ID1 Register
CLUSTERPMCLAIMSET_EL1	3	c15	0	c6	6	32-bit	Cluster Performance Monitor Claim Tag Set Register
CLUSTERPMCLAIMCLR_EL1	3	c15	0	c6	7	32-bit	Cluster Performance Monitor Claim Tag Clear Register

Security

Name	Type	Description
ACTLR_EL3	RW	13.7 ACTLR_EL3, Auxiliary Control Register, EL3 on page 111
AFSR0_EL3	RW	13.10 AFSR0_EL3, Auxiliary Fault Status Register 0, EL3 on page 115
AFSR1_EL3	RW	13.13 AFSR1_EL3, Auxiliary Fault Status Register 1, EL3 on page 117
AMAIR_EL3	RW	13.17 AMAIR_EL3, Auxiliary Memory Attribute Indirection Register, EL3 on page 120
CPTR_EL3	RW	13.27 CPTR_EL3, Architectural Feature Trap Register, EL3 on page 136
MDCR_EL3	RW	13.92 MDCR_EL3, Monitor Debug Configuration Register, EL3 on page 233

Reset management registers

Name	Type	Description
RMR_EL3	RW	13.97 RMR_EL3, Reset Management Register on page 240
RVBAR_EL3	RW	13.98 RVBAR_EL3, Reset Vector Base Address Register, EL3 on page 241

Address registers

Name	Type	Description
PAR_EL1	RW	13.95 PAR_EL1, Physical Address Register, EL1 on page 238

13.5 ACTLR_EL1, Auxiliary Control Register, EL1

ACTLR_EL1 provides **IMPLEMENTATION DEFINED** configuration and control options for execution at EL1 and EL0.


Bit field descriptions

ACTLR_EL1 is a 64-bit register, and is part of:

- The Other system control registers functional group.

- The **IMPLEMENTATION DEFINED** functional group.

Figure 13-1: ACTLR_EL1 bit assignments

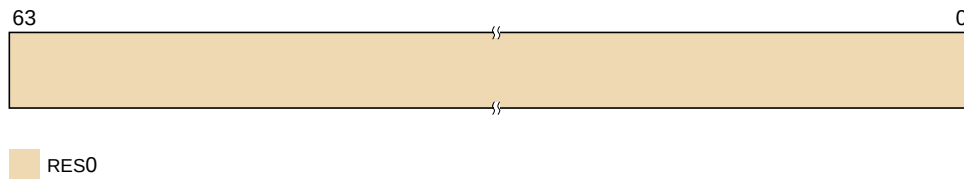

RES0, [63:0]

RES0 Reserved.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.6 ACTLR_EL2, Auxiliary Control Register, EL2


The ACTLR_EL2 provides **IMPLEMENTATION DEFINED** configuration and control options for EL2.

Bit field descriptions

ACTLR_EL2 is a 64-bit register, and is part of:

- The Virtualization registers functional group.
- The Other system control registers functional group.
- The **IMPLEMENTATION DEFINED** functional group.

This register resets to value 0x0000000000000000.

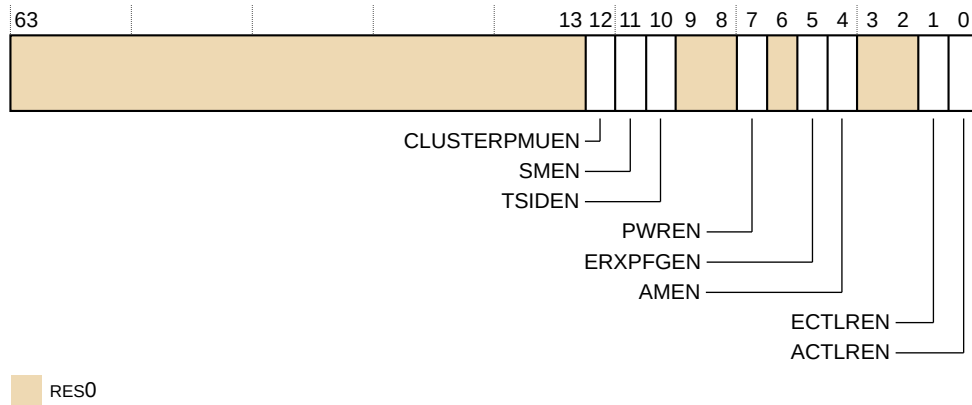Figure 13-2: ACTLR_EL2 bit assignments**RES0, [63:13]**

RES0 Reserved.

CLUSTERPMUEN, [12]

Performance Management Registers enable. The possible values are:

- 0** CLUSTERPM* registers are not write-accessible from a lower Exception level. This is the reset value.
- 1** CLUSTERPM* registers are write-accessible from EL1 Non-secure if they are write-accessible from EL2.

SMEN, [11]

Scheme Management Registers enable. The possible values are:

- 0** Registers CLUSTERACPSID, CLUSTERSTASHSID, CLUSTERPARTCR, CLUSTERBUSQOS, and CLUSTERTHREADSIDOVR are not write-accessible from EL1 Non-secure. This is the reset value.
- 1** Registers CLUSTERACPSID, CLUSTERSTASHSID, CLUSTERPARTCR, CLUSTERBUSQOS, and CLUSTERTHREADSIDOVR are write-accessible from EL1 Non-secure if they are write-accessible from EL2.

TSIDEN, [10]

Thread Scheme ID Register enable. The possible values are:

- 0** Register CLUSTERTHREADSID is not write-accessible from EL1 Non-secure. This is the reset value.
- 1** Register CLUSTERTHREADSID is write-accessible from EL1 Non-secure if they are write-accessible from EL2.

RES0, [9:8]

RES0	Reserved.
-------------	-----------

PWREN, [7]

Power Control Registers enable. The possible values are:

- | | |
|----------|--|
| 0 | Registers CPUPWRCTLR, CLUSTERPWRCTLR, CLUSTERPWRDN, CLUSTERPWRSTAT, CLUSTERL3HIT and CLUSTERL3MISS are not write-accessible from EL1 Non-secure. This is the reset value. |
| 1 | Registers CPUPWRCTLR, CLUSTERPWRCTLR, CLUSTERPWRDN, CLUSTERPWRSTAT, CLUSTERL3HIT and CLUSTERL3MISS are write-accessible from EL1 Non-secure if they are write-accessible from EL2. |

RES0, [6]

RES0	Reserved.
-------------	-----------

ERXPFGEN, [5]

Error Record Registers enable. The possible values are:

- | | |
|----------|---|
| 0 | ERXPFG* are not write-accessible from EL1 Non-secure. This is the reset value. |
| 1 | ERXPFG* are write-accessible from EL1 Non-secure if they are write-accessible from EL2. |

AMEN, [4]

Activity Monitor enable. The possible values are:

- | | |
|----------|---|
| 0 | Non-secure accesses from EL1 and EL0 to activity monitor registers are trapped to EL2. This is the reset value. |
| 1 | Non-secure accesses from EL1 and EL0 to activity monitor registers are not trapped to EL2. |

RES0, [3:2]

RES0	Reserved.
-------------	-----------

ECTLREN, [1]

Extended Control Registers enable. The possible values are:

- | | |
|----------|---|
| 0 | CPUECTLR and CLUSTERECTLR are not write-accessible from EL1 Non-secure. This is the reset value. |
| 1 | CPUECTLR and CLUSTERECTLR are write-accessible from EL1 Non-secure if they are write-accessible from EL2. |

Configurations

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.7 ACTLR_EL3, Auxiliary Control Register, EL3

The ACTLR_EL3 provides **IMPLEMENTATION DEFINED** configuration and control options for EL3.


Bit field descriptions

ACTLR_EL3 is a 64-bit register, and is part of:

- The Other system control registers functional group.
- The Security registers functional group.
- The **IMPLEMENTATION DEFINED** functional group.

This register resets to value 0x0000000000000000.

Figure 13-3: ACTLR_EL3 bit assignments

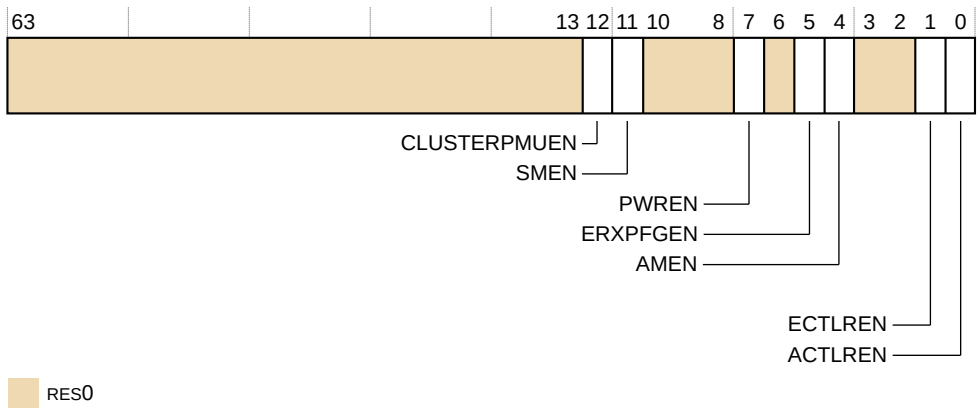

RES0, [63:13]

RES0 Reserved.

CLUSTERPMUEN, [12]

Performance Management Registers enable. The possible values are:

- | | |
|---|--|
| 0 | CLUSTERPM* registers are not write-accessible from a lower Exception level. This is the reset value. |
| 1 | CLUSTERPM* registers are write-accessible from EL2 and EL1 Secure. |

SMEN, [11]

Scheme Management Registers enable. The possible values are:

- | | |
|----------|--|
| 0 | Registers CLUSTERACPSID, CLUSTERSTASHSID, CLUSTERPARTCR, CLUSTERBUSQOS, and CLUSTERTHREADSIDOVR are not write-accessible from EL2 and EL1 Secure. This is the reset value. |
| 1 | Registers CLUSTERACPSID, CLUSTERSTASHSID, CLUSTERPARTCR, CLUSTERBUSQOS, and CLUSTERTHREADSIDOVR are write-accessible from EL2 and EL1 Secure. |

TSIDEN, [10]

Thread Scheme ID Register enable. The possible values are:

- | | |
|----------|---|
| 0 | Register CLUSTERTHREADSID is not write-accessible from EL2 and EL1 Secure. This is the reset value. |
| 1 | Register CLUSTERTHREADSID is write-accessible from EL2 and EL1 Secure. |

RES0, [9:8]

RES0	Reserved.
-------------	-----------

PWREN, [7]

Power Control Registers enable. The possible values are:

- | | |
|----------|---|
| 0 | Registers CPUPWRCTLR, CLUSTERPWRCTLR, CLUSTERPWRDN, CLUSTERPWRSTAT, CLUSTERL3HIT and CLUSTERL3MISS are not write-accessible from EL2 and EL1 Secure. This is the reset value. |
| 1 | Registers CPUPWRCTLR, CLUSTERPWRCTLR, CLUSTERPWRDN, CLUSTERPWRSTAT, CLUSTERL3HIT and CLUSTERL3MISS are write-accessible from EL2 and EL1 Secure. |

RES0, [6]

RES0	Reserved.
-------------	-----------

ERXPFGEN, [5]

Error Record Registers enable. The possible values are:

- | | |
|----------|--|
| 0 | ERXPFG* are not write-accessible from EL2 and EL1 Secure. This is the reset value. |
| 1 | ERXPFG* are write-accessible from EL2 and EL1 Secure. |

AMEN, [4]

Activity Monitor enable. The possible values are:

- | | |
|----------|--|
| 0 | Accesses from EL2, EL1, and EL0 to activity monitor registers are trapped to EL3. This is the reset value. |
|----------|--|

- 1
- Accesses from EL2, EL1, and EL0 to activity monitor registers are not trapped to EL3.

RES0, [3:2]

- RES0
- Reserved.

ECTLREN, [1]

Extended Control Registers enable. The possible values are:

- 0
- CPUECTLR and CLUSTERECTLR are not write-accessible from EL2 and EL1 Secure. This is the reset value.
- 1
- CPUECTLR and CLUSTERECTLR are write-accessible from EL2 and EL1 Secure.

Configurations

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.8 AFSR0_EL1, Auxiliary Fault Status Register 0, EL1


AFSR0_EL1 provides additional **IMPLEMENTATION DEFINED** fault status information for exceptions that are taken to EL1. In the Cortex®-A77 core, no additional information is provided for these exceptions. Therefore this register is not used.

Bit field descriptions

AFSR0_EL1 is a 64-bit register, and is part of:

- The Exception and fault handling registers functional group.
- The **IMPLEMENTATION DEFINED** functional group.

Figure 13-4: AFSR0_EL1 bit assignments

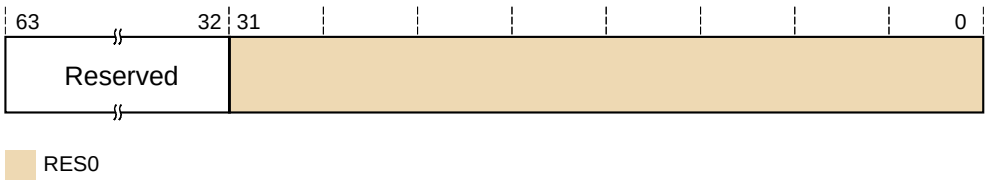

Reserved, [63:32]

Reserved.

RES0, [31:0]

RES0 Reserved.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.9 AFSR0_EL2, Auxiliary Fault Status Register 0, EL2

AFSR0_EL2 provides extra **IMPLEMENTATION DEFINED** fault status information for exceptions that are taken to EL2.

Bit field descriptions

- AFSR0_EL2 is a 64-bit register, and is part of:
- The Virtualization registers functional group.
 - The Exception and fault handling registers functional group.
 - The **IMPLEMENTATION DEFINED** functional group.

Figure 13-5: AFSR0_EL2 bit assignments

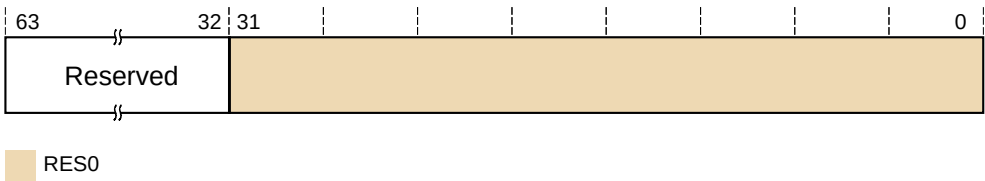

Reserved, [63:32]

Reserved.

RES0, [31:0]

RES0 Reserved.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.10 AFSR0_EL3, Auxiliary Fault Status Register 0, EL3


AFSR0_EL3 provides additional **IMPLEMENTATION DEFINED** fault status information for exceptions that are taken to EL3. In the Cortex®-A77 core, no additional information is provided for these exceptions. Therefore this register is not used.

Bit field descriptions

AFSR0_EL3 is a 64-bit register, and is part of:

- The Exception and fault handling registers functional group.
- The Security registers functional group.
- The **IMPLEMENTATION DEFINED** functional group.

Figure 13-6: AFSR0_EL3 bit assignments

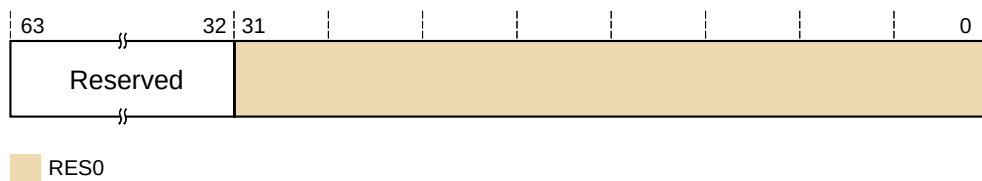

Reserved, [63:32]

Reserved.

RES0, [31:0]

RES0

Reserved.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.11 AFSR1_EL1, Auxiliary Fault Status Register 1, EL1


AFSR1_EL1 provides additional **IMPLEMENTATION DEFINED** fault status information for exceptions that are taken to EL1. This register is not used in Cortex®-A77.

Bit field descriptions

AFSR1_EL1 is a 64-bit register, and is part of:

- The Exception and fault handling registers functional group.
- The **IMPLEMENTATION DEFINED** functional group.

Figure 13-7: AFSR1_EL1 bit assignments

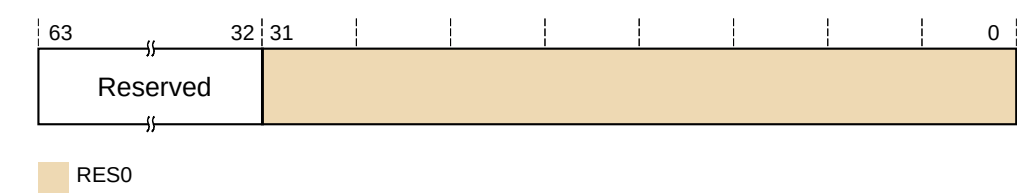

Reserved, [63:32]

Reserved.

RES0, [31:0]

RES0

Reserved.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.12 AFSR1_EL2, Auxiliary Fault Status Register 1, EL2

AFSR1_EL2 provides additional **IMPLEMENTATION DEFINED** fault status information for exceptions that are taken to EL2. This register is not used in the Cortex®-A77 core.

Bit field descriptions

AFSR1_EL2 is a 64-bit register, and is part of:

- The Virtualization registers functional group.
- The Exception and fault handling registers functional group.
- The **IMPLEMENTATION DEFINED** functional group.

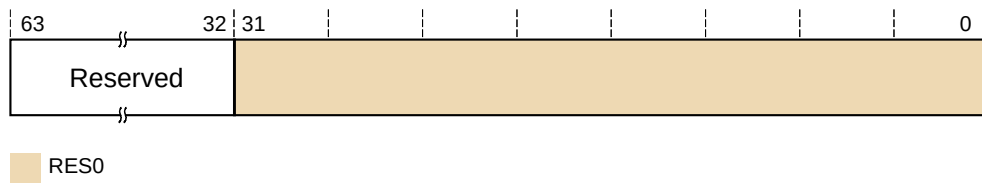Figure 13-8: AFSR1_EL2 bit assignments**Reserved, [63:32]**

Reserved.

RES0, [31:0]

RES0

Reserved.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.13 AFSR1_EL3, Auxiliary Fault Status Register 1, EL3

AFSR1_EL3 provides additional **IMPLEMENTATION DEFINED** fault status information for exceptions that are taken to EL3. This register is not used in the Cortex®-A77 core.

Bit field descriptions

AFSR1_EL3 is a 64-bit register, and is part of:

- The Exception and fault handling registers functional group.
- The Security registers functional group.
- The **IMPLEMENTATION DEFINED** functional group.

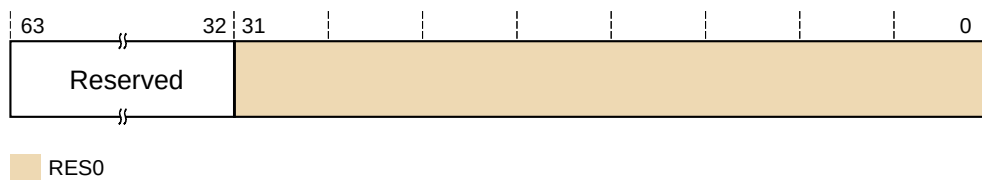Figure 13-9: AFSR1_EL3 bit assignments

Reserved, [63:32]

Reserved.

RES0, [31:0]

RES0 Reserved.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.14 AIDR_EL1, Auxiliary ID Register, EL1

AIDR_EL1 provides **IMPLEMENTATION DEFINED** identification information. This register is not used in the Cortex®-A77 core.


Bit field descriptions

AIDR_EL1 is a 64-bit register, and is part of:

- The Identification registers functional group.
- The **IMPLEMENTATION DEFINED** functional group.

This register is read-only.

Figure 13-10: >AIDR_EL1 bit assignments

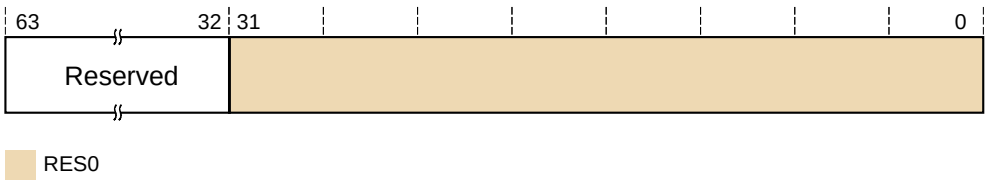

Reserved, [63:32]

Reserved.

RES0, [31:0]

RES0 Reserved.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.15 AMAIR_EL1, Auxiliary Memory Attribute Indirection Register, EL1


AMAIR_EL1 provides **IMPLEMENTATION DEFINED** memory attributes for the memory regions that are specified by MAIR_EL1. This register is not used in the Cortex®-A77 core.

Bit field descriptions

AMAIR_EL1 is a 64-bit register, and is part of:

- The Virtual memory control registers functional group.
- The **IMPLEMENTATION DEFINED** functional group.

Figure 13-11: AMAIR_EL1 bit assignments

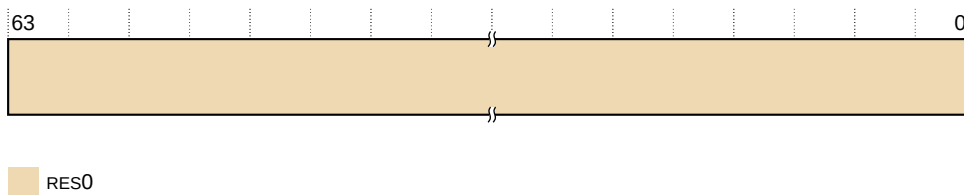

RES0, [63:0]

RES0 Reserved.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.16 AMAIR_EL2, Auxiliary Memory Attribute Indirection Register, EL2


AMAIR_EL2 provides **IMPLEMENTATION DEFINED** memory attributes for the memory regions that are specified by MAIR_EL2. This register is not used in the Cortex®-A77 core.

Bit field descriptions

AMAIR_EL2 is a 64-bit register, and is part of:

- The Virtualization registers functional group.
- The Virtual memory control registers functional group.
- The **IMPLEMENTATION DEFINED** functional group.

Figure 13-12: AMAIR_EL1 bit assignments

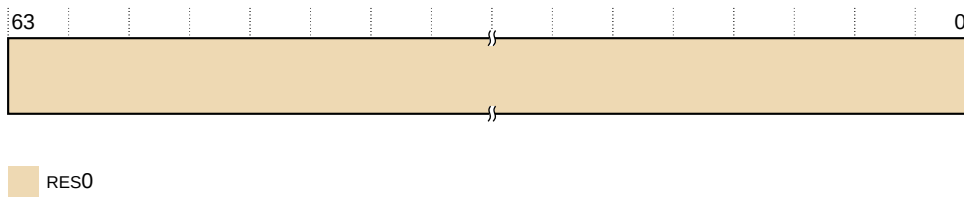

RES0, [63:0]

RES0 Reserved.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.17 AMAIR_EL3, Auxiliary Memory Attribute Indirection Register, EL3

AMAIR_EL3 provides **IMPLEMENTATION DEFINED** memory attributes for the memory regions that are specified by MAIR_EL3. This register is not used in the Cortex®-A77 core.


Bit field descriptions

AMAIR_EL3 is a 64-bit register, and is part of:

- The Virtual memory control registers functional group.
- The Security registers functional group.

- The **IMPLEMENTATION DEFINED** functional group.

Figure 13-13: AMAIR_EL3 bit assignments

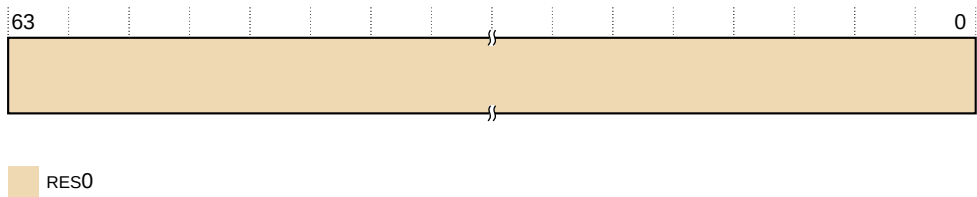

RES0, [63:0]

RES0 Reserved.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.18 ATCR_EL1, Auxiliary Translation Control Register, EL1

The ATCR_EL1 determines the values of *Page-Based Hardware Attributes* (PBHA) on translation table walks memory access in EL1 translation regime.

Bit field descriptions

ATCR_EL1 is a 64-bit register.

Figure 13-14: ATCR_EL1 bit assignments

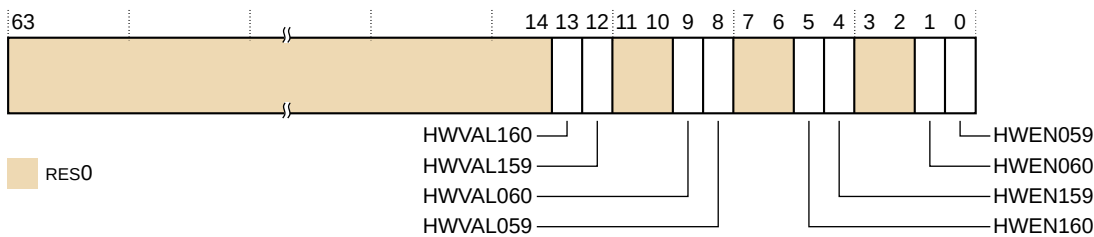

RES0, [63:14]

RES0.

HWVAL160, [13]

Indicates the value of PBHA[1] on translation table walks memory access targeting the base address defined by TTBR1_EL1 if HWEN160 is set.

HWVAL159, [12]

Indicates the value of PBHA[0] on translation table walks memory access targeting the base address defined by TTBR1_EL1 if HWEN159 is set.

RES0, [11:10]

RES0.

HWVAL060, [9]

Indicates the value of PBHA[1] translation table walks memory access targeting the base address defined by TTBRO_EL1 if HWEN060 is set.

HWVAL059, [8]

Indicates the value of PBHA[1] translation table walks memory access targeting the base address defined by TTBRO_EL1 if HWEN059 is set.

RES0, [7:6]

RES0.

HWEN160, [5]

Enables PBHA[1] translation table walks memory access targeting the base address defined by TTBR1_EL1. If this bit is clear, PBHA[1] on translation table walks is 0.

HWEN159, [4]

Enables PBHA[0] translation table walks memory access targeting the base address defined by TTBR1_EL1. If this bit is clear, PBHA[0] on translation table walks is 0.

RES0, [3:2]

RES0.

HWEN060, [1]

Enables PBHA[1] translation table walks memory access targeting the base address defined by TTBR0_EL1. If this bit is clear, PBHA[1] on translation table walks is 0.

HWEN059, [0]

Enables PBHA[0] translation table walks memory access targeting the base address defined by TTBR0_EL1. If this bit is clear, PBHA[0] on translation table walks is 0.

Configurations

AArch64 register ATCR_EL1 is mapped to AArch32 register ATTCR (NS).

At EL2 with HCR_EL2.E2H set, accesses to ATCR_EL1 are remapped to access ATCR_EL2.

Usage constraints**Accessing the ATCR_EL1**

To access the ATCR_EL1:

```
MRS Xt, S<3>0 c15 c7 0>; Read ATCR_EL1 into Xt
MSR S<3>0 c15 c7 0>, Xt; Write Xt to ATCR_EL1
```

This syntax is encoded with the following settings in the instruction encoding:

Op0	Op1	CRn	CRm	Op2
3	0	c15	c7	0

Accessibility

ATCR_EL1 is accessible as follows:

	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
ATCR_EL1	x	x	0	-	RW	n/a	RW
ATCR_EL1	0	0	1	-	RW	RW	RW
ATCR_EL1	0	1	1	-	n/a	RW	RW
ATCR_EL1	1	0	1	-	RW	ATCR_EL2	RW
ATCR_EL1	1	1	1	-	n/a	ATCR_EL2	RW



Note

ATCR_EL1 is also accessible using ATCR_EL12 when HCR_EL2.E2H is set. See [13.20 ATCR_EL12, Alias to Auxiliary Translation Control Register EL1](#) on page 126.

Traps and enables

Rules of traps and enables for this register are the same as TCR_EL1. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.19 ATCR_EL2, Auxiliary Translation Control Register, EL2

The ATCR_EL2 determines the values of *Page-Based Hardware Attributes* (PBHA) on translation table walks memory access in EL2 translation regime.

Bit field descriptions

ATCR_EL2 is a 64-bit register.

Figure 13-15: ATCR_EL2 bit assignments

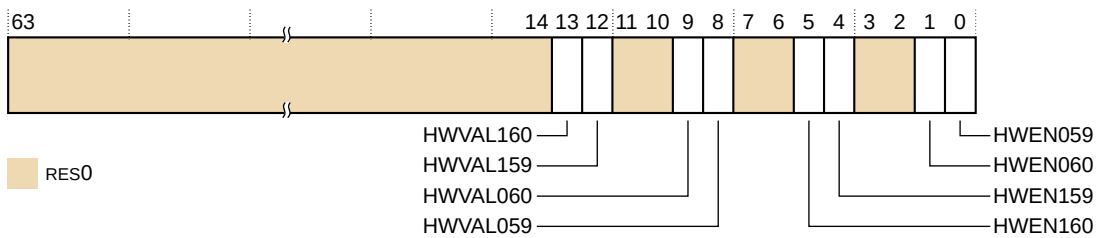

RES0, [63:14]

RES0.

HWVAL160, [13]

Indicates the value of PBHA[1] on translation table walks memory access targeting the base address defined by TTBR1_EL2 if HWEN160 is set.

HWVAL159, [12]

Indicates the value of PBHA[0] on translation table walks memory access targeting the base address defined by TTBR1_EL2 if HWEN159 is set.

RES0, [11:10]

RES0.

HWVAL060, [9]

Indicates the value of PBHA[1] translation table walks memory access targeting the base address defined by TTBR0_EL2 if HWEN060 is set.

HWVAL059, [8]

Indicates the value of PBHA[1] translation table walks memory access targeting the base address defined by TTBR0_EL2 if HWEN059 is set.

RES0, [7:6]

RES0.

HWEN160, [5]

Enables PBHA[1] translation table walks memory access targeting the base address defined by TTBR1_EL2. If this bit is clear, PBHA[1] on translation table walks is 0.

HWEN159, [4]

Enables PBHA[0] translation table walks memory access targeting the base address defined by TTBR1_EL2. If this bit is clear, PBHA[0] on translation table walks is 0.

RES0, [3:2]

RES0.

HWEN060, [1]

Enables PBHA[1] translation table walks memory access targeting the base address defined by TTBR0_EL2. If this bit is clear, PBHA[1] on translation table walks is 0.

HWEN059, [0]

Enables PBHA[0] translation table walks memory access targeting the base address defined by TTBR0_EL2. If this bit is clear, PBHA[0] on translation table walks is 0.

Configurations

AArch64 ATCR_EL2 register is architecturally mapped to AArch32 register AHTCR.

Usage constraints

Accessing the ATCR_EL2

To access the ATCR_EL2:

```
MRS Xt, S< 3 4 c15 c7 0> ; Read ATCR_EL2 into Xt
MSR S< 3 4 c15 c7 0>, Xt ; Write Xt to ATCR_EL2
```

This syntax is encoded with the following settings in the instruction encoding:

Op0	Op1	CRn	CRm	Op2
3	4	c15	c7	0

Accessibility

ATCR_EL2 is accessible as follows:

ELO (NS)	EL1 (NS)	EL1 (S)	EL2	EL3 (SCR.NS=1)	EL3 (SCR.NS=0)
-	-	-	RW	RW	RW

13.20 ATCR_EL12, Alias to Auxiliary Translation Control Register EL1

The ATCR_EL12 alias allows access to ATCR_EL1 at EL2 or EL3 when HCR_EL2.E2H is set to 1.

Usage constraints

Accessing the ATCR_EL12

To access the ATCR_EL1 using the ATCR_EL12 alias:

```
MRS Xt, S< 3 5 c15 c7 0> ; Read ATCR_EL12/ATCR_EL1 into Xt
MSR S< 3 5 c15 c7 0>, Xt ; Write Xt to ATCR_EL12/ATCR_EL1
```

This syntax is encoded with the following settings in the instruction encoding:

Op0	Op1	CRn	CRm	Op2
3	5	15	7	0

Accessibility

ATCR_EL12 is accessible as follows:

	Control			Accessibility			
	E2H	TGE	NS	ELO	EL1	EL2	EL3
ATCR_EL12	x	x	0	-	-	n/a	-
ATCR_EL12	0	0	1	-	-	-	-
ATCR_EL12	0	1	1	-	n/a	-	-

	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
ATCR_EL12	1	0	1	-	-	ATCR_EL1	ATCR_EL1
ATCR_EL12	1	1	1	-	n/a	ATCR_EL1	ATCR_EL1

Traps and enables

All traps that are associated with the ATCR_EL1 register that apply at EL2 or EL3 also apply to the ATCR_EL12 alias.

This alias is only accessible when HCR_EL2.E2H == 1.

When HCR_EL2.E2H == 0, access to this alias is *UNDEFINED*.


13.21 ATCR_EL3, Auxiliary Translation Control Register, EL3

The ATCR_EL3 determines the values of *Page-Based Hardware Attributes* (PBHA) on translation table walks memory access in EL3 translation regime.

Bit field descriptions

ATCR_EL3 is a 64-bit register.

Figure 13-16: ATCR_EL3 bit assignments

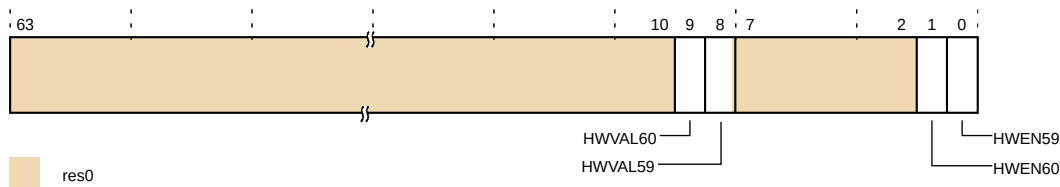

RES0, [63:10]

RES0.

HWVAL60, [9]

Indicates the value of PBHA[1] translation table walks memory access if HWEN60 is set.

HWVAL59, [8]

Indicates the value of PBHA[1] translation table walks memory access if HWEN59 is set.

RES0, [7:2]**RES0.****HWEN60, [1]**

Enables PBHA[1] translation table walks memory access. If this bit is clear, PBHA[1] on translation table walks is 0.

HWEN59, [0]

Enables PBHA[0] translation table walks memory access. If this bit is clear, PBHA[0] on translation table walks is 0.

Configurations

AArch64 register ATCR_EL3 is architecturally mapped to AArch32 register ATCR (S).

Usage constraints**Accessing the ATCR_EL3**

To access the ATCR_EL3:

```
MRS Xt, <3 6 c15 c7 0>; Read ATCR_EL3 into Xt
MSR S <3 6 c15 c7 0>, Xt; Write Xt to ATCR_EL3
```

This syntax is encoded with the following settings in the instruction encoding:

Op0	Op1	CRn	CRm	Op2
3	6	c15	c7	0

Accessibility

ATCR_EL3 is accessible as follows:


EL0	EL1 (NS)	EL1 (S)	EL2	EL3 (SCR.NS=1)	EL3 (SCR.NS=0)
-	-	-	-	RW	RW

13.22 AVTCR_EL2, Auxiliary Virtualized Translation Control Register, EL2

The AVTCR_EL2 determines the values of *Page-Based Hardware Attributes* (PBHA) on stage 2 translation table walks memory access in EL1 Non-secure translation regime if stage 2 is enable.

Bit field descriptions

AVTCR_EL2 is a 64-bit register.

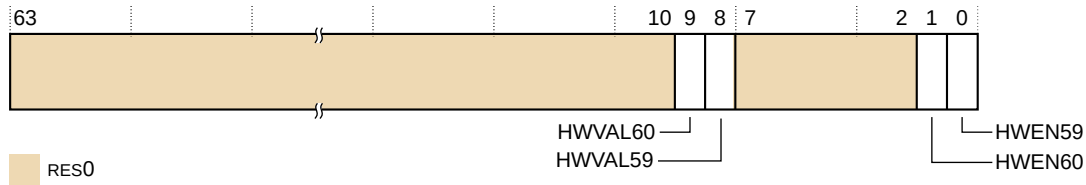Figure 13-17: AVTCCR_EL2 bit assignments**RES0, [63:10]**

RES0.

HWVAL60, [9]

Indicates the value of PBHA[1] translation table walks memory access if HWEN60 is set.

HWVAL59, [8]

Indicates the value of PBHA[1] translation table walks memory access if HWEN59 is set.

RES0, [7:2]

RES0.

HWEN60, [1]

Enables PBHA[1] translation table walks memory access. If this bit is clear, PBHA[1] on translation table walks is 0.

HWEN59, [0]

Enables PBHA[0] translation table walks memory access. If this bit is clear, PBHA[0] on translation table walks is 0.

Configurations

AArch64 register AVTCCR_EL2 is architecturally mapped to AArch32 register AVTCCR.

Usage constraints**Accessing the AVTCCR_EL2**

To access the AVTCCR_EL2:

```
MRS Xt, S<3 4 c15 c7 1>; Read AVTCCR_EL2 into Xt
MSR S<3 4 c15 c7 1>, Xt; Write Xt to AVTCCR_EL2
```

This syntax is encoded with the following settings in the instruction encoding:

Op0	Op1	CRn	CRm	Op2
3	4	c15	c7	1

Accessibility

AVTCR_EL2 is accessible as follows:

ELO	EL1 (NS)	EL1 (S)	EL2	EL3 (SCR.NS=1)	EL3 (SCR.NS=0)
-	-	-	RW	RW	RW

13.23 CCSIDR_EL1, Cache Size ID Register, EL1


The CCSIDR_EL1 provides information about the architecture of the currently selected cache.

Bit field descriptions

CCSIDR_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-18: CCSIDR_EL1 bit assignments

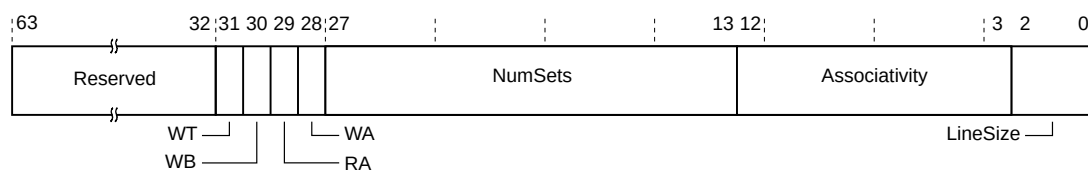

Reserved, [63:32]

Reserved.

WT, [31]

Indicates whether the selected cache level supports Write-Through:

0 Cache Write-Through is not supported at any level.

For more information about encoding, see [CCSIDR_EL1 encodings](#) on page 132.

WB, [30]

Indicates whether the selected cache level supports Write-Back. Permitted values are:

0	Write-Back is not supported.
1	Write-Back is supported.

For more information about encoding, see [CCSIDR_EL1 encodings](#) on page 132.

RA, [29]

Indicates whether the selected cache level supports read-allocation. Permitted values are:

0	Read-allocation is not supported.
1	Read-allocation is supported.

For more information about encoding, see [CCSIDR_EL1 encodings](#) on page 132.

WA, [28]

Indicates whether the selected cache level supports write-allocation. Permitted values are:

0	Write-allocation is not supported.
1	Write-allocation is supported.

For more information about encoding, see [CCSIDR_EL1 encodings](#) on page 132.

NumSets, [27:13]

(Number of sets in cache) - 1. Therefore, a value of 0 indicates one set in the cache. The number of sets does not have to be a power of 2.

For more information about encoding, see [CCSIDR_EL1 encodings](#) on page 132.

Associativity, [12:3]

(Associativity of cache) - 1. Therefore, a value of 0 indicates an associativity of 1. The associativity does not have to be a power of 2.

For more information about encoding, see [CCSIDR_EL1 encodings](#) on page 132.

LineSize, [2:0]

($\log_2(\text{Number of bytes in cache line})$) - 4. For example:

For a line length of 16 bytes: $\log_2(16) = 4$, LineSize entry = 0. This is the minimum line length.

For a line length of 32 bytes: $\log_2(32) = 5$, LineSize entry = 1.

For more information about encoding, see [CCSIDR_EL1 encodings](#) on page 132.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

CCSIDR_EL1 encodings

The following table shows the individual bit field and complete register encodings for the CCSIDR_EL1.

Table 13-26: CCSIDR encodings

CSSELR		Cache	Size	Complete register encoding	Register bit field encoding						
Level	InD				WT	WB	RA	WA	NumSets	Associativity	LineSize
0b000	0b0	L1 Data cache	64KB	701FE01A	0	1	1	1	0x00FF	0x003	2
0b000	0b1	L1 Instruction cache	64KB	201FE01A	0	0	1	0	0x00FF	0x003	2
0b001	0b0	L2 cache	128KB	701FE03A	0	1	1	1	0x00FF	0x007	2
			256KB	703FE03A	0	1	1	1	0x01FF	0x007	2
			512KB	707FE03A	0	1	1	1	0x03FF	0x007	2
0b001	0b1	Reserved	-	-	-	-	-	-	-	-	-
0b010	0b0	L3 cache When L3 is not implemented, the value of CCSIDR is UNKNOWN .	512KB	703FE07A	0	1	1	1	0x01FF	0x00F	2
			1024KB	707FE07A					0x03FF		
			2048KB	70FFE07A					0x07FF		
			4096KB	71FFE07A					0x0FFF		
0b010	0b1	Reserved	-	-	-	-	-	-	-	-	-
0b0101 - 0b1111		Reserved	-	-	-	-	-	-	-	-	-

13.24 CLIDR_EL1, Cache Level ID Register, EL1

The CLIDR_EL1 identifies the type of cache, or caches, which are implemented at each level, up to a maximum of seven levels.


It also identifies the *Level of Coherency* (LoC) and *Level of Unification* (LoU) for the cache hierarchy.

Bit field descriptions

CLIDR_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-19: CLIDR_EL1 bit assignments

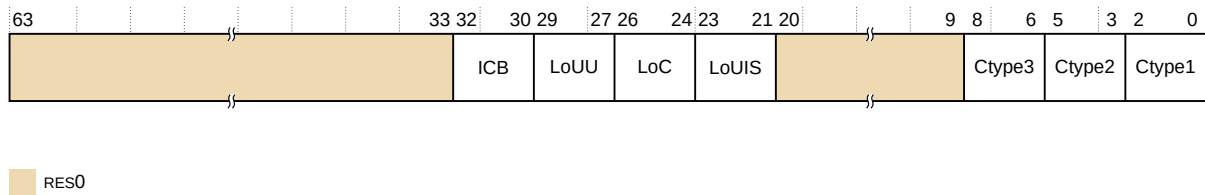

RES0, [63:33]

RES0	Reserved.
------	-----------

ICB, [32:30]

Inner cache boundary. This field indicates the boundary between the inner and the outer domain:

0b010 L2 cache is the highest inner level.

0b011 L3 cache is the highest inner level.

LoUU, [29:27]

Indicates the Level of Unification Uniprocessor for the cache hierarchy:

0b000	No levels of cache need to be cleaned or invalidated when cleaning or invalidating to the Point of Unification. This is the value if no caches are configured.
--------------	--

LoC, [26:24]

Indicates the Level of Coherency for the cache hierarchy:

0b010 L3 cache is not implemented.

0b011 L3 cache is implemented.

LoUIS, [23:21]

Indicates the *Level of Unification Inner Shareable* (LoUIS) for the cache hierarchy.

0b000 No cache level needs cleaning to Point of Unification.

RESO, [20:9]

No cache at levels L7 down to L4.

RES0 Reserved.

Ctype3, [8:6]

Indicates the type of cache if the core implements L3 cache. If present, unified instruction and data caches at level 3:

0b100	Both per-core L2 and cluster L3 caches are present.
0b000	All other options.

If Ctype2 has a value of 0b000, then the value of Ctype3 must be **IGNORED**.

Ctype2, [5:3]

Indicates the type of unified instruction and data caches at level 2:

0b100	Either per-core L2 or cluster L2 cache is present.
0b000	All other options.

Ctype1, [2:0]

Indicates the type of cache which is implemented at L1:

0b011	Separate instruction and data caches at L1.
--------------	---

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.25 CPACR_EL1, Architectural Feature Access Control Register, EL1

The CPACR_EL1 controls access to trace functionality and access to registers associated with Advanced SIMD and floating-point execution.

Bit field descriptions

CPACR_EL1 is a 64-bit register, and is part of the Other system control registers functional group.

Figure 13-20: CPACR_EL1 bit assignments

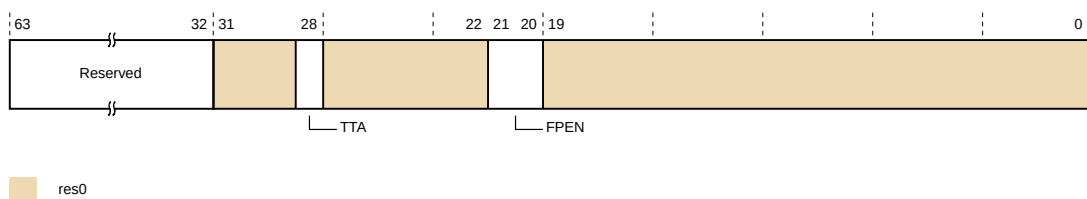

Reserved, [63:32]

Reserved.

RES0, [31:29]

RES0 Reserved.

TTA, [28]

Traps EL0 and EL1 System register accesses to all implemented trace registers to EL1, from both Execution states. This bit is **RES0**. The core does not provide System register access to ETM control.

Configurations

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.26 CPTR_EL2, Architectural Feature Trap Register, EL2

The CPTR_EL2 controls trapping to EL2 for accesses to CPACR, trace functionality and registers associated with Advanced SIMD and floating-point execution. It also controls EL2 access to this functionality.

Bit field descriptions

CPTR_EL2 is a 64-bit register, and is part of the Virtualization registers functional group.

Figure 13-21: CPTR_EL2 bit assignments

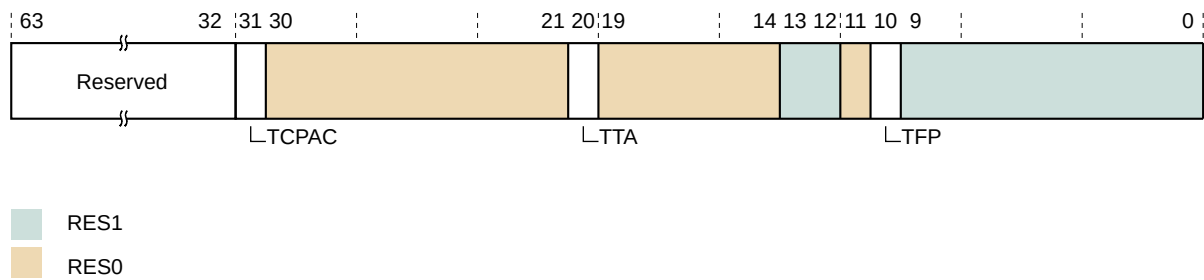

Reserved, [63:32]

Reserved.

TTA, [20]

Trap Trace Access.

This bit is not implemented. **RES0**.

Configurations

RW fields in this register reset to **UNKNOWN** values.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.27 CPTR_EL3, Architectural Feature Trap Register, EL3


The CPTR_EL3 controls trapping to EL3 of access to CPACR_EL1, CPTR_EL2, trace functionality and registers associated with Advanced SIMD and floating-point execution.

It also controls EL3 access to trace functionality and registers associated with Advanced SIMD and floating-point execution.

Bit field descriptions

CPTR_EL3 is a 64-bit register, and is part of the Security registers functional group.

Figure 13-22: CPTR_EL3 bit assignments

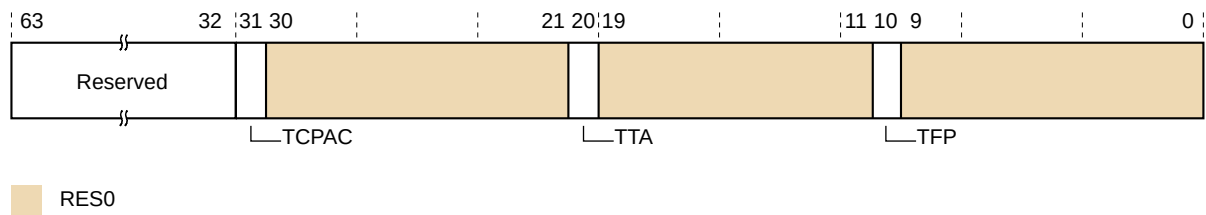

Reserved, [63:32]

Reserved.

TTA, [20]

Trap Trace Access.

Not implemented. **RES0**.

TFP, [10]

Traps all accesses to SVE, Advanced SIMD and floating-point functionality to EL3. This applies to all Exception levels, both Security states, and both Execution states. The possible values are:

- | | |
|---|---|
| 0 | Does not cause any instruction to be trapped. This is the reset value. |
| 1 | Any attempt at any Exception level to execute an instruction that uses the registers that are associated with SVE, Advanced SIMD and floating-point is trapped to EL3, subject to the exception prioritization rules. |

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.28 CPUACTLR_EL1, CPU Auxiliary Control Register, EL1

The CPUACTLR_EL1 provides **IMPLEMENTATION DEFINED** configuration and control options for the core.

Bit field descriptions

CPUACTLR_EL1 is a 64-bit register, and is part of the **IMPLEMENTATION DEFINED** registers functional group.

Figure 13-23: CPUACTLR_EL1 bit assignments

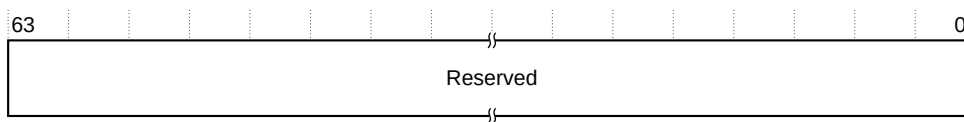

Reserved, [63:0]

Reserved for Arm® internal use.

Configurations

CPUACTLR_EL1 is common to the Secure and Non-secure states.

Usage constraints

Accessing the CPUACTLR_EL1

The CPU Auxiliary Control Register can be written only when the system is idle. Arm recommends that you write to this register after a Cold reset, before the MMU is enabled.

Setting many of these bits can cause significantly lower performance on your code. Therefore, Arm strongly recommends that you do not modify this register unless directed by Arm.

This register is accessible as follows:

This register can be read with the MRS instruction using the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written with the MSR instruction using the following syntax:

```
MSR <systemreg>, <Xt>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
S3_O_C15_C1_0	11	000	1111	0001	000

Accessibility

This register is accessible in software as follows:

<systemreg>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_O_C15_C1_0	x	x	0	-	RW	n/a	RW
S3_O_C15_C1_0	x	0	1	-	RW	RW	RW
S3_O_C15_C1_0	x	1	1	-	n/a	RW	RW

'n/a' Not accessible. The core cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Synchronous exception prioritization* in the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.29 CPUACTLR2_EL1, CPU Auxiliary Control Register 2, EL1

The CPUACTLR2_EL1 provides **IMPLEMENTATION DEFINED** configuration and control options for the core.

Bit field descriptions

CPUACTLR2_EL1 is a 64-bit register, and is part of the **IMPLEMENTATION DEFINED** registers functional group.

Figure 13-24: CPUACTLR2_EL1 bit assignments

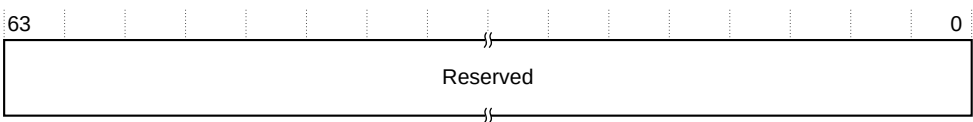

Reserved, [63:0]

Reserved for Arm® internal use.

Configurations

CPUACTLR2_EL1 is common to the Secure and Non-secure states.

Usage constraints

Accessing the CPUACTLR2_EL1

The CPUACTLR2_EL1 can be written only when the system is idle. Arm recommends that you write to this register after a powerup reset, before the MMU is enabled.

Setting many of these bits can cause significantly lower performance on your code. Therefore, Arm strongly recommends that you do not modify this register unless directed by Arm.

This register can be read using MRS with the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written using MSR with the following syntax:

```
MSR <systemreg>, <Xt>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	Op0	Op1	CRn	CRm	Op2
S3_0_C15_C1_1	11	000	1111	0001	001

Accessibility

This register is accessible in software as follows:

<syntax>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_0_C15_C1_1	x	x	0	-	RW	n/a	RW
S3_0_C15_C1_1	x	0	1	-	RW	RW	RW
S3_0_C15_C1_1	x	1	1	-	n/a	RW	RW

'n/a' Not accessible. The PE cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Exception priority order* in the [Arm® Architecture Reference Manual for A-profile architecture](#) for exceptions that are taken to AArch64 state, and see *Synchronous exception prioritization* for exceptions that are taken to AArch64 state.

Write-Access to this register from EL1 or EL2 depends on the value of bit[0] of ACTLR_EL2 and ACTLR_EL3.

13.30 CPUACTLR3_EL1, CPU Auxiliary Control Register 3, EL1

The CPUACTLR3_EL1 provides **IMPLEMENTATION DEFINED** configuration and control options for the core.

Bit field descriptions

CPUACTLR3_EL1 is a 64-bit register, and is part of the **IMPLEMENTATION DEFINED** registers functional group.

Figure 13-25: CPUACTLR3_EL1 bit assignments



Reserved, [63:0]

Reserved for Arm® internal use.

Configurations

Usage constraints

Accessing the CPUACTLR3_EL1

The CPUACTLR3_EL1 can be written only when the system is idle. Arm recommends that you write to this register after a powerup reset, before the MMU is enabled.

Setting many of these bits can cause significantly lower performance on your code. Therefore, Arm strongly recommends that you do not modify this register unless directed by Arm.

This register can be read using MRS with the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written using MSR with the following syntax:

```
MSR <systemreg>, <Xt>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	Op0	Op1	CRn	CRm	Op2
S3_0_C15_C1_2	11	000	1111	0001	010

Accessibility

This register is accessible in software as follows:

<syntax>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_0_C15_C1_2	x	x	0	-	RW	n/a	RW
S3_0_C15_C1_2	x	0	1	-	RW	RW	RW
S3_0_C15_C1_2	x	1	1	-	n/a	RW	RW

'n/a' Not accessible. The PE cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Exception priority order* in the [Arm® Architecture Reference Manual for A-profile architecture](#) for exceptions that are taken to AArch64 state, and see *Synchronous exception prioritization* for exceptions that are taken to AArch64 state.

Write-Access to this register from EL1 or EL2 depends on the value of bit[0] of ACTLR_EL2 and ACTLR_EL3.

13.31 CPUCFR_EL1, CPU Configuration Register, EL1


The CPUCFR_EL1 provides configuration information for the core.

Bit field descriptions

CPUCFR_EL1 is a 64-bit register, and is part of the **IMPLEMENTATION DEFINED** registers functional group.

This register is read-only.

Figure 13-26: CPUCFR_EL1 bit assignments

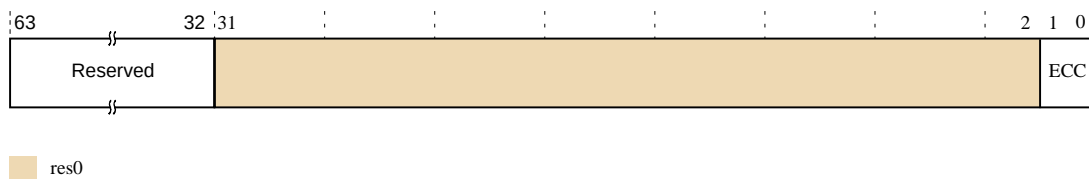

Reserved, [63:32]

Reserved.

RES0, [31:2]**RES0** Reserved.**ECC, [1:0]**

Indicates whether ECC is present or not. The possible values are:

00

ECC is not present.

01

ECC is present.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

Usage constraints**Accessing the CPUCFR_EL1**

This register can be read with the MRS instruction using the following syntax:

```
MRS <Xt>, <systemreg>
```

To access the CPUCFR_EL1:

```
MRS <Xt>, CPUCFR_EL1 ; Read CPUCFR_EL1 into Xt
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
S3_0_C15_CO_0	11	000	1111	0000	000

Accessibility

This register is accessible in software as follows:

<systemreg>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_0_C15_CO_0	x	x	0	-	RO	n/a	RO
S3_0_C15_CO_0	x	0	1	-	RO	RO	RO
S3_0_C15_CO_0	x	1	1	-	n/a	RO	RO

'n/a' Not accessible. The PE cannot be executing at this Exception level, so this access is not possible.

13.32 CPUECTLR_EL1, CPU Extended Control Register, EL1


The CPUECTLR_EL1 provides additional **IMPLEMENTATION DEFINED** configuration and control options for the core.

Bit field descriptions

CPUECTLR_EL1 is a 64-bit register, and is part of the 64-bit registers functional group.

This register resets to value 0x0000000969563000.

Figure 13-27: CPUECTLR_EL1 bit assignments

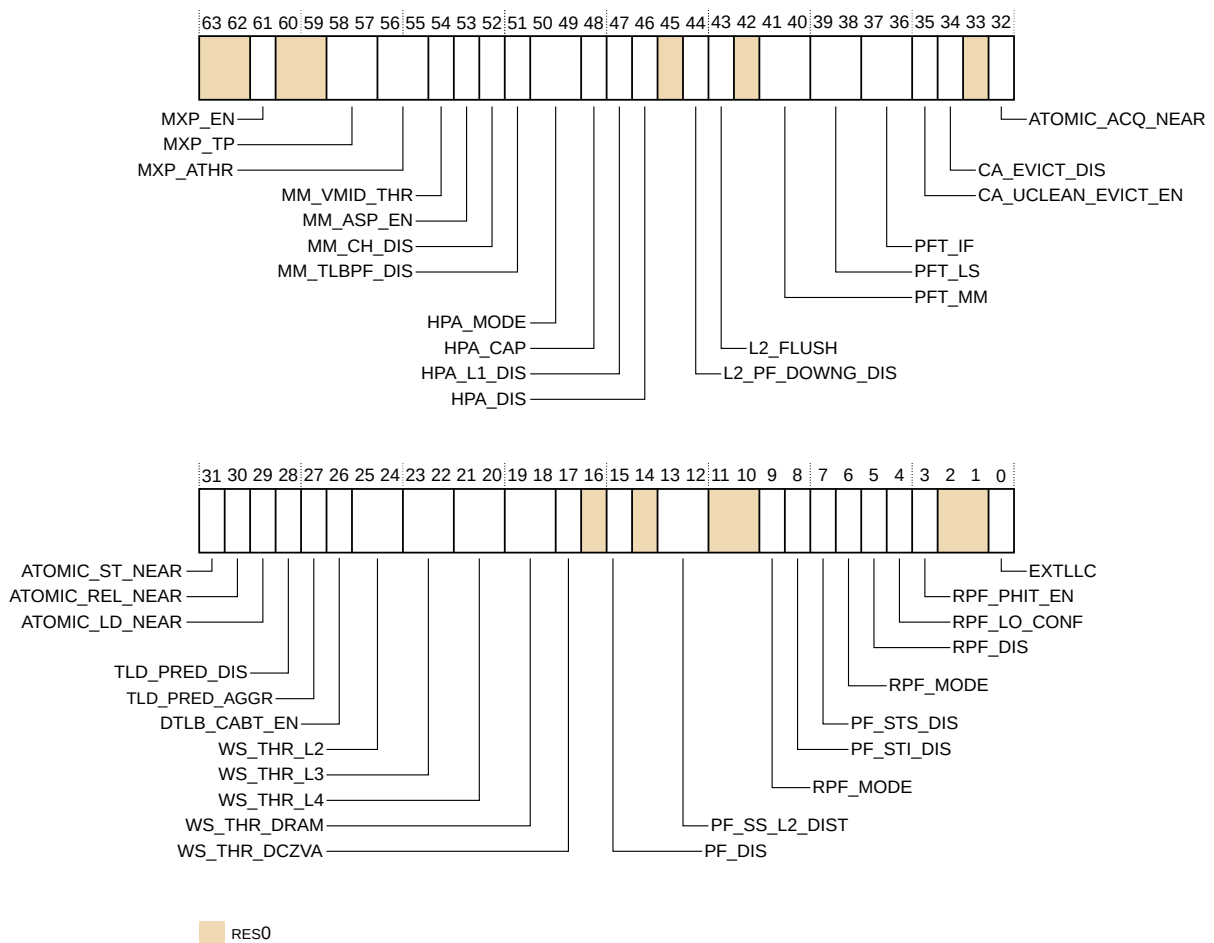

RES0, [63:62]

RES0 Reserved.

MXP_EN, [61]

Max-power throttle enable. The possible values are:

- | | |
|----------|---|
| 0 | Disables max-power throttling mechanism. This is the reset value. |
| 1 | Enables max-power throttling mechanism. |

Both the MXP_EN bit and the MPMMEN input pin at the DSU cluster level must be asserted to enable the max-power throttling mechanism.

MPMMSTATE[1:0] input pin at the DSU cluster level can be used to select between the 4 banks:



0 = {CPUECTLR_EL1.MXP_TP, CPUECTLR_EL1.MXP_ATHR}

1 = {CPUECTLR2_EL1.MXP_TP_B1, CPUECTLR2_EL1.MXP_ATHR_B1}

2 = {CPUECTLR2_EL1.MXP_TP_B2, CPUECTLR2_EL1.MXP_ATHR_B2}

3 = {CPUECTLR2_EL1.MXP_TP_B3, CPUECTLR2_EL1.MXP_ATHR_B3}

RES0, [60:59]

RES0 Reserved.

MXP_TP, [58:57]

Percentage of throttling in the Load-Store and Vector Execute units during the period when throttling has been triggered and is active. The possible values are:

- | | |
|-----------|---|
| 00 | Throttle by 60%. This is the reset value. |
| 01 | Throttle by 50%. |
| 10 | Throttle by 40%. |
| 11 | Throttle by 30%. |

MXP_ATHR, [56:55]

Peak activity threshold at which max-power throttling is triggered. The possible values are:

- | | |
|-----------|--|
| 00 | Max-power throttling that is triggered at 70% of peak activity. This is the reset value. |
| 01 | Max-power throttling that is triggered at 60% of peak activity. |
| 10 | Max-power throttling that is triggered at 50% of peak activity. |
| 11 | Max-power throttling that is triggered at 40% of peak activity. |

MM_VMID_THR, [54]

VMID filter threshold. The possible values are:

- | | |
|----------|---|
| 0 | Flush VMID filter after 16 unique VMID allocations to the MMU Translation Cache. This is the reset value. |
| 1 | Flush VMID filter after 32 unique VMID allocations to the MMU Translation Cache. |

MM_ASP_EN, [53]

Disables allocation of splintered pages in L2 TLB. The possible values are:

- | | |
|----------|--|
| 0 | Enables allocation of splintered pages in the L2 TLB. This is the reset value. |
| 1 | Disables allocation of splintered pages in the L2 TLB. |

MM_CH_DIS, [52]

Disables use of contiguous hint. The possible values are:

- | | |
|----------|--|
| 0 | Enables use of contiguous hint. This is the reset value. |
| 1 | Disables use of contiguous hint. |

MM_TLBPF_DIS, [51]

Disables L2 TLB prefetcher. The possible values are:

- | | |
|----------|---|
| 0 | Enables L2 TLB prefetcher. This is the reset value. |
| 1 | Disables L2 TLB prefetcher. |

HPA_MODE, [50:49]

Hardware Page Aggregation (HPA) mode. The possible values are:

- | | |
|-----------|---|
| 00 | Moderately conservative hardware page aggregation. This is the reset value. |
| 01 | Aggressive hardware page aggregation. |
| 10 | Moderately aggressive hardware page aggregation. |
| 11 | Conservative hardware page aggregation. |

HPA_CAP, [48]

Limited or full hardware page aggregation selection. The possible values are:

- | | |
|----------|---|
| 0 | Limited hardware page aggregation. This is the reset value. |
| 1 | Full hardware page aggregation. |

HPA_L1_DIS, [47]

Disables HPA in L1 TLBs (but continues to use HPA in L2 TLB). The possible values are:

- | | |
|----------|--|
| 0 | Enables hardware page aggregation in L1 TLBs. This is the reset value. |
| 1 | Disables hardware page aggregation in L1 TLBs. |

HPA_DIS, [46]

Disables hardware page aggregation. The possible values are:

- | | |
|----------|---|
| 0 | Enables hardware page aggregation. This is the reset value. |
| 1 | Disables hardware page aggregation. |

RES0, [45]

RES0	Reserved.
-------------	-----------

L2_PF_DOWNG_DIS, [44]

Disable the L2 PF downgrade feature. The possible values are:

- | | |
|----------|---|
| 0 | The core can dynamically downgrade some L2 hardware prefetches to L3 prefetches depending on L2 resource availability. This is the reset value. |
| 1 | The core will not dynamically downgrade L2 hardware prefetches to L3 prefetches. |

L2_FLUSH, [43]

Allocation behavior of copybacks that are caused by L2 cache hardware flush and DC C1SW instructions targeting the L2 cache. If it is known that data is likely to be used soon by another core, setting this bit can improve system performance. The possible values are:

- | | |
|----------|---|
| 0 | L2 cache flushes and invalidates by set/way do not allocate in the L3 cache. Cache lines in the UniqueDirty state cause WriteBack transactions with the allocation hint cleared, while cache lines in UniqueClean or SharedClean states cause address-only Evict transactions. This is the reset value. |
| 1 | L2 cache flushes by set/way allocate in the L3 cache. Cache lines in the UniqueDirty or UniqueClean state cause WriteBackFull or WriteEvictFull transactions, respectively, both with the allocation hint set. Cache lines in the SharedClean state cause address-only Evict transactions. |

RES0, [42]

RES0	Reserved.
-------------	-----------

PFT_MM, [41:40]

DRAM prefetch using PrefetchTgt transactions for table walk requests. The possible values are:

- | | |
|-----------|---|
| 00 | Disable prefetchtgt generation for requests from the Memory Management Unit (MMU). This is the reset value. |
| 01 | Conservatively generate prefetchtgt for cacheable requests from the MMU, always generate for non-cacheable. |
| 10 | Aggressively generate prefetchtgt for cacheable requests from the MMU, always generate for non-cacheable. |
| 11 | Always generate prefetchtgt for cacheable requests from the MMU, always generate for non-cacheable. |

PFT_LS, [39:38]

DRAM prefetch using PrefetchTgt transactions for load and store requests. The possible values are:

- | | |
|-----------|--|
| 00 | Disable prefetchtgt generation for requests from the Load-Store unit (LS). This is the reset value. |
| 01 | Conservatively generate prefetchtgt for cacheable requests from the LS, always generate for non-cacheable. |
| 10 | Aggressively generate prefetchtgt for cacheable requests from the LS, always generate for non-cacheable. |
| 11 | Always generate prefetchtgt for cacheable requests from the LS, always generate for non-cacheable. |

PFT_IF, [37:36]

DRAM prefetch using PrefetchTgt transactions for instruction fetch requests. The possible values are:

- | | |
|-----------|--|
| 00 | Disable prefetchtgt generation for requests from the Instruction Fetch unit (IF). This is the reset value. |
| 01 | Conservatively generate prefetchtgt for cacheable requests from the IF, always generate for non-cacheable. |
| 10 | Aggressively generate prefetchtgt for cacheable requests from the IF, always generate for non-cacheable. |
| 11 | Always generate prefetchtgt for cacheable requests from the IF, always generate for non-cacheable. |

CA_UCLEAN_EVICT_EN, [35]

Enables sending WriteEvict transactions on the CPU CHI interface for UniqueClean evictions. WriteEvict transactions update downstream caches. Enable WriteEvict transactions only if there is an extra level of cache below the CPU's level 2 cache. This value is set to:

- | | |
|----------|---|
| 1 | Enables sending data with UniqueClean evictions. This is the reset value. |
|----------|---|

CA_EVICT_DIS, [34]

Disables sending of Evict transactions on the CPU CHI interface for clean cache lines that are evicted from the core. Evict transactions are required only if the system contains a snoop filter that requires notification when the core evicts the cache line. This value is set to:

- 1** Disables sending Evict transactions.

RES0, [33]

- RES0** Reserved.

ATOMIC_ACQ_NEAR, [32]

An atomic instruction to WB memory with acquire semantics that does not hit in the cache in Exclusive state, can make up to one fill request. The possible values are:

- 0** Acquire-atomic is near if cache line is already Exclusive, otherwise make far atomic request.
- 1** Acquire-atomic will make up to 1 fill request to perform near. This is the reset value.

ATOMIC_ST_NEAR, [31]

A store atomic instruction to WB memory that does not hit in the cache in Exclusive state, can make up to one fill request. The possible values are:

- 0** Store-atomic is near if cache line is already Exclusive, otherwise make far atomic request. This is the reset value.
- 1** Store-atomic will make up to 1 fill request to perform near.

ATOMIC_REL_NEAR, [30]

An atomic instruction to WB memory with release semantics that does not hit in the cache in Exclusive state, can make up to one fill request. The possible values are:

- 0** Release-atomic is near if cache line is already Exclusive, otherwise make far atomic request.
- 1** Release-atomic will make up to 1 fill request to perform near. This is the reset value.

ATOMIC_LD_NEAR, [29]

A load atomic (including SWP and CAS) instruction to WB memory that does not hit in the cache in Exclusive state, can make up to one fill request. The possible values are:

- 0** Load-atomic is near if cache line is already Exclusive, otherwise make far atomic request.
- 1** Load-atomic will make up to 1 fill request to perform near. This is the reset value.

TLD_PRED_DIS, [28]

Disables Transient Load Prediction. The possible values are:

- 0** Enables transient load prediction. This is the reset value.
- 1** Disables transient load prediction.

TLD_PRED_AGGR, [27]

Enables aggressive transient load prediction. The possible values are:

0

Transient load prediction uses more conservative threshold.

1

Transient load prediction uses more aggressive threshold. This is the reset value.

DTLB_CABT_EN, [26]

Enables TLB Conflict Data Abort Exception. The possible values are:

0

Disables TLB conflict data abort exception. This is the reset value.

1

Enables TLB conflict data abort exception.

WS_THR_L2, [25:24]

Threshold for direct stream to L2 cache on store. The possible values are:

00

256B.

01

4KB. This is the reset value.

10

8KB.

11

Disables direct stream to L2 cache on store.

WS_THR_L3, [23:22]

Threshold for direct stream to L3 cache on store. The possible values are:

00

768B.

01

16KB. This is the reset value.

10

32KB.

11

Disables direct stream to L3 cache on store.

WS_THR_L4, [21:20]

Threshold for direct stream to L4 cache on store. The possible values are:

00

16KB.

01

64KB. This is the reset value.

10

128KB.

11

Disables direct stream to L4 cache on store.

WS_THR_DRAM, [19:18]

Threshold for direct stream to DRAM on store. The possible values are:

00

64KB.

01

1MB, for memory designated as outer-allocate. This is the reset value.

10

1MB, allocating irrespective of outer-allocation designation.

11

Disables direct stream to DRAM on store.

WS_THR_DCZVA, [17]

Have DCZVA use a lower WS_THR_L2 configuration. The possible values are:

0	DCZVA behaves like normal store wrt WS_THR_L2.
1	DCZVA will use one lower stream threshold from WS_THR_L2. This is the reset value.

RES0, [16]

RES0	Reserved.
-------------	-----------

PF_DIS, [15]

Disables data-side hardware prefetching. The possible values are:

0	Enables hardware prefetching. This is the reset value.
1	Disables hardware prefetching.

RES0, [14]

RES0	Reserved.
-------------	-----------

PF_SS_L2_DIST, [13:12]

Single cache line stride prefetching L2 distance. The possible values are:

00	22
01	40
10	60
11	Dynamically managed by hardware. This is the reset value.

RES0, [11:10]

RES0	Reserved.
-------------	-----------

RPF_MODE, [9,6]

General prefetcher aggressibility. The possible values are:

00	Dynamically managed by hardware. This is the reset value.
01	Aggressive prefetching.
10	Less aggressive prefetching.
11	Conservative prefetching. This results in fewer prefetch requests.

PF_STI_DIS, [8]

Disables store prefetches at issue. The possible values are:

0	Enables store prefetching. This is the reset value.
1	Disables store prefetching.

PF_STS_DIS, [7]

Disables store-stride prefetches. The possible values are:

0	Enables store prefetching. This is the reset value.
1	Disables store prefetching.

RPF_MODE, [6]

See bit[9].

RPF_DIS, [5]

Disables region prefetcher. The possible values are:

0	Enables region prefetching. This is the reset value.
1	Disables region prefetching.

RPF_LO_CONF, [4]

Region prefetcher training behavior. The possible values are:

0	Limited training for region prefetcher on single accesses. This is the reset value.
1	Always train the region prefetcher on single accesses, which results in fewer prefetch requests.

RPF_PHIT_EN, [3]

Enable region prefetcher propagation on hit. The possible values are:

0	Disables region prefetcher propagation on hit. This is the reset value.
1	Enables region prefetcher propagation on hit.

RES0, [2:1]

RES0	Reserved.
-------------	-----------

EXTLLC, [0]

Internal or external Last-level cache (LLC) in the system. The possible values are:

0	Indicates that an internal Last-level cache is present in the system, and that the DataSource field on the master CHI interface indicates when data is returned from the LLC. This is used to control how the LL_CACHE* PMU events count. This is the reset value.
1	Indicates that an external Last-level cache is present in the system, and that the DataSource field on the master CHI interface indicates when data is returned from the LLC. This is used to control how the LL_CACHE* PMU events count.

Configurations

This register has no configuration options.

Usage constraints

Accessing the CPUECTLR_EL1

The CPU Extended Control Register can be written only when the system is idle. Arm recommends that you write to this register after a powerup reset, before the MMU is enabled.

This register can be read using MRS with the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written using MSR with the following syntax:

```
MSR <systemreg>, <Xt>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
CPUECTLR_EL1	11	000	1111	0001	100

Accessibility

This register is accessible in software as follows:

<systemreg>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
CPUECTLR_EL1	x	x	0	-	RW	n/a	RW
CPUECTLR_EL1	x	0	1	-	RW	RW	RW
CPUECTLR_EL1	x	1	1	-	n/a	RW	RW

'n/a' Not accessible. The PE cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Synchronous exception prioritization* in the [Arm® Architecture Reference Manual for A-profile architecture](#) for exceptions taken to AArch64 state.

Access to this register depends on bit[1] of ACTLR_EL2 and ACTLR_EL3.

13.33 CPUECTLR2_EL1, CPU Extended Control Register2, EL1


The CPUECTLR2_EL1 provides additional **IMPLEMENTATION DEFINED** configuration and control options for the core.

Bit field descriptions

CPUECTLR2_EL1 is a 64-bit register, and is part of the 64-bit registers functional group.

This register resets to value 0x0000000000000000.

Figure 13-28: CPUECTLR2_EL1 bit assignments

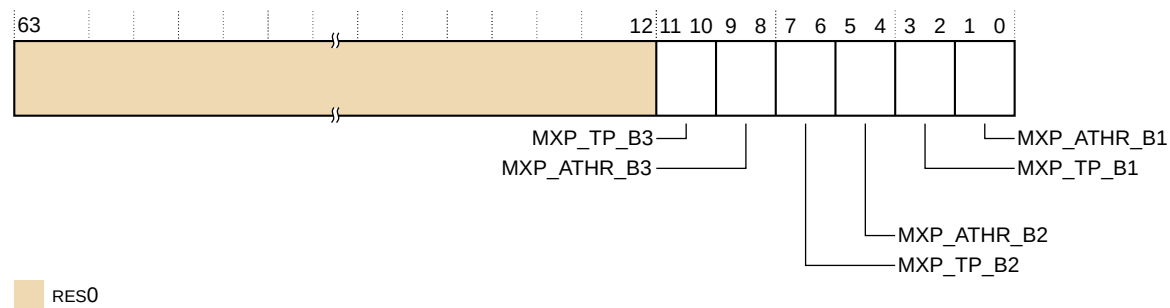

RES0, [63:12]

RES0 Reserved.

MXP_TP_B3, [11:10]

Percentage of throttling in the Load-Store and Vector Execute units during the period when throttling has been triggered and is active. The possible values are:

- | | |
|----|---|
| 00 | Throttle by 60%. This is the reset value. |
| 01 | Throttle by 50%. |
| 10 | Throttle by 40%. |
| 11 | Throttle by 30%. |

MXP_ATHR_B3, [9:8]

Peak activity threshold at which max-power throttling is triggered. The possible values are:

- | | |
|----|--|
| 00 | Max-power throttling triggered at 70% of peak activity. This is the reset value. |
| 01 | Max-power throttling triggered at 60% of peak activity. |
| 10 | Max-power throttling triggered at 50% of peak activity. |
| 11 | Max-power throttling triggered at 40% of peak activity. |

MXP_TP_B2, [7:6]

Percentage of throttling in the Load-Store and Vector Execute units during the period when throttling has been triggered and is active. The possible values are:

00	Throttle by 60%. This is the reset value.
01	Throttle by 50%.
10	Throttle by 40%.
11	Throttle by 30%.

MXP_ATHR_B2, [5:4]

Peak activity threshold at which max-power throttling is triggered. The possible values are:

00	Max-power throttling triggered at 70% of peak activity. This is the reset value.
01	Max-power throttling triggered at 60% of peak activity.
10	Max-power throttling triggered at 50% of peak activity.
11	Max-power throttling triggered at 40% of peak activity.

MXP_TP_B1, [3:2]

Percentage of throttling in the Load-Store and Vector Execute units during the period when throttling has been triggered and is active. The possible values are:

00	Throttle by 60%. This is the reset value.
01	Throttle by 50%.
10	Throttle by 40%.
11	Throttle by 30%.

MXP_ATHR_B1, [1:0]

Peak activity threshold at which max-power throttling is triggered. The possible values are:

00	Max-power throttling triggered at 70% of peak activity. This is the reset value.
01	Max-power throttling triggered at 60% of peak activity.
10	Max-power throttling triggered at 50% of peak activity.
11	Max-power throttling triggered at 40% of peak activity.

Configurations

This register has no configuration options.

Usage constraints**Accessing the CPUECTLR2_EL1**

The CPU Extended Control Register can be written only when the system is idle. Arm recommends that you write to this register after a powerup reset, before the MMU is enabled.

This register can be read using MRS with the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written using MSR with the following syntax:

```
MSR <systemreg>, <Xt>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
CPUECTLR2_EL1	11	000	1111	0001	101

Accessibility

This register is accessible in software as follows:

<systemreg>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
CPUECTLR2_EL1	x	x	0	-	RW	n/a	RW
CPUECTLR2_EL1	x	0	1	-	RW	RW	RW
CPUECTLR2_EL1	x	1	1	-	n/a	RW	RW

'n/a' Not accessible. The PE cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Synchronous exception prioritization* in the [Arm® Architecture Reference Manual for A-profile architecture](#) for exceptions taken to AArch64 state.


Access to this register depends on bit[1] of ACTLR_EL2 and ACTLR_EL3.

13.34 CPUPCR_EL3, CPU Private Control Register, EL3

The CPUPCR_EL3 provides **IMPLEMENTATION DEFINED** configuration and control options for the core.

Bit field descriptions

CPUPCR_EL3 is a 64-bit register, and is part of the **IMPLEMENTATION DEFINED** registers functional group.

Figure 13-29: CPUPCR_EL3 bit assignments**Reserved, [63:0]**

Reserved for Arm® internal use.

Configurations

CPUPCR_EL3 is only accessible in Secure state.

Usage constraints**Accessing the CPUPCR_EL3**

The CPUPCR_EL3 can be written only when the system is idle. Arm recommends that you write to this register after a powerup reset, before the MMU is enabled.

Writing to this register might cause **UNPREDICTABLE** behaviors. Therefore, Arm strongly recommends that you do not modify this register unless directed by Arm.

This register is accessible as follows:

This register can be read with the MRS instruction using the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written with the MSR instruction using the following syntax:

```
MSR <systemreg>, <Xt>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
S3_6_C15_8_1	11	110	1111	1000	001

Accessibility

This register is accessible in software as follows:

<systemreg>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_6_C15_8_1	x	x	0	-	-	n/a	RW
S3_6_C15_8_1	x	0	1	-	-	-	RW

<systemreg>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_6_C15_8_1	x	1	1	-	n/a	-	RW

'n/a' Not accessible. The core cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Synchronous exception prioritization* in the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.35 CPUPMR_EL3, CPU Private Mask Register, EL3

The CPUPMR_EL3 provides **IMPLEMENTATION DEFINED** configuration and control options for the core.

Bit field descriptions

CPUPMR_EL3 is a 64-bit register, and is part of the **IMPLEMENTATION DEFINED** registers functional group.

Figure 13-30: CPUPMR_EL3 bit assignments



Reserved, [63:0]

Reserved for Arm® internal use.

Configurations

CPUPMR_EL3 is only accessible in Secure state.

Usage constraints

Accessing the CPUPMR_EL3

The CPUPMR_EL3 can be written only when the system is idle. Arm recommends that you write to this register after a powerup reset, before the MMU is enabled.

Writing to this register might cause **UNPREDICTABLE** behaviors. Therefore, Arm strongly recommends that you do not modify this register unless directed by Arm.

This register is accessible as follows:

This register can be read with the MRS instruction using the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written with the MSR instruction using the following syntax:

```
MSR <systemreg>, <Xt>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
S3_6_C15_8_3	11	110	1111	1000	011

Accessibility

This register is accessible in software as follows:

<systemreg>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_6_C15_8_3	x	x	0	-	-	n/a	RW
S3_6_C15_8_3	x	0	1	-	-	-	RW
S3_6_C15_8_3	x	1	1	-	n/a	-	RW

'n/a' Not accessible. The core cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Synchronous exception prioritization* in the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.36 CPUPMR2_EL3, CPU Private Mask Register 2, EL3

The CPUPMR2_EL3 provides **IMPLEMENTATION DEFINED** configuration and control options for the core.

Bit field descriptions

CPUPMR2_EL3 is a 64-bit register, and is part of the **IMPLEMENTATION DEFINED** registers functional group.

Figure 13-31: CPUPMR2_EL3 bit assignments

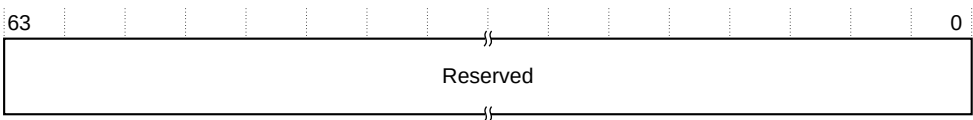

Reserved, [63:0]

Reserved for Arm® internal use.

Configurations

CPUPMR2_EL3 is only accessible in Secure state.

Usage constraints**Accessing the CPUPMR2_EL3**

The CPUPMR2_EL3 can be written only when the system is idle. Arm recommends that you write to this register after a powerup reset, before the MMU is enabled.

Writing to this register might cause **UNPREDICTABLE** behaviors. Therefore, Arm strongly recommends that you do not modify this register unless directed by Arm.

This register is accessible as follows:

This register can be read with the MRS instruction using the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written with the MSR instruction using the following syntax:

```
MSR <systemreg>, <Xt>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
S3_6_C15_8_5	11	110	1111	1000	011

Accessibility

This register is accessible in software as follows:

<systemreg>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_6_C15_8_5	x	x	0	-	-	n/a	RW
S3_6_C15_8_5	x	0	1	-	-	-	RW
S3_6_C15_8_5	x	1	1	-	n/a	-	RW

'n/a' Not accessible. The core cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Synchronous exception prioritization* in the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.37 CPUPOR_EL3, CPU Private Operation Register, EL3

The CPUPOR_EL3 provides **IMPLEMENTATION DEFINED** configuration and control options for the core.

Bit field descriptions

CPUPOR_EL3 is a 64-bit register, and is part of the **IMPLEMENTATION DEFINED** registers functional group.

Figure 13-32: CPUPOR_EL3 bit assignments

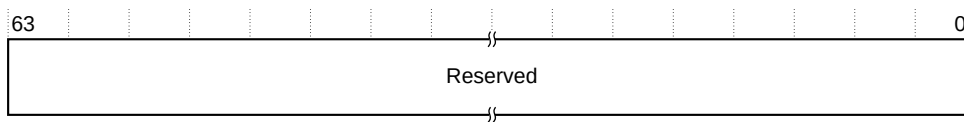

Reserved, [63:0]

Reserved for Arm® internal use.

Configurations

CPUPOR_EL3 is only accessible in Secure state.

Usage constraints

Accessing the CPUPOR_EL3

The CPUPOR_EL3 can be written only when the system is idle. Arm recommends that you write to this register after a powerup reset, before the MMU is enabled.

Writing to this register might cause **UNPREDICTABLE** behaviors. Therefore, Arm strongly recommends that you do not modify this register unless directed by Arm.

This register is accessible as follows:

This register can be read with the MRS instruction using the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written with the MSR instruction using the following syntax:

```
MSR <systemreg>, <Xt>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
S3_6_C15_8_2	11	110	1111	1000	010

Accessibility

This register is accessible in software as follows:

<systemreg>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_6_C15_8_2	x	x	0	-	-	n/a	RW
S3_6_C15_8_2	x	0	1	-	-	-	RW
S3_6_C15_8_2	x	1	1	-	n/a	-	RW

'n/a' Not accessible. The core cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Synchronous exception prioritization* in the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.38 CPUPOR2_EL3, CPU Private Operation Register 2, EL3

The CPUPOR2_EL3 provides **IMPLEMENTATION DEFINED** configuration and control options for the core.

Bit field descriptions

CPUPOR2_EL3 is a 64-bit register, and is part of the **IMPLEMENTATION DEFINED** registers functional group.

Figure 13-33: CPUPOR2_EL3 bit assignments

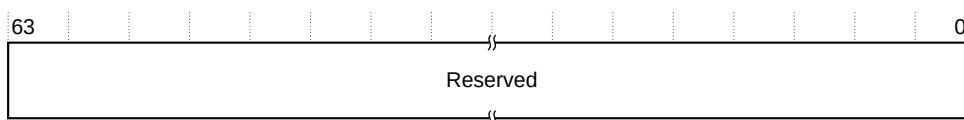

Reserved, [63:0]

Reserved for Arm® internal use.

Configurations

CPUPOR2_EL3 is only accessible in Secure state.

Usage constraints

Accessing the CPUPOR2_EL3

The CPUPOR2_EL3 can be written only when the system is idle. Arm recommends that you write to this register after a powerup reset, before the MMU is enabled.

Writing to this register might cause **UNPREDICTABLE** behaviors. Therefore, Arm strongly recommends that you do not modify this register unless directed by Arm.

This register is accessible as follows:

This register can be read with the MRS instruction using the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written with the MSR instruction using the following syntax:

```
MSR <systemreg>, <Xt>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
S3_6_C15_8_4	11	110	1111	1000	010

Accessibility

This register is accessible in software as follows:

<systemreg>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_6_C15_8_4	x	x	0	-	-	n/a	RW
S3_6_C15_8_4	x	0	1	-	-	-	RW
S3_6_C15_8_4	x	1	1	-	n/a	-	RW

'n/a' Not accessible. The core cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Synchronous exception prioritization* in the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.39 CPUPSELR_EL3, CPU Private Selection Register, EL3

The CPUPSELR_EL3 provides **IMPLEMENTATION DEFINED** configuration and control options for the core.

Bit field descriptions

CPUPSELR_EL3 is a 64-bit register, and is part of the **IMPLEMENTATION DEFINED** registers functional group.

Figure 13-34: CPUPSELR_EL3 bit assignments

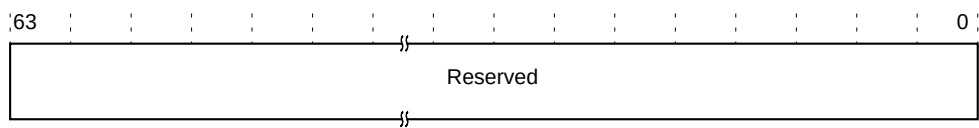

Reserved, [63:0]

Reserved for Arm® internal use.

Configurations

CPUPSELR_EL3 is only accessible in Secure state.

Usage constraints

Accessing the CPUPSELR_EL3

The CPUPSELR_EL3 can be written only when the system is idle. Arm recommends that you write to this register after a powerup reset, before the MMU is enabled.

Writing to this register might cause **UNPREDICTABLE** behaviors. Therefore, Arm strongly recommends that you do not modify this register unless directed by Arm.

This register is accessible as follows:

This register can be read with the MRS instruction using the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written with the MSR instruction using the following syntax:

```
MSR <systemreg>, <Xt>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
S3_6_C15_8_0	11	110	1111	1000	000

Accessibility

This register is accessible in software as follows:

<systemreg>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_6_C15_8_0	x	x	0	-	-	n/a	RW
S3_6_C15_8_0	x	0	1	-	-	-	RW
S3_6_C15_8_0	x	1	1	-	n/a	-	RW

'n/a' Not accessible. The core cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Synchronous exception prioritization* in the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.40 CPUPWRCTLR_EL1, Power Control Register, EL1

The CPUPWRCTLR_EL1 provides information about power control support for the core.

Bit field descriptions

CPUPWRCTLR_EL1 is a 64-bit register, and is part of the **IMPLEMENTATION DEFINED** registers functional group.

Figure 13-35: CPUPWRCTLR_EL1 bit assignments

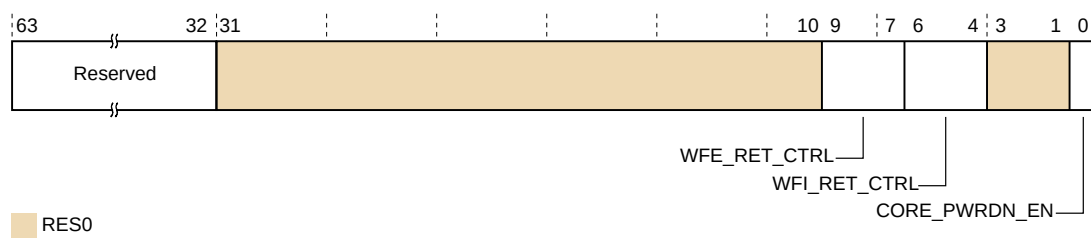

Reserved, [63:32]

Reserved.

RES0, [31:10]

RES0 Reserved.

WFE_RET_CTRL, [9:7]

CPU WFE retention control:

000 Disable the retention circuit. This is the default value, see [Table 13-51: CPUPWRCTLR Retention Control Field](#) on page 165 for more retention control options.

WFI_RET_CTRL, [6:4]

CPU WFI retention control:

000 Disable the retention circuit. This is the default value, see [Table 13-51: CPUPWRCTLR Retention Control Field](#) on page 165 for more retention control options.

RES0, [3:1]

RES0 Reserved.

CORE_PWRDN_EN, [0]

Indicates to the power controller using PACTIVE if the core wants to power down when it enters WFI state.

0 No powerdown requested. This is the reset value.
1 A power down is requested.

Table 13-51: CPUPWRCTLR Retention Control Field

Encoding	Number of counter ticks ²	Minimum retention entry delay (System counter at 50MHz-10MHz)
000	Disable the retention circuit	Default Condition.
001	2	40ns-200ns
010	8	160ns-800ns
011	32	640ns – 3,200ns
100	64	1,280ns-6,400ns
101	128	2,560ns-12,800ns
110	256	5,120ns-25,600ns
111	512	10,240ns-51,200ns

Configurations

There are no configuration notes.

² The number of system counter ticks required before the core signals retention readiness on PACTIVE to the power controller. The core does not accept a retention entry request until this time.

Usage constraints

Accessing the CPUPWRCTLR_EL1

This register can be read using MRS with the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written using MSR with the following syntax:

```
MSR <systemreg>, <Xt>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
S3_O_C15_C2_7	11	000	1111	0010	111

Accessibility

This register is accessible in software as follows:

<systemreg>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_O_C15_C2_7	x	x	0	-	RW	n/a	RW
S3_O_C15_C2_7	x	0	1	-	RW	RW	RW
S3_O_C15_C2_7	x	1	1	-	n/a	RW	RW

'n/a' Not accessible. The PE cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Exception priority order* in the [Arm® Architecture Reference Manual for A-profile architecture](#) for exceptions that are taken to AArch32 state, and see *Synchronous exception prioritization* for exceptions that are taken to AArch64 state.

Write-Access to this register from EL1 or EL2 depends on the value of bit[7] of ACTLR_EL2 and ACTLR_EL3.

13.41 CSSELR_EL1, Cache Size Selection Register, EL1

CSSELR_EL1 selects the current Cache Size ID Register (CCSIDR_EL1), by specifying:


- The required cache level.
- The cache type, either instruction or data cache.

For details of the CCSIDR_EL1, see [13.23 CCSIDR_EL1, Cache Size ID Register, EL1](#) on page 130.

Bit field descriptions

CSSELR_EL1 is a 64-bit register, and is part of the Identification registers functional group.

Figure 13-36: CSSELR_EL1 bit assignments

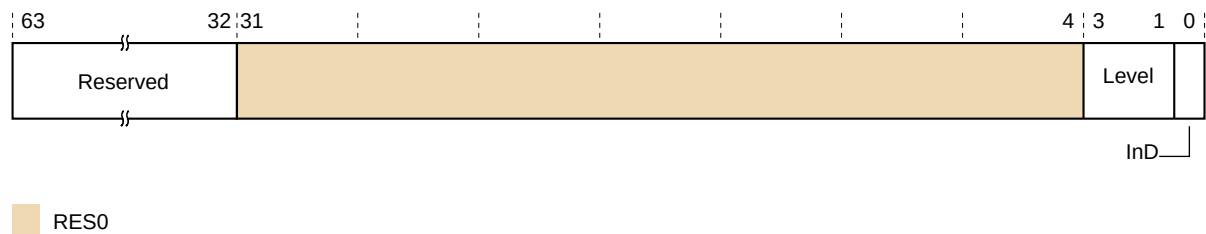

Reserved, [63:32]

Reserved.

RES0, [31:4]

RES0 Reserved.

Level, [3:1]

Cache level of required cache:

000	L1.
001	L2.
010	L3, if present.

The combination of Level=001 and InD=1 is reserved.

The combinations of Level and InD for 0100 to 1111 are reserved.

InD, [0]

Instruction not Data bit:

0	Data or unified cache.
1	Instruction cache.

The combination of Level=001 and InD=1 is reserved.

The combinations of Level and InD for 0100 to 1111 are reserved.

Configurations

If a cache level is missing but CSSELR_EL1 selects this level, then a CCSIDR_EL1 read returns an **UNKNOWN** value.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.42 CTR_EL0, Cache Type Register, EL0


The CTR_EL0 provides information about the architecture of the caches.

Bit field descriptions

CTR_EL0 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-37: CTR_EL0 bit assignments

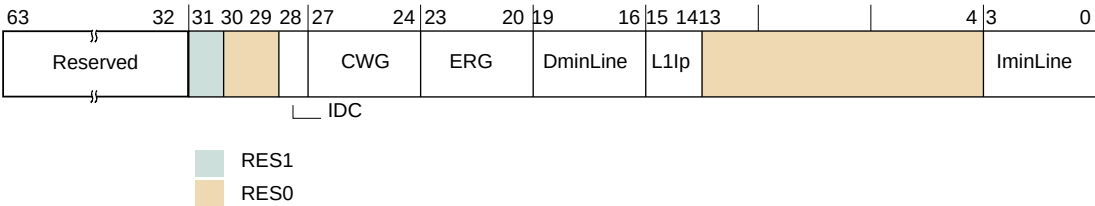

Reserved, [63:32]

Reserved.

RES1, [31]

RES1 Reserved.

RES0, [30:29]

RES0 Reserved.

IDC, [28]

Data cache clean requirements for instruction to data coherence:

- | | |
|----------|---|
| 0 | Data cache clean to the point of unification is required for instruction to data coherence, unless CLIDR_EL1.LoC == 0b000 or (CLIDR_EL1.LoUIS == 0b000 && CLIDR_EL1.LoUU == 0b000). |
| 1 | Data cache clean to the point of unification is not required for instruction to data coherence. |

IDC reflects the inverse value of the BROADCASTCACHEMAINTPOU pin.

CWG, [27:24]

Cache write-back granule. Log₂ of the number of words of the maximum size of memory that can be overwritten as a result of the eviction of a cache entry that has had a memory location in it modified:

- | | |
|-------------|--|
| 0100 | Cache write-back granule size is 16 words. |
|-------------|--|

ERG, [23:20]

Exclusives Reservation Granule. Log₂ of the number of words of the maximum size of the reservation granule that has been implemented for the Load-Exclusive and Store-Exclusive instructions:

- | | |
|-------------|---|
| 0100 | Exclusive reservation granule size is 16 words. |
|-------------|---|

DminLine, [19:16]

Log₂ of the number of words in the smallest cache line of all the data and unified caches that the core controls:

- | | |
|-------------|--|
| 0100 | Smallest data cache line size is 16 words. |
|-------------|--|

L1Ip, [15:14]

Instruction cache policy. Indicates the indexing and tagging policy for the L1 instruction cache:

- | | |
|-----------|---|
| 11 | <i>Physically Indexed Physically Tagged (PIPT).</i> |
|-----------|---|

RES0, [13:4]

- | | |
|-------------|-----------|
| RES0 | Reserved. |
|-------------|-----------|

IminLine, [3:0]

Log₂ of the number of words in the smallest cache line of all the instruction caches that the core controls.

- | | |
|-------------|---|
| 0100 | Smallest instruction cache line size is 16 words. |
|-------------|---|

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.43 DCZID_EL0, Data Cache Zero ID Register, EL0


The DCZID_EL0 indicates the block size that is written with byte values of zero by the `DC ZVA` (Data Cache Zero by Address) System instruction.

Bit field descriptions

DCZID_EL0 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-38: DCZID_EL0 bit assignments

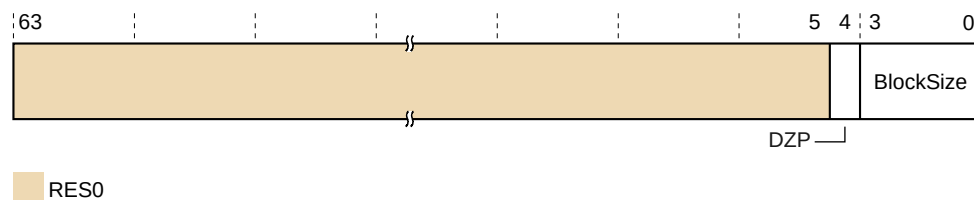

RES0, [63:5]

RES0 Reserved.

BlockSize, [3:0]

\log_2 of the block size in words:

0100 The block size is 16 words.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.44 DISR_EL1, Deferred Interrupt Status Register, EL1

The DISR_EL1 records the SError interrupts consumed by an `ESB` instruction.

Bit field descriptions

DISR_EL1 is a 64-bit register, and is part of the registers *Reliability, Availability, Serviceability* (RAS) functional group.

Figure 13-39: DISR_EL1 bit assignments, DISR_EL1.IDS is 0

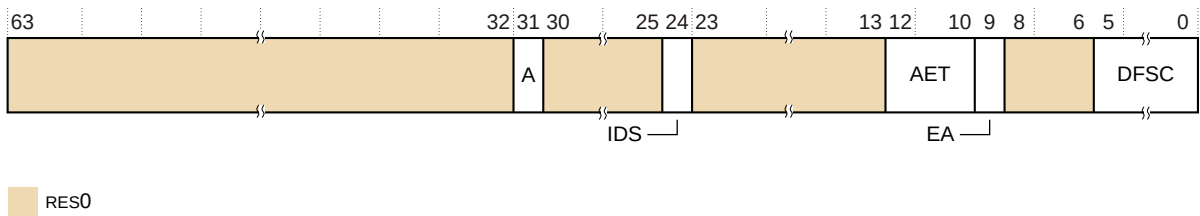

RES0, [63:32]

RES0 Reserved.

A, [31]

Set to 1 when ESB defers an asynchronous SError interrupt. If the implementation does not include any synchronizable sources of SError interrupt, this bit is **RES0**.

RES0, [30:25]

RES0 Reserved.

IDS, [24]

Indicates the type of format the deferred SError interrupt uses. The value of this bit is:

0 Deferred error uses architecturally-defined format.

RES0, [23:13]

RES0 Reserved.

AET, [12:10]

Asynchronous Error Type. Describes the state of the core after taking an asynchronous Data Abort exception. The possible values are:

000 Uncontainable error (UC).
001 Unrecoverable error (UEU).



The recovery software must also examine any implemented fault records to determine the location and extent of the error.

EA, [9]

RES0 Reserved.

RES0, [8:6]

RES0 Reserved.

DFSC, [5:0]

Data Fault Status Code. The possible values of this field are:

010001 Asynchronous SError interrupt.



In AArch32, the 010001 code previously meant an Asynchronous External Abort on memory access. With the RAS extension, it extends to include any asynchronous SError interrupt. The Parity Error codes are not used in the RAS extension.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.45 ERRIDR_EL1, Error ID Register, EL1


The ERRIDR_EL1 defines the number of error record registers.

Bit field descriptions

ERRIDR_EL1 is a 64-bit register, and is part of the registers *Reliability, Availability, Serviceability* (RAS) functional group.

This register is read-only.

Figure 13-40: ERRIDR_EL1 bit assignments

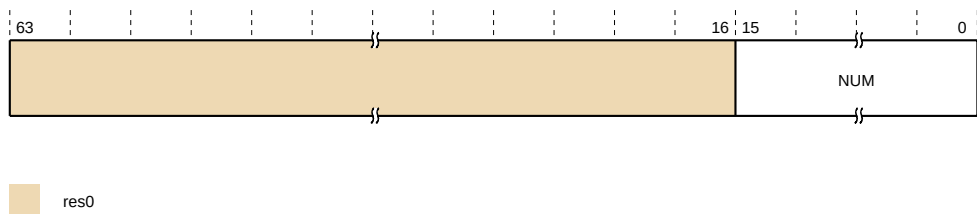

RES0, [63:16]

RES0 Reserved.

NUM, [15:0]

Number of records that can be accessed through the Error Record System registers.

0x0002 Two records present, if L3 cache is present.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.46 ERRSELR_EL1, Error Record Select Register, EL1

The ERRSELR_EL1 selects which error record should be accessed through the Error Record System registers. This register is not reset on a Warm reset.

Bit field descriptions

ERRSELR_EL1 is a 64-bit register, and is part of the *Reliability, Availability, Serviceability* (RAS) registers functional group.

Figure 13-41: ERRSELR_EL1 bit assignments

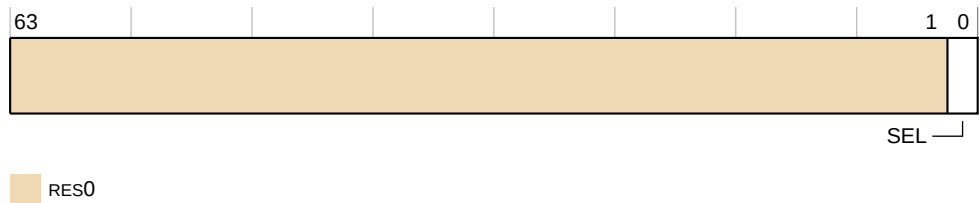

RES0, [63:1]

RES0 Reserved.

SEL, [0]

Selects which error record should be accessed.

- | | |
|----------|---|
| 0 | Select error record 0 containing errors from level 1 and level 2 RAMs that are located on the Cortex®-A77 core. |
| 1 | Select error record 1 containing errors from level 3 RAMs that are located on the <i>DynamiQ Shared Unit</i> (DSU). |

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.47 ERXADDR_EL1, Selected Error Record Address Register, EL1

Register ERXADDR_EL1 accesses the ERR<n>ADDR address register for the error record that is selected by ERRSELR_EL1.SEL.

If ERRSELR_EL1.SEL==0, then ERXADDR_EL1 accesses the ERROADDR register of the core error record. See [14.2 ERROADDR, Error Record Address Register](#) on page 259.

If ERRSELR_EL1.SEL==1, then ERXADDR_EL1 accesses the ERR1ADDR register of the *DynamiQ Shared Unit* (DSU) error record. See the [Arm® DynamiQ™ Shared Unit Technical Reference Manual](#).

13.48 ERXCTLR_EL1, Selected Error Record Control Register, EL1

Register ERXCTLR_EL1 accesses the ERR<n>CTLR control register for the error record that is selected by ERRSELR_EL1.SEL.

If ERRSELR_EL1.SEL==0, then ERXCTLR_EL1 accesses the ERROCTLR register of the core error record. See [14.3 ERROCTLR, Error Record Control Register](#) on page 260.

If ERRSELR_EL1.SEL==1, then ERXCTLR_EL1 accesses the ERR1CTLR register of the DSU error record. See the [Arm® DynamiQ™ Shared Unit Technical Reference Manual](#).

13.49 ERXFR_EL1, Selected Error Record Feature Register, EL1

Register ERXFR_EL1 accesses the ERR<n>FR feature register for the error record that is selected by ERRSELR_EL1.SEL.

If ERRSELR_EL1.SEL==0, then ERXFR_EL1 accesses the ERROFR register of the core error record. See [14.4 ERROFR, Error Record Feature Register](#) on page 262.

If ERRSELR_EL1.SEL==1, then ERXFR_EL1 accesses the ERR1FR register of the *DynamIQ Shared Unit* (DSU) error record. See the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#).

13.50 ERXMISCO_EL1, Selected Error Record Miscellaneous Register 0, EL1

Register ERXMISCO_EL1 accesses the ERR<n>MISCO register for the error record that is selected by ERRSELR_EL1.SEL.

If ERRSELR_EL1.SEL==0, then ERXMISCO_EL1 accesses the ERR0MISCO register of the core error record. See [14.5 ERR0MISCO, Error Record Miscellaneous Register 0](#) on page 264.

If ERRSELR_EL1.SEL==1, then ERXMISCO_EL1 accesses the ERR1MISCO register of the *DynamIQ Shared Unit* (DSU) error record. See the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#).

13.51 ERXMISC1_EL1, Selected Error Record Miscellaneous Register 1, EL1

Register ERXMISC1_EL1 accesses the ERR<n>MISC1 miscellaneous register 1 for the error record that is selected by ERRSELR_EL1.SEL.

If ERRSELR_EL1.SEL==0, then ERXMISC1_EL1 accesses the ERR0MISC1 register of the core error record. See [14.6 ERR0MISC1, Error Record Miscellaneous Register 1](#) on page 267.

If ERRSELR_EL1.SEL==1, then ERXMISC1_EL1 accesses the ERR1MISC1 register of the *DynamIQ Shared Unit* (DSU) error record. See the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#).

13.52 ERXPFGCDN_EL1, Selected Error Pseudo Fault Generation Count Down Register, EL1

Register ERXPFGCDN_EL1 accesses the ERR<n>PFGCDN register for the error record that is selected by ERRSELR_EL1.SEL.

If ERRSELR_EL1.SEL==0, then ERXPFGCDN_EL1 accesses the ERROPFGCDN register of the core error record. See [14.7 ERROPFGCDN, Error Pseudo Fault Generation Count Down Register](#) on page 268.

If ERRSELR_EL1.SEL==1, then ERXPFGCDN_EL1 accesses the ERR1PFGCDNR register of the *DynamlQ Shared Unit* (DSU) error record. See the [Arm® DynamlQ™ Shared Unit Technical Reference Manual](#).

Configurations

There are no configuration notes.

Accessing the ERXPFGCDN_EL1

This register can be read using MRS with the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written using MSR with the following syntax:

```
MSR <Xt>, <systemreg>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
S3_0_C15_C2_2	11	000	1111	0010	010

Accessibility

This register is accessible in software as follows:

<syntax>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_0_C15_C2_2	x	x	0	-	RW	n/a	RW
S3_0_C15_C2_2	x	0	1	-	RW	RW	RW
S3_0_C15_C2_2	x	1	1	-	n/a	RW	RW

'n/a' Not accessible. Executing the PE at this Exception level is not permitted.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Exception priority order* in the [Arm® Architecture Reference Manual for A-profile architecture](#) for exceptions taken to AArch32 state, and see *Synchronous exception prioritization* for exceptions taken to AArch64

state. Subject to these prioritization rules, the following traps and enables are applicable when accessing this register.

ERXPFPGCDN_EL1 is accessible at EL3 and can be accessible at EL1 and EL2 depending on the value of bit[5] in ACTLR_EL2 and ACTLR_EL3. See [13.6 ACTLR_EL2, Auxiliary Control Register, EL2](#) on page 108 and [13.7 ACTLR_EL3, Auxiliary Control Register, EL3](#) on page 111.

ERXPFPGCDN_EL1 is *UNDEFINED* at EL0.

13.53 ERXPFPGCTL_EL1, Selected Error Pseudo Fault Generation Control Register, EL1

Register ERXPFPGCTL_EL1 accesses the ERR<n>PFGCTL register for the error record that is selected by ERRSELR_EL1.SEL.

If ERRSELR_EL1.SEL==0, then ERXPFPGCTL_EL1 accesses the ERROPFGCTL register of the core error record. See [14.8 ERROPFGCTL, Error Pseudo Fault Generation Control Register](#) on page 268.

If ERRSELR_EL1.SEL==1, then ERXPFPGCTL_EL1 accesses the ERR1PFGCTL register of the *DynamIQ Shared Unit (DSU)* error record. See the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#).

Configurations

There are no configuration notes.

Accessing the ERXPFPGCTL_EL1

This register can be read using MRS with the following syntax:

```
MRS <Xt>, <systemreg>
```

This register can be written using MSR with the following syntax:

```
MSR <Xt>, <systemreg>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
S3_0_C15_C2_1	11	000	1111	0010	001

Accessibility

This register is accessible in software as follows:

<syntax>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_0_C15_C2_1	x	x	0	-	RW	n/a	RW
S3_0_C15_C2_1	x	0	1	-	RW	RW	RW
S3_0_C15_C2_1	x	1	1	-	n/a	RW	RW

'n/a' Not accessible. The PE cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Exception priority order* in the [Arm® Architecture Reference Manual for A-profile architecture](#) for exceptions taken to AArch32 state, and see *Synchronous exception prioritization* for exceptions taken to AArch64 state. Subject to these prioritization rules, the following traps and enables are applicable when accessing this register.

ERXPFGCTL_EL1 is accessible at EL3 and can be accessible at EL1 and EL2 depending on the value of bit[5] in ACTLR_EL2 and ACTLR_EL3. See [13.6 ACTLR_EL2, Auxiliary Control Register, EL2](#) on page 108 and [13.7 ACTLR_EL3, Auxiliary Control Register, EL3](#) on page 111.

ERXPFGCTL_EL1 is *UNDEFINED* at EL0.

If ERXPFGCTL_EL1 is accessible at EL1 and HCR_EL2.TERR == 1, then direct reads and writes of ERXPFGCTL_EL1 at Non-secure EL1 generate a Trap exception to EL2.

If ERXPFGCTL_EL1 is accessible at EL1 or EL2 and SCR_EL3.TERR == 1, then direct reads and writes of ERXPFGCTL_EL1 at EL1 or EL2 generate a Trap exception to EL3.

13.54 ERXPFGF_EL1, Selected Pseudo Fault Generation Feature Register, EL1

Register ERXPFGF_EL1 accesses the ERR<n>PFGF register for the error record that is selected by ERRSELR_EL1.SEL.

If ERRSELR_EL1.SEL==0, then ERXPFGF_EL1 accesses the ERROPFGF register of the core error record. See [14.9 ERROPFGF, Error Pseudo Fault Generation Feature Register](#) on page 270.

If ERRSELR_EL1.SEL==1, then ERXPFGF_EL1 accesses the ERR1PFGFR register of the *DynamlQ Shared Unit* (DSU) error record. See the [Arm® DynamlQ™ Shared Unit Technical Reference Manual](#).

Configurations

This core has no configuration notes.

Accessing the ERXPFGR_EL1

This register can be read using MRS with the following syntax:

```
MRS <Xt>, <systemreg>
```

This syntax is encoded with the following settings in the instruction encoding:

<systemreg>	op0	op1	CRn	CRm	op2
S3_0_C15_C2_0	11	000	1111	0010	000

Accessibility

This register is accessible in software as follows:

<syntax>	Control			Accessibility			
	E2H	TGE	NS	EL0	EL1	EL2	EL3
S3_0_C15_C2_0	x	x	0	-	RO	n/a	RO
S3_0_C15_C2_0	x	0	1	-	RO	RO	RO
S3_0_C15_C2_0	x	1	1	-	n/a	RO	RO

'n/a' Not accessible. The PE cannot be executing at this Exception level, so this access is not possible.

Traps and enables

For a description of the prioritization of any generated exceptions, see *Exception priority order* in the [Arm® Architecture Reference Manual for A-profile architecture](#) for exceptions taken to AArch32 state, and see *Synchronous exception prioritization* for exceptions taken to AArch64 state. Subject to these prioritization rules, the following traps and enables are applicable when accessing this register.

ERXPFGR_EL1 is accessible at EL3 and can be accessible at EL1 and EL2 depending on the value of bit[5] in ACTLR_EL2 and ACTLR_EL3. See [13.6 ACTLR_EL2, Auxiliary Control Register, EL2](#) on page 108 and [13.7 ACTLR_EL3, Auxiliary Control Register, EL3](#) on page 111.

ERXPFGR_EL1 is *UNDEFINED* at EL0.

If ERXPFGR_EL1 is accessible at EL1 and HCR_EL2.TERR == 1, then direct reads and writes of ERXPFGR_EL1 at Non-secure EL1 generate a Trap exception to EL2.

If ERXPFGR_EL1 is accessible at EL1 or EL2 and SCR_EL3.TERR == 1, then direct reads and writes of ERXPFGR_EL1 at EL1 or EL2 generate a Trap exception to EL3.

13.55 ERXSTATUS_EL1, Selected Error Record Primary Status Register, EL1

Register ERXSTATUS_EL1 accesses the ERR<n>STATUS primary status register for the error record that is selected by ERRSELR_EL1.SEL.

If ERRSELR_EL1.SEL==0, then ERXSTATUS_EL1 accesses the ERROSTATUS register of the core error record. See [14.10 ERROSTATUS, Error Record Primary Status Register](#) on page 272.

If `ERRSELR_EL1.SEL==1`, then `ERXSTATUS_EL1` accesses the `ERR1STATUS` register of the *DynamiQ Shared Unit (DSU)* error record. See the [Arm® DynamiQ™ Shared Unit Technical Reference Manual](#).


13.56 ESR_EL1, Exception Syndrome Register, EL1

The ESR_EL1 holds syndrome information for an exception taken to EL1.

Bit field descriptions

ESR_EL1 is a 64-bit register, and is part of the Exception and fault handling registers functional group.

Figure 13-42: ESR_EL1 bit assignments

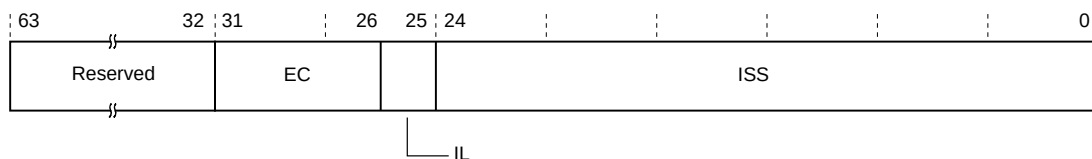

Reserved, [63:32]

Reserved.

EC, [31:26]

Exception Class. Indicates the reason for the exception that this register holds information about.

IL, [25]

Instruction Length for synchronous exceptions. The possible values are:

0

16-bit.

1 32-bit.

This field is 1 for the SError interrupt, instruction aborts, misaligned PC, Stack pointer misalignment, Data Aborts for which the ISV bit is 0, exceptions caused by an illegal instruction set state, and exceptions using the 0x00 Exception Class.

ISS, [24:0]

Syndrome information.

When reporting a virtual SEI, bits[24:0] take the value of VSESRL_EL2[24:0].

When reporting a physical SEI, the following occurs:

- IDS==0 (architectural syndrome).
- AET always reports an uncontainable error (UC) with value 0b000 or an unrecoverable error (UEU) with value 0b001.
- EA is **RES0**.

When reporting a synchronous data abort, EA is **RES0**.

See [13.111 VSESRL_EL2, Virtual SError Exception Syndrome Register](#) on page 256.

Configurations

There are no configuration notes.

Bit fields and details not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.57 ESR_EL2, Exception Syndrome Register, EL2

The ESR_EL2 holds syndrome information for an exception taken to EL2.

Bit field descriptions

ESR_EL2 is a 64-bit register, and is part of:

- The Virtualization registers functional group.
- The Exception and fault handling registers functional group.

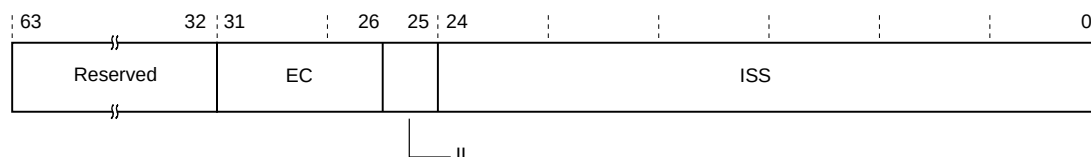Figure 13-43: ESR_EL2 bit assignments**Reserved, [63:32]**

Reserved.

EC, [31:26]

Exception Class. Indicates the reason for the exception that this register holds information about. See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information.

IL, [25]

Instruction Length for synchronous exceptions. The possible values are:

0	16-bit.
1	32-bit.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information.

ISS, [24:0]

Syndrome information. See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information.

When reporting a virtual SEI, bits[24:0] take the value of VSESRL_EL2[24:0].

When reporting a physical SEI, the following occurs:

- IDS==0 (architectural syndrome).
- AET always reports an uncontainable error (UC) with value 0b000 or an unrecoverable error (UEU) with value 0b001.
- EA is **RES0**.

When reporting a synchronous Data Abort, EA is **RES0**.

See [13.111 VSESR_EL2, Virtual SError Exception Syndrome Register](#) on page 256.

Configurations

RW fields in this register reset to architecturally **UNKNOWN** values.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.58 ESR_EL3, Exception Syndrome Register, EL3

The ESR_EL3 holds syndrome information for an exception taken to EL3.

Bit field descriptions

ESR_EL3 is a 64-bit register, and is part of the Exception and fault handling registers functional group.

Figure 13-44: ESR_EL3 bit assignments

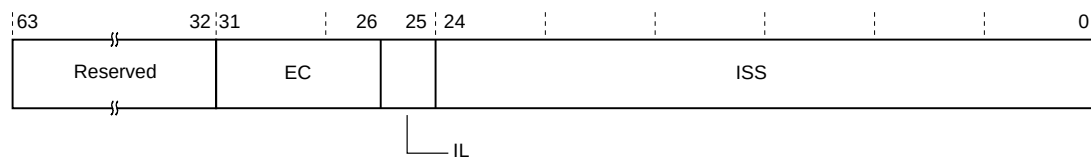

Reserved, [63:32]

Reserved.

EC, [31:26]

Exception Class. Indicates the reason for the exception that this register holds information about.

IL, [25]

Instruction Length for synchronous exceptions. The possible values are:

0	16-bit.
1	32-bit.

This field is 1 for the SError interrupt, instruction aborts, misaligned PC, Stack pointer misalignment, data aborts for which the ISV bit is 0, exceptions caused by an illegal instruction set state, and exceptions using the 0x0 Exception Class.

ISS, [24:0]

Syndrome information.

When reporting a virtual SEI, bits[24:0] take the value of VSESRL_EL2[24:0].

When reporting a physical SEI, the following occurs:

- IDS==0 (architectural syndrome).
- AET always reports an uncontainable error (UC) with value 0b000 or an unrecoverable error (UEU) with value 0b001.
- EA is **RES0**.

When reporting a synchronous data abort, EA is **RES0**.

See [13.111 VESR_EL2, Virtual SError Exception Syndrome Register](#) on page 256.

Configurations

RW fields in this register reset to architecturally **UNKNOWN** values.

Bit fields and details not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.59 HACR_EL2, Hyp Auxiliary Configuration Register, EL2

HACR_EL2 controls trapping to EL2 of **IMPLEMENTATION DEFINED** aspects of Non-secure EL1 or EL0 operation. This register is not used in the Cortex®-A77 core.

Bit field descriptions

HACR_EL2 is a 64-bit register, and is part of Virtualization registers functional group.

Figure 13-45: HACR_EL2 bit assignments

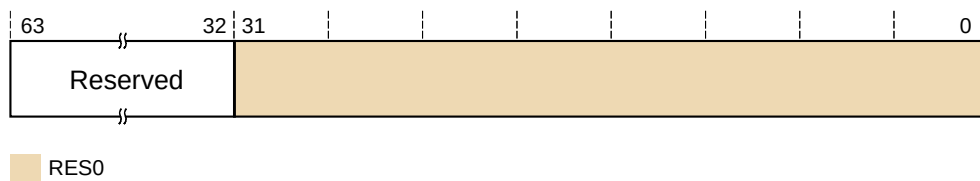

Reserved, [63:32]

Reserved.

RES0, [31:0]

Reserved, **RES0**.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.60 HCR_EL2, Hypervisor Configuration Register, EL2

The HCR_EL2 provides configuration control for virtualization, including whether various Non-secure operations are trapped to EL2.

Bit field descriptions

HCR_EL2 is a 64-bit register, and is part of the Virtualization registers functional group.

Figure 13-46: HCR_EL2 bit assignments

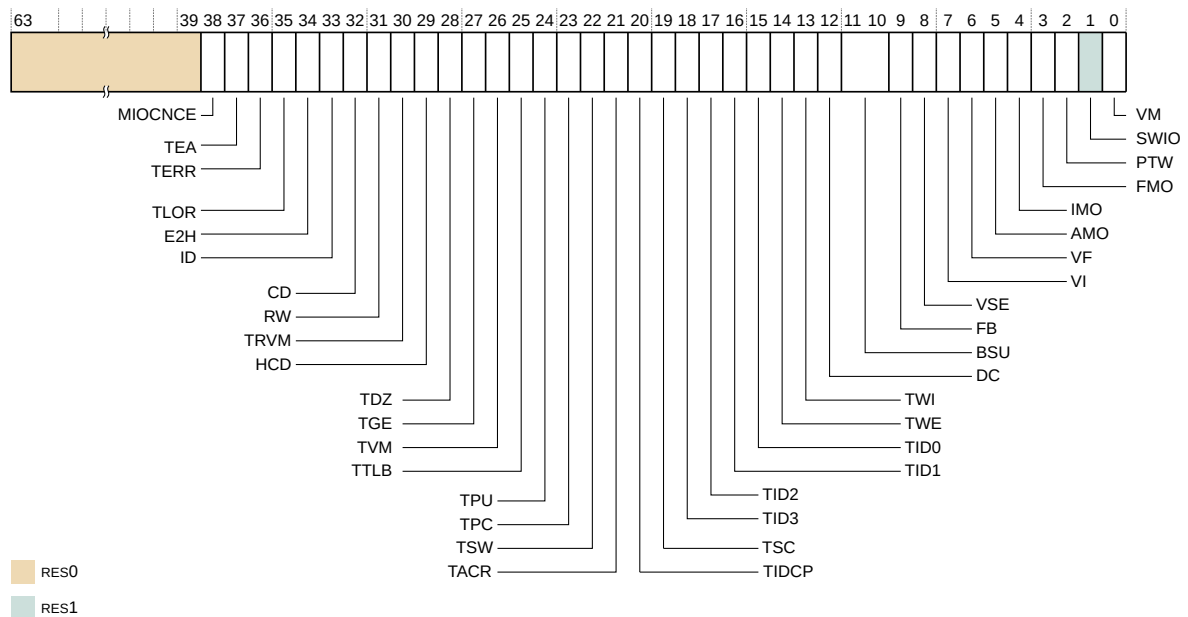

RES0, [63:39]

RES0 Reserved.

MIOCNCNCE, [38]

Mismatched Inner/Outer Cacheable Non-Coherency Enable, for the Non-secure EL1 and ELO translation regime.

RW, [31]

RES1 Reserved.

HCD, [29]**RES0** Reserved.**TGE, [27]**

Traps general exceptions. If this bit is set, and SCR_EL3.NS is set, then:

- All exceptions that would be routed to EL1 are routed to EL2.
- The SCTLR_EL1.M bit is treated as 0 regardless of its actual state, other than for reading the bit.
- The HCR_EL2.FMO, IMO, and AMO bits are treated as 1 regardless of their actual state, other than for reading the bits.
- All virtual interrupts are disabled.
- Any **IMPLEMENTATION DEFINED** mechanisms for signaling virtual interrupts are disabled.
- An exception return to EL1 is treated as an illegal exception return.

HCR_EL2.TGE must not be cached in a TLB.

When the value of SCR_EL3.NS is 0, the core behaves as if this field is 0 for all purposes other than a direct read or Write-Access of HCR_EL2.

TID3, [18]

Traps ID group 3 registers. The possible values are:

- | | |
|----------|---|
| 0 | ID group 3 register accesses are not trapped. |
| 1 | Reads to ID group 3 registers that are executed from Non-secure EL1 are trapped to EL2. |

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for the registers covered by this setting.**Configurations**If EL2 is not implemented, this register is **RES0** from EL3RW fields in this register reset to architecturally **UNKNOWN** values.Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.61 ID_AA64AFR0_EL1, AArch64 Auxiliary Feature Register 0

The core does not use this register, ID_AA64AFR0_EL1 is **RES0**.

13.62 ID_AA64AFR1_EL1, AArch64 Auxiliary Feature Register 1

The core does not use this register, ID_AA64AFR0_EL1 is **RES0**.

13.63 ID_AA64DFR0_EL1, AArch64 Debug Feature Register 0, EL1


Provides top-level information about the debug system in AArch64.

Bit field descriptions

ID_AA64DFR0_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-47: ID_AA64DFR0_EL1 bit assignments

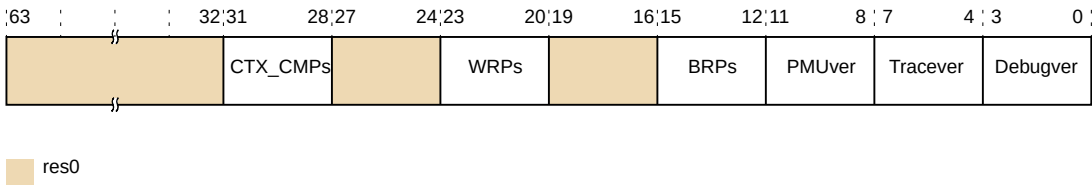

RES0, [63:32]

RES0
Reserved.

CTX_CMPs, [31:28]

Number of breakpoints that are context-aware, minus 1. These are the highest numbered breakpoints:

0x1
Two breakpoints are context-aware.

RES0, [27:24]

RES0
Reserved.

WRPs, [23:20]

The number of watchpoints minus 1:

0x3

Four watchpoints.

RES0, [19:16]

RES0

Reserved.

BRPs, [15:12]

The number of breakpoints minus 1:

0x5

Six breakpoints.

PMUVer, [11:8]

Performance Monitors Extension version.

0x4

Performance monitor System registers implemented, PMUv3.

TraceVer, [7:4]

Trace extension:

0x0

Trace System registers not implemented.

DebugVer, [3:0]

Debug architecture version:

0x8

Arm®v8-A debug architecture implemented.

Configurations

ID_AA64DFR0_EL1 is architecturally mapped to external register EDDFR.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.64 ID_AA64DFR1_EL1, AArch64 Debug Feature Register 1, EL1

This register is reserved for future expansion of top-level information about the debug system in AArch64 state.

13.65 ID_AA64ISAR0_EL1, AArch64 Instruction Set Attribute Register 0, EL1

The ID_AA64ISAR0_EL1 provides information about the instructions that are implemented in AArch64 state, including the instructions that are provided by the Cryptographic Extension.


Bit field descriptions

ID_AA64ISAR0_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

The optional Cryptographic Extension is not included in the base product of the core. Arm requires licensees to have contractual rights to obtain the Cryptographic Extension.

Figure 13-48: ID_AA64ISAR0_EL1 bit assignments

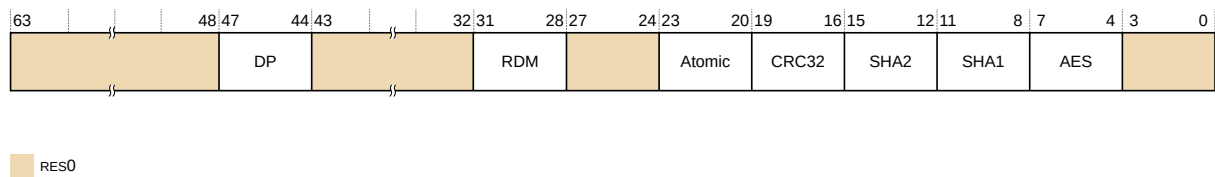

RES0, [63:48]

RES0 Reserved.

DP, [47:44]

Indicates whether Dot Product support instructions are implemented.

0x1 UDOT, SDOT instructions are implemented.

RES0, [43:32]

RES0 Reserved.

RDM, [31:28]

Indicates whether SQRDMLAH and SQRDMLSH instructions in AArch64 are implemented.

0x1 SQRDMLAH and SQRDMLSH instructions are implemented.

RES0, [27:24]

RES0 Reserved.

Atomic, [23:20]

Indicates whether Atomic instructions in AArch64 are implemented. The value is:

0x2 LDADD, LDCLR, LDEOR, LDSET, LDSMAX, LDSMIN, LDUMAX, LDUMIN, CAS, CASP, and SWP instructions are implemented.

CRC32, [19:16]

Indicates whether CRC32 instructions are implemented. The value is:

0x1 CRC32 instructions are implemented.

SHA2, [15:12]

Indicates whether SHA2 instructions are implemented. The possible values are:

0x0 No SHA2 instructions are implemented. This is the value if the core implementation does not include the Cryptographic Extension.

0x1 SHA256H, SHA256H2, SHA256U0, and SHA256U1 implemented. This is the value if the core implementation includes the Cryptographic Extension.

SHA1, [11:8]

Indicates whether SHA1 instructions are implemented. The possible values are:

0x0 No SHA1 instructions implemented. This is the value if the core implementation does not include the Cryptographic Extension.

0x1 SHA1C, SHA1P, SHA1M, SHA1SU0, and SHA1SU1 implemented. This is the value if the core implementation includes the Cryptographic Extension.

AES, [7:4]

Indicates whether AES instructions are implemented. The possible values are:

0x0 No AES instructions implemented. This is the value if the core implementation does not include the Cryptographic Extension.

0x2 AESE, AESD, AESMC, and AESIMC implemented, plus PMULL and PMULL2 instructions operating on 64-bit data. This is the value if the core implementation includes the Cryptographic Extension.

RES0, [3:0]

RES0 Reserved.

Configurations

ID_AA64ISAR0_EL1 is architecturally mapped to external register ID_AA64ISAR0.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.66 ID_AA64ISAR1_EL1, AArch64 Instruction Set Attribute Register 1, EL1


The ID_AA64ISAR1_EL1 provides information about the instructions that are implemented in AArch64 state.

Bit field descriptions

ID_AA64ISAR1_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-49: ID_AA64ISAR1_EL1 bit assignments

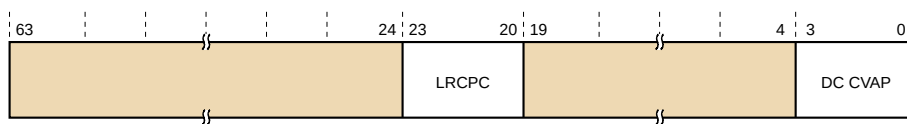

res0

RES0, [63:24]

RES0

Reserved.

LRCPC, [23:20]

Indicates whether load-acquire (LDA) instructions are implemented for a Release Consistent core consistent RCPC model.

0x1

The LDAPRB, LDAPRH, and LDAPR instructions are implemented in AArch64.

RES0, [19:4]

RES0

Reserved.

DC CVAP, [3:0]

Indicates whether data cache, Clean to the Point of Persistence (DC CVAP) instructions are implemented.

0x1

DC CVAP is supported in AArch64.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.67 ID_AA64MMFR0_EL1, AArch64 Memory Model Feature Register 0, EL1


The ID_AA64MMFR0_EL1 provides information about the implemented memory model and memory management support in the AArch64 Execution state.

Bit field descriptions

ID_AA64MMFR0_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-50: ID_AA64MMFR0_EL1 bit assignments

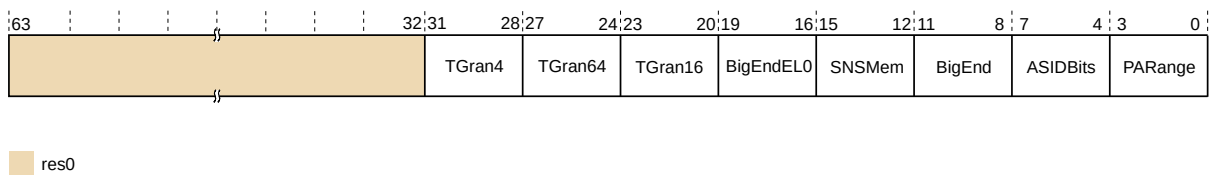

RES0, [63:32]

RES0

Reserved.

TGran4, [31:28]

Support for 4KB memory translation granule size:

0x0

4KB granule supported.

TGran64, [27:24]

Support for 64KB memory translation granule size:

0x0

64KB granule supported.

TGran16, [23:20]

Support for 16KB memory translation granule size:

0x1

Indicates that the 16KB granule is supported.

BigEndELO, [19:16]

Mixed-endian support only at ELO.

0x0

No mixed-endian support at ELO. The SCTLR_EL1.EOE bit has a fixed value.

SNSMem, [15:12]

Secure versus Non-secure Memory distinction:

0x1

Supports a distinction between Secure and Non-secure Memory.

BigEnd, [11:8]

Mixed-endian configuration support:

0x1

Mixed-endian support. The SCTLR_ELx.EE and SCTLR_EL1.EOE bits can be configured.

ASIDBits, [7:4]

Number of ASID bits:

0x2

16 bits.

PARange, [3:0]

Physical address range supported:

0x2

40 bits, 1TB.

The supported Physical Address Range is 40-bits. Other cores in the *DynamiQ Shared Unit* (DSU) may support a different Physical Address Range.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.68 ID_AA64MMFR1_EL1, AArch64 Memory Model Feature Register 1, EL1


The ID_AA64MMFR1_EL1 provides information about the implemented memory model and memory management support in the AArch64 Execution state.

Bit field descriptions

ID_AA64MMFR1_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-51: ID_AA64MMFR1_EL1 bit assignments



RES0

RES0, [63:32]

RES0

Reserved.

XNX, [31:28]

Indicates whether provision of EL0 vs EL1 execute-never control at stage 2 is supported.

0x1

EL0/EL1 execute control distinction at stage 2 bit is supported. All other values are reserved.

SpecSEI, [27:24]

Describes whether the PE can generate SError interrupt exceptions from Speculative reads of memory, including Speculative instruction fetches.

0x0

The PE never generates an SError interrupt due to an External abort on a Speculative read.

PAN, [23:20]

Privileged Access Never. Indicates support for the PAN bit in PSTATE, SPSR_EL1, SPSR_EL2, SPSR_EL3, and DSPSR_EL0.

0x2

PAN supported and AT S1E1RP and AT S1E1WP instructions supported.

LO, [19:16]

Indicates support for LORegions.

0x1

LORegions are supported.

HPDS, [15:12]

Presence of Hierarchical Disables. Enables an operating system or hypervisor to hand over up to 4 bits of the last level translation table descriptor (bits[62:59] of the translation table entry) for use by hardware for **IMPLEMENTATION DEFINED** usage. The value is:

0x2

Hierarchical Permission Disables and Hardware allocation of bits[62:59] supported.

VH, [11:8]

Indicates whether Virtualization Host Extensions are supported.

0x1

Virtualization Host Extensions supported.

VMIDBits, [7:4]

Indicates the number of VMID bits supported.

0x2

16 bits are supported.

HAFDBS, [3:0]

Indicates the support for hardware updates to Access flag and dirty state in translation tables.

0x2

Hardware update of both the Access flag and dirty state is supported in hardware.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.69 ID_AA64MMFR2_EL1, AArch64 Memory Model Feature Register 2, EL1


The ID_AA64MMFR2_EL1 provides information about the implemented memory model and memory management support in the AArch64 Execution state.

Bit field descriptions

ID_AA64MMFR2_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-52: ID_AA64MMFR2_EL1 bit assignments

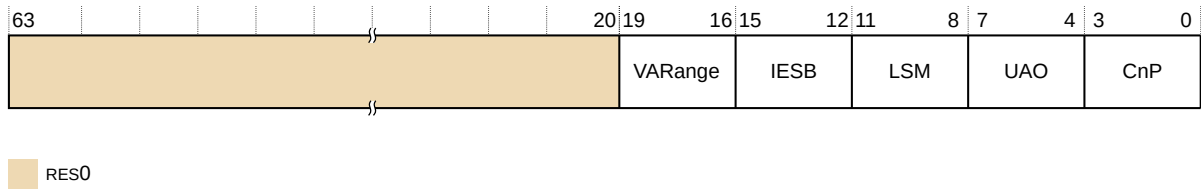

RES0, [63:20]

RES0

Reserved.

VARange, [19:16]

Indicates support for a larger virtual address. The value is:

0x0

VMSAv8-64 supports 48-bit virtual addresses.

IESB, [15:12]

Indicates whether an implicit Error Synchronization Barrier has been inserted. The value is:

0x1

SCTLR_ELx.IESB implicit `ErrorSynchronizationBarrier` control implemented.

LSM, [11:8]

Indicates whether LDM and STM ordering control bits are supported. The value is:

0x0

LSMAOE and nTLSMD bit not supported.

UAO, [7:4]

Indicates the presence of the *User Access Override* (UAO). The value is:

0x1

UAO is supported.

CnP, [3:0]

Common not Private. Indicates whether a TLB entry is pointed at a translation table base register that is a member of a common set. The value is:

0x1

CnP bit is supported.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.70 ID_AA64PFR0_EL1, AArch64 Processor Feature Register 0, EL1

The ID_AA64PFR0_EL1 provides additional information about implemented core features in AArch64.

The optional Advanced SIMD and floating-point support is not included in the base product of the core. Arm requires licensees to have contractual rights to obtain the Advanced SIMD and floating-point support.

Bit field descriptions

ID_AA64PFR0_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-53: ID_AA64PFR0_EL1 bit assignments

63	60	59	56	55	32	31	28	27	24	23	20	19	16	15	12	11	8	7	4	3	0
CSV3	CSV2				RAS		GIC		AdvSIMD		FP		EL3 handling		EL2 handling		EL1 handling		EL0 handling		

RES0

CSV3, [63:60]

0x1

Data that are loaded under speculation with a permission or domain fault cannot be used to form an address or generate condition codes to be used by instructions newer than the load in the speculative sequence. This is the reset value.

All other values reserved.

CSV2, [59:56]

0x1

Branch targets trained in one context cannot affect speculative execution in a different hardware described context. This is the reset value.

All other values reserved.

RES0, [55:32]**RES0**

Reserved.

RAS, [31:28]

RAS extension version. The possible value is:

0x1

Version 1 of the RAS extension is present. This is the value if the core implementation has ECC present.

GIC, [27:24]

GIC CPU interface:

0x0

GIC CPU interface is disabled, GICCDISABLE is HIGH, or not implemented.

0x1

GIC CPU interface is implemented and enabled, GICCDISABLE is LOW. GICv4 is supported.

AdvSIMD, [23:20]

Advanced SIMD. The possible values are:

0x1

Advanced SIMD, including half-precision support, is implemented.

FP, [19:16]

Floating-point. The possible values are:

0x1

Floating-point, including half-precision support, is implemented.

EL3 handling, [15:12]

EL3 exception handling:

0x1

Instructions can be executed at EL3 in AArch64 state only.

EL2 handling, [11:8]

EL2 exception handling:

0x1

Instructions can be executed at EL3 in AArch64 state only.

EL1 handling, [7:4]

EL1 exception handling. The possible values are:

0x1

Instructions can be executed at EL3 in AArch64 state only.

ELO handling, [3:0]

ELO exception handling. The possible values are:

0x2

Instructions can be executed at ELO in AArch64 or AArch32 state.

Configurations

ID_AA64PFR0_EL1 is architecturally mapped to External register EDPFR.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.71 ID_AA64PFR1_EL1, AArch64 Processor Feature Register 1, EL1


The ID_AA64PFR1_EL1 provides additional information about implemented core features in AArch64.

Bit field descriptions

ID_AA64PFR1_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is Read Only.

Figure 13-54: ID_AA64PFR1_EL1 bit assignments

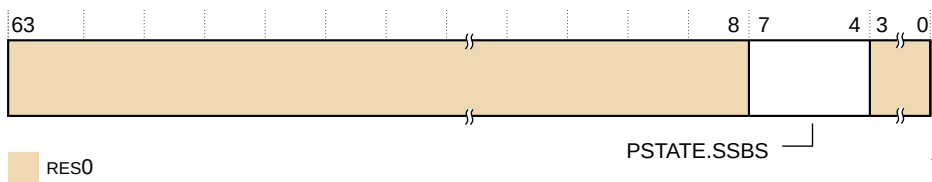

RES0, [63:8]

RES0 Reserved.

SSBS, [7:4]

AArch64 provides the PSTATE.SSBS mechanism to mark regions that are *Speculative Store Bypassing Safe* (SSBS).

0x01

The MSR/MRS instructions are not implemented to directly read and write the PSTATE.SSBS field.

RES0, [3:0]

RES0 Reserved.

Configurations

There are no configuration notes.

Bit fields and details not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.72 ID_AFR0_EL1, AArch32 Auxiliary Feature Register 0, EL1


The ID_AFR0_EL1 provides information about the **IMPLEMENTATION DEFINED** features of the PE in AArch32. This register is not used in the Cortex®-A77 core.

Bit field descriptions

ID_AFR0_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-55: ID_AFR0_EL1 bit assignments

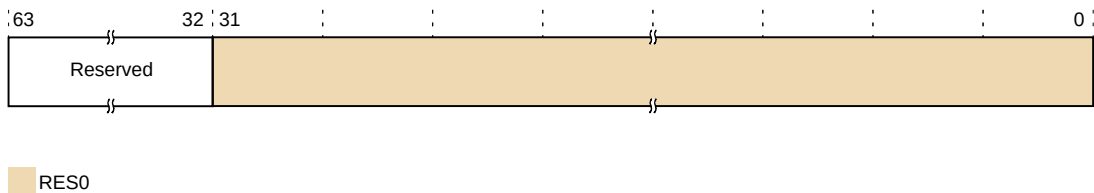

Reserved, [63:32]

Reserved.

RES0, [31:0]

Reserved, **RES0**.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.73 ID_DFR0_EL1, AArch32 Debug Feature Register 0, EL1


The ID_DFR0_EL1 provides top-level information about the debug system in AArch32.

Bit field descriptions

ID_DFR0_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-56: ID_DFR0_EL1 bit assignments

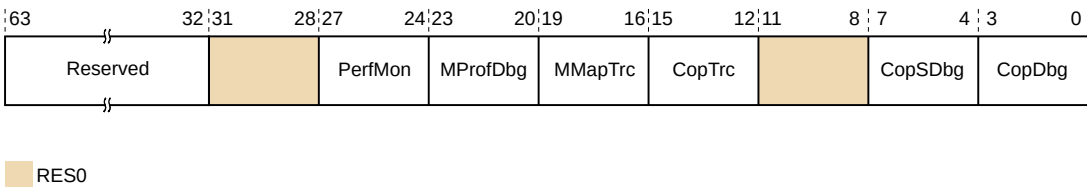

Reserved, [63:32]

Reserved.

RES0, [31:28]

RES0 Reserved.

PerfMon, [27:24]

Indicates support for performance monitor model:

4 Support for *Performance Monitoring Unit version 3* (PMUV3) System registers, with a 16-bit evtCount field.

MProfDbg, [23:20]

Indicates support for memory-mapped debug model for M profile cores:

0 This product does not support M profile Debug architecture.

MMapTrc, [19:16]

Indicates support for memory-mapped trace model:

- | | |
|---|--|
| 1 | Support for Arm trace architecture, with memory-mapped access. |
|---|--|

In the Trace registers, the ETMIDR gives more information about the implementation.

CopTrc, [15:12]

Indicates support for coprocessor-based trace model:

- | | |
|---|---|
| 0 | This product does not support Arm trace architecture. |
|---|---|

RES0, [11:8]

- | | |
|------|-----------|
| RES0 | Reserved. |
|------|-----------|

CopSDBG, [7:4]

Indicates support for coprocessor-based Secure debug model:

- | | |
|---|---|
| 8 | This product supports the Armv8.2 Debug architecture. |
|---|---|

CopDBG, [3:0]

Indicates support for coprocessor-based debug model:

- | | |
|---|---|
| 8 | This product supports the Armv8.2 Debug architecture. |
|---|---|

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.74 ID_ISAR0_EL1, AArch32 Instruction Set Attribute Register 0, EL1


The ID_ISAR0_EL1 provides information about the instruction sets implemented by the core in AArch32.

Bit field descriptions

ID_ISAR0_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-57: ID_ISAR0_EL1 bit assignments

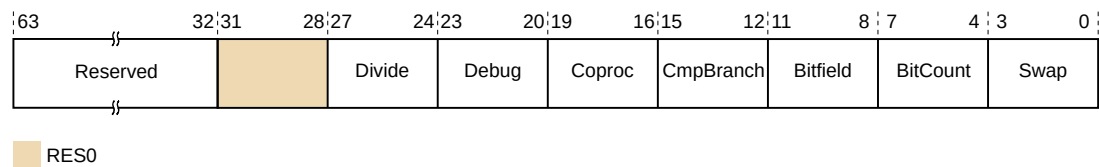

Reserved, [63:32]

Reserved.

RES0, [31:28]

RES0 Reserved.

Divide, [27:24]

Indicates the implemented Divide instructions:

- 0x2
- SDIV and UDIV in the T32 instruction set.
 - SDIV and UDIV in the A32 instruction set.

Debug, [23:20]

Indicates the implemented Debug instructions:

0x1 BKPT.

Coproc, [19:16]

Indicates the implemented coprocessor instructions:

0x0 None implemented, except for instructions separately attributed by the architecture to provide access to AArch32 System registers and System instructions.

CmpBranch, [15:12]

Indicates the implemented combined Compare and Branch instructions in the T32 instruction set:

0x1 CBNZ and CBZ.

Bitfield, [11:8]

Indicates the implemented bit field instructions:

0x1 BFC, BFI, SBFX, and UBFX.

BitCount, [7:4]

Indicates the implemented Bit Counting instructions:

0x1 CLZ.

Swap, [3:0]

Indicates the implemented Swap instructions in the A32 instruction set:

0x0 None implemented.

Configurations

In an AArch64-only implementation, this register is **UNKNOWN**.

Must be interpreted with ID_ISAR1_EL1, ID_ISAR2_EL1, ID_ISAR3_EL1, ID_ISAR4_EL1, ID_ISAR5_EL1, and ID_ISAR6_EL1. See:

- [13.75 ID_ISAR1_EL1, AArch32 Instruction Set Attribute Register 1, EL1](#) on page 204.
- [13.76 ID_ISAR2_EL1, AArch32 Instruction Set Attribute Register 2, EL1](#) on page 206.
- [13.77 ID_ISAR3_EL1, AArch32 Instruction Set Attribute Register 3, EL1](#) on page 209.
- [13.78 ID_ISAR4_EL1, AArch32 Instruction Set Attribute Register 4, EL1](#) on page 211.
- [13.79 ID_ISAR5_EL1, AArch32 Instruction Set Attribute Register 5, EL1](#) on page 213.
- [13.80 ID_ISAR6_EL1, AArch32 Instruction Set Attribute Register 6, EL1](#) on page 215.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.75 ID_ISAR1_EL1, AArch32 Instruction Set Attribute Register 1, EL1

The ID_ISAR1_EL1 provides information about the instruction sets implemented by the core in AArch32.

Bit field descriptions

ID_ISAR1_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-58: ID_ISAR1_EL1 bit assignments**Reserved, [63:32]**

Reserved.

Jazelle, [31:28]

Indicates the implemented Jazelle state instructions:

0x1 Adds the `BXJ` instruction, and the J bit in the PSR.**Interwork, [27:24]**

Indicates the implemented interworking instructions:

0x3

- The `BX` instruction, and the T bit in the PSR.
- The `BLX` instruction. The PC loads have `BX`-like behavior.
- Data-processing instructions in the A32 instruction set with the PC as the destination and the S bit clear, have `BX`-like behavior.

Immediate, [23:20]

Indicates the implemented data-processing instructions with long immediates:

0x1

- The `MOVT` instruction.
- The `MOV` instruction encodings with zero-extended 16-bit immediates.
- The T32 `ADD` and `SUB` instruction encodings with zero-extended 12-bit immediates, and other `ADD`, `ADR`, and `SUB` encodings cross-referenced by the pseudocode for those encodings.

IfThen, [19:16]

Indicates the implemented If-Then instructions in the T32 instruction set:

0x1 The `IT` instructions, and the IT bits in the PSRs.**Extend, [15:12]**

Indicates the implemented Extend instructions:

0x2

- The `SXTB`, `SXTH`, `UXTB`, and `UXTH` instructions.
- The `SXTB16`, `SXTAB`, `SXTAB16`, `SXTAH`, `UXTB16`, `UXTAB`, `UXTAB16`, and `UXTAH` instructions.

Except_AR, [11:8]

Indicates the implemented A profile exception-handling instructions:

- 0x1** The `SRS` and `RFE` instructions, and the A profile forms of the `CPS` instruction.

Except, [7:4]

Indicates the implemented exception-handling instructions in the A32 instruction set:

- 0x1** The `LDM` (exception return), `LDM` (user registers), and `STM` (user registers) instruction versions.

Endian, [3:0]

Indicates the implemented Endian instructions:

- 0x1** The `SETEND` instruction, and the E bit in the PSRs.

Configurations

In an AArch64-only implementation, this register is **UNKNOWN**.

Must be interpreted with `ID_ISAR0_EL1`, `ID_ISAR2_EL1`, `ID_ISAR3_EL1`, `ID_ISAR4_EL1`, `ID_ISAR5_EL1`, and `ID_ISAR6_EL1`. See:

- [13.74 ID_ISAR0_EL1, AArch32 Instruction Set Attribute Register 0, EL1](#) on page 202.
- [13.76 ID_ISAR2_EL1, AArch32 Instruction Set Attribute Register 2, EL1](#) on page 206.
- [13.77 ID_ISAR3_EL1, AArch32 Instruction Set Attribute Register 3, EL1](#) on page 209.
- [13.78 ID_ISAR4_EL1, AArch32 Instruction Set Attribute Register 4, EL1](#) on page 211.
- [13.79 ID_ISAR5_EL1, AArch32 Instruction Set Attribute Register 5, EL1](#) on page 213.
- [13.80 ID_ISAR6_EL1, AArch32 Instruction Set Attribute Register 6, EL1](#) on page 215.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.76 ID_ISAR2_EL1, AArch32 Instruction Set Attribute Register 2, EL1


The ID_ISAR2_EL1 provides information about the instruction sets implemented by the core in AArch32.

Bit field descriptions

ID_ISAR2_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-59: ID_ISAR2_EL1 bit assignments

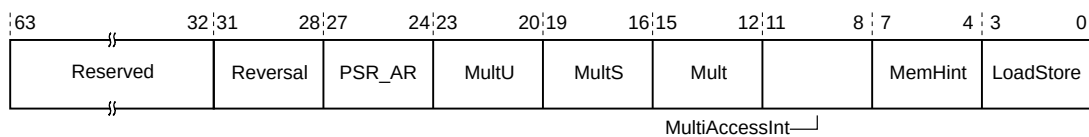

Reserved, [63:32]

Reserved.

Reversal, [31:28]

Indicates the implemented Reversal instructions:

0x2 The REV, REV16, REVSH, and RBIT instructions.

PSR_AR, [27:24]

Indicates the implemented A and R profile instructions to manipulate the PSR:

0x1 The MRS and MSR instructions, and the exception return forms of data-processing instructions.

The exception return forms of the data-processing instructions are:

- In the A32 instruction set, data-processing instructions with the PC as the destination and the S bit set.
- In the T32 instruction set, the SUBSPC, LR, #N instruction.

MultU, [23:20]

Indicates the implemented advanced unsigned Multiply instructions:

0x2 The UMULL, UMLAL, and UMAAL instructions.

MultS, [19:16]

Indicates the implemented advanced signed Multiply instructions.

0x3

- The `SMULL` and `SMLAL` instructions.
- The `SMLABB`, `SMLABT`, `SMLALBB`, `SMLALBT`, `SMLALTB`, `SMLALTT`, `SMLATB`, `SMLATT`, `SMLAWB`, `SMLAWT`, `SMULBB`, `SMULBT`, `SMULTB`, `SMULTT`, `SMULWB`, `SMULWT` instructions, and the Q bit in the PSRs.
- The `SMLAD`, `SMLADX`, `SMLALD`, `SMLALDX`, `SMLSD`, `SMLSDX`, `SMLSLD`, `SMLSLDX`, `SMMLA`, `SMMLAR`, `SMMLS`, `SMMLSR`, `SMMUL`, `SMMULR`, `SMUAD`, `SMUADX`, `SMUSD`, and `SMUSDx` instructions.

Mult, [15:12]

Indicates the implemented additional Multiply instructions:

0x2

The `MUL`, `MLA`, and `MLS` instructions.

MultiAccessInt, [11:8]

Indicates the support for interruptible multi-access instructions:

0x0

No support. This means that the `LDM` and `STM` instructions are not interruptible.

MemHint, [7:4]

Indicates the implemented memory hint instructions:

0x4

The `PLD`, `PLI`, and `PLDWIN` instructions.

LoadStore, [3:0]

Indicates the implemented additional load/store instructions:

0x2

The `LDRD` and `STRD` instructions.

The Load Acquire (`LDAB`, `LDAH`, `LDA`, `LDAEXB`, `LDAEXH`, `LDAEX`, and `LDAEXD`) and Store Release (`STLB`, `STLH`, `STL`, `STLEXB`, `STLEXH`, `STLEX`, and `STLEXD`) instructions.

Configurations

In an AArch64-only implementation, this register is **UNKNOWN**.

Must be interpreted with `ID_ISARO_EL1`, `ID_ISAR1_EL1`, `ID_ISAR3_EL1`, `ID_ISAR4_EL1`, `ID_ISAR5_EL1`, and `ID_ISAR6_EL1`. See:

- [13.74 ID_ISARO_EL1, AArch32 Instruction Set Attribute Register 0, EL1](#) on page 202.
- [13.75 ID_ISAR1_EL1, AArch32 Instruction Set Attribute Register 1, EL1](#) on page 204.
- [13.77 ID_ISAR3_EL1, AArch32 Instruction Set Attribute Register 3, EL1](#) on page 209.
- [13.78 ID_ISAR4_EL1, AArch32 Instruction Set Attribute Register 4, EL1](#) on page 211.

- 13.79 ID_ISAR5_EL1, AArch32 Instruction Set Attribute Register 5, EL1 on page 213.
- 13.80 ID_ISAR6_EL1, AArch32 Instruction Set Attribute Register 6, EL1 on page 215.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.77 ID_ISAR3_EL1, AArch32 Instruction Set Attribute Register 3, EL1

The ID_ISAR3_EL1 provides information about the instruction sets implemented by the core in AArch32.

Bit field descriptions

ID_ISAR3_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-60: ID_ISAR3_EL1 bit assignments

63	32	31	28	27	24	23	20	19	16	15	12	11	8	7	4	3	0	
Reserved				T32EE		TrueNOP		T32Copy		TabBranch		SynchPrim		SVC		SIMD		Saturate

Reserved, [63:32]

Reserved.

T32EE, [31:28]

Indicates the implemented T32EE instructions:

0x0 None implemented.

TrueNOP, [27:24]

Indicates support for True NOP instructions:

0x1 True NOP instructions in both the A32 and T32 instruction sets, and additional NOP-compatible hints.

T32Copy, [23:20]

Indicates the support for T32 non flag-setting mov instructions:

0x1 Support for T32 instruction set encoding T1 of the `mov` (register) instruction, copying from a low register to a low register.

TabBranch, [19:16]

Indicates the implemented Table Branch instructions in the T32 instruction set.

0x1 The `TBB` and `TBH` instructions.

SynchPrim, [15:12]

Indicates the implemented synchronization primitive instructions:

0x2

- The `LDREX` and `STREX` instructions.
- The `CLREX`, `LDREXB`, `STREXB`, and `STREXH` instructions.
- The `LDREXD` and `STREXD` instructions.

SVC, [11:8]

Indicates the implemented SVC instructions:

0x1 The `svc` instruction.

SIMD, [7:4]

Indicates the implemented *Single Instruction Multiple Data* (SIMD) instructions.

0x3

- The `SSAT` and `USAT` instructions, and the Q bit in the PSRs.
- The `PKHBT`, `PKHTB`, `QADD16`, `QADD8`, `QASX`, `QSUB16`, `QSUB8`, `QSAX`, `SADD16`, `SADD8`, `SASX`, `SEL`, `SHADD16`, `SHADD8`, `SHASX`, `SHSUB16`, `SHSUB8`, `SHSAX`, `SSAT16`, `SSUB16`, `SSUB8`, `SSAX`, `SXTAB16`, `SXTB16`, `UADD16`, `UADD8`, `UASX`, `UHADD16`, `UHADD8`, `UHASX`, `UHSUB16`, `UHSUB8`, `UHSAX`, `UQADD16`, `UQADD8`, `UQASX`, `UQSUB16`, `UQSUB8`, `UQSAX`, `USAD8`, `USADA8`, `USAT16`, `USUB16`, `USUB8`, `USAX`, `UXTAB16`, `UXTB16` instructions, and the GE[3:0] bits in the PSRs.

The SIMD field relates only to implemented instructions that perform SIMD operations on the general-purpose registers. In an implementation that supports Advanced SIMD and floating-point instructions, `MVFR0`, `MVFR1`, and `MVFR2` give information about the implemented Advanced SIMD instructions.

Saturate, [3:0]

Indicates the implemented Saturate instructions:

0x1 The `QADD`, `QDADD`, `QDSUB`, `QSUB` Q bit in the PSRs.

Configurations

In an AArch64-only implementation, this register is **UNKNOWN**.

Must be interpreted with `ID_ISAR0_EL1`, `ID_ISAR1_EL1`, `ID_ISAR2_EL1`, `ID_ISAR4_EL1`, `ID_ISAR5_EL1`, and `ID_ISAR6_EL1`. See:

- 13.74 ID_ISAR0_EL1, AArch32 Instruction Set Attribute Register 0, EL1 on page 202.
- 13.75 ID_ISAR1_EL1, AArch32 Instruction Set Attribute Register 1, EL1 on page 204.
- 13.76 ID_ISAR2_EL1, AArch32 Instruction Set Attribute Register 2, EL1 on page 206.
- 13.78 ID_ISAR4_EL1, AArch32 Instruction Set Attribute Register 4, EL1 on page 211.
- 13.79 ID_ISAR5_EL1, AArch32 Instruction Set Attribute Register 5, EL1 on page 213.
- 13.80 ID_ISAR6_EL1, AArch32 Instruction Set Attribute Register 6, EL1 on page 215.

Bit fields and details that are not provided in this description are architecturally defined. See the *Arm® Architecture Reference Manual for A-profile architecture*.

13.78 ID_ISAR4_EL1, AArch32 Instruction Set Attribute Register 4, EL1


The ID_ISAR4_EL1 provides information about the instruction sets implemented by the core in AArch32.

Bit field descriptions

ID_ISAR4_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-61: ID_ISAR4_EL1 bit assignments

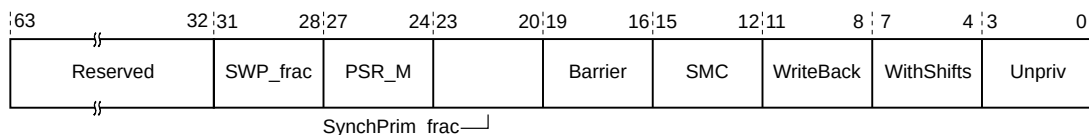

Reserved, [63:32]

Reserved.

SWP_frac, [31:28]

Indicates support for the memory system locking the bus for SWP or SWPB instructions:

0x0 SWP and SWPB instructions not implemented.

PSR_M, [27:24]

Indicates the implemented M profile instructions to modify the PSRs:

0x0 None implemented.

SynchPrim_frac, [23:20]

This field is used with the ID_ISAR3.SynchPrim field to indicate the implemented synchronization primitive instructions:

0x0

- The LDREX and STREX instructions.
- The CLREX, LDREXB, LDREXH, STREXB, and STREXH instructions.
- The LDREXD and STREXD instructions.

Barrier, [19:16]

Indicates the supported Barrier instructions in the A32 and T32 instruction sets:

0x1 The DMB, DSB, and ISB barrier instructions.

SMC, [15:12]

Indicates the implemented smc instructions:

0x0 None implemented.

WriteBack, [11:8]

Indicates the support for Write-Back addressing modes:

0x1 Core supports all the Write-Back addressing modes as defined in Arm®v8-A.

WithShifts, [7:4]

Indicates the support for instructions with shifts.

0x4

- Support for shifts of loads and stores over the range LSL 0-3.
- Support for other constant shift options, both on load/store and other instructions.
- Support for register-controlled shift options.

Unpriv, [3:0]

Indicates the implemented unprivileged instructions.

0x2

- The LDRBT, LDRT, STRBT, and STRT instructions.
- The LDRHT, LDRSBT, LDRSHT, and STRHT instructions.

Configurations

In an AArch64-only implementation, this register is **UNKNOWN**.

Must be interpreted with ID_ISAR0_EL1, ID_ISAR1_EL1, ID_ISAR2_EL1, ID_ISAR3_EL1, ID_ISAR5_EL1, and ID_ISAR6_EL1. See:

- 13.74 ID_ISAR0_EL1, AArch32 Instruction Set Attribute Register 0, EL1 on page 202.
- 13.75 ID_ISAR1_EL1, AArch32 Instruction Set Attribute Register 1, EL1 on page 204.
- 13.76 ID_ISAR2_EL1, AArch32 Instruction Set Attribute Register 2, EL1 on page 206.
- 13.77 ID_ISAR3_EL1, AArch32 Instruction Set Attribute Register 3, EL1 on page 209.
- 13.79 ID_ISAR5_EL1, AArch32 Instruction Set Attribute Register 5, EL1 on page 213.
- 13.80 ID_ISAR6_EL1, AArch32 Instruction Set Attribute Register 6, EL1 on page 215.

Bit fields and details that are not provided in this description are architecturally defined. See the *Arm® Architecture Reference Manual for A-profile architecture*.

13.79 ID_ISAR5_EL1, AArch32 Instruction Set Attribute Register 5, EL1


The ID_ISAR5_EL1 provides information about the instruction sets that the core implements.

Bit field descriptions

ID_ISAR5_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-62: ID_ISAR5_EL1 bit assignments

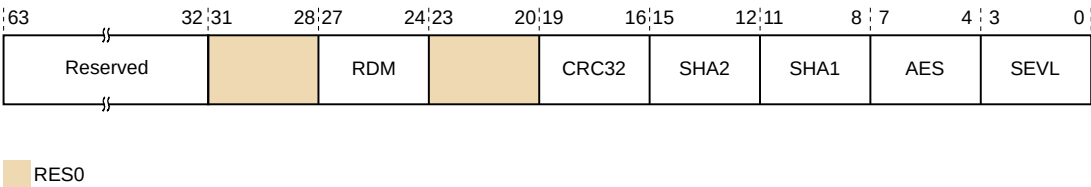

Reserved, [63:32]

Reserved.

RES0, [31:28]

RES0

Reserved.

RDM, [27:24]

VQRDMLAH and VQRDMLSH instructions in AArch32. The value is:

0x1 VQRDMLAH and VQRDMLSH instructions are implemented.

RES0, [23:20]

RES0 Reserved.

CRC32, [19:16]

Indicates whether CRC32 instructions are implemented in AArch32 state. The value is:

0x1 CRC32B, CRC32H, CRC32W, CRC32CB, CRC32CH, and CRC32CW instructions are implemented.

SHA2, [15:12]

Indicates whether SHA2 instructions are implemented in AArch32 state. The possible values are:

0x0 No SHA2 instructions implemented. This is the value when the Cryptographic Extensions are not implemented or are disabled.

0x1 SHA256H, SHA256H2, SHA256SU0, and SHA256SU1 instructions are implemented. This is the value when the Cryptographic Extensions are implemented and enabled.

SHA1, [11:8]

Indicates whether SHA1 instructions are implemented in AArch32 state. The possible values are:

0x0 No SHA1 instructions implemented. This is the value when the Cryptographic Extensions are not implemented or are disabled.

0x1 SHA1C, SHA1P, SHA1M, SHA1H, SHA1SU0, and SHA1SU1 instructions are implemented. This is the value when the Cryptographic Extensions are implemented and enabled.

AES, [7:4]

Indicates whether AES instructions are implemented in AArch32 state. The possible values are:

0x0 No AES instructions implemented. This is the value when the Cryptographic Extensions are not implemented or are disabled.

0x2

- AESE, AESD, AESMC, and AESIMC implemented.
- PMULL and PMULL2 instructions operating on 64-bit data.

This is the value when the Cryptographic Extensions are implemented and enabled.

SEVL, [3:0]

Indicates whether the `SEVL` instruction is implemented:

0x1 `SEVL` implemented to send event local.

Configurations

ID_ISAR5 must be interpreted with ID_ISAR0_EL1, ID_ISAR1_EL1, ID_ISAR2_EL1, ID_ISAR3_EL1, ID_ISAR4_EL1, and ID_ISAR6_EL1. See:

- [13.74 ID_ISAR0_EL1, AArch32 Instruction Set Attribute Register 0, EL1](#) on page 202.
- [13.75 ID_ISAR1_EL1, AArch32 Instruction Set Attribute Register 1, EL1](#) on page 204.
- [13.76 ID_ISAR2_EL1, AArch32 Instruction Set Attribute Register 2, EL1](#) on page 206.
- [13.77 ID_ISAR3_EL1, AArch32 Instruction Set Attribute Register 3, EL1](#) on page 209.
- [13.78 ID_ISAR4_EL1, AArch32 Instruction Set Attribute Register 4, EL1](#) on page 211.
- [13.80 ID_ISAR6_EL1, AArch32 Instruction Set Attribute Register 6, EL1](#) on page 215.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.80 ID_ISAR6_EL1, AArch32 Instruction Set Attribute Register 6, EL1


The ID_ISAR6_EL1 provides information about the instruction sets that the core implements.

Bit field descriptions

ID_ISAR6_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-63: ID_ISAR6_EL1 bit assignments

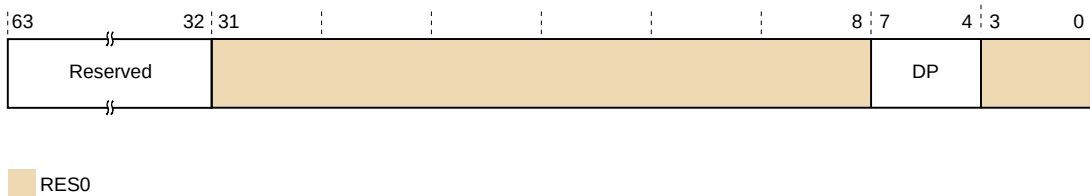

Reserved, [63:32]

Reserved.

RES0, [31:8]**RES0** Reserved.**DP, [7:4]**

UDOT and SDOT instructions. The value is:

0b0001 UDOT and SDOT instructions are implemented.**RES0, [3:0]****RES0** Reserved.**Configurations**

There is one copy of this register that is used in both Secure and Non-secure states.

ID_ISAR6_EL1 must be interpreted with ID_ISAR0_EL1, ID_ISAR1_EL1, ID_ISAR2_EL1, ID_ISAR3_EL1, ID_ISAR4_EL1, and ID_ISAR5_EL1. See:

- [13.74 ID_ISAR0_EL1, AArch32 Instruction Set Attribute Register 0, EL1](#) on page 202.
- [13.75 ID_ISAR1_EL1, AArch32 Instruction Set Attribute Register 1, EL1](#) on page 204.
- [13.76 ID_ISAR2_EL1, AArch32 Instruction Set Attribute Register 2, EL1](#) on page 206.
- [13.77 ID_ISAR3_EL1, AArch32 Instruction Set Attribute Register 3, EL1](#) on page 209.
- [13.78 ID_ISAR4_EL1, AArch32 Instruction Set Attribute Register 4, EL1](#) on page 211.
- [13.79 ID_ISAR5_EL1, AArch32 Instruction Set Attribute Register 5, EL1](#) on page 213.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.81 ID_MMFR0_EL1, AArch32 Memory Model Feature Register 0, EL1

The ID_MMFR0_EL1 provides information about the memory model and memory management support in AArch32.

Bit field descriptions

ID_MMFR0_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-64: ID_MMFR0_EL1 bit assignments

63	32	31	28	27	24	23	20	19	16	15	12	11	8	7	4	3	0
Reserved		InnerShr		FCSE		AuxReg		TCM		ShareLvl		OuterShr		PMSA		VMSA	

Reserved, [63:32]

Reserved.

InnerShr, [31:28]

Indicates the innermost Shareability domain implemented:

0x1 Implemented with hardware coherency support.**FCSE, [27:24]**Indicates support for *Fast Context Switch Extension* (FCSE):**0x0** Not supported.**AuxReg, [23:20]**

Indicates support for Auxiliary registers:

0x2 Support for Auxiliary Fault Status Registers (AIFSR and ADFSR) and Auxiliary Control Register.**TCM, [19:16]**

Indicates support for TCMs and associated DMAs:

0x0 Not supported.**ShareLvl, [15:12]**

Indicates the number of Shareability levels implemented:

0x1 Two levels of Shareability implemented.**OuterShr, [11:8]**

Indicates the outermost Shareability domain implemented:

0x1 Implemented with hardware coherency support.**PMSA, [7:4]**Indicates support for a *Protected Memory System Architecture* (PMSA):

0x0 Not supported.

VMSA, [3:0]

Indicates support for a *Virtual Memory System Architecture* (VMSA).

0x5 Support for:

- VMSAv7, with support for remapping and the Access flag.
- The PXN bit in the Short-descriptor translation table format descriptors.
- The Long-descriptor translation table format.

Configurations

Must be interpreted with ID_MMFR1_EL1, ID_MMFR2_EL1, ID_MMFR3_EL1, and ID_MMFR4_EL1. See:

- [13.82 ID_MMFR1_EL1, AArch32 Memory Model Feature Register 1, EL1](#) on page 218.
- [13.83 ID_MMFR2_EL1, AArch32 Memory Model Feature Register 2, EL1](#) on page 220.
- [13.84 ID_MMFR3_EL1, AArch32 Memory Model Feature Register 3, EL1](#) on page 222.
- [13.85 ID_MMFR4_EL1, AArch32 Memory Model Feature Register 4, EL1](#) on page 224.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.82 ID_MMFR1_EL1, AArch32 Memory Model Feature Register 1, EL1

The ID_MMFR1_EL1 provides information about the memory model and memory management support in AArch32.

Bit field descriptions

ID_MMFR1_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-65: ID_MMFR1_EL1 bit assignments

63	32:31	28:27	24:23	20:19	16:15	12:11	8:7	4:3	0
Reserved	BPred	L1TstCln	L1Uni	L1Hvd	L1UniSW	L1HvdSW	L1UniVA	L1HvdVA	

Reserved, [63:32]

Reserved.

BPred, [31:28]

Indicates branch predictor management requirements:

0x4	For execution correctness, branch predictor requires no flushing at any time.
------------	---

L1TstCln, [27:24]

Indicates the supported L1 data cache test and clean operations, for Harvard or unified cache implementation:

0x0	None supported.
------------	-----------------

L1Uni, [23:20]

Indicates the supported entire L1 cache maintenance operations, for a unified cache implementation:

0x0	None supported.
------------	-----------------

L1Hvd, [19:16]

Indicates the supported entire L1 cache maintenance operations, for a Harvard cache implementation:

0x0	None supported.
------------	-----------------

L1UniSW, [15:12]

Indicates the supported L1 cache line maintenance operations by set/way, for a unified cache implementation:

0x0	None supported.
------------	-----------------

L1HvdSW, [11:8]

Indicates the supported L1 cache line maintenance operations by set/way, for a Harvard cache implementation:

0x0	None supported.
------------	-----------------

L1UniVA, [7:4]

Indicates the supported L1 cache line maintenance operations by MVA, for a unified cache implementation:

0x0	None supported.
------------	-----------------

L1HvdVA, [3:0]

Indicates the supported L1 cache line maintenance operations by MVA, for a Harvard cache implementation:

0x0 None supported.

Configurations

Must be interpreted with ID_MMFR0_EL1, ID_MMFR2_EL1, ID_MMFR3_EL1, and ID_MMFR4_EL1. See:

- [13.81 ID_MMFR0_EL1, AArch32 Memory Model Feature Register 0, EL1](#) on page 216.
- [13.83 ID_MMFR2_EL1, AArch32 Memory Model Feature Register 2, EL1](#) on page 220.
- [13.84 ID_MMFR3_EL1, AArch32 Memory Model Feature Register 3, EL1](#) on page 222.
- [13.85 ID_MMFR4_EL1, AArch32 Memory Model Feature Register 4, EL1](#) on page 224.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.83 ID_MMFR2_EL1, AArch32 Memory Model Feature Register 2, EL1

The ID_MMFR2_EL1 provides information about the implemented memory model and memory management support in AArch32.

Bit field descriptions

ID_MMFR2_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-66: ID_MMFR2_EL1 bit assignments

63	32	31	28	27	24	23	20	19	16	15	12	11	8	7	4	3	0
Reserved		HWAAccFlg		WFIStall		MemBarr		UniTLB		HvdTLB		LL1HvdRng		L1HvdBG		L1HvdFG	

Reserved, [63:32]

Reserved.

HWAaccFlg, [31:28]

Hardware access flag. Indicates support for a hardware access flag, as part of the VMSAv7 implementation:

0x0 Not supported.

WFIStall, [27:24]

Wait For Interrupt Stall. Indicates the support for *Wait For Interrupt* (WFI) stalling:

0x1 Support for WFI stalling.

MemBarr, [23:20]

Memory Barrier. Indicates the supported CP15 memory barrier operations.

0x2 Supported CP15 memory barrier operations are:

- *Data Synchronization Barrier* (DSB).
- *Instruction Synchronization Barrier* (ISB).
- *Data Memory Barrier* (DMB).

UniTLB, [19:16]

Unified TLB. Indicates the supported TLB maintenance operations, for a unified TLB implementation.

0x6 Supported unified TLB maintenance operations are:

- Invalidate all entries in the TLB.
- Invalidate TLB entry by MVA.
- Invalidate TLB entries by ASID match.
- Invalidate instruction TLB and data TLB entries by MVA All ASID. This is a shared unified TLB operation.
- Invalidate Hyp mode unified TLB entry by MVA.
- Invalidate entire Non-secure EL1 and EL0 unified TLB.
- Invalidate entire Hyp mode unified TLB.
- TLBIMVALIS, TLBIMVAALIS, TLBIMVALHIS, TLBIMVAL, TLBIMVAAL, and TLBIMVALH.
- TLBIIPAS2IS, TLBIIPAS2LIS, TLBIIPAS2, and TLBIIPAS2L.

HvdTLB, [15:12]

Harvard TLB. Indicates the supported TLB maintenance operations, for a Harvard TLB implementation:

0x0 Not supported.

LL1HvdRng, [11:8]

L1 Harvard cache Range. Indicates the supported L1 cache maintenance range operations, for a Harvard cache implementation:

0x0 Not supported.

L1HvdBG, [7:4]

L1 Harvard cache Background fetch. Indicates the supported L1 cache background prefetch operations, for a Harvard cache implementation:

0x0 Not supported.

L1HvdFG, [3:0]

L1 Harvard cache Foreground fetch. Indicates the supported L1 cache foreground prefetch operations, for a Harvard cache implementation:

0x0 Not supported.

Configurations

Must be interpreted with ID_MMFR0_EL1, ID_MMFR1_EL1, ID_MMFR3_EL1, and ID_MMFR4_EL1. See:

- [13.81 ID_MMFR0_EL1, AArch32 Memory Model Feature Register 0, EL1](#) on page 216.
- [13.82 ID_MMFR1_EL1, AArch32 Memory Model Feature Register 1, EL1](#) on page 218.
- [13.84 ID_MMFR3_EL1, AArch32 Memory Model Feature Register 3, EL1](#) on page 222.
- [13.85 ID_MMFR4_EL1, AArch32 Memory Model Feature Register 4, EL1](#) on page 224.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.84 ID_MMFR3_EL1, AArch32 Memory Model Feature Register 3, EL1

The ID_MMFR3_EL1 provides information about the memory model and memory management support in AArch32.

Bit field descriptions

ID_MMFR3_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-67: ID_MMFR3_EL1 bit assignments**Reserved, [63:32]**

Reserved.

Supersec, [31:28]

Supersections. Indicates support for supersections:

0x0 Supersections supported.**CMemSz, [27:24]**

Cached memory size. Indicates the size of physical memory that is supported by the core caches:

0x2 1TByte or more, corresponding to a 40-bit, or larger physical address range.**CohWalk, [23:20]**

Coherent walk. Indicates whether translation table updates require a clean to the point of unification:

0x1 Updates to the translation tables do not require a clean to the point of unification to ensure visibility by subsequent translation table walks.**PAN, [19:16]**

Privileged Access Never.

0x2 PAN supported and new `ATS1CPRP` and `ATS1CPWP` instructions supported.**MaintBcst, [15:12]**

Maintenance broadcast. Indicates whether cache, TLB, and branch predictor operations are broadcast:

0x2 Cache, TLB, and branch predictor operations affect structures according to Shareability and defined behavior of instructions.

BPMaint, [11:8]

Branch predictor maintenance. Indicates the supported branch predictor maintenance operations.

0x2

Supported branch predictor maintenance operations are:

- Invalidate all branch predictors.
- Invalidate branch predictors by MVA.

CMaintSW, [7:4]

Cache maintenance by set/way. Indicates the supported cache maintenance operations by set/way.

0x1

Supported hierarchical cache maintenance operations by set/way are:

- Invalidate data cache by set/way.
- Clean data cache by set/way.
- Clean and invalidate data cache by set/way.

CMaintVA, [3:0]

Cache maintenance by *Virtual Address* (VA). Indicates the supported cache maintenance operations by VA.

0x1

Supported hierarchical cache maintenance operations by VA are:

- Invalidate data cache by VA.
- Clean data cache by VA.
- Clean and invalidate data cache by VA.
- Invalidate instruction cache by VA.
- Invalidate all instruction cache entries.

Configurations

Must be interpreted with ID_MMFR0_EL1, ID_MMFR1_EL1, ID_MMFR2_EL1, and ID_MMFR4_EL1. See:

- [13.81 ID_MMFR0_EL1, AArch32 Memory Model Feature Register 0, EL1](#) on page 216.
- [13.82 ID_MMFR1_EL1, AArch32 Memory Model Feature Register 1, EL1](#) on page 218.
- [13.83 ID_MMFR2_EL1, AArch32 Memory Model Feature Register 2, EL1](#) on page 220.
- [13.85 ID_MMFR4_EL1, AArch32 Memory Model Feature Register 4, EL1](#) on page 224.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.85 ID_MMFR4_EL1, AArch32 Memory Model Feature Register 4, EL1

The ID_MMFR4_EL1 provides information about the memory model and memory management support in AArch32.

Bit field descriptions

ID_MMFR4_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-68: ID_MMFR4_EL1 bit assignments

63	32	31	24	23	20	19	16	15	12	11	8	7	4	3	0
Reserved		RAZ		LSM		HPDS		CNP		XNX		AC2		SpecSEI	

Reserved, [63:32]

Reserved.

RAZ, [31:24]

Read-As-Zero.

LSM, [23:20]

Load/Store Multiple. Indicates whether adjacent loads or stores can be combined. The value is:

0x0 LSMAOE and nTLSMD bit not supported.

HPDS, [19:16]

Presence of Hierarchical Disables. Enables an operating system or hypervisor to hand over up to 4 bits of the last level translation table descriptor (bits[62:59] of the translation table entry) for use by hardware for **IMPLEMENTATION DEFINED** usage. The value is:

0x2 Hierarchical Permission Disables and Hardware allocation of bits[62:59] supported.

CNP, [15:12]

Common Not Private. Indicates support for selective sharing of TLB entries across multiple PEs. The value is:

0x1 CnP bit supported.

XNX, [11:8]

Execute Never. Indicates whether the stage 2 translation tables allows the stage 2 control of whether memory is executable at EL1 independent of whether memory is executable at EL0. The value is:

0x1 EL0/EL1 execute control distinction at stage 2 bit supported.

AC2, [7:4]

Indicates the extension of the ACTLR and HACTLR registers using ACTLR2 and HACTLR2. The value is:

0x1 ACTLR2 and HACTLR2 are implemented.

SpecSEI, [3:0]

Describes whether the core can generate SError interrupt exceptions from Speculative reads of memory, including Speculative instruction fetches. The value is:

0x0 The core never generates an SError interrupt due to an External abort on a Speculative read.

Configurations

There is one copy of this register that is used in both Secure and Non-secure states.

Must be interpreted with ID_MMFR0_EL1, ID_MMFR1_EL1, ID_MMFR2_EL1, and ID_MMFR3_EL1. See:

- [13.81 ID_MMFR0_EL1, AArch32 Memory Model Feature Register 0, EL1](#) on page 216.
- [13.82 ID_MMFR1_EL1, AArch32 Memory Model Feature Register 1, EL1](#) on page 218.
- [13.83 ID_MMFR2_EL1, AArch32 Memory Model Feature Register 2, EL1](#) on page 220.
- [13.84 ID_MMFR3_EL1, AArch32 Memory Model Feature Register 3, EL1](#) on page 222.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.86 ID_PFR0_EL1, AArch32 Processor Feature Register 0, EL1


The ID_PFR0_EL1 provides top-level information about the instruction sets supported by the core in AArch32.

Bit field descriptions

ID_PFR0_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-69: ID_PFR0_EL1 bit assignments

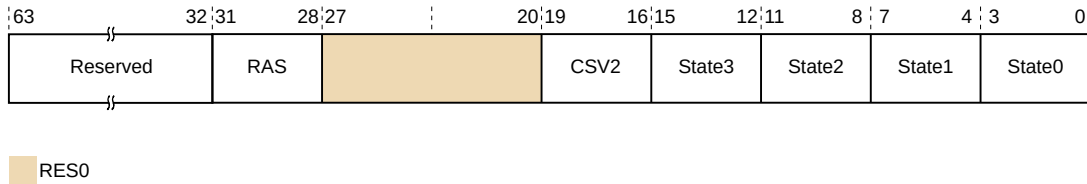

Reserved, [63:32]

Reserved.

RAS, [31:28]

RAS extension version. The value is:

0x1 Version 1 of the RAS extension is present.

RES0, [27:20]

RES0 Reserved.

CSV2, [19:16]

0x0 This device does not disclose whether branch targets trained in one context can affect speculative execution in a different context.

0x1 Branch targets trained in one context cannot affect speculative execution in a different hardware described context. This is the reset value.

State3, [15:12]

Indicates support for *Thumb Execution Environment* (T32EE) instruction set. This value is:

0x0 Core does not support the T32EE instruction set.

State2, [11:8]

Indicates support for Jazelle. This value is:

0x1 Core supports trivial implementation of Jazelle.

State1, [7:4]

Indicates support for T32 instruction set. This value is:

0x3 Core supports T32 encoding after the introduction of Thumb-2 technology, and for all 16-bit and 32-bit T32 basic instructions.

State0, [3:0]

Indicates support for A32 instruction set. This value is:

0x1 A32 instruction set implemented.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.87 ID_PFR1_EL1, AArch32 Processor Feature Register 1, EL1


The ID_PFR1_EL1 provides information about the programmers model and architecture extensions that are supported by the core.

Bit field descriptions

ID_PFR1_EL1 is a 64-bit register, and must be interpreted with ID_PFR0. It is part of the Identification registers functional group.

This register is read-only.

Figure 13-70: ID_PFR1_EL1 bit assignments

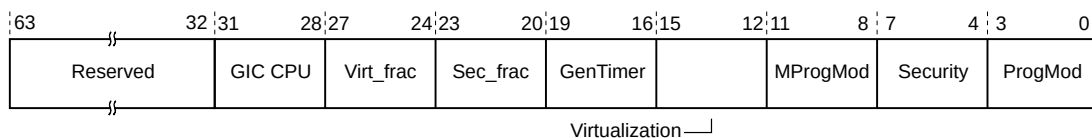

Reserved, [63:32]

Reserved.

GIC CPU, [31:28]

GIC CPU support:

0

GIC CPU interface is disabled, GICCDISABLE is HIGH, or not implemented.

1

GIC CPU interface is implemented and enabled, GICCDISABLE is LOW.

Virt_frac, [27:24]

0

No features from the Armv7 Virtualization Extensions are implemented.

Sec_frac, [23:20]

0

No features from the Armv7 Virtualization Extensions are implemented.

GenTimer, [19:16]

Generic Timer support:

1

Generic Timer supported.

Virtualization, [15:12]

Virtualization support:

0

Virtualization not implemented.

MProgMod, [11:8]

M profile programmers model support:

0

Not supported.

Security, [7:4]

Security support:

0

Security not implemented.

ProgMod, [3:0]

Indicates support for the standard programmers model for Armv4 and later.

Model must support User, FIQ, IRQ, Supervisor, Abort, Undefined, and System modes:

0

Not supported.

Configurations

There are no configuration notes.

13.88 ID_PFR2_EL1, AArch32 Processor Feature Register 2, EL1


The ID_PFR2_EL1 provides information about the programmers model and architecture extensions that are supported by the core.

Bit field descriptions

ID_PFR2_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-71: ID_PFR2_EL1 bit assignments

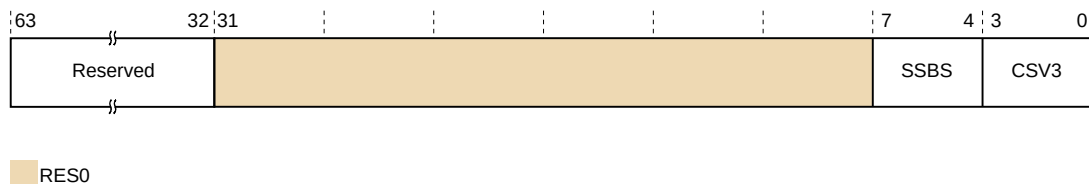

Reserved, [63:32]

Reserved.

RES0, [31:8]

RES0

Reserved.

SSBS, [7:4]

1

AArch32 provides the PSTATE.SSBS mechanism to mark regions that are *Speculative Store Bypassing Safe* (SSBS).

CSV3, [3:0]

1

Data that are loaded under speculation with a permission or domain fault cannot be used to form an address or generate condition codes to be used by instructions newer than the load in the speculative sequence. This is the reset value.

Configurations

There are no configuration notes.

Bit fields and details not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.89 LORC_EL1, LORegion Control Register, EL1

The LORC_EL1 register enables and disables LORegions, and selects the current LORegion descriptor.

Bit field descriptions

LORC_EL1 is a 64-bit register and is part of the Virtual memory control registers functional group.

Figure 13-72: LORC_EL1 bit assignments

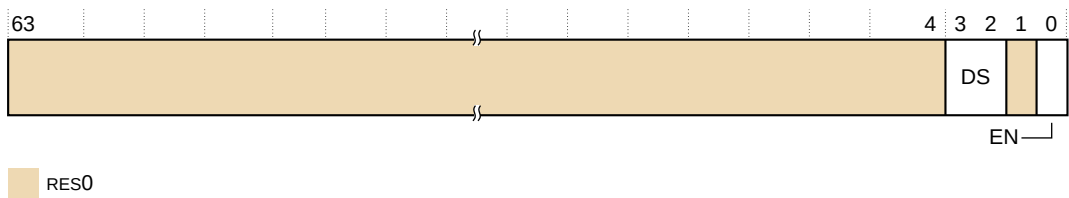

RES0, [63:4]

Reserved, **RES0**.

DS, [3:2]

Descriptor Select. Number that selects the current LORegion descriptor that is accessed by the LORSA_EL1, LOREA_EL1, and LORN_EL1 registers.

RES0, [1]

Reserved, **RES0**.

EN, [0]

Enable. The possible values are:

- | | |
|---|------------------------------------|
| 0 | Disabled. This is the reset value. |
| 1 | Enabled. |

Configurations

RW fields in this register reset to architecturally **UNKNOWN** values.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.90 LORID_EL1, LORegion ID Register, EL1

The LORID_EL1 ID register indicates the supported number of LORegions and LORegion descriptors.

Bit field descriptions

LORID_EL1 is a 64-bit register.

Figure 13-73: LORID_EL1 bit assignments

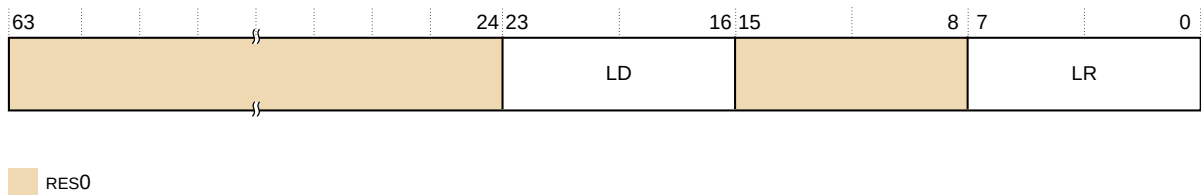

RES0, [63:24]

Reserved, **RES0**.

LD, [23:16]

Number of LORegion descriptors supported by the implementation, expressed as binary 8-bit number. The value is:

0x04

Four LORegion descriptors are supported.

RES0, [15:8]

Reserved, **RES0**.

LR, [7:0]

Number of LORegions supported by the implementation, expressed as a binary 8-bit number. The value is:

0x04

Four LORegions are supported.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.91 LORN_EL1, LORegion Number Register, EL1

The LORN_EL1 register holds the number of the LORegion described in the current LORegion descriptor that is selected by LORC_EL1.DS.

Bit field descriptions

LORN_EL1 is a 64-bit register and is part of the Virtual memory control registers functional group.

Figure 13-74: LORN_EL1 bit assignments

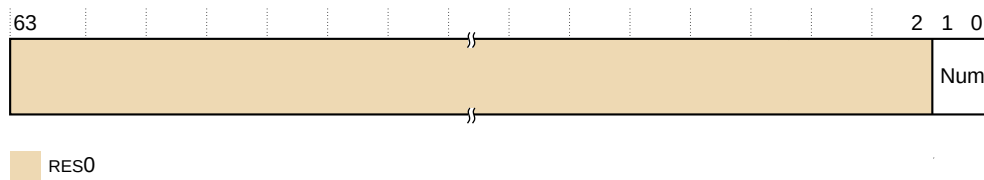

RES0, [63:2]

Reserved, **RES0**.

Num, [1:0]

Indicates the LORegion number.

Configurations

RW fields in this register reset to architecturally **UNKNOWN** values.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.92 MDCR_EL3, Monitor Debug Configuration Register, EL3


The MDCR_EL3 provides configuration options for Security to self-hosted debug.

Bit field descriptions

MDCR_EL3 is a 64-bit register, and is part of:

- The Debug registers functional group.
- The Security registers functional group.

Figure 13-75: MDCR_EL3 bit assignments

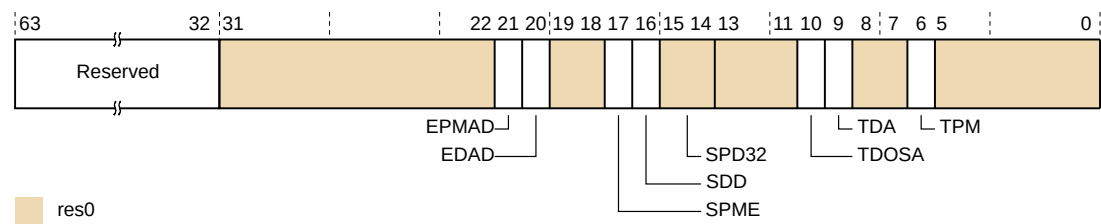

Reserved, [63:32]

Reserved.

RES0, [31:22]

RES0

Reserved.

EPMAD, [21]

External debugger access to Performance Monitors registers disabled. This disables access to these registers by an external debugger. The possible values are:

- | | |
|---|---|
| 0 | Access to Performance Monitors registers from external debugger is permitted. |
| 1 | Access to Performance Monitors registers from external debugger is disabled, unless overridden by authentication interface. |

EDAD, [20]

External debugger access to breakpoint and watchpoint registers disabled. This disables access to these registers by an external debugger. The possible values are:

- | | |
|---|--|
| 0 | Access to breakpoint and watchpoint registers from external debugger is permitted. |
| 1 | Access to breakpoint and watchpoint registers from external debugger is disabled, unless overridden by authentication interface. |

SPME, [17]

Secure performance monitors enable. This enables event counting exceptions from Secure state. The possible values are:

- | | |
|---|--|
| 0 | Event counting prohibited in Secure state. |
| 1 | Event counting allowed in Secure state. |

SPD32, [15:14]**RES0**

Reserved.

TDOSA, [10]

Trap accesses to the OS Debug system registers, OSLAR_EL1, OSLSR_EL1, OSDLR_EL1, and DBGPRCR_EL1 OS.

- | | |
|----------|---|
| 0 | Accesses are not trapped. |
| 1 | Accesses to the OS Debug system registers are trapped to EL3. |

The reset value is **UNKNOWN**.

TDA, [9]

Trap accesses to the remaining sets of Debug registers to EL3.

- | | |
|----------|--|
| 0 | Accesses are not trapped. |
| 1 | Accesses to the remaining Debug system registers are trapped to EL3. |

The reset value is **UNKNOWN**.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.93 MIDR_EL1, Main ID Register, EL1

The MIDR_EL1 provides identification information for the core, including an implementer code for the device and a device ID number.

Bit field descriptions

MIDR_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-76: MIDR_EL1 bit assignments**Reserved, [63:32]**

Reserved.

Implementer, [31:24]

Indicates the implementer code. This value is:

0x41 ASCII character 'A' - implementer is Arm® Limited.**Variant, [23:20]**

Indicates the variant number of the core. This is the major revision number x in the rx part of the rxy description of the product revision status. This value is:

0x1 r1p1.**Architecture, [19:16]**

Indicates the architecture code. This value is:

0xF Defined by CPUID scheme.**PartNum, [15:4]**

Indicates the primary part number. This value is:

0xD0D Cortex®-A77 core.**Revision, [3:0]**

Indicates the minor revision number of the core. This is the minor revision number y in the py part of the rxy description of the product revision status. This value is:

0x1 r1p1.**Configurations**

The MIDR_EL1 is architecturally mapped to external MIDR_EL1 register.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.94 MPIDR_EL1, Multiprocessor Affinity Register, EL1


The MPIDR_EL1 provides an additional core identification mechanism for scheduling purposes in a cluster.

Bit field descriptions

MPIDR_EL1 is a 64-bit register, and is part of the Other system control registers functional group.

This register is read-only.

Figure 13-77: MPIDR_EL1 bit assignments

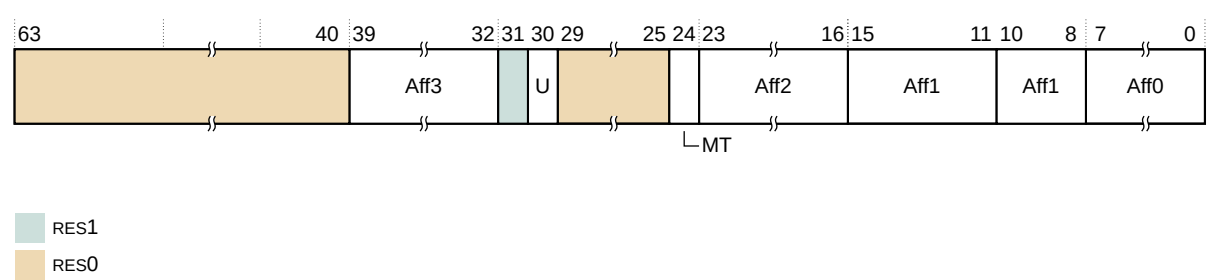

RES0, [63:40]

RES0 Reserved.

Aff3, [39:32]

Affinity level 3. Highest level affinity field.

CLUSTERID

Indicates the value read in the CLUSTERIDAFF3 configuration signal.

RES1, [31]

RES1 Reserved.

U, [30]

Indicates a single core system, as distinct from core 0 in a cluster. This value is:

0 Core is part of a multiprocessor system. This is the value for implementations with more than one core, and for implementations with an ACE manager interface or a CHI requester interface.

RES0, [29:25]

RES0 Reserved.

MT, [24]

Indicates whether the lowest level of affinity consists of logical cores that are implemented using a multithreading type approach. This value is:

1 Performance of PEs at the lowest affinity level is interdependent.

Affinity0 represents threads. Cortex®-A77 is not multithreaded, but may be in a system with other cores that are multithreaded.

Aff2, [23:16]

Affinity L2. Second highest level affinity field.

CLUSTERID

Indicates the value read in the CLUSTERIDAFF2 configuration signal.

Aff1, [15:11]

Part of Affinity L1. Third highest level affinity field.

RAZ Read-As-Zero.

Aff1, [10:8]

Part of Affinity L1. Third highest level affinity field.

CPUID Identification number for each CPU in the cluster:

0x0 MP1: CPUID: 0.

0x7 MP8: CPUID: 7.

Aff0, [7:0]

Affinity level 0. The level identifies individual threads within a multithreaded core. The Cortex®-A77 core is single-threaded, so this field has the value 0x00.

Configurations

MPIDR_EL1[31:0] is mapped to external register EDDEVAFF0.

MPIDR_EL1[63:32] is mapped to external register EDDEVAFF1.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.95 PAR_EL1, Physical Address Register, EL1

The PAR_EL1 returns the output address from an address translation instruction that executed successfully, or fault information if the instruction did not execute successfully.

Bit field descriptions, PAR_EL1.F is 0

The following figure shows the PAR bit assignments when PAR.F is 0.

Figure 13-78: PAR bit assignments, PAR_EL1.F is 0

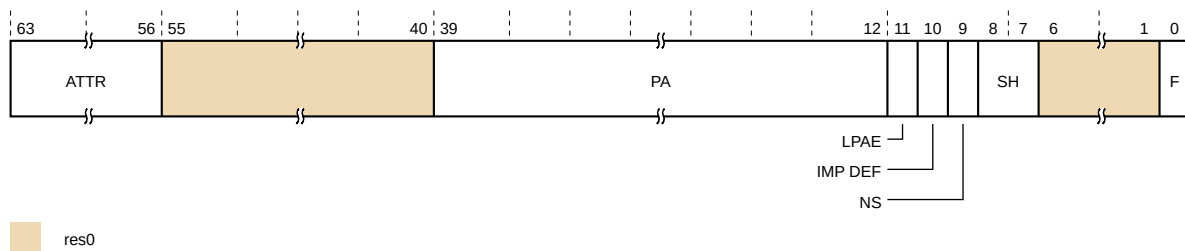

IMP DEF, [10]

IMPLEMENTATION DEFINED. Bit[10] is **RES0**.

F, [0]

Indicates whether the instruction performed a successful address translation.

- | | |
|----------|---|
| 0 | Address translation completed successfully. |
| 1 | Address translation aborted. |

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

Bit field descriptions, PAR_EL1.F is 1

See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.96 REVIDR_EL1, Revision ID Register, EL1


The REVIDR_EL1 provides revision information, additional to MIDR_EL1, that identifies minor fixes (errata) which might be present in a specific implementation of the Cortex®-A77 core.

Bit field descriptions

REVIDR_EL1 is a 64-bit register, and is part of the Identification registers functional group.

This register is read-only.

Figure 13-79: REVIDR_EL1 bit assignments



Reserved, [63:32]

Reserved.

IMPLEMENTATION DEFINED, [31:0]

IMPLEMENTATION DEFINED.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.97 RMR_EL3, Reset Management Register

The RMR_EL3 controls the Execution state that the core boots into and allows request of a Warm reset.

Bit field descriptions

RMR_EL3 is a 64-bit register, and is part of the Reset management registers functional group.

Figure 13-80: RMR_EL3 bit assignments

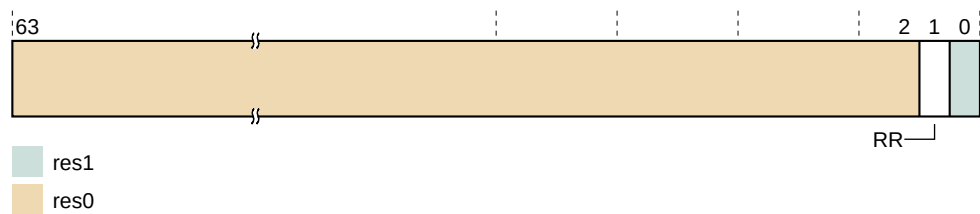

RES0, [63:2]

RES0 Reserved.

RR, [1]

Reset Request. The possible values are:

0	This is the reset value on both a Warm and a Cold reset.
1	Requests a Warm reset.

The bit is strictly a request.

RES1, [0]

RES1	Reserved.
-------------	-----------

Configurations

There are no configuration notes.

Details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.98 RVBAR_EL3, Reset Vector Base Address Register, EL3


RVBAR_EL3 contains the **IMPLEMENTATION DEFINED** address that execution starts from after reset.

Bit field descriptions

RVBAR_EL3 is a 64-bit register, and is part of the Reset management registers functional group.

This register is read-only.

Figure 13-81: RVBAR_EL3 bit assignments



RVBA, [63:0]

Reset Vector Base Address. The address that execution starts from after reset when executing in 64-bit state. Bits[1:0] of this register are 0b00, as this address must be aligned,

and bits [63:40] are 0x000000 because the address must be within the physical address size supported by the core.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.99 SCTLR_EL1, System Control Register, EL1


The SCTLR_EL1 provides top-level control of the system, including its memory system, at EL1 and EL0.

Bit field descriptions

SCTLR_EL1 is a 64-bit register, and is part of the Other system control registers functional group.

This register resets to 0x0000000030D50838.

Figure 13-82: SCTLR_EL1 bit assignments

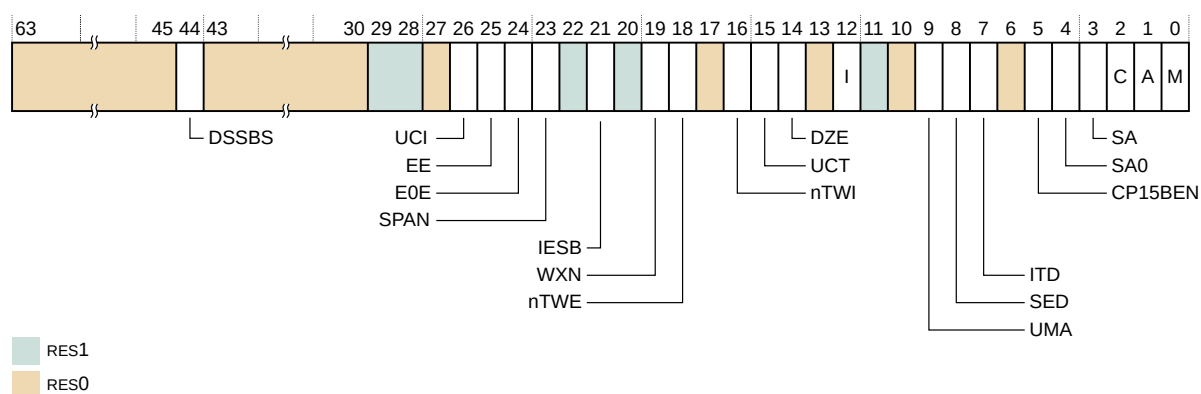

RES0, [63:45]

RES0 Reserved

DSSBS, [44]

DSSBS is used to set the new PSTATE bit, SSBS (Speculative Store Bypassing Safe).

- | | |
|----------|---|
| 0 | PSTATE.SSBS is set to 0 on an exception taken to this Exception level. This is the reset value. |
| 1 | PSTATE.SSBS is set to 1 on an exception taken to this Exception level. |

RES0, [43:30]

RES0	Reserved
------	----------

RES1, [29:28]

RES1	Reserved
------	----------

RES0, [27]

RES0	Reserved
------	----------

EE, [25]

Exception endianness. The value of this bit controls the endianness for explicit data accesses at EL1. This value also indicates the endianness of the translation table data for translation table lookups. The possible values of this bit are:

0	Little-endian.
1	Big-endian.

ITD, [7]

This field is *RAZ/WI*.

RES0, [6]

RES0	Reserved
------	----------

CP15BEN, [5]

CP15 barrier enable. The possible values are:

0	CP15 barrier operations disabled. Their encodings are UNDEFINED .
1	CP15 barrier operations enabled.

M, [0]

MMU enable. The possible values are:

0	EL1 and EL0 stage 1 MMU disabled.
1	EL1 and EL0 stage 1 MMU enabled.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.100 SCTLR_EL2, System Control Register, EL2


The SCTLR_EL2 provides top-level control of the system, including its memory system at EL2.

Bit field descriptions

SCTLR_EL2 is a 64-bit register, and is part of:

- The Virtualization registers functional group
- The Other system control registers functional group

Figure 13-83: SCTLR_EL2 bit assignments

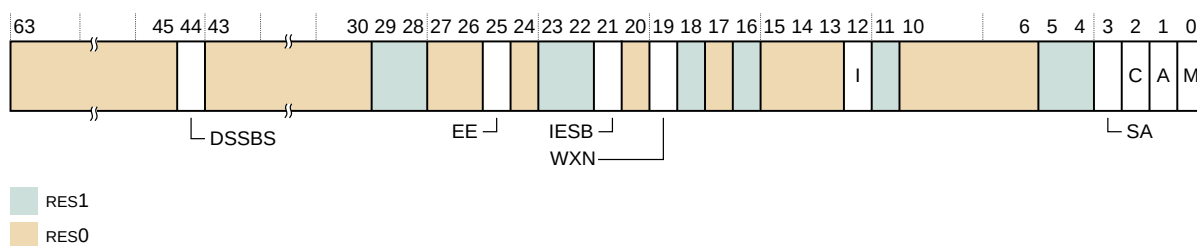

This register resets to 0x30C50838.

Reserved, [63:45]

Reserved.

DSSBS, [44]

DSSBS is used to set the new PSTATE bit, SSBS (Speculative Store Bypassing Safe).

SCTLR_EL2.DSSBS is held in bit[44] regardless of the value of HCR_EL2.E2H or HCR_EL2.TGE.

0	PSTATE.SSBS is set to 0 on an exception taken to this Exception level. This is the reset value.
1	PSTATE.SSBS is set to 1 on an exception taken to this Exception level.

Configurations

If EL2 is not implemented, this register is **RES0** from EL3.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.101 SCTL_EL3, System Control Register, EL3


The SCTL_EL3 provides top-level control of the system, including its memory system at EL3.

Bit field descriptions

SCTL_EL3 is a 64-bit register, and is part of the Other system control registers functional group.

This register resets to 0x30C50838.

Figure 13-84: SCTL_EL3 bit assignments

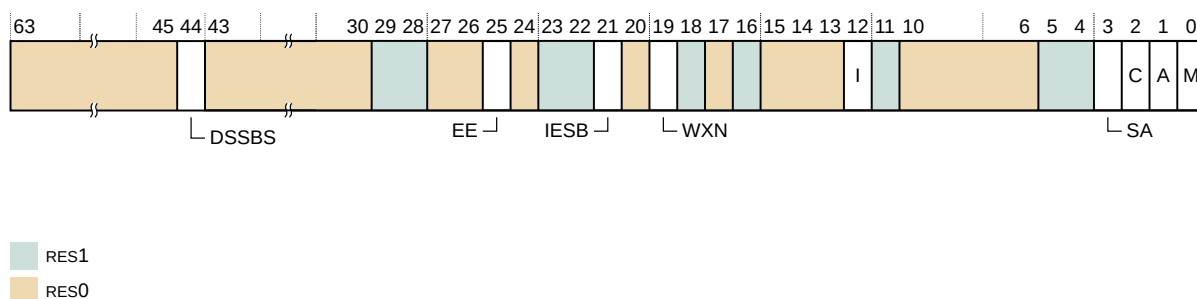

RES0, [63:45]

RES0 Reserved

DSSBS, [44]

DSSBS is used to set the new PSTATE bit, SSBS (Speculative Store Bypassing Safe).

0	PSTATE.SSBS is set to 0 on an exception taken to this Exception level. This is the reset value.
1	PSTATE.SSBS is set to 1 on an exception taken to this Exception level.

RES0, [43:30]

RES0 Reserved

RES1, [29:28]

RES1 Reserved

RES0, [27:26]

RES0 Reserved

EE, [25]

Exception endianness. This bit controls the endianness for:

- Explicit data accesses at EL3.
- Stage 1 translation table walks at EL3.

The possible values are:

0	Little-endian
1	Big-endian

The reset value is determined by the CFGEND configuration signal.

I, [12]

Global instruction cache enable. The possible values are:

0	Instruction caches disabled. This is the reset value.
1	Instruction caches enabled.

C, [2]

Global enable for data and unified caches. The possible values are:

0	Disables data and unified caches. This is the reset value.
1	Enables data and unified caches.

M, [0]

Global enable for the EL3 MMU. The possible values are:

0	Disables EL3 MMU. This is the reset value.
1	Enables EL3 MMU.

Configurations

There are no configuration notes.


Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.102 TCR_EL1, Translation Control Register, EL1

The TCR_EL1 determines which Translation base registers define the base address register for a translation table walk required for stage 1 translation of a memory access from EL0 or EL1 and holds Cacheability and Shareability information.

Bit field descriptions

TCR_EL1 is a 64-bit register, and is part of the Virtual memory control registers functional group.

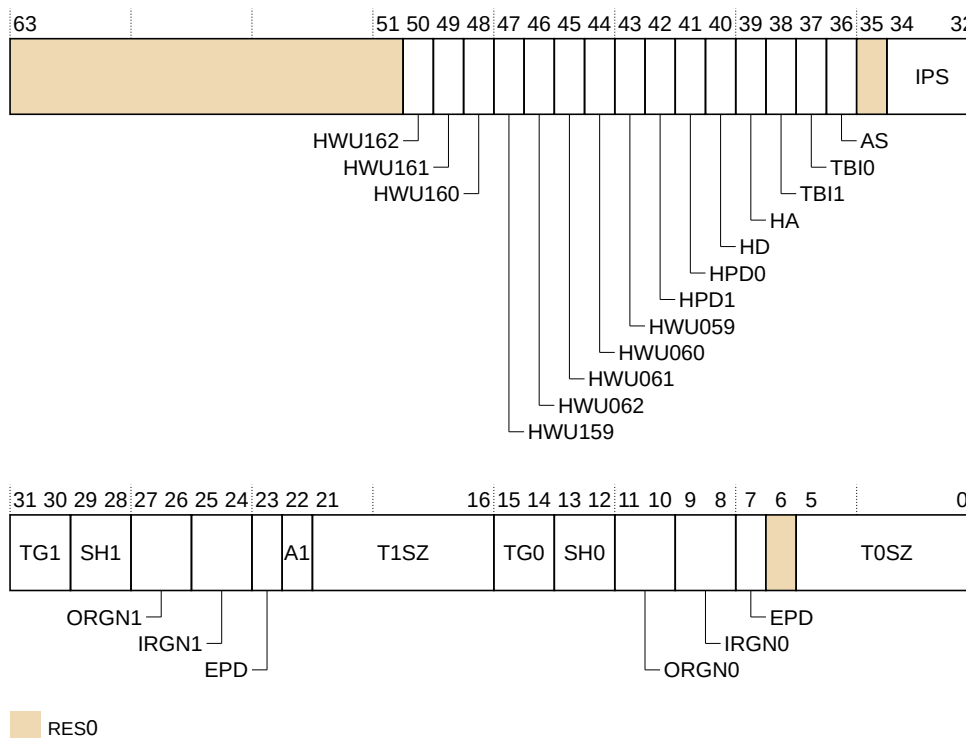Figure 13-85: TCR_EL1 bit assignments

Bits[50:39], architecturally defined, are implemented in the core.

HD, [40]

Hardware management of dirty state in stage 1 translations from EL0 and EL1. The possible values are:

- | | |
|----------|--|
| 0 | Stage 1 hardware management of dirty state disabled. |
| 1 | Stage 1 hardware management of dirty state enabled, only if the HA bit is also set to 1. |

HA, [39]

Hardware Access flag update in stage 1 translations from EL0 and EL1. The possible values are:

- | | |
|----------|--------------------------------------|
| 0 | Stage 1 Access flag update disabled. |
| 1 | Stage 1 Access flag update enabled. |

Configurations

RW fields in this register reset to **UNKNOWN** values.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.103 TCR_EL2, Translation Control Register, EL2

The TCR_EL2 controls translation table walks required for stage 1 translation of a memory access from EL2 and holds Cacheability and Shareability information.


Bit field descriptions

TCR_EL2 is a 64-bit register.

TCR_EL2 is part of:

- The Virtual memory control registers functional group.
- The Hypervisor and virtualization registers functional group.

Figure 13-86: TCR_EL2 bit assignments

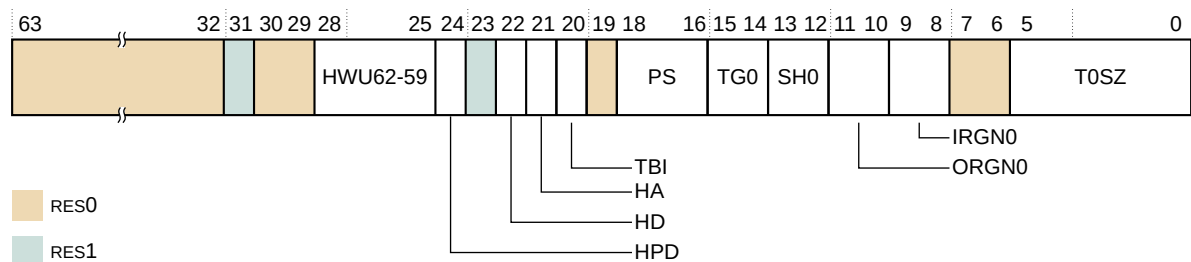

Bits[28:21], architecturally defined, are implemented in the core.

HD, [22]

Dirty bit update. The possible values are:

- | | |
|----------|-------------------------------|
| 0 | Dirty bit update is disabled. |
| 1 | Dirty bit update is enabled. |

HA, [21]

Stage 1 Access flag update. The possible values are:

- | | |
|----------|---|
| 0 | Stage 1 Access flag update is disabled. |
| 1 | Stage 1 Access flag update is enabled. |

Configurations

When the Virtualization Host Extension is activated, TCR_EL2 has the same bit assignments as TCR_EL1.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.104 TCR_EL3, Translation Control Register, EL3

The TCR_EL3 controls translation table walks required for stage 1 translation of memory accesses from EL3 and holds Cacheability and Shareability information for the accesses.

Bit field descriptions

TCR_EL3 is a 64-bit register and is part of the Virtual memory control registers functional group.

Figure 13-87: TCR_EL3 bit assignments

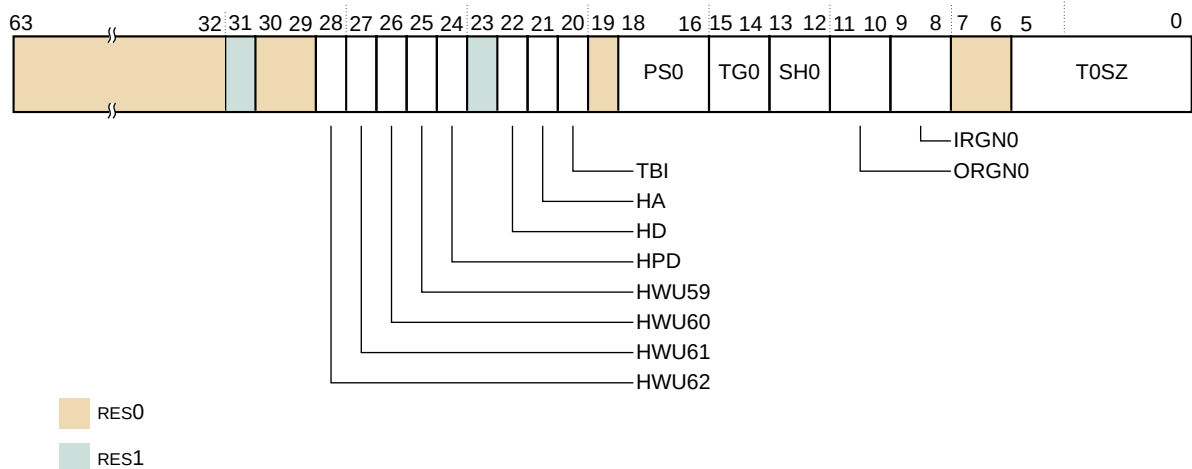

Bits[28:21], architecturally defined, are implemented in the core.

Reserved, [63:32]

Reserved.

HD, [22]

Dirty bit update. The possible values are:

- 0

Dirty bit update is disabled.
- 1

Dirty bit update is enabled.

HA, [21]

Stage 1 Access flag update. The possible values are:

- 0

Stage 1 Access flag update is disabled.
- 1

Stage 1 Access flag update is enabled.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.105 TTBR0_EL1, Translation Table Base Register 0, EL1

The TTBR0_EL1 holds the base address of translation table 0, and information about the memory it occupies. This is one of the translation tables for the stage 1 translation of memory accesses from modes other than Hyp mode.

Bit field descriptions

TTBR0_EL1 is 64-bit register.

Figure 13-88: TTBR0_EL1 bit assignments

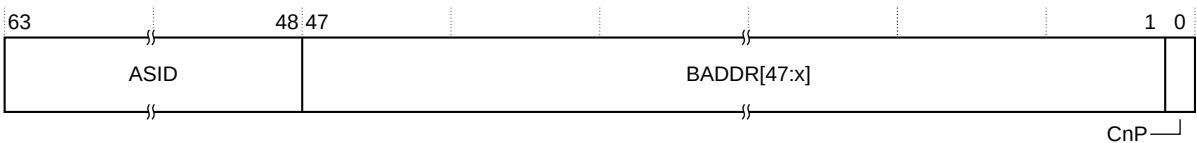

ASID, [63:48]

An ASID for the translation table base address. The TCR_EL1.A1 field selects either TTBR0_EL1.ASID or TTBR1_EL1.ASID.

BADDR[47:x], [47:1]

Translation table base address, bits[47:x]. Bits [x-1:1] are **RES0**.

x is based on the value of TCR_EL1.TOSZ, the stage of translation, and the memory translation granule size.

For instructions on how to calculate it, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

The value of x determines the required alignment of the translation table, that must be aligned to 2^x bytes.

If bits $[x-1:1]$ are not all zero, this is a misaligned translation table base address. Its effects are **CONSTRAINED UNPREDICTABLE**, where bits $[x-1:1]$ are treated as if all the bits are zero. The value read back from those bits is the value that is written.

CnP, [0]

Common not Private. The possible values are:

0

CnP is not supported.

1

CnP is supported.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.106 TTBR0_EL2, Translation Table Base Register 0, EL2

The TTBR0_EL2 holds the base address of the translation table for the stage 1 translation of memory accesses from EL2.

Bit field descriptions

TTBR0_EL2 is a 64-bit register, and is part of the Virtual memory control registers functional group.

Figure 13-89: TTBR0_EL2 bit assignments

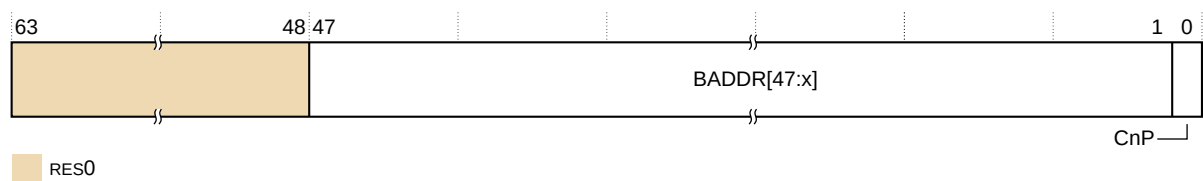

RES0, [63:48]

RES0

Reserved.

BADDR, [47:1]

Translation table base address, bits $[47:x]$. Bits $[x-1:1]$ are **RES0**.

x is based on the value of TCR_EL2.TOSZ, the stage of translation, and the memory translation granule size.

For instructions on how to calculate it, see the *Arm® Architecture Reference Manual Arm®v8, for Arm®v8-A architecture profile*.

The value of x determines the required alignment of the translation table, that must be aligned to 2^x bytes.

If bits [x-1:1] are not all zero, this is a misaligned translation table base address. Its effects are **CONSTRAINED UNPREDICTABLE**, where bits [x-1:1] are treated as if all the bits are zero. The value read back from those bits is the value that is written.

CnP, [0]

Common not Private. The possible values are:

0

CnP is not supported.

1

CnP is supported.

Configurations

When the Virtualization Host Extension is activated, TTBR0_EL2 has the same bit assignments as TTBR0_EL1.

Bit fields and details that are not provided in this description are architecturally defined. See the *Arm® Architecture Reference Manual for A-profile architecture*.


13.107 TTBR0_EL3, Translation Table Base Register 0, EL3

The TTBR0_EL3 holds the base address of the translation table for the stage 1 translation of memory accesses from EL3.

Bit field descriptions

TTBR0_EL3 is a 64-bit register.

Figure 13-90: TTBR0_EL3 bit assignments

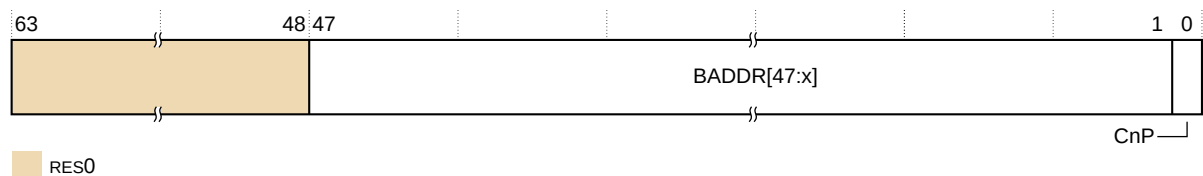

[63:48]Reserved, **RES0**.**BADDR[47:x], [47:1]**Translation table base address, bits[47:x]. Bits [x-1:1] are **RES0**.

x is based on the value of TCR_EL1.TOSZ, the stage of translation, and the memory translation granule size.

For instructions on how to calculate it, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

The value of x determines the required alignment of the translation table, that must be aligned to 2^x bytes.

If bits [x-1:1] are not all zero, this is a misaligned translation table base address. Its effects are **CONSTRAINED UNPREDICTABLE**, where bits [x-1:1] are treated as if all the bits are zero. The value read back from those bits is the value that is written.

CnP, [0]

Common not Private. The possible values are:

0	CnP is not supported.
1	CnP is supported.

Configurations

There are no configuration notes.


Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.108 TTBR1_EL1, Translation Table Base Register 1, EL1

The TTBR1_EL1 holds the base address of translation table 1, and information about the memory it occupies. This is one of the translation tables for the stage 1 translation of memory accesses at EL0 and EL1.

Bit field descriptions

TTBR1_EL1 is a 64-bit register.

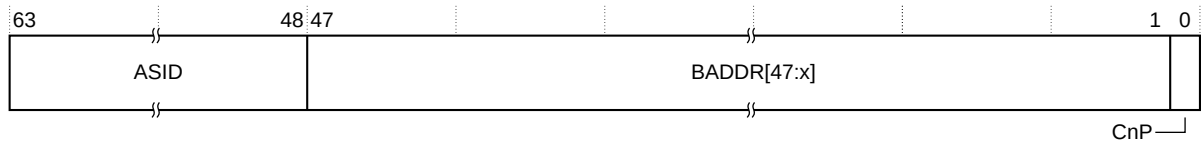Figure 13-91: TTBR1_EL1 bit assignments**ASID, [63:48]**

An ASID for the translation table base address. The TCR_EL1.A1 field selects either TTBR0_EL1.ASID or TTBR1_EL1.ASID.

BADDR[47:x], [47:1]

Translation table base address, bits[47:x]. Bits [x-1:0] are **RES0**.

x is based on the value of TCR_EL1.TOSZ, the stage of translation, and the memory translation granule size.

For instructions on how to calculate it, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

The value of x determines the required alignment of the translation table, that must be aligned to 2^x bytes.

If bits [x-1:1] are not all zero, this is a misaligned Translation Table Base Address. Its effects are **CONSTRAINED UNPREDICTABLE**, where bits [x-1:1] are treated as if all the bits are zero. The value read back from those bits is the value that is written.

CnP, [0]

Common not Private. The possible values are:

0	CnP is not supported.
1	CnP is supported.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.109 TTBR1_EL2, Translation Table Base Register 1, EL2

TTBR1_EL2 has the same format and contents as TTBR1_EL1.

See [13.108 TTBR1_EL1, Translation Table Base Register 1, EL1](#) on page 253.

13.110 VDISR_EL2, Virtual Deferred Interrupt Status Register, EL2

The VDISR_EL2 records that a virtual SError interrupt has been consumed by an `ESB` instruction executed at Non-secure EL1.

Bit field descriptions

VDISR_EL2 is a 64-bit register, and is part of the *Reliability, Availability, Serviceability* (RAS) registers functional group.

Configurations

See [13.110.1 VDISR_EL2 at EL1 using AArch64](#) on page 255.


Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.110.1 VDISR_EL2 at EL1 using AArch64

VDISR_EL2 has a specific format when written at EL1.

The following figure shows the VDISR_EL2 bit assignments when written at EL1 using AArch64:

Figure 13-92: VDISR_EL2 at EL1 using AArch64

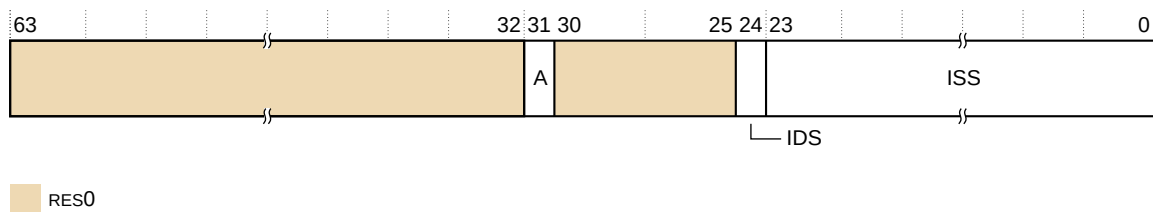

RES0, [63:32]

RES0 Reserved.

A, [31]

Set to 1 when ESB defers an asynchronous SError interrupt.

RES0, [30:25]

RES0 Reserved.

IDS, [24]

Contains the value from VESR_EL2.IDS.

ISS, [23:0]

Contains the value from VESR_EL2, bits[23:0].

13.111 VESR_EL2, Virtual SError Exception Syndrome Register

The VESR_EL2 provides the syndrome value that is reported to software on taking a virtual SError interrupt exception.

Bit field descriptions


VESR_EL2 is a 64-bit register, and is part of:

- The Exception and fault handling registers functional group.
- The Virtualization registers functional group.

If the virtual SError interrupt is taken to EL1, VESR_EL2 provides the syndrome value that is reported in ESR_EL1.

VESR_EL2 bit assignments

Figure 13-93: VESR_EL2 bit assignments

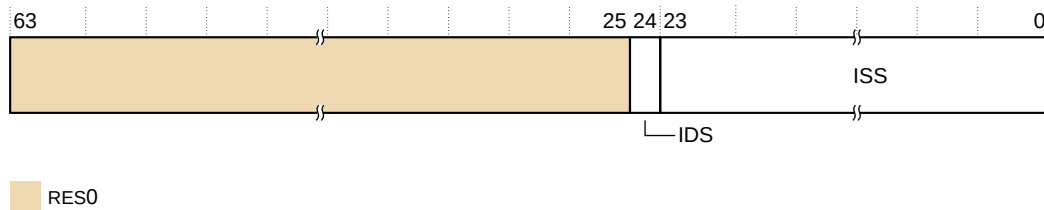**RES0, [63:25]**

RES0 Reserved.

IDS, [24]

Indicates whether the deferred SError interrupt was of an **IMPLEMENTATION DEFINED** type. See ESR_EL1.IDS for a description of the functionality.

On taking a virtual SError interrupt to EL1 using AArch64 because HCR_EL2.VSE == 1, ESR_EL1[24] is set to VESR_EL2.IDS.

ISS, [23:0]

Syndrome information. See ESR_EL1.ISS for a description of the functionality.

On taking a virtual SError interrupt to EL1 using AArch32 due to HCR_EL2.VSE == 1, ESR_EL1 [23:0] is set to VESR_EL2.ISS.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

13.112 VTCR_EL2, Virtualization Translation Control Register, EL2

The VTCR_EL2 controls the translation table walks required for the stage 2 translation of memory accesses from Non-secure EL0 and EL1.


It also holds Cacheability and Shareability information for the accesses.

Bit field descriptions

VTCR_EL2 is a 64-bit register, and is part of:

- The Virtualization registers functional group.
- The Virtual memory control registers functional group.

Figure 13-94: VTCR_EL2 bit assignments

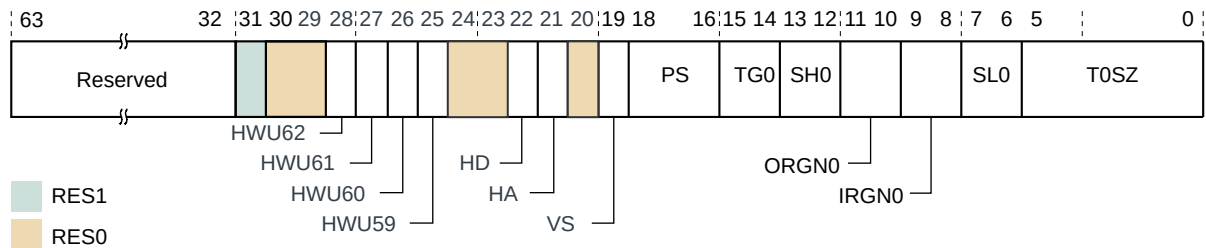

Bits[28:25] and bits[22:21], architecturally defined, are implemented in the core.

Reserved, [63:32]

Reserved.

TG0, [15:14]

TTBR0_EL2 granule size. The possible values are:

00 4KB.

01	64KB.
10	16KB.
11	Reserved.

All other values are not supported.

Configurations

RW fields in this register reset to architecturally **UNKNOWN** values.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


13.113 VTTBR_EL2, Virtualization Translation Table Base Register, EL2

VTTBR_EL2 holds the base address of the translation table for the stage 2 translation of memory accesses from Non-secure ELO and EL1.

Bit field descriptions

VTTBR_EL2 is a 64-bit register.

Figure 13-95: VTTBR_EL2 bit assignments

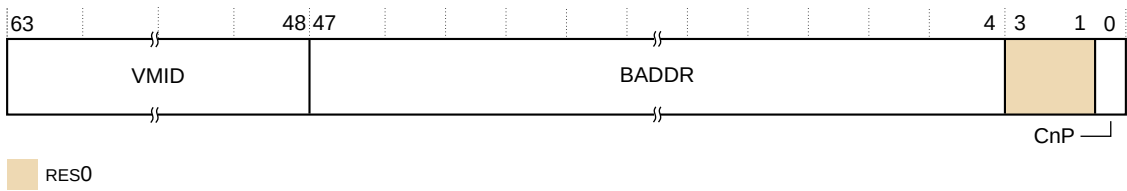

CnP, [0]

Common not Private. The possible values are:

0	CnP is not supported.
1	CnP is supported.

Configurations

There are no configuration notes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

14. Error System registers

This chapter describes the error registers accessed by the AArch64 error registers.

14.1 Error System register summary

This section identifies the ERRO* core error record registers accessed by the AArch64 ERX* error registers.

The ERRO* registers are agnostic to the architectural state. For example, this means that for $ERRSELR==0$ and $ERRSELR_EL1==0$, $ERXPFGF$ and $ERXPFGF_EL1$ will both access $ERROPFGF$.

For those registers that are not described in this chapter, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

The following table describes the architectural error record registers.

Table 14-1: Architectural error System register summary

Register mnemonic	Size	Register name	Access aliases from AArch64
ERROADDR	64	14.2 ERROADDR, Error Record Address Register on page 259	13.47 ERXADDR_EL1, Selected Error Record Address Register, EL1 on page 174
ERROCTLR	64	14.3 ERROCTLR, Error Record Control Register on page 260	13.48 ERXCTLR_EL1, Selected Error Record Control Register, EL1 on page 174
ERROFR	64	14.4 ERROFR, Error Record Feature Register on page 262	13.49 ERXFR_EL1, Selected Error Record Feature Register, EL1 on page 174
ERROMISCO	64	14.5 ERROMISCO, Error Record Miscellaneous Register 0 on page 264	13.50 ERXMISCO_EL1, Selected Error Record Miscellaneous Register 0, EL1 on page 175
ERROMISC1	64	14.6 ERROMISC1, Error Record Miscellaneous Register 1 on page 267	13.51 ERXMISC1_EL1, Selected Error Record Miscellaneous Register 1, EL1 on page 175
ERROSTATUS	32	14.10 ERROSTATUS, Error Record Primary Status Register on page 272	13.55 ERXSTATUS_EL1, Selected Error Record Primary Status Register, EL1 on page 179

The following table describes the error record registers that are **IMPLEMENTATION DEFINED**.

Table 14-2: IMPLEMENTATION DEFINED error System register summary

Register mnemonic	Size	Register name	Access aliases from AArch64
ERROPFGCDN	32	14.7 ERROPFGCDN, Error Pseudo Fault Generation Count Down Register on page 268	13.52 ERXPFGCDN_EL1, Selected Error Pseudo Fault Generation Count Down Register, EL1 on page 175
ERROPFGCTL	32	14.8 ERROPFGCTL, Error Pseudo Fault Generation Control Register on page 268	13.53 ERXPFGCTL_EL1, Selected Error Pseudo Fault Generation Control Register, EL1 on page 177
ERROPFGF	32	14.9 ERROPFGF, Error Pseudo Fault Generation Feature Register on page 270	13.54 ERXPFGF_EL1, Selected Pseudo Fault Generation Feature Register, EL1 on page 178


14.2 ERR0ADDR, Error Record Address Register

The ERR0ADDR stores the address that is associated to an error that is recorded.

Bit field descriptions

ERR0ADDR is a 64-bit register, and is part of the *Reliability, Availability, Serviceability* (RAS) registers functional group.

Figure 14-1: ERR0ADDR bit assignments

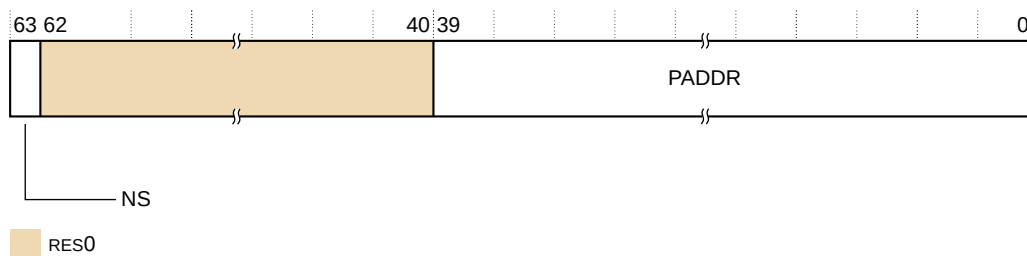

NS, [63]

Non-secure attribute. The possible values are:

0	The physical address is Secure.
1	The physical address is Non-secure.

RES0, [62:40]

RES0	Reserved.
-------------	-----------

PADDR, [39:0]

Physical address.

Configurations

ERR0ADDR resets to **UNKNOWN**.

When ERRSELR.SEL==0, this register is accessible from [13.47 ERXADDR_EL1, Selected Error Record Address Register, EL1](#) on page 174.

14.3 ERR0CTLR, Error Record Control Register

The ERR0CTLR contains enable bits for the node that writes to this record:

- Enabling error detection and correction.
- Enabling an error recovery interrupt.


- Enabling a fault handling interrupt.
- Enabling error recovery reporting as a read or write error response.

Bit field descriptions

ERROCTL is a 64-bit register and is part of the *Reliability, Availability, Serviceability* (RAS) registers functional group.

ERROCTL resets to CFI [8], FI [3], UI [2], and ED[0] are **UNKNOWN**. The rest of the register is **RES0**.

Figure 14-2: ERROCTL bit assignments

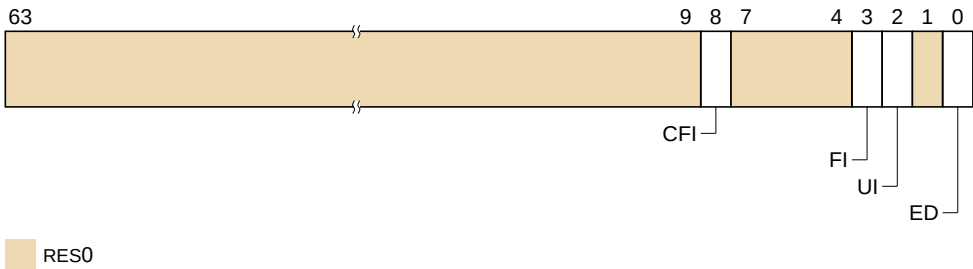

RES0, [63:9]

RES0 Reserved.

CFI, [8]

Fault handling interrupt for corrected errors enable.

The fault handling interrupt is generated when one of the standard CE counters on ERR0MISCO overflows and the overflow bit is set. The possible values are:

- | | |
|----------|--|
| 0 | Fault handling interrupt not generated for corrected errors. |
| 1 | Fault handling interrupt generated for corrected errors. |

The interrupt is generated even if the error status is overwritten because the error record already records a higher priority error.



This applies to both reads and writes.

RES0, [7:4]

RES0 Reserved.

FI, [3]

Fault handling interrupt enable.

The fault handling interrupt is generated for all detected Deferred errors and Uncorrected errors. The possible values are:

0	Fault handling interrupt disabled.
1	Fault handling interrupt enabled.

UI, [2]

Uncorrected error recovery interrupt enable. When enabled, the error recovery interrupt is generated for all detected Uncorrected errors that are not deferred. The possible values are:

0	Error recovery interrupt disabled.
1	Error recovery interrupt enabled.



Applies to both reads and writes.

RES0, [1]

RES0	Reserved.
-------------	-----------

ED, [0]

Error Detection and correction enable. The possible values are:

0	Error detection and correction disabled.
1	Error detection and correction enabled.

Configurations

This register is accessible from the following registers when ERRSELR.SEL==0:
[13.48 ERXCTLR_EL1](#), [Selected Error Record Control Register, EL1](#) on page 174.


14.4 ERROFR, Error Record Feature Register

The ERROFR defines which of the common architecturally defined features are implemented and, of the implemented features, which are software programmable.

Bit field descriptions

ERROFR is a 64-bit register, and is part of the *Reliability, Availability, Serviceability* (RAS) registers functional group.

The register is read-only.

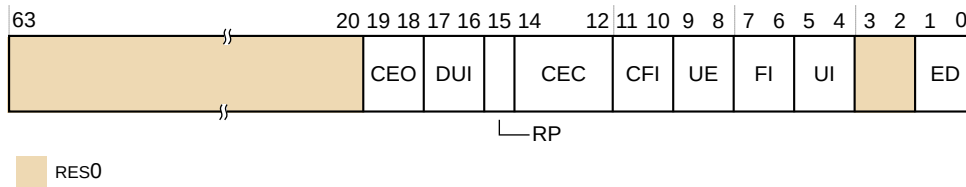Figure 14-3: ERR0FR bit assignments**RES0, [63:20]**

RES0

Reserved.

CEO, [19:18]

Corrected Error Overwrite. The value is:

00

Counts CE if a counter is implemented and keeps the previous error status. If the counter overflows, ERR0STATUS.OF is set to 1.

DUI, [17:16]

Error recovery interrupt for deferred errors. The value is:

00

The core does not support this feature.

RP, [15]

Repeat counter. The value is:

1

A first repeat counter and a second other counter are implemented. The repeat counter is the same size as the primary error counter.

CEC, [14:12]

Corrected Error Counter. The value is:

010

The node implements an 8-bit standard CE counter in ERR0MISCO[39:32].

CFI, [11:10]

Fault handling interrupt for corrected errors. The value is:

10

The node implements a control for enabling fault handling interrupts on corrected errors.

UE, [9:8]

In-band uncorrected error reporting. The value is:

- 01** The node implements in-band uncorrected error reporting, that is External aborts.

FI, [7:6]

Fault handling interrupt. The value is:

- 10** The node implements a fault handling interrupt and implements controls for enabling and disabling.

UI, [5:4]

Error recovery interrupt for uncorrected errors. The value is:

- 10** The node implements an error recovery interrupt and implements controls for enabling and disabling.

RES0, [3:2]

RES0

Reserved.

ED, [1:0]

Error detection and correction. The value is:

- 10** The node implements controls for enabling or disabling error detection and correction.

Configurations

ERR0FR resets to 0x000000000000A9A2

ERR0FR is accessible from the following registers when ERRSELR.SEL==0:


[13.49 ERXFR_EL1](#), [Selected Error Record Feature Register, EL1](#) on page 174.

14.5 ERR0MISC0, Error Record Miscellaneous Register 0

The ERR0MISC0 is an error syndrome register. It contains corrected error counters, information to identify where the error was detected, and other state information not present in the corresponding status and address error record registers.

Bit field descriptions

ERR0MISC0 is a 64-bit register, and is part of the *Reliability, Availability, Serviceability* (RAS) registers functional group.

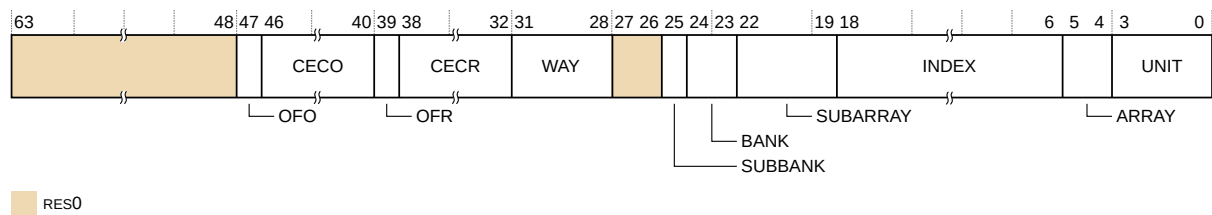Figure 14-4: ERRORMISCO bit assignments**RES0, [63:48]**

Reserved, **RES0**.

OFO, [47]

Sticky overflow bit, other. The possible values of this bit are:

0	Other counter has not overflowed.
1	Other counter has overflowed.

The fault handling interrupt is generated when the corrected fault handling interrupt is enabled and either overflow bit is set to 1.

CECO, [46:40]

Corrected error count, other. Incremented for each Corrected error that does not match the recorded syndrome.

This field resets to an **IMPLEMENTATION DEFINED** which might be **UNKNOWN** on a Cold reset. If the reset value is **UNKNOWN**, then the value of this field remains **UNKNOWN** until software initializes it.

OFR, [39]

Sticky overflow bit, repeat. The possible values of this bit are:

0	Repeat counter has not overflowed.
1	Repeat counter has overflowed.

The fault handling interrupt is generated when the corrected fault handling interrupt is enabled and either overflow bit is set to 1.

CECR, [38:32]

Corrected error count, repeat. Incremented for the first recorded error, which also records other syndromes, and then again for each Corrected error that matches the recorded syndrome.

This field resets to an **IMPLEMENTATION DEFINED** which might be **UNKNOWN** on a Cold reset. If the reset value is **UNKNOWN**, then the value of this field remains **UNKNOWN** until software initializes it.

WAY, [31:28]

The encoding depends on the unit from which the error being recorded was detected. The possible values are:

L1 Data Cache	Indicates which Tag RAM way or data RAM way detected the error. Upper 2 bits are unused.
L2 TLB	Indicates which RAM has an error. The possible values are 0 (RAM 1) to 9 (RAM 10).
L1 Instruction Cache	Indicates which way has the error. Upper 2 bits are unused.

RES0, [27:26]

Reserved, **RES0**.

SUBBANK, [25]

The encoding depends on the unit from which the error being recorded was detected. The possible values are:

L1 Instruction Cache	Indicates which subbank has the error, valid for instruction data cache. For Tag errors, this field is zero.
-------------------------------------	--

BANK, [24:23]

The encoding depends on the unit from which the error being recorded was detected. The possible values are:

L2 cache	Indicates which L2 bank detected the error. Upper 1 bit is unused.
L1 Instruction Cache	Indicates which bank has the error, valid for instruction data cache. For Tag errors, this field is zero.

SUBARRAY, [22:19]

The encoding depends on the unit from which the error being recorded was detected. The possible values are:

L2 Cache	Indicates which L2 Tag way or data doubleword detected the error. Upper 1 bit is unused.
L1 Data Cache	Indicates for L1 Data RAM which word had the error detected. For L1 Tag RAMs which bank had the error (0b0000: bank0, 0b0001: bank1)

INDEX, [18:6]

The encoding depends on the unit from which the error being recorded was detected. The possible values are:

L2 Cache	Indicates which index detected the error. Upper bits of the index are unused depending on the cache size.
L1 Data Cache	Indicates which index detected the error. Upper bits of the index are unused depending on the cache size.
L2 TLB	Index of TLB RAM. Upper 4 bits are unused.
L1 Instruction Cache	Indicates which index has the error. Upper bits of the index are unused depending on the cache size.

ARRAY, [5:4]

The encoding depends on the unit from which the error being recorded was detected. The possible values are:

L2 Cache	Indicates which array has the error. The possible values are:
	0b00 L2 Tag RAM.
	0b01 L2 Data RAM.
	0b11 CHI Completer Error.
L1 Data Cache	Indicates which array detected the error. The possible values are:
	0b00 LS0 copy of Tag RAM.
	0b01 LS1 copy of Tag RAM.
	0b10 LS Data RAM.
L1 Instruction Cache	Indicates which array that detected the error, Data Array has higher priority. The possible values are:
	0b00 Tag.
	0b01 Data.
	0b10 Macro-OP cache.

UNIT, [3:0]

Indicates the unit which detected the error. The possible values are:

0b1000	L2 Cache.
0b0100	L1 Data Cache.
0b0010	L2 TLB.
0b0001	L1 Instruction Cache.

Configurations

ERRMISCO resets to [63:32] is 0x00000000, [31:0] is **UNKNOWN**.

This register is accessible from the following registers when ERRSELR.SEL=0:

- [13.50 ERXMISCO_EL1, Selected Error Record Miscellaneous Register 0, EL1](#) on page 175.

14.6 ERR0MISC1, Error Record Miscellaneous Register 1

This register is unused in the Cortex®-A77 core and marked as **RES0**.

Configurations

When ERRSELR.SEL==0, ERR0MISC1 is accessible from [13.51 ERXMISC1_EL1, Selected Error Record Miscellaneous Register 1, EL1](#) on page 175.


14.7 ERR0PFGCDN, Error Pseudo Fault Generation Count Down Register

ERR0PFGCDN is the Cortex®-A77 node register that generates one of the errors that are enabled in the corresponding ERR0PFGCTL register.

Bit field descriptions

ERR0PFGCDN is a 32-bit register and is RW.

Figure 14-5: ERR0PFGCDN bit assignments



CDN, [31:0]

Count Down value. The reset value of the Error Generation Counter is used for the countdown.

Configurations

There are no configuration options.

ERR0PFGCDN resets to **UNKNOWN**.

When ERRSELR.SEL==0, ERR0PFGCDN is accessible from [13.52 ERXPFGCDN_EL1, Selected Error Pseudo Fault Generation Count Down Register, EL1](#) on page 175.


14.8 ERROPFGCTL, Error Pseudo Fault Generation Control Register

The ERROPFGCTL is the Cortex®-A77 node register that enables controlled fault generation.

Bit field descriptions

ERROPFGCTL is a 32-bit read/write register.

Figure 14-6: ERROPFGCTL bit assignments

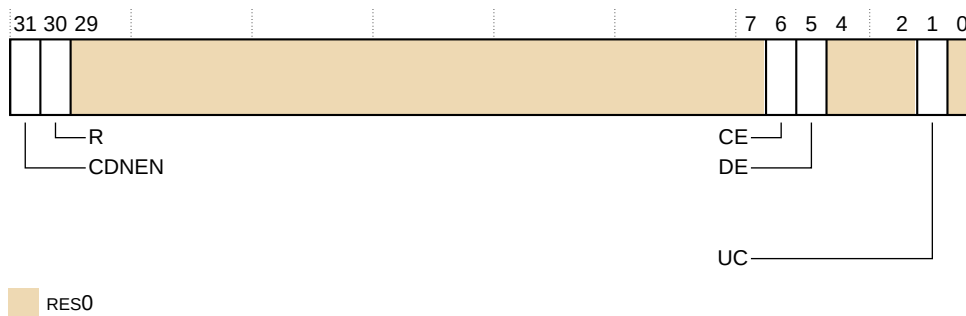

CDNEN, [31]

Count down enable. This bit controls transfers from the value that is held in the ERROPFGCDN into the Error Generation Counter and enables this counter to start counting down. The possible values are:

- | | |
|---|---|
| 0 | The Error Generation Counter is disabled. |
| 1 | The value that is held in the ERROPFGCDN register is transferred into the Error Generation Counter. The Error Generation Counter counts down. |

R, [30]

Restartable bit. When it reaches 0, the Error Generation Counter restarts from the ERROPFGCDN value or stops. The possible values are:

- | | |
|---|---|
| 0 | When it reaches 0, the counter stops. |
| 1 | When it reaches 0, the counter reloads the value that is stored in ERROPFGCDN and starts counting down again. |

RES0, [29:7]

Reserved, RES0.

CE, [6]

Corrected error generation enable. The possible values are:

- | | |
|---|----------------------------------|
| 0 | No corrected error is generated. |
|---|----------------------------------|

- | | |
|---|--|
| 1 | A corrected error might be generated when the Error Generation Counter is triggered. |
|---|--|

DE, [5]

Deferred Error generation enable. The possible values are:

- | | |
|---|---|
| 0 | No deferred error is generated. |
| 1 | A deferred error might be generated when the Error Generation Counter is triggered. |

This bit is **RES0** if the node does not support this control.

This bit resets to an architecturally **UNKNOWN** value on a Cold reset. This bit is preserved on an Error Recovery reset.

RES0, [4:2]

Reserved, **RES0**.

UC, [1]

Uncontainable error generation enable. The possible values are:

- | | |
|---|---|
| 0 | No uncontainable error is generated. |
| 1 | An uncontainable error might be generated when the Error Generation Counter is triggered. |

RES0, [0]

Reserved, **RES0**.

Configurations

There are no configuration notes.

ERR0PFGCTL resets to 0x00000000.

ERR0PFGCTL is accessible from the following registers when ERRSELR.SEL==0:

- [13.53 ERXPFPGCTL_EL1, Selected Error Pseudo Fault Generation Control Register, EL1](#) on page 177.


14.9 ERR0PFGF, Error Pseudo Fault Generation Feature Register

The ERR0PFGF is the Cortex®-A77 node register that defines which fault generation features are implemented.

Bit field descriptions

ERR0PFGF is a 32-bit register and is RO.

Figure 14-7: ERR0PFGF bit assignments

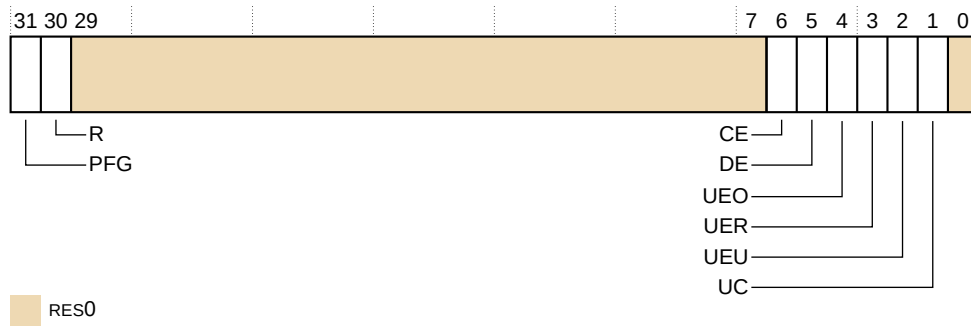

PFG, [31]

Pseudo Fault Generation. The value is:

- 1 The node implements a fault injection mechanism.

R, [30]

Restartable bit. When it reaches zero, the Error Generation Counter restarts from the ERRPGCDN value or stops. The value is:

- 1** This feature is controllable.

RES0, [29:7]

- | | |
|------|-----------|
| RES0 | Reserved. |
|------|-----------|

CE, [6]

Corrected Error generation. The value is:

- 1** This feature is controllable.

DE, [5]

Deferred Error generation. The value is:

- 1** This feature is controllable.

UEO, [4]

Latent or Restartable Error generation. The value is:

- 0 The node does not support this feature.

UER, [3]

Signaled or Recoverable Error generation. The value is:

- 0** The node does not support this feature.

UEU, [2]

Unrecoverable Error generation. The value is:

0 The node does not support this feature.

UC, [1]

Uncontainable Error generation. The value is:

1 This feature is controllable.

[0]

RES0 Reserved.

Configurations

There are no configuration notes.

ERR0PFGF resets to 0xC0000062.

When ERRSELR.SEL==0, ERR0PFGF is accessible from [13.54 ERXPFGF_EL1, Selected Pseudo Fault Generation Feature Register, EL1](#) on page 178.

14.10 ERROSTATUS, Error Record Primary Status Register


The ERROSTATUS contains information about the error record.

The register indicates:

- Whether any error has been detected.
- Whether any detected error was not corrected and returned to a requester.
- Whether any detected error was not corrected and deferred.
- Whether a second error of the same type was detected before software handled the first error.
- Whether any error has been reported.
- Whether the other error record registers contain valid information.

Bit field descriptions

ERROSTATUS is a 32-bit register.

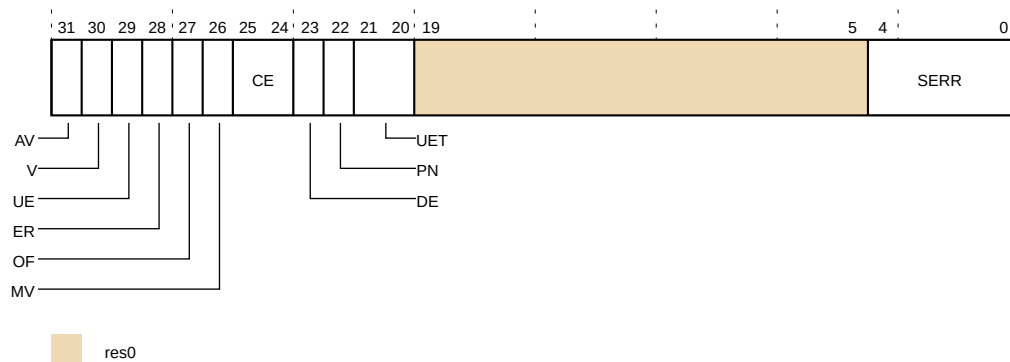Figure 14-8: ERROSTATUS bit assignments**AV, [31]**

Address Valid. The possible values are:

- | | |
|---|--|
| 0 | ERROADDR is not valid. |
| 1 | ERROADDR contains an address that is associated with the highest priority error recorded by this record. |

V, [30]

Status Register valid. The possible values are:

- | | |
|---|--|
| 0 | ERROSTATUS is not valid. |
| 1 | ERROSTATUS is valid. At least one error has been recorded. |

UE, [29]

Uncorrected error. The possible values are:

- | | |
|---|--|
| 0 | No error that could not be corrected or deferred has been detected. |
| 1 | At least one error that could not be corrected or deferred has been detected. If error recovery interrupts are enabled, then the interrupt signal is asserted until this bit is cleared. |

ER, [28]

Error reported. The possible values are:

- | | |
|---|---|
| 0 | No External abort has been reported. |
| 1 | The node has reported an External abort to the requester that is in access or making a transaction. |

OF, [27]

Overflow. The possible values are:

- | | |
|---|---|
| 0 | <ul style="list-style-type: none"> If UE == 1, then no error status for an Uncorrected error has been discarded. |
|---|---|

- If UE == 0 and DE == 1, then no error status for a Deferred error has been discarded.

- If UE == 0, DE == 0, and CE != 0b00, then:
The corrected error counter has not overflowed.

1 More than one error has occurred and so details of the other error have been discarded.

MV, [26]

Miscellaneous Registers Valid. The possible values are:

0	ERRORMISC0 and ERRORMISC1 are not valid.
1	This bit indicates that ERRORMISC0 contains additional information about any error that is recorded by this record.

CE, [25:24]

Corrected error. The possible values are:

0b00	No corrected error recorded.
0b10	At least one corrected error recorded.

DE, [23]

Deferred error. The possible values are:

0	No errors were deferred.
1	At least one error was not corrected and deferred by poisoning.

PN, [22]

Poison. The value is:

0	The Cortex®-A77 core cannot distinguish a poisoned value from a corrupted value.
----------	--

UET, [21:20]

Uncorrected Error Type. The value is:

0b00	Uncontainable.
-------------	----------------

RES0, [19:5]

RES0.

Reserved.

SERR, [4:0]

Primary error code. The possible values are:

0x0	No error.
0x1	Errors due to fault injection.
0x2	ECC error from internal data buffer.

0x6	ECC error on cache data RAM.
0x7	ECC error on cache tag or dirty RAM.
0x8	Parity error on TLB data RAM.
0x12	Error response for a cache copyback.
0x15	Deferred error from a completer not supported at the consumer. For example, poisoned data received from a completer by a requester that cannot defer the error further.

Configurations

There are no configuration notes.

ERROSTATUS resets to 0x00000000.

ERROSTATUS is accessible from the following registers when ERRSELR_EL1.SEL==0:

- [13.55 ERXSTATUS_EL1, Selected Error Record Primary Status Register, EL1](#) on page 179.

15. GIC registers

This chapter describes the GIC registers.

15.1 CPU interface registers

Each CPU interface block provides the interface for the Cortex®-A77 core that interfaces with a GIC distributor within the system.

The Cortex®-A77 core only supports System register access to the GIC CPU interface registers. The following table lists the three types of GIC CPU interface System registers supported in the Cortex®-A77 core.

Table 15-1: GIC CPU interface System register types supported in the Cortex®-A77 core.

Register prefix	Register type
ICC	Physical GIC CPU interface System registers.
ICV	Virtual GIC CPU interface System registers.
ICH	Virtual interface control System registers.

Access to virtual GIC CPU interface System registers is only possible at Non-secure EL1.

Access to ICC registers or the equivalent ICV registers is determined by HCR_EL2. See [13.60 HCR_EL2, Hypervisor Configuration Register, EL2](#) on page 185.

For more information on the CPU interface, see the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.2 AArch64 physical GIC CPU interface System register summary

The following table lists the AArch64 physical GIC CPU interface System registers that have **IMPLEMENTATION DEFINED** bits.

See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#) for more information and a complete list of AArch64 physical GIC CPU interface System registers.

Table 15-2: AArch64 physical GIC CPU interface System register summary

Name	Op0	Op1	CRn	CRm	Op2	Type	Description
ICC_APOR0_EL1	3	0	12	8	4	RW	15.3 ICC_APOR0_EL1, Interrupt Controller Active Priorities Group 0 Register 0, EL1 on page 277

Name	Op0	Op1	CRn	CRm	Op2	Type	Description
ICC_AP1R0_EL1	3	0	12	9	0	RW	15.4 ICC_AP1R0_EL1, Interrupt Controller Active Priorities Group 1 Register 0 EL1 on page 277
ICC_BPR0_EL1	3	0	12	8	3	RW	15.5 ICC_BPR0_EL1, Interrupt Controller Binary Point Register 0, EL1 on page 278
ICC_BPR1_EL1	3	0	12	12	3	RW	15.6 ICC_BPR1_EL1, Interrupt Controller Binary Point Register 1, EL1 on page 279
ICC_CTLR_EL1	3	0	12	12	4	RW	15.7 ICC_CTLR_EL1, Interrupt Controller Control Register, EL1 on page 280
ICC_CTLR_EL3	3	6	12	12	4	RW	15.8 ICC_CTLR_EL3, Interrupt Controller Control Register, EL3 on page 282
ICC_SRE_EL1	3	0	12	12	5	RW	15.9 ICC_SRE_EL1, Interrupt Controller System Register Enable Register, EL1 on page 284
ICC_SRE_EL2	3	4	12	9	5	RW	15.10 ICC_SRE_EL2, Interrupt Controller System Register Enable register, EL2 on page 286
ICC_SRE_EL3	3	6	12	12	5	RW	15.11 ICC_SRE_EL3, Interrupt Controller System Register Enable register, EL3 on page 287

15.3 ICC_AP0R0_EL1, Interrupt Controller Active Priorities Group 0 Register 0, EL1

The ICC_AP0R0_EL1 provides information about Group 0 active priorities.

Bit descriptions

This register is a 32-bit register and is part of:

- The GIC System registers functional group.
- The GIC control registers functional group.

The core implements 5 bits of priority with 32 priority levels, corresponding to the 32 bits [31:0] of the register. The possible values for each bit are:

0x00000000	No interrupt active. This is the reset value.
0x00000001	Interrupt active for priority 0x0.
0x00000002	Interrupt active for priority 0x8.
...	
0x80000000	Interrupt active for priority 0xF8.

Details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.4 ICC_AP1R0_EL1, Interrupt Controller Active Priorities Group 1 Register 0 EL1

The ICC_AP1R0_EL1 provides information about Group 1 active priorities.

Bit descriptions

This register is a 32-bit register and is part of:

- The GIC System registers functional group.
- The GIC control registers functional group.

The core implements 5 bits of priority with 32 priority levels, corresponding to the 32 bits [31:0] of the register. The possible values for each bit are:

0x00000000	No interrupt active. This is the reset value.
0x00000001	Interrupt active for priority 0x0.
0x00000002	Interrupt active for priority 0x8.
	...
0x80000000	Interrupt active for priority 0xF8.

Details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).


15.5 ICC_BPR0_EL1, Interrupt Controller Binary Point Register 0, EL1

ICC_BPR0_EL1 defines the point at which the priority value fields split into two parts, the group priority field and the subpriority field. The group priority field determines Group 0 interrupt preemption.

Bit field descriptions

ICC_BPR0_EL1 is a 32-bit register and is part of:

- The GIC System registers functional group.
- The GIC control registers functional group.

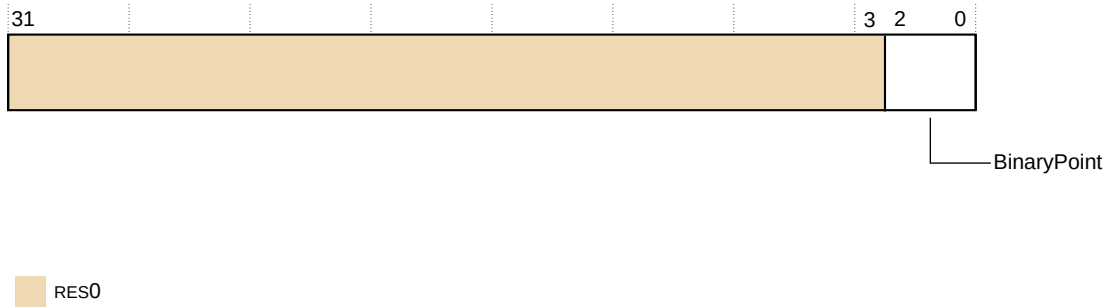Figure 15-1: ICC_BPR0_EL1 bit assignments**RES0, [31:3]**

RES0 Reserved.

BinaryPoint, [2:0]

The value of this field controls how the 8-bit interrupt priority field is split into a group priority field, that determines interrupt preemption, and a subpriority field. The minimum value that is implemented is:

0x2

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).


15.6 ICC_BPR1_EL1, Interrupt Controller Binary Point Register 1, EL1

ICC_BPR1_EL1 defines the point at which the priority value fields split into two parts, the group priority field and the subpriority field. The group priority field determines Group 1 interrupt preemption.

Bit field descriptions

ICC_BPR1_EL1 is a 32-bit register and is part of:

- The GIC System registers functional group.
- The GIC control registers functional group.

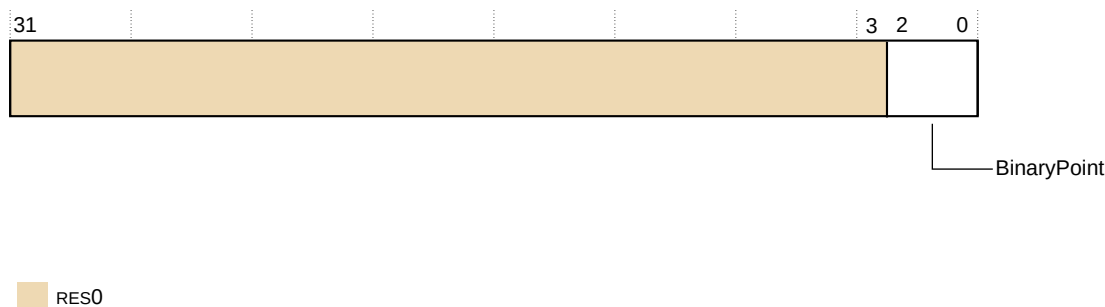Figure 15-2: ICC_BPR1_EL1 bit assignments**RES0, [31:3]**

RES0 Reserved.

BinaryPoint, [2:0]

The value of this field controls how the 8-bit interrupt priority field is split into a group priority field, that determines interrupt preemption, and a subpriority field.

The minimum value that is implemented of ICC_BPR1_EL1 Secure register is 0x2.

The minimum value that is implemented of ICC_BPR1_EL1 Non-secure register is 0x3.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.7 ICC_CTLR_EL1, Interrupt Controller Control Register, EL1


ICC_CTLR_EL1 controls aspects of the behavior of the GIC CPU interface and provides information about the features implemented.

Bit field descriptions

ICC_CTLR_EL1 is a 32-bit register and is part of:

- The GIC System registers functional group.
- The GIC control registers functional group.

Figure 15-3: ICC_CTLR_EL1 bit assignments

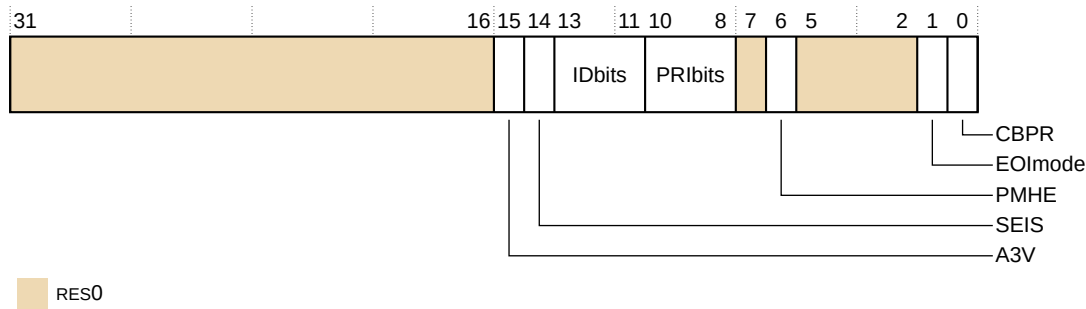

RES0, [31:16]

RES0 Reserved.

A3V, [15]

Affinity 3 Valid. The value is:

1 The CPU interface logic supports nonzero values of Affinity 3 in SGI generation System registers.

SEIS, [14]

SEI Support. The value is:

0 The CPU interface logic does not support local generation of SEIs.

IDbits, [13:11]

Identifier bits. The value is:

0 The number of physical interrupt identifier bits supported is 16 bits.

This field is an alias of ICC_CTLR_EL3.IDbits.

PRIbits, [10:8]

Priority bits. The value is:

0x4 The core supports 32 levels of physical priority with 5 priority bits.

RES0, [7]

RES0 Reserved.

PMHE, [6]

Priority Mask Hint Enable. This bit is read-only and is an alias of ICC_CTLR_EL3.PMHE. The possible values are:

- | | |
|---|---|
| 0 | Disables use of ICC_PMR as a hint for interrupt distribution. |
| 1 | Enables use of ICC_PMR as a hint for interrupt distribution. |

RES0, [5:2]

- | | |
|------|-----------|
| RES0 | Reserved. |
|------|-----------|

EOImode, [1]

End of interrupt mode for the current Security state. The possible values are:

- | | |
|---|---|
| 0 | ICC_EOIR0 and ICC_EOIR1 provide both priority drop and interrupt deactivation functionality. Accesses to ICC_DIR are UNPREDICTABLE . |
| 1 | ICC_EOIR0 and ICC_EOIR1 provide priority drop functionality only. ICC_DIR provides interrupt deactivation functionality. |

CBPR, [0]

Common Binary Point Register. Control whether the same register is used for interrupt preemption of both Group 0 and Group 1 interrupt. The possible values are:

- | | |
|---|--|
| 0 | ICC_BPRO determines the preemption group for Group 0 interrupts. |
| 1 | ICC_BPR1 determines the preemption group for Group 1 interrupts.
ICC_BPRO determines the preemption group for Group 0 and Group 1 interrupts. |

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.8 ICC_CTLR_EL3, Interrupt Controller Control Register, EL3


ICC_CTLR_EL3 controls aspects of the behavior of the GIC CPU interface and provides information about the features implemented.

Bit field descriptions

ICC_CTLR_EL3 is a 32-bit register and is part of:

- The GIC System registers functional group.
- The Security registers functional group.
- The GIC control registers functional group.

Figure 15-4: ICC_CTLR_EL3 bit assignments

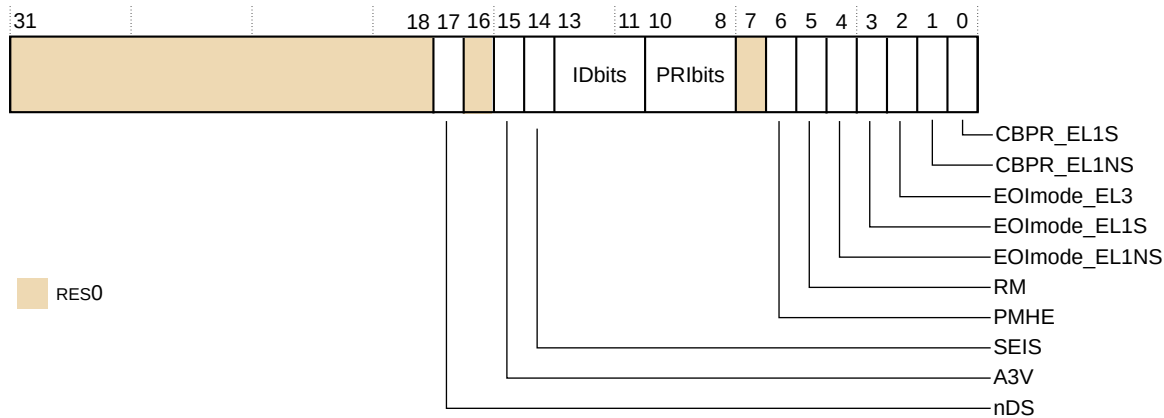

RES0, [31:18]

RES0 Reserved.

nDS, [17]

Disable Security not supported. Read-only and writes are **IGNORED**. The value is:

1 The CPU interface logic does not support disabling of security, and requires that security is not disabled.

RES0, [16]

RES0 Reserved.

A3V, [15]

Affinity 3 Valid. This bit is RAO/WI.

SEIS, [14]

SEI Support. The value is:

0 The CPU interface logic does not support generation of SEIs.

IDbits, [13:11]

Identifier bits. The value is:

0x0 The number of physical interrupt identifier bits supported is 16 bits.

This field is an alias of ICC_CTLR_EL3.IDbits.

PRbits, [10:8]

Priority bits. The value is:

0x4 The core supports 32 levels of physical priority with 5 priority bits.

RES0, [7]

Reserved, **RES0**.

PMHE, [6]

Priority Mask Hint Enable. The possible values are:

0 Disables use of ICC_PMR as a hint for interrupt distribution.
1 Enables use of ICC_PMR as a hint for interrupt distribution.

RM, [5]

Routing Modifier. This bit is RAZ/WI.

EOImode_EL1NS, [4]

EOI mode for interrupts handled at Non-secure EL1 and EL2.

Controls whether a write to an End of Interrupt register also deactivates the interrupt.

EOImode_EL1S, [3]

EOI mode for interrupts handled at Secure EL1.

Controls whether a write to an End of Interrupt register also deactivates the interrupt.

EOImode_EL3, [2]

EOI mode for interrupts handled at EL3.

Controls whether a write to an End of Interrupt register also deactivates the interrupt.

CBPR_EL1NS, [1]

Common Binary Point Register, EL1 Non-secure.

Control whether the same register is used for interrupt preemption of both Group 0 and Group 1 Non-secure interrupts at EL1 and EL2.

CBPR_EL1S, [0]

Common Binary Point Register, EL1 Secure.

Control whether the same register is used for interrupt preemption of both Group 0 and Group 1 Secure interrupt at EL1.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.9 ICC_SRE_EL1, Interrupt Controller System Register Enable Register, EL1


ICC_SRE_EL1 controls whether the System register interface or the memory-mapped interface to the GIC CPU interface is used for EL0 and EL1.

Bit field descriptions

ICC_SRE_EL1 is a 32-bit register and is part of:

- The GIC System registers functional group.
- The GIC control registers functional group.

Figure 15-5: ICC_SRE_EL1 bit assignments

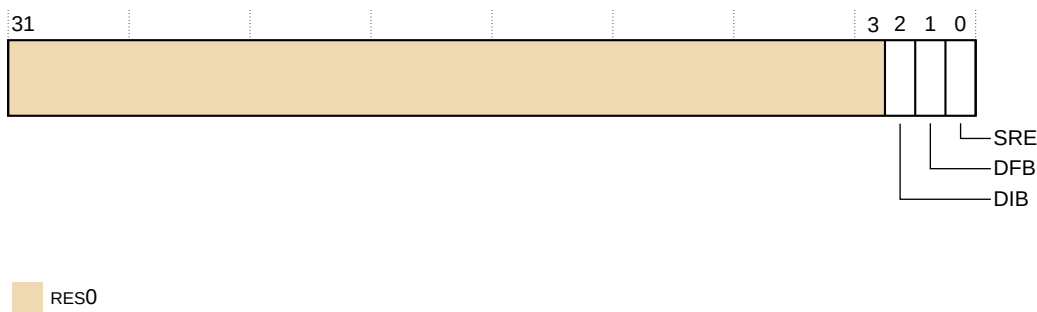

RES0, [31:3]

RES0 Reserved.

DIB, [2]

Disable IRQ bypass. The possible values are:

0x0	IRQ bypass enabled.
0x1	IRQ bypass disabled.

This bit is an alias of ICC_SRE_EL3.DIB

DFB, [1]

Disable FIQ bypass. The possible values are:

0x0	FIQ bypass enabled.
0x1	FIQ bypass disabled.

This bit is an alias of ICC_SRE_EL3.DFB

SRE, [0]

System Register Enable. The value is:

0x1

The System register interface for the current Security state is enabled.

This bit is RAO/WI. The core only supports a System register interface to the GIC CPU interface.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#) .

15.10 ICC_SRE_EL2, Interrupt Controller System Register Enable register, EL2


ICC_SRE_EL2 controls whether the System register interface or the memory-mapped interface to the GIC CPU interface is used for EL2.

Bit field descriptions

ICC_SRE_EL2 is a 32-bit register and is part of:

- The GIC System registers functional group.
- The Virtualization registers functional group.
- The GIC control registers functional group.

Figure 15-6: ICC_SRE_EL2 bit assignments

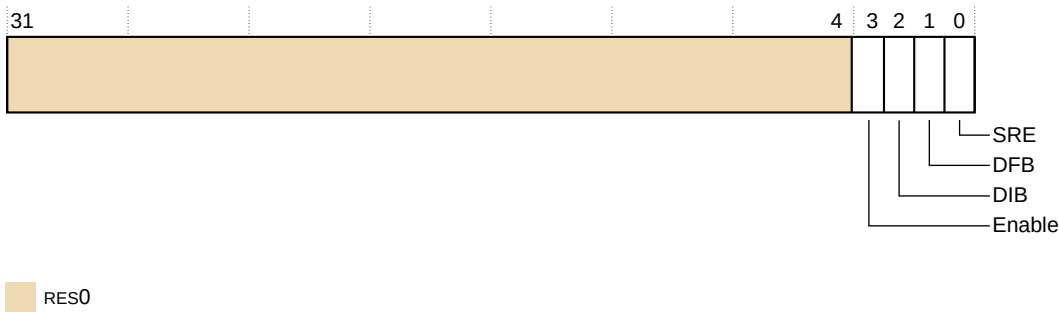

RES0, [31:4]

RES0

Reserved.

Enable, [3]

Enables lower Exception level access to ICC_SRE_EL1. The value is:

0x1

Non-secure EL1 accesses to ICC_SRE_EL1 do not trap to EL2.

This bit is RAO/WI.

DIB, [2]

Disable IRQ bypass. The possible values are:

0x0	IRQ bypass enabled.
0x1	IRQ bypass disabled.

This bit is an alias of ICC_SRE_EL3.DIB

DFB, [1]

Disable FIQ bypass. The possible values are:

0x0	FIQ bypass enabled.
0x1	FIQ bypass disabled.

This bit is an alias of ICC_SRE_EL3.DFB

SRE, [0]

System Register Enable. The value is:

0x1	The System register interface for the current Security state is enabled.
------------	--

This bit is RAO/WI. The core only supports a System register interface to the GIC CPU interface.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.11 ICC_SRE_EL3, Interrupt Controller System Register Enable register, EL3


ICC_SRE_EL3 controls whether the System register interface or the memory-mapped interface to the GIC CPU interface is used for EL3.

Bit field descriptions

ICC_SRE_EL3 is a 32-bit register and is part of:

- The GIC System registers functional group.
- The Security registers functional group.
- The GIC control registers functional group.

Figure 15-7: ICC_SRE_EL3 bit assignments

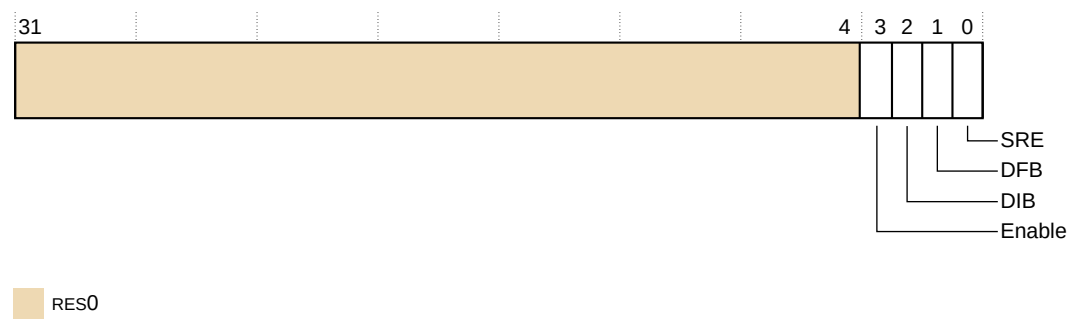

RES0, [31:4]

RES0 Reserved.

Enable, [3]

Enables lower Exception level access to ICC_SRE_EL1 and ICC_SRE_EL2. The value is:

- | | |
|---|--|
| 1 | Secure EL1 accesses to Secure ICC_SRE_EL1 do not trap to EL3. |
| | EL2 accesses to Non-secure ICC_SRE_EL1 and ICC_SRE_EL2 do not trap to EL3. |
| | Non-secure EL1 accesses to ICC_SRE_EL1 do not trap to EL3. |

This bit is RAO/WI.

DIB, [2]

Disable IRQ bypass. The possible values are:

- | | |
|---|----------------------|
| 0 | IRQ bypass enabled. |
| 1 | IRQ bypass disabled. |

DFB, [1]

Disable FIQ bypass. The possible values are:

- | | |
|---|----------------------|
| 0 | FIQ bypass enabled. |
| 1 | FIQ bypass disabled. |

SRE, [0]

System Register Enable. The value is:

- | | |
|---|--|
| 1 | The System register interface for the current Security state is enabled. |
|---|--|

This bit is RAO/WI. The core only supports a System register interface to the GIC CPU interface.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.12 AArch64 virtual GIC CPU interface register summary

The following table describes the AArch64 virtual GIC CPU interface System registers that have **IMPLEMENTATION DEFINED** bits.

See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#) for more information and a complete list of AArch64 virtual GIC CPU interface System registers.

Table 15-3: AArch64 virtual GIC CPU interface register summary

Name	Op0	Op1	CRn	CRm	Op2	Type	Description
ICV_APOR0_EL1	3	0	12	8	4	RW	15.13 ICV_APOR0_EL1, Interrupt Controller Virtual Active Priorities Group 0 Register 0, EL1 on page 289
ICV_AP1R0_EL1	3	0	12	9	0	RW	15.14 ICV_AP1R0_EL1, Interrupt Controller Virtual Active Priorities Group 1 Register 0, EL1 on page 290
ICV_BPR0_EL1	3	0	12	8	3	RW	15.15 ICV_BPR0_EL1, Interrupt Controller Virtual Binary Point Register 0, EL1 on page 290
ICV_BPR1_EL1	3	0	12	12	3	RW	15.16 ICV_BPR1_EL1, Interrupt Controller Virtual Binary Point Register 1, EL1 on page 291
ICV_CTLR_EL1	3	0	12	12	4	RW	15.17 ICV_CTLR_EL1, Interrupt Controller Virtual Control Register, EL1 on page 292

15.13 ICV_APOR0_EL1, Interrupt Controller Virtual Active Priorities Group 0 Register 0, EL1

The ICV_APOR0_EL1 register provides information about virtual Group 0 active priorities.

Bit descriptions

This register is a 32-bit register and is part of the virtual GIC System registers functional group.

The core implements 5 bits of priority with 32 priority levels, corresponding to the 32 bits [31:0] of the register. The possible values for each bit are:

- 0x00000000** No interrupt active. This is the reset value.
- 0x00000001** Interrupt active for priority 0x0.
- 0x00000002** Interrupt active for priority 0x8.

...
0x80000000 Interrupt active for priority 0xF8.

Details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.14 ICV_AP1R0_EL1, Interrupt Controller Virtual Active Priorities Group 1 Register 0, EL1

The ICV_AP1R0_EL1 register provides information about virtual Group 1 active priorities.

Bit descriptions

This register is a 32-bit register and is part of the virtual GIC System registers functional group.

The core implements 5 bits of priority with 32 priority levels, corresponding to the 32 bits [31:0] of the register. The possible values for each bit are:

0x00000000 No interrupt active. This is the reset value.
0x00000001 Interrupt active for priority 0x0.
0x00000002 Interrupt active for priority 0x8.
 ...
0x80000000 Interrupt active for priority 0xF8.


Details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.15 ICV_BPR0_EL1, Interrupt Controller Virtual Binary Point Register 0, EL1

ICV_BPR0_EL1 defines the point at which the priority value fields split into two parts, the group priority field and the subpriority field. The group priority field determines virtual Group 0 interrupt preemption.

Bit field descriptions

ICC_BPR0_EL1 is a 32-bit register and is part of the virtual GIC System registers functional group.

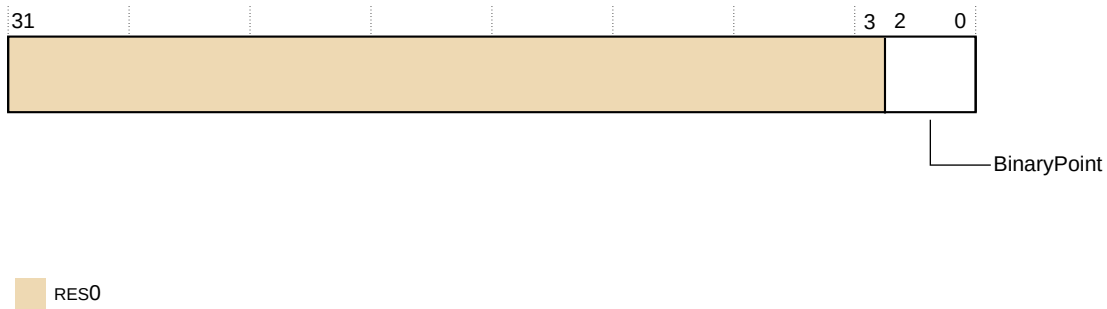Figure 15-8: ICV_BPR0_EL1 bit assignments**RES0, [31:3]**Reserved, **RES0**.**BinaryPoint, [2:0]**

The value of this field controls how the 8-bit interrupt priority field is split into a group priority field, that determines interrupt preemption, and a subpriority field. The minimum value that is implemented is:

0x2


Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.16 ICV_BPR1_EL1, Interrupt Controller Virtual Binary Point Register 1, EL1

ICV_BPR1_EL1 defines the point at which the priority value fields split into two parts, the group priority field and the subpriority field. The group priority field determines virtual Group 1 interrupt preemption.

Bit field descriptions

ICV_BPR1_EL1 is a 32-bit register and is part of the virtual GIC System registers functional group.

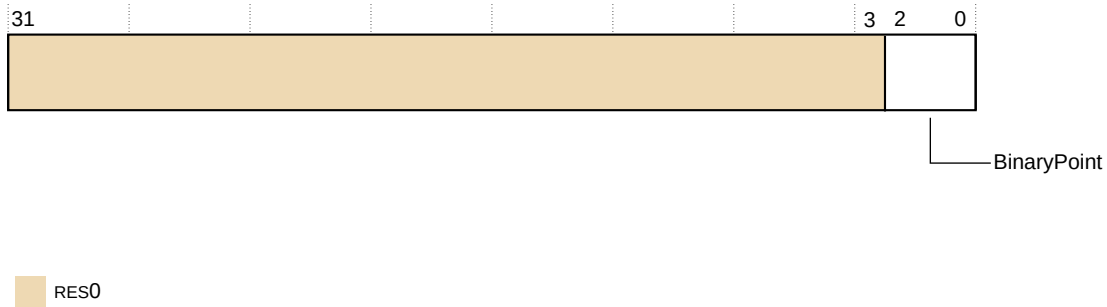Figure 15-9: ICV_BPR1_EL1 bit assignments**RES0, [31:3]**

RES0 Reserved.

BinaryPoint, [2:0]

The value of this field controls how the 8-bit interrupt priority field is split into a group priority field, that determines interrupt preemption, and a subpriority field.

The minimum value that is implemented of ICV_BPR1_EL1 Secure register is 0x2.

The minimum value that is implemented of ICV_BPR1_EL1 Non-secure register is 0x3.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).


15.17 ICV_CTLR_EL1, Interrupt Controller Virtual Control Register, EL1

ICV_CTLR_EL1 controls aspects of the behavior of the GIC virtual CPU interface and provides information about the features implemented.

Bit field descriptions

ICV_CTLR_EL1 is a 32-bit register and is part of the virtual GIC System registers functional group.

Figure 15-10: ICV_CTLR_EL1 bit assignments

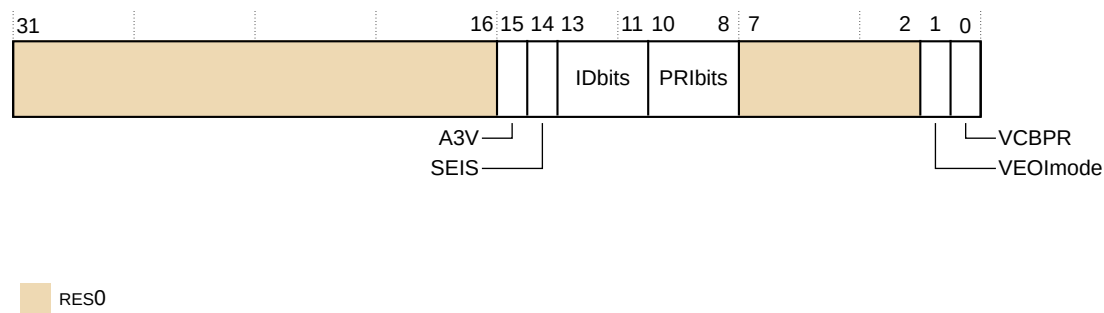

RES0, [31:16]

RES0 Reserved.

A3V, [15]

Affinity 3 Valid. The value is:

0x1 The virtual CPU interface logic supports nonzero values of Affinity 3 in SGI generation System registers.

SEIS, [14]

SEI Support. The value is:

0x0 The virtual CPU interface logic does not support local generation of SEIs.

IDbits, [13:11]

Identifier bits. The value is:

0x0 The number of physical interrupt identifier bits supported is 16 bits.

PRIbits, [10:8]

Priority bits. The value is:

0x4 Support 32 levels of physical priority (5 priority bits).

RES0, [7:2]

RES0 Reserved.

VEOImode, [1]

Virtual EOI mode. The possible values are:

- 0x0** ICV_EOIR0_EL1 and ICV_EOIR1_EL1 provide both priority drop and interrupt deactivation functionality. Accesses to ICV_DIR_EL1 are **UNPREDICTABLE**.
- 0x1** ICV_EOIR0_EL1 and ICV_EOIR1_EL1 provide priority drop functionality only. ICV_DIR provides interrupt deactivation functionality.

VCBPR, [0]

Common Binary Point Register. Controls whether the same register is used for interrupt preemption of both virtual Group 0 and virtual Group 1 interrupts. The possible values are:

- 0** ICV_BPRO_EL1 determines the preemption group for virtual Group 0 interrupts only.
- ICV_BPR1_EL1 determines the preemption group for virtual Group 1 interrupts.
- 1** ICV_BPRO_EL1 determines the preemption group for both virtual Group 0 and virtual Group 1 interrupts.

Reads of ICV_BPR1_EL1 return ICV_BPRO_EL1 plus one, saturated to 111. Writes to ICV_BPR1_EL1 are **IGNORED**.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.18 AArch64 virtual interface control System register summary

The following table lists the AArch64 virtual interface control System registers that have **IMPLEMENTATION DEFINED** bits.

See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#) for more information and a complete list of AArch64 virtual interface control System registers.

Table 15-4: AArch64 virtual interface control System register summary

Name	Op0	Op1	CRn	CRm	Op2	Type	Description
ICH_APOR0_EL2	3	0	12	8	4	RW	15.19 ICH_APOR0_EL2, Interrupt Controller Hyp Active Priorities Group 0 Register 0, EL2 on page 295
ICH_AP1R0_EL2	3	0	19	9	0	RW	15.20 ICH_AP1R0_EL2, Interrupt Controller Hyp Active Priorities Group 1 Register 0, EL2 on page 295
ICH_HCR_EL2	3	4	12	11	0	RW	15.21 ICH_HCR_EL2, Interrupt Controller Hyp Control Register, EL2 on page 296
ICH_VTR_EL2	3	4	12	11	1	RO	15.22 ICH_VMCR_EL2, Interrupt Controller Virtual Machine Control Register, EL2 on page 298

Name	Op0	Op1	CRn	CRm	Op2	Type	Description
ICH_VMCR_EL2	3	4	12	11	7	RW	15.23 ICH_VTR_EL2, Interrupt Controller VGIC Type Register, EL2 on page 300

15.19 ICH_AP0R0_EL2, Interrupt Controller Hyp Active Priorities Group 0 Register 0, EL2

The ICH_AP0R0_EL2 provides information about Group 0 active priorities for EL2.

Bit field descriptions

This register is a 32-bit register and is part of:

- The GIC System registers functional group.
- The Virtualization registers functional group.
- The GIC host interface control registers functional group.

The core implements 5 bits of priority with 32 priority levels, corresponding to the 32 bits [31:0] of the register. The possible values for each bit are:

0x00000000	No interrupt active. This is the reset value.
0x00000001	Interrupt active for priority 0x0.
0x00000002	Interrupt active for priority 0x8.
	...
0x80000000	Interrupt active for priority 0xF8.

Details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.20 ICH_AP1R0_EL2, Interrupt Controller Hyp Active Priorities Group 1 Register 0, EL2

The ICH_AP1R0_EL2 provides information about Group 1 active priorities for EL2.

Bit field descriptions

This register is a 32-bit register and is part of:

- The GIC System registers functional group.
- The Virtualization registers functional group.
- The GIC host interface control registers functional group.

The core implements 5 bits of priority with 32 priority levels, corresponding to the 32 bits [31:0] of the register. The possible values for each bit are:

0x00000000	No interrupt active. This is the reset value.
0x00000001	Interrupt active for priority 0x0.
0x00000002	Interrupt active for priority 0x8.
...	
0x80000000	Interrupt active for priority 0xF8.

Details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.21 ICH_HCR_EL2, Interrupt Controller Hyp Control Register, EL2

ICH_HCR_EL2 controls the environment for VMs.

Bit field descriptions

ICH_HCR_EL2 is a 32-bit register and is part of:

- The GIC System registers functional group.
- The Virtualization registers functional group.
- The GIC host interface control registers functional group.

EOIcount, [31:27]

Number of outstanding deactivates.

RES0, [26:15]

RES0 Reserved.

TDIR, [14]

Trap Non-secure EL1 writes to ICC_DIR_EL1 and ICV_DIR_EL1. The possible values are:

0x0	Non-secure EL1 writes of ICC_DIR_EL1 and ICV_DIR_EL1 are not trapped to EL2, unless trapped by other mechanisms.
0x1	Non-secure EL1 writes of ICC_DIR_EL1 and ICV_DIR_EL1 are trapped to EL2.

TSEI, [13]

Trap all locally generated SEIs. The value is:

0 Locally generated SEIs do not cause a trap to EL2.

TALL1, [12]

Trap all Non-secure EL1 accesses to ICC_* and ICV_* System registers for Group 1 interrupts to EL2. The possible values are:

- | | |
|------------|--|
| 0x0 | Non-secure EL1 accesses to ICC_* and ICV_* registers for Group 1 interrupts proceed as normal. |
| 0x1 | Non-secure EL1 accesses to ICC_* and ICV_* registers for Group 1 interrupts trap to EL2. |

TALLO, [11]

Trap all Non-secure EL1 accesses to ICC_* and ICV_* System registers for Group 0 interrupts to EL2. The possible values are:

- | | |
|------------|--|
| 0x0 | Non-secure EL1 accesses to ICC_* and ICV_* registers for Group 0 interrupts proceed as normal. |
| 0x1 | Non-secure EL1 accesses to ICC_* and ICV_* registers for Group 0 interrupts trap to EL2. |

TC, [10]

Trap all Non-secure EL1 accesses to System registers that are common to Group 0 and Group 1 to EL2. The possible values are:

- | | |
|------------|--|
| 0x0 | Non-secure EL1 accesses to common registers proceed as normal. |
| 0x1 | Non-secure EL1 accesses to common registers trap to EL2. |

VGrp1DIE, [7]

VM Group 1 Disabled Interrupt Enable. The possible values are:

- | | |
|----------|--|
| 0 | Maintenance interrupt disabled. |
| 1 | Maintenance interrupt signaled when ICH_VMCR_EL2.VENG1 is 0. |

VGrp1EIE, [6]

VM Group 1 Enabled Interrupt Enable. The possible values are:

- | | |
|----------|--|
| 0 | Maintenance interrupt disabled. |
| 1 | Maintenance interrupt signaled when ICH_VMCR_EL2.VENG1 is 1. |

VGrp0DIE, [5]

VM Group 0 Disabled Interrupt Enable. The possible values are:

- | | |
|----------|--|
| 0 | Maintenance interrupt disabled. |
| 1 | Maintenance interrupt signaled when ICH_VMCR_EL2.VENG0 is 0. |

VGrp0EIE, [4]

VM Group 0 Enabled Interrupt Enable. The possible values are:

- | | |
|----------|--|
| 0 | Maintenance interrupt disabled. |
| 1 | Maintenance interrupt signaled when ICH_VMCR_EL2.VENG0 is 1. |

NPIE, [3]

No Pending Interrupt Enable. The possible values are:

- | | |
|---|---|
| 0 | Maintenance interrupt disabled. |
| 1 | Maintenance interrupt signaled while the List registers contain no interrupts in the pending state. |

LRENPIE, [2]

List Register Entry Not Present Interrupt Enable. The possible values are:

- | | |
|---|--|
| 0 | Maintenance interrupt disabled. |
| 1 | Maintenance interrupt is asserted while the EOICount field is not 0. |

UIE, [1]

Underflow Interrupt Enable. The possible values are:

- | | |
|---|--|
| 0 | Maintenance interrupt disabled. |
| 1 | Maintenance interrupt is asserted if none, or only one, of the List register entries is marked as a valid interrupt. |

En, [0]

Enable. The possible values are:

- | | |
|---|---|
| 0 | Virtual CPU interface operation disabled. |
| 1 | Virtual CPU interface operation enabled. |

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).


15.22 ICH_VMCR_EL2, Interrupt Controller Virtual Machine Control Register, EL2

ICH_VMCR_EL2 enables the hypervisor to save and restore the virtual machine view of the GIC state.

Bit field descriptions

ICH_VMCR_EL2 is a 32-bit register and is part of:

- The GIC System registers functional group.
- The Virtualization registers functional group.
- The GIC host interface control registers functional group.

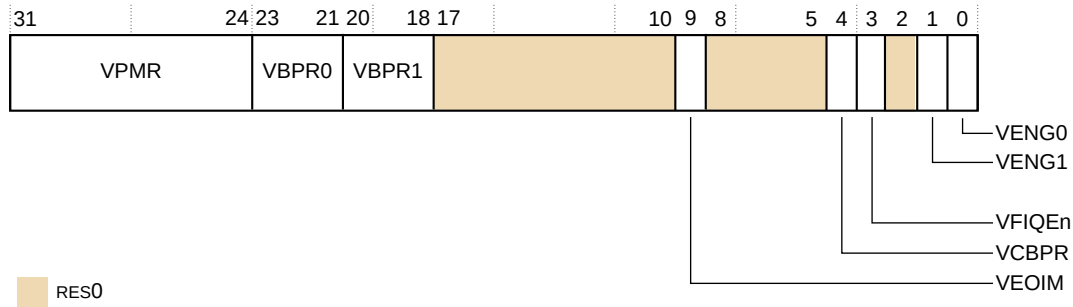Figure 15-11: ICH_VMCR_EL2 bit assignments**VPMR, [31:24]**

Virtual Priority Mask.

This field is an alias of ICV_PMR_EL1.Priority.

VBPR0, [23:21]

Virtual Binary Point Register, Group 0. The minimum value is:

0x2

This field is an alias of ICV_BPR0_EL1.BinaryPoint.

VBPR1, [20:18]

Virtual Binary Point Register, Group 1. The minimum value is:

0x3

This field is an alias of ICV_BPR1_EL1.BinaryPoint.

RES0, [17:10]**RES0**

Reserved.

VEOIM, [9]

Virtual EOI mode. The possible values are:

0x0ICV_EOIR0_EL1 and ICV_EOIR1_EL1 provide both priority drop and interrupt deactivation functionality. Accesses to ICV_DIR_EL1 are **UNPREDICTABLE**.**0x1**

ICV_EOIR0_EL1 and ICV_EOIR1_EL1 provide priority drop functionality only. ICV_DIR_EL1 provides interrupt deactivation functionality.

This bit is an alias of ICV_CTLR_EL1.EOI mode.

RES0, [8:5]**RES0**

Reserved.

VCBPR, [4]

Virtual Common Binary Point Register. The possible values are:

0x0	ICV_BPRO_EL1 determines the preemption group for virtual Group 0 interrupts only.
0x1	ICV_BPR1_EL1 determines the preemption group for virtual Group 1 interrupts. ICV_BPRO_EL1 determines the preemption group for both virtual Group 0 and virtual Group 1 interrupts.
	Reads of ICV_BPR1_EL1 return ICV_BPRO_EL1 plus one, saturated to 111. Writes to ICV_BPR1_EL1 are IGNORED .

VFIQEn, [3]

Virtual FIQ enable. The value is:

0x1	Group 0 virtual interrupts are presented as virtual FIQs.
------------	---

RES0, [2]

RES0	Reserved.
-------------	-----------

VENG1, [1]

Virtual Group 1 interrupt enable. The possible values are:

0x0	Virtual Group 1 interrupts are disabled.
0x1	Virtual Group 1 interrupts are enabled.

VENG0, [0]

Virtual Group 0 interrupt enable. The possible values are:

0x0	Virtual Group 0 interrupts are disabled.
0x1	Virtual Group 0 interrupts are enabled.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

15.23 ICH_VTR_EL2, Interrupt Controller VGIC Type Register, EL2


ICH_VTR_EL2 reports supported GIC virtualization features.

Bit field descriptions

ICH_VTR_EL2 is a 32-bit register and is part of:

- The GIC System registers functional group.
- The Virtualization registers functional group.
- The GIC host interface control registers functional group.

Figure 15-12: ICH_VTR_EL2 bit assignments

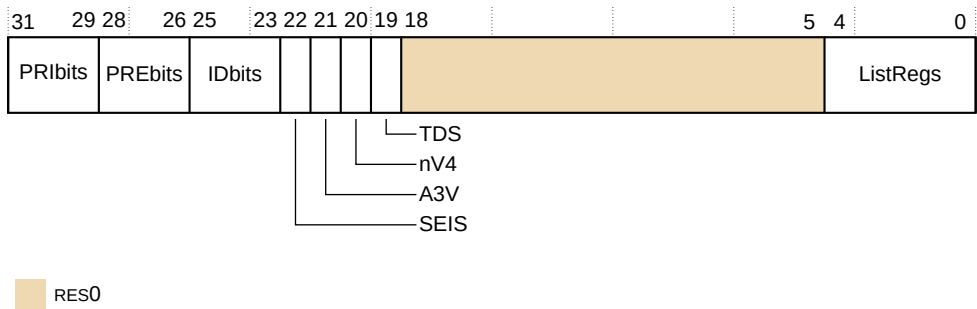

PRIbits, [31:29]
Priority bits. The number of virtual priority bits implemented, minus one.

0x4 Priority implemented is 5-bit.

PREbits, [28:26]
The number of virtual preemption bits implemented, minus one. The value is:

0x4 Virtual preemption implemented is 5-bit.

IDbits, [25:23]
The number of virtual interrupt identifier bits supported. The value is:

0x0 Virtual interrupt identifier bits that are implemented is 16-bit.

SEIS, [22]
SEI Support. The value is:

0x0 The virtual CPU interface logic does not support generation of SEIs.

A3V, [21]
Affinity 3 Valid. The value is:

0x1 The virtual CPU interface logic supports nonzero values of Affinity 3 in SGI generation System registers.

nV4, [20]
Direct injection of virtual interrupts not supported. The value is:

0x0 The CPU interface logic supports direct injection of virtual interrupts.

TDS, [19]

Separate trapping of Non-secure EL1 writes to ICH_DIR_EL1 supported. The value is:

0x1 Implementation supports ICH_HCR_EL2.TDIR.

RES0, [18:5]

RES0 Reserved.

ListRegs, [4:0]

0x3 The number of implemented List registers, minus one.

The core implements four list registers. Accesses to ICH_LR_EL2[x] (x>3) in AArch64 are **UNDEFINED**.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Generic Interrupt Controller Architecture Specification, GIC architecture version 3 and version 4](#).

16. Advanced SIMD and floating-point registers

This chapter describes the Advanced SIMD and floating-point registers.

16.1 AArch64 register summary

The core has several Advanced SIMD and floating-point System registers in the AArch64 Execution state. Each register has a specific purpose, specific usage constraints, configurations, and attributes.

The following table gives a summary of the Cortex®-A77 core Advanced SIMD and floating-point System registers in the AArch64 Execution state.

Table 16-1: AArch64 Advanced SIMD and floating-point System registers


Name	Type	Reset	Description
FPCR	RW	0x00000000	See 16.2 FPCR, Floating-point Control Register on page 303.
FPSR	RW	UNKNOWN	See 16.3 FPSR, Floating-point Status Register on page 306.
MVFR0_EL1	RO	0x10110222	See 16.4 MVFR0_EL1, Media, and VFP Feature Register 0, EL1 on page 308.
MVFR1_EL1	RO	0x13211111	See 16.5 MVFR1_EL1, Media, and VFP Feature Register 1, EL1 on page 309.
MVFR2_EL1	RO	0x00000043	See 16.6 MVFR2_EL1, Media, and VFP Feature Register 2, EL1 on page 311.

16.2 FPCR, Floating-point Control Register

The FPCR controls floating-point behavior.

Bit field descriptions

FPCR is a 32-bit register.

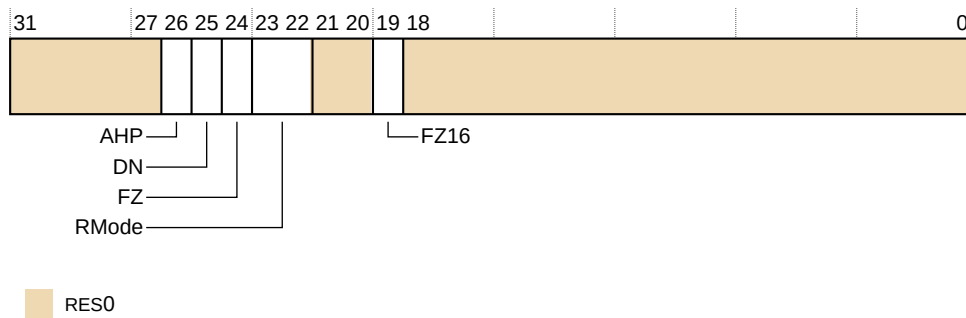Figure 16-1: FPCR bit assignments**RES0, [31:27]****RES0**

Reserved.

AHP, [26]

Alternative half-precision control bit. The possible values are:

0

IEEE half-precision format selected. This is the reset value.

1

Alternative half-precision format selected.

DN, [25]

Default NaN mode control bit. The possible values are:

0

NaN operands propagate through to the output of a floating-point operation. This is the reset value.

1

Any operation involving one or more NaNs returns the Default NaN.

FZ, [24]

Flush-to-zero mode control bit. The possible values are:

0

Flush-to-zero mode disabled. Behavior of the floating-point system is fully compliant with the IEEE 754 standard. This is the reset value.

1

Flush-to-zero mode enabled.

RMode, [23:22]

Rounding Mode control field. The encoding of this field is:

- 0b00

Round to Nearest (RN) mode. This is the reset value.
- 0b01

Round towards Plus Infinity (RP) mode.
- 0b10

Round towards Minus Infinity (RM) mode.
- 0b11

Round towards Zero (RZ) mode.

RES0, [21:20]

RES0
Reserved.

FZ16, [19]

Flush-to-zero mode control bit on half-precision data-processing instructions. The possible values are:

- 0

Flush-to-zero mode disabled. Behavior of the floating-point system is fully compliant with the IEEE 754 standard. This is the default value.
- 1

Flush-to-zero mode enabled.

RES0, [18:0]

RES0
Reserved.

Configurations

The named fields in this register map to the equivalent fields in the AArch32 FPSCR. See [16.8 FPSCR, Floating-Point Status and Control Register](#) on page 313.

Usage constraints

Accessing the FPCR

To access the FPCR:

```
Flush-to-zero mode disabled. Behavior of the floating-point
MRS <Xt>, FPCR ; Read FPCR into Xt
MSR FPCR, <Xt> ; Write Xt to FPCR
```

Register access is encoded as follows:

Table 16-2: FPCR access encoding

op0	op1	CRn	CRm	op2
11	011	0100	0100	000

Accessibility

This register is accessible as follows:

ELO	EL1 (NS)	EL1 (S)	EL2	EL3 (SCR.NS = 1)	EL3 (SCR.NS = 0)
RW	RW	RW	RW	RW	RW


16.3 FPSR, Floating-point Status Register

The FPSR provides floating-point system status information.

Bit field descriptions

FPSR is a 32-bit register.

Figure 16-2: FPSR bit assignments

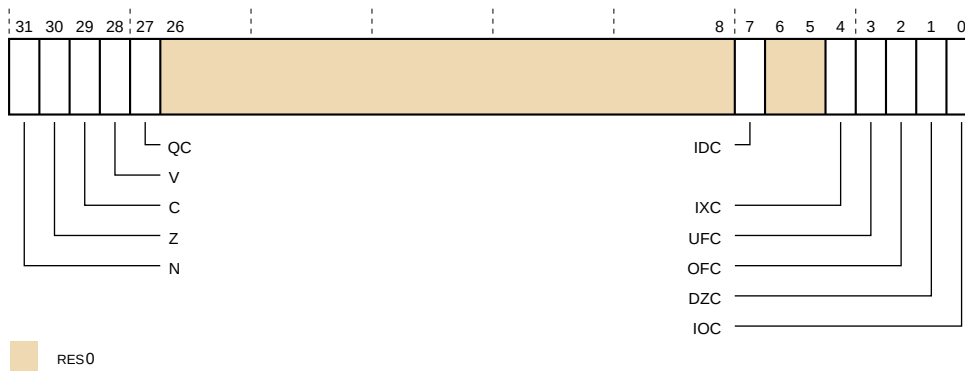

N, [31]

Negative condition flag for AArch32 floating-point comparison operations. AArch64 floating-point comparisons set the PSTATE.N flag instead.

Z, [30]

Zero condition flag for AArch32 floating-point comparison operations. AArch64 floating-point comparisons set the PSTATE.Z flag instead.

C, [29]

Carry condition flag for AArch32 floating-point comparison operations. AArch64 floating-point comparisons set the PSTATE.C flag instead.

V, [28]

Overflow condition flag for AArch32 floating-point comparison operations. AArch64 floating-point comparisons set the PSTATE.V flag instead.

QC, [27]

Cumulative saturation bit. This bit is set to 1 to indicate that an Advanced SIMD integer operation has saturated since a 0 was last written to this bit.

RES0, [26:8]

Reserved, **RES0**.

IDC, [7]

Input Denormal cumulative exception bit. This bit is set to 1 to indicate that the Input Denormal exception has occurred since 0 was last written to this bit.

RES0, [6:5]

Reserved, **RES0**.

IXC, [4]

Inexact cumulative exception bit. This bit is set to 1 to indicate that the Inexact exception has occurred since 0 was last written to this bit.

UFC, [3]

Underflow cumulative exception bit. This bit is set to 1 to indicate that the Underflow exception has occurred since 0 was last written to this bit.

OFC, [2]

Overflow cumulative exception bit. This bit is set to 1 to indicate that the Overflow exception has occurred since 0 was last written to this bit.

DZC, [1]

Division by Zero cumulative exception bit. This bit is set to 1 to indicate that the Division by Zero exception has occurred since 0 was last written to this bit.

IOC, [0]

Invalid Operation cumulative exception bit. This bit is set to 1 to indicate that the Invalid Operation exception has occurred since 0 was last written to this bit.

Configurations

The named fields in this register map to the equivalent fields in the AArch32 FPSCR. See [16.8 FPSCR, Floating-Point Status and Control Register](#) on page 313.

Usage constraints**Accessing the FPSR**

To access the FPSR:

```
MRS <Xt>, FPSR; Read FPSR into Xt
MSR FPSR, <Xt>; Write Xt to FPSR
```

Register access is encoded as follows:

Table 16-4: FPSR access encoding

op0	op1	CRn	CRm	op2
11	011	0100	0100	001

Accessibility

This register is accessible as follows:

EL0	EL1 (NS)	EL1 (S)	EL2	EL3 (SCR.NS = 1)	EL3 (SCR.NS = 0)
RW	RW	RW	RW	RW	RW

16.4 MVFR0_EL1, Media, and VFP Feature Register 0, EL1

The MVFR0_EL1 describes the features that are provided by the AArch64 Advanced SIMD and floating-point implementation.

Bit field descriptions

MVFR0_EL1 is a 32-bit register.

Figure 16-3: MVFR0_EL1 bit assignments

31	28	27	24	23	20	19	16	15	12	11	8	7	4	3	0																
FPRound				FPShVec				FPSqrt				FPDivide				FPTrap				FPDP				FPSP				SIMDReg			

FPDP, [11:8]

Indicates the hardware support for floating-point double-precision operations:

0x2

Supported, VFPv3 or greater.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information.

FPSP, [7:4]

Indicates the hardware support for floating-point single-precision operations:

0x2

Supported, VFPv3 or greater.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information.

SIMDReg, [3:0]

Indicates support for the Advanced SIMD register bank:

0x2

Supported, 32 x 64-bit registers supported.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information.

Configurations

There are no configuration notes.

Usage constraints**Accessing the MVFR0_EL1**

To access the MVFR0_EL1:

```
MRS <Xt>, MVFR0_EL1 ; Read MVFR0_EL1 into Xt
```

Register access is encoded as follows:

Table 16-6: MVFR0_EL1 access encoding

op0	op1	CRn	CRm	op2
11	000	0000	0011	000

Accessibility

This register is accessible as follows:

ELO	EL1(NS)	EL1(S)	EL2	EL3 (SCR.NS = 1)	EL3(SCR.NS = 0)
-	RO	RO	RO	RO	RO

16.5 MVFR1_EL1, Media, and VFP Feature Register 1, EL1

The MVFR1_EL1 describes the features that are provided by the AArch64 Advanced SIMD and floating-point implementation.

Bit field descriptions

MVFR1_EL1 is a 32-bit register.

Figure 16-4: MVFR1_EL1 bit assignments

31	28	27	24	23	20	19	16	15	12	11	8	7	4	3	0
SIMDFMAC				FPHP				SIMDHP				SIMDSP			

SIMDLS, [11:8]

Indicates whether the Advanced SIMD and floating-point unit supports load/store instructions:

- 1**
Implemented.

FPDNaN, [7:4]

Indicates whether the floating-point hardware implementation supports only the Default NaN mode:

- 1**
Hardware supports propagation of NaN values.

FPFtZ, [3:0]

Indicates whether the floating-point hardware implementation supports only the Flush-to-zero mode of operation:

- 1**
Hardware supports full denormalized number arithmetic.

Configurations

There are no configuration notes.

Usage constraints**Accessing the MVFR1_EL1**

To access the MVFR1_EL1:

```
MRS <Xt>, MVFR1_EL1 ; Read MVFR1_EL1 into Xt
```

Register access is encoded as follows:

Table 16-8: MVFR1_EL1 access encoding

op0	op1	CRn	CRm	op2
11	000	0000	0011	001

Accessibility

This register is accessible as follows:

EL0	EL1(NS)	EL1(S)	EL2	EL3 (SCR.NS = 1)	EL3(SCR.NS = 0)
-	RO	RO	RO	RO	RO

16.6 MVFR2_EL1, Media, and VFP Feature Register 2, EL1

The MVFR2_EL1 describes the features that are provided by the AArch64 Advanced SIMD and floating-point implementation.

Bit field descriptions

MVFR2_EL1 is a 32-bit register.

Figure 16-5: MVFR2_EL1 bit assignments



 RES0

RES0, [31:8]

RES0
Reserved.

FPMisc, [7:4]

Indicates support for miscellaneous floating-point features.

- 0x4
- Supports:
- Floating-point selection.
 - Floating-point Conversion to Integer with Directed rounding modes.
 - Floating-point Round to Integral Floating-point.
 - Floating-point MaxNum and MinNum.

SIMDMisc, [3:0]

Indicates support for miscellaneous Advanced SIMD features.

- 0x3
- Supports:
- Floating-point Conversion to Integer with Directed rounding modes.
 - Floating-point Round to Integral Floating-point.
 - Floating-point MaxNum and MinNum.

Configurations

There are no configuration notes.

Usage constraints

Accessing the MVFR2_EL1

To access the MVFR2_EL1:

```
MRS <Xt>, MVFR2_EL1 ; Read MVFR2_EL1 into Xt
```

Register access is encoded as follows:

Table 16-10: MVFR2_EL1 access encoding

op0	op1	CRn	CRm	op2
11	000	0000	0011	010

Accessibility

This register is accessible as follows:

EL0	EL1(NS)	EL1(S)	EL2	EL3 (SCR.NS = 1)	EL3(SCR.NS = 0)
-	RO	RO	RO	RO	RO

16.7 AArch32 register summary

The core has one Advanced SIMD and floating-point System registers in the AArch32 Execution state.

The following table gives a summary of the Cortex®-A77 core Advanced SIMD and floating-point System registers in the AArch32 Execution state.

Table 16-12: AArch32 Advanced SIMD and floating-point System registers

Name	Type	Reset	Description
FPSCR	RW	UNKNOWN	See 16.8 FPSCR, Floating-Point Status and Control Register on page 313.


See the [Arm® Architecture Reference Manual for A-profile architecture](#) for information on permitted accesses to the Advanced SIMD and floating-point System registers.

16.8 FPSCR, Floating-Point Status and Control Register

The FPSCR provides floating-point system status information and control.

Bit field descriptions

FPSCR is a 32-bit register.

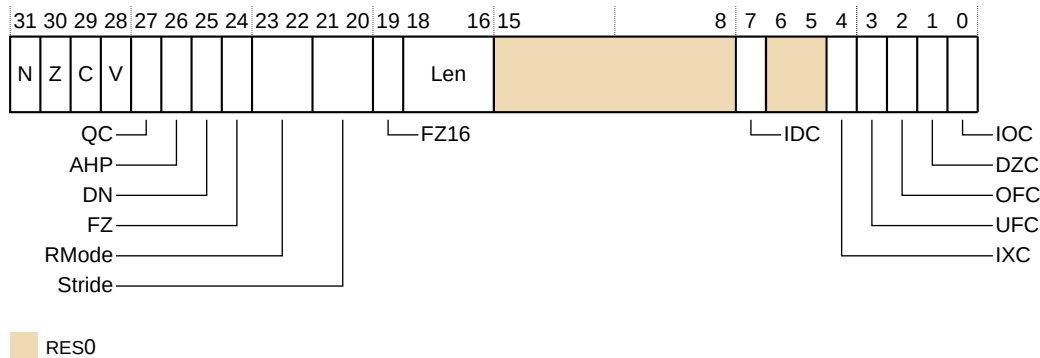Figure 16-6: FPSCR bit assignments**N, [31]**

Floating-point Negative condition code flag.

Set to 1 if a floating-point comparison operation produces a less than result.

Z, [30]

Floating-point Zero condition code flag.

Set to 1 if a floating-point comparison operation produces an equal result.

C, [29]

Floating-point Carry condition code flag.

Set to 1 if a floating-point comparison operation produces an equal, greater than, or unordered result.

V, [28]

Floating-point Overflow condition code flag.

Set to 1 if a floating-point comparison operation produces an unordered result.

QC, [27]

Cumulative saturation bit.

This bit is set to 1 to indicate that an Advanced SIMD integer operation has saturated after 0 was last written to this bit.

AHP, [26]

Alternative Half-Precision control bit:

0

IEEE half-precision format selected. This is the reset value.

1

Alternative half-precision format selected.

DN, [25]

Default NaN mode control bit:

0

NaN operands propagate through to the output of a floating-point operation. This is the reset value.

1

Any operation involving one or more NaNs returns the Default NaN.

The value of this bit only controls floating-point arithmetic. AArch32 Advanced SIMD arithmetic always uses the Default NaN setting, regardless of the value of the DN bit.

FZ, [24]

Flush-to-zero mode control bit:

0

Flush-to-zero mode disabled. Behavior of the floating-point system is fully compliant with the IEEE 754 standard. This is the reset value.

1

Flush-to-zero mode enabled.

The value of this bit only controls floating-point arithmetic. AArch32 Advanced SIMD arithmetic always uses the Flush-to-zero setting, regardless of the value of the FZ bit.

RMode, [23:22]

Rounding Mode control field:

0b00

Round to Nearest (RN) mode. This is the reset value.

0b01

Round towards Plus Infinity (RP) mode.

0b10

Round towards Minus Infinity (RM) mode.

0b11

Round towards Zero (RZ) mode.

The specified rounding mode is used by almost all floating-point instructions. AArch32 Advanced SIMD arithmetic always uses the Round to Nearest setting, regardless of the value of the RMode bits.

Stride, [21:20]

RES0

Reserved.

FZ16, [19]

Flush-to-zero mode control bit on half-precision data-processing instructions:

0

Flush-to-zero mode disabled. Behavior of the floating-point system is fully compliant with the IEEE 754 standard.

1

Flush-to-zero mode enabled.

Len, [18:16]**RES0**

Reserved.

RES0, [15:8]**RES0**

Reserved.

IDC, [7]

Input Denormal cumulative exception bit. This bit is set to 1 to indicate that the Input Denormal exception has occurred since 0 was last written to this bit.

RES0, [6:5]**RES0**

Reserved.

IXC, [4]

Inexact cumulative exception bit. This bit is set to 1 to indicate that the Inexact exception has occurred since 0 was last written to this bit.

UFC, [3]

Underflow cumulative exception bit. This bit is set to 1 to indicate that the Underflow exception has occurred since 0 was last written to this bit.

OFC, [2]

Overflow cumulative exception bit. This bit is set to 1 to indicate that the Overflow exception has occurred since 0 was last written to this bit.

DZC, [1]

Division by Zero cumulative exception bit. This bit is set to 1 to indicate that the Division by Zero exception has occurred since 0 was last written to this bit.

IOC, [0]

Invalid Operation cumulative exception bit. This bit is set to 1 to indicate that the Invalid Operation exception has occurred since 0 was last written to this bit.

Configurations

There is one copy of this register that is used in both Secure and Non-secure states.

The named fields in this register map to the equivalent fields in the AArch64 FPCR and FPSR. See [16.2 FPCR, Floating-point Control Register](#) on page 303 and [16.3 FPSR, Floating-point Status Register](#) on page 306

Usage constraints

Accessing the FPSCR


To access the FPSCR:

```
VMRS <Rt>, FPSCR ; Read FPSCR into Rt
VMSR FPSCR, <Rt> ; Write Rt to FPSCR
```

Register access is encoded as follows:

Table 16-13: FPSCR access encoding

spec_reg
0001



Note

The Cortex®-A77 core implementation does not support the deprecated VFP short vector feature. Attempts to execute the associated VFP data-processing instructions result in an **UNDEFINED** Instruction exception.

Accessibility

This register is accessible as follows:

ELO (NS)	ELO (S)	EL1 (NS)	EL1 (S)	EL2	EL3 (SCR.NS = 1)	EL3 (SCR.NS = 0)
Config	RW	-	-	-	-	-

Access to this register depends on the values of CPACR_EL1.FPEN, CPTR_EL2.FPEN, CPTR_EL2.TFP, CPTR_EL3.TFP, and HCR_EL2.{E2H, TGE}. For details of which values of these fields allow access at which Exception levels, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

17. Debug


This chapter describes the Cortex®-A77 core Debug registers and shows examples of how to use them.

17.1 About debug methods

The core is part of a debug system and supports both self-hosted and external debug.

The following figure shows a typical external debug system.

Figure 17-1: External debug system

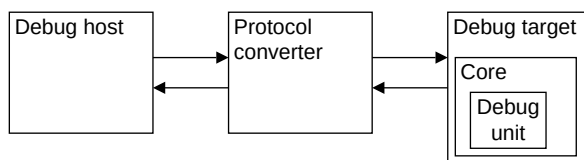

Debug host

A computer, for example a personal computer, that is running a software debugger such as the DS-5 Debugger. With the debug host, you can issue high-level commands, such as setting a breakpoint at a certain location or examining the contents of a memory address.

Protocol converter

The debug host sends messages to the debug target using an interface such as Ethernet. However, the debug target typically implements a different interface protocol. A device such as DSTREAM is required to convert between the two protocols.

Debug target

The lowest level of the system implements system support for the protocol converter to access the debug unit using the *Advanced Peripheral Bus (APB)* completer interface. An example of a debug target is a development system with a test chip or a silicon part with a core.

Debug unit

Helps debugging software that is running on the core:

- Hardware systems that are based on the core.
- Operating systems.
- Application software.

With the debug unit, you can:

- Stop program execution.

- Examine and alter process and coprocessor state.
- Examine and alter memory and the state of the input or output peripherals.
- Restart the core.

For self-hosted debug, the debug target runs additional debug monitor software that runs on the Cortex®-A77 core itself. This way, it does not require expensive interface hardware to connect a second host computer.

17.2 Debug register interfaces

The Debug architecture defines a set of Debug registers.

The Debug register interfaces provide access to these registers from:

- Software running on the core.
- An external debugger.

The Cortex®-A77 core implements the Armv8 Debug architecture and debug events as described in the [Arm® Architecture Reference Manual for A-profile architecture](#). It also implements improvements to Debug introduced in Armv8.1 and Armv8.2.

17.2.1 Core interfaces

System register access allows the core to directly access certain debug registers.

The external debug interface enables both external and self-hosted debug agents to access Debug registers. Access to the Debug registers is partitioned as follows:

Debug registers

This function is System register based and memory-mapped. You can access the Debug register map using the APB completer port.

Performance monitor

This function is System register based and memory-mapped. You can access the performance monitor registers using the APB completer port.

Activity monitor

This function is System register based and memory-mapped. You can access the activity monitor registers using the APB completer port.

Trace registers

This function is memory-mapped.

ELA registers

This function is memory-mapped.

Related information

[External debug interface](#) on page 322

17.2.2 Breakpoints and watchpoints

The core supports six breakpoints, four watchpoints, and a standard *Debug Communications Channel* (DCC).

A breakpoint consists of a breakpoint control register and a breakpoint value register. These two registers are referred to as a *Breakpoint Register Pair* (BRP).

Four of the breakpoints (BRP 0-3) match only to virtual address and the other two (BRP 4 and 5) match against either virtual address or context ID, or VMID. All the watchpoints can be linked to two breakpoints (BRP 4 and 5) to enable a memory request to be trapped in a given process context.

17.2.3 Effects of resets on Debug registers

The core has the following reset signals that affect the Debug registers:

nCPUPORESET

This signal initializes the core processing logic, including the debug, ETM trace unit, breakpoint, watchpoint logic, and performance monitors logic. This maps to a Cold reset that covers reset of the core processing logic and the integrated debug functionality.

nCORERESET

This signal resets some of the debug and performance monitor logic. This maps to a Warm reset that covers reset of the core processing logic.

17.2.4 External access permissions to Debug registers

External access permission to the Debug registers is subject to the conditions at the time of the access.

The following table describes the core response to accesses through the external debug interface.

Table 17-1: External access conditions to registers

Name	Condition	Description
Off	EDPRSR.PU is 0	Core power domain is completely off, or in a low-power state where the Core power domain registers cannot be accessed. If debug power is off, then all external debug and memory-mapped register accesses return an error.
DLK	DoubleLockStatus() == TRUE (EDPRSR.DLK is 1)	OS Double Lock is locked.
OSLK	OSLSR_EL1.OSLK is 1	OS Lock is locked.

Name	Condition	Description
EDAD	<code>AllowExternalDebugAccess() == FALSE</code>	External debug access is disabled. When an error is returned because of an EDAD condition code, and this is the highest priority error condition, EDPRSR.SDAD is set to 1. Otherwise SDAD is unchanged.
Default	-	None of the conditions apply, normal access.

The following table shows an example of external register access condition codes for access to a performance monitor register. To determine the access permission for the register, scan the columns from left to right. Stop at the first column a condition is true, the entry gives the access permission of the register and scanning stops.

Table 17-2: External register condition code example

Off	DLK	OSLK	EDAD	Default
-	-	-	-	RO

17.3 Debug events

A debug event can be a software debug event or a Halting debug event.

A core responds to a debug event in one of the following ways:

- Ignores the debug event.
- Takes a debug exception.
- Enters debug state.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information about the debug events.

Related information

[External debug interface](#) on page 322

[About clocks, resets, and input synchronization](#) on page 34

17.3.1 Watchpoint debug events

In the Cortex®-A77 core, watchpoint debug events are always synchronous.

Memory hint instructions and cache clean operations, except `dc zva` and `dc ivac`, do not generate watchpoint debug events. Store exclusive instructions generate a watchpoint debug event even when the check for the control of exclusive monitor fails. Atomic CAS instructions generate a watchpoint debug event even when the compare operation fails.

17.3.2 Debug OS Lock

Debug OS Lock is set by the powerup reset, nCPUPORESET.

For normal behavior of debug events and Debug register accesses, Debug OS Lock must be cleared. For more information, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

17.4 External debug interface

For information about external debug interface, including debug memory map and debug signals, see the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#).

18. Performance Monitoring Unit

This chapter describes the *Performance Monitoring Unit* (PMU) and the registers that it uses.

18.1 About the PMU

The Cortex®-A77 core includes performance monitors that enable you to gather various statistics on the operation of the core and its memory system during runtime. These provide useful information about the behavior of the core that you can use when debugging or profiling code.

The PMU provides six event counters. Each counter can count any of the events available in the core. The absolute counts that are recorded might vary because of pipeline effects. This has negligible effect except in cases where the counters are enabled for a very short time.

Related information

[PMU events](#) on page 324

18.2 PMU functional description

This section describes the functionality of the PMU.

The PMU includes the following interfaces and counters:

Event interface

Events from all other units from across the design are provided to the PMU.

System register and APB interface

You can program the PMU registers using the System registers or the external APB interface.

Counters

The PMU has 32-bit counters that increment when they are enabled, based on events, and a 64-bit cycle counter.

PMU register interfaces

The Cortex®-A77 core supports access to the performance monitor registers from the internal System register interface and a memory-mapped interface.

18.2.1 External register access permissions

Whether or not access is permitted to a register depends on:

- If the core is powered up.
- The state of the OS Lock and OS Double Lock.
- The state of External Performance Monitors access disable.

- The state of the debug authentication inputs to the core.

The behavior is specific to each register and is not described in this document. For a detailed description of these features and their effects on the registers, see the *Arm® Architecture Reference Manual Arm®v8, for Arm®v8-A architecture profile*.

The register descriptions that are provided in this manual describe whether each register is read/write or read-only.

18.3 PMU events

The following table shows the events that are generated and the numbers that the PMU uses to reference the events. The table also shows the bit position of each event on the event bus. Event reference numbers that are not listed are reserved.

Table 18-1: PMU Events

Event number	PMU event bus (to trace)	Event mnemonic	Event description
0x0	[00]	SW_INCR	Software increment. Instruction architecturally executed (condition code check pass).
0x1	[01]	L1I_CACHE_REFILL	<p>L1 instruction cache refill. This event counts any instruction fetch which misses in the cache.</p> <p>The following instructions are not counted:</p> <ul style="list-style-type: none"> • Cache maintenance instructions. • Non-cacheable accesses.
0x2	[02]	L1I_TLB_REFILL	<p>L1 instruction TLB refill. This event counts any refill of the instruction L1 TLB from the L2 TLB. This includes refills that result in a translation fault.</p> <p>The following instructions are not counted:</p> <ul style="list-style-type: none"> • TLB maintenance instructions. <p>This event counts regardless of whether the MMU is enabled.</p>
0x3	[170]	L1D_CACHE_REFILL	<p>L1 data cache refill. This event counts any load or store operation or page table walk access which causes data to be read from outside the L1, including accesses which do not allocate into L1.</p> <p>The following instructions are not counted:</p> <ul style="list-style-type: none"> • Cache maintenance instructions and prefetches. • Stores of an entire cache line, even if they make a coherency request outside the L1. • Partial cache line writes which do not allocate into the L1 cache. • Non-cacheable accesses. <p>This event counts the sum of L1D_CACHE_REFILL_RD and L1D_CACHE_REFILL_WR.</p>

Event number	PMU event bus (to trace)	Event mnemonic	Event description
0x4	[05:03]	L1D_CACHE	<p>L1 data cache access. This event counts any load or store operation or page table walk access which looks up in the L1 data cache. In particular, any access which could count the L1D_CACHE_REFILL event causes this event to count.</p> <p>The following instructions are not counted:</p> <ul style="list-style-type: none"> Cache maintenance instructions and prefetches. Non-cacheable accesses. <p>This event counts the sum of L1D_CACHE_RD and L1D_CACHE_WR.</p>
0x5	[07:06]	L1D_TLB_REFILL	<p>L1 data TLB refill. This event counts any refill of the data L1 TLB from the L2 TLB. This includes refills that result in a translation fault. The following instructions are not counted:</p> <ul style="list-style-type: none"> TLB maintenance instructions. <p>This event counts regardless of whether the MMU is enabled.</p>
0x8	[12:08]	INST_RETIRED	Instruction architecturally executed. This event counts all retired instructions, including those that fail their condition check.
0x9	[13]	EXC_TAKEN	Exception taken.
0x0A	[14]	EXC_RETURN	Instruction architecturally executed, condition code check pass, exception return.
0x0B	[160]	CID_WRITE_RETIRED	<p>Instruction architecturally executed, condition code check pass, write to CONTEXTIDR. This event only counts writes to CONTEXTIDR in AArch32 state, and via the CONTEXTIDR_EL1 mnemonic in AArch64 state.</p> <p>The following instructions are not counted:</p> <ul style="list-style-type: none"> Writes to CONTEXTIDR_EL12 and CONTEXTIDR_EL2.
0x10	[15]	BR_MIS_PRED	Mispredicted or not predicted branch speculatively executed. This event counts any predictable branch instruction which is mispredicted either due to dynamic misprediction or because the MMU is off and the branches are statically predicted not taken.
0x11	[177]	CPU_CYCLES	Cycle
0x12	[17:16]	BR_PRED	Predictable branch speculatively executed. This event counts all predictable branches.
0x13	[20:18]	MEM_ACCESS	<p>Data memory access. This event counts memory accesses due to load or store instructions.</p> <p>The following instructions are not counted:</p> <ul style="list-style-type: none"> Instruction fetches. Cache maintenance instructions. Translation table walks or prefetches. <p>This event counts the sum of MEM_ACCESS_RD and MEM_ACCESS_WR.</p>
0x14	[21]	L1I_CACHE	<p>L1 instruction cache access or Level 0 Macro-op cache access. This event counts any instruction fetch which accesses the L1 instruction cache or LO Macro-op cache.</p> <p>The following instructions are not counted:</p> <ul style="list-style-type: none"> Cache maintenance instructions. Non-cacheable accesses.

Event number	PMU event bus (to trace)	Event mnemonic	Event description
0x15	[22]	L1D_CACHE_WB	L1 data cache Write-Back. This event counts any write-back of data from the L1 data cache to L2 or L3. This counts both victim line evictions and snoops, including cache maintenance operations. The following instructions are not counted: <ul style="list-style-type: none"> Invalidations which do not result in data being transferred out of the L1. Full-line writes which write to L2 without writing L1, such as write streaming mode.
0x16	[25:23]	L2D_CACHE	L2 unified cache access. This event counts any transaction from L1 which looks up in the L2 cache, and any write-back from the L1 to the L2. Snoops from outside the core and cache maintenance operations are not counted.
0x17	[28:26]	L2D_CACHE_REFILL	L2 unified cache refill. This event counts any Cacheable transaction from L1 which causes data to be read from outside the core. L2 refills caused by stashes and prefetches that target this level of cache, should not be counted.
0x18	[31:29]	L2D_CACHE_WB	L2 unified cache write-back. This event counts any write-back of data from the L2 cache to outside the core. This includes snoops to the L2 which return data, regardless of whether they cause an invalidation. Invalidations from the L2 which do not write data outside of the core and snoops which return data from the L1 are not counted.
0x19	[33:32]	BUS_ACCESS	Bus access. This event counts for every beat of data that are transferred over the data channels between the core and the SCU. If both read and write data beats are transferred on a given cycle, this event is counted twice on that cycle. This event counts the sum of BUS_ACCESS_RD, BUS_ACCESS_WR, and snoops.
0x1A	[34]	MEMORY_ERROR	Local memory error. This event counts any correctable or uncorrectable memory error (ECC or parity) in the protected core RAMs.
0x1B	[38:35]	INST_SPEC	Operation speculatively executed
0x1C	[179]	TTBR_WRITE_RETIRED	Instruction architecturally executed, condition code check pass, write to TTBR. This event only counts writes to TTBR0/TTBR1 in AArch32 state and TTBR0_EL1/TTBR1_EL1 in AArch64 state. The following instructions are not counted: <ul style="list-style-type: none"> Accesses to TTBR0_EL12/TTBR1_EL12 or TTBR0_EL2/TTBR1_EL2.
0x1D	[39]	BUS_CYCLES	Bus cycles. This event duplicates CPU_CYCLES.
0x1E	[40]	CHAIN	For odd-numbered counters, increments the count by one for each overflow of the preceding even-numbered counter. For even-numbered counters, there is no increment.
0x20	[42:41]	L2D_CACHE_ALLOCATE	L2 unified cache allocation without refill. This event counts any full cache line write into the L2 cache which does not cause a linefill, including write-backs from L1 to L2 and full-line writes which do not allocate into L1.
0x21	[44:43]	BR_RETIRED	Instruction architecturally executed, branch. This event counts all branches, taken or not. This excludes exception entries, debug entries and CCFAIL branches.
0x22	[46:45]	BR_MIS_PRED_RETIRED	Instruction architecturally executed, mispredicted branch. This event counts any branch counted by BR_RETIRED which is not correctly predicted and causes a pipeline flush.
0x23	[172]	STALL_FRONTEND	No operation issued because of the frontend. The counter counts on any cycle when there are no fetched instructions available to dispatch.
0x24	[173]	STALL_BACKEND	No operation issued because of the backend. The counter counts on any cycle fetched instructions are not dispatched due to resource constraints.

Event number	PMU event bus (to trace)	Event mnemonic	Event description
0x25	[49:47]	L1D_TLB	L1 data TLB access. This event counts any load or store operation which accesses the data L1 TLB. If both a load and a store are executed on a cycle, this event counts twice. This event counts regardless of whether the MMU is enabled.
0x26	[171]	L1I_TLB	L1 instruction TLB access. This event counts any instruction fetch which accesses the instruction L1 TLB. This event counts regardless of whether the MMU is enabled.
0x29	[159]	L3D_CACHE_ALLOCATE	Attributable L3 data or unified cache allocation without refill. This event counts any full cache line write into the L3 cache which does not cause a linefill, including write-backs from L2 to L3 and full-line writes which do not allocate into L2.
0x2A	[162:161]	L3D_CACHE_REFILL	Attributable Level 3 unified cache refill. This event counts for any cacheable read transaction returning data from the SCU for which the data source was outside the cluster. Transactions such as ReadUnique are counted here as 'read' transactions, even though they can be generated by store instructions. Prefetches and stashes that target the L3 cache are not counted.
0x2B	[163]	L3D_CACHE_RD	Attributable L3 unified cache access. This event counts for any cacheable read transaction returning data from the SCU, or for any cacheable write to the SCU.
0x2D	[50]	L2D_TLB_REFILL	Attributable L2 data or unified TLB refill. This event counts on any refill of the L2 TLB, caused by either an instruction or data access. This event does not count if the MMU is disabled.
0x2F	[52:51]	L2D_TLB	Attributable L2 data or unified TLB access. This event counts on any access to the L2 TLB (caused by a refill of any of the L1 TLBs). This event does not count if the MMU is disabled.
0x31	[164]	REMOTE_ACCESS	Access to another socket in a multi-socket system.
0x34	[53]	DTLB_WALK	Access to data TLB that caused a page table walk. This event counts on any data access which causes L2D_TLB_REFILL to count.
0x35	[54]	ITLB_WALK	Access to instruction TLB that caused a page table walk. This event counts on any instruction access which causes L2D_TLB_REFILL to count.
0x36	[166:165]	LL_CACHE_RD	Last level cache access, read. <ul style="list-style-type: none"> If CPUECTLR.EXTLLC is set: This event counts any cacheable read transaction which returns a data source of 'interconnect cache'. If CPUECTLR.EXTLLC is not set: This event is a duplicate of the L*D_CACHE_RD event corresponding to the last level of cache implemented – L3D_CACHE_RD if both per-core L2 and cluster L3 are implemented, L2D_CACHE_RD if only one is implemented, or L1D_CACHE_RD if neither is implemented.
0x37	[168:167]	LL_CACHE_MISS_RD	Last level cache miss, read. <ul style="list-style-type: none"> If CPUECTLR.EXTLLC is set: This event counts any cacheable read transaction which returns a data source of 'DRAM', 'remote' or 'inter-cluster peer'. If CPUECTLR.EXTLLC is not set: This event is a duplicate of the L*D_CACHE_REFILL_RD event corresponding to the last level of cache implemented – L3D_CACHE_REFILL_RD if both per-core L2 and cluster L3 are implemented, L2D_CACHE_REFILL_RD if only one is implemented, or L1D_CACHE_REFILL_RD if neither is implemented.

Event number	PMU event bus (to trace)	Event mnemonic	Event description
0x40	[56:55]	L1D_CACHE_RD	<p>L1 data cache access, read. This event counts any load operation or page table walk access which looks up in the L1 data cache. In particular, any access which could count the L1D_CACHE_REFILL_RD event causes this event to count.</p> <p>The following instructions are not counted:</p> <ul style="list-style-type: none"> Cache maintenance instructions and prefetches. Non-cacheable accesses.
0x41	[58:57]	L1D_CACHE_WR	<p>L1 data cache access, write. This event counts any store operation which looks up in the L1 data cache. In particular, any access which could count the L1D_CACHE_REFILL_WR event causes this event to count.</p> <p>The following instructions are not counted:</p> <ul style="list-style-type: none"> Cache maintenance instructions and prefetches. Non-cacheable accesses.
0x42	[59]	L1D_CACHE_REFILL_RD	<p>L1 data cache refill, read. This event counts any load operation or page table walk access which causes data to be read from outside the L1, including accesses which do not allocate into L1.</p> <p>The following instructions are not counted:</p> <ul style="list-style-type: none"> Cache maintenance instructions and prefetches. Non-cacheable accesses.
0x43	[60]	L1D_CACHE_REFILL_WR	<p>L1 data cache refill, write. This event counts any store operation which causes data to be read from outside the L1, including accesses which do not allocate into L1.</p> <p>The following instructions are not counted:</p> <ul style="list-style-type: none"> Cache maintenance instructions and prefetches. Stores of an entire cache line, even if they make a coherency request outside the L1. Partial cache line writes which do not allocate into the L1 cache. Non-cacheable accesses.
0x44	[61]	L1D_CACHE_REFILL_INNER	L1 data cache refill, inner. This event counts any L1 data cache linefill (as counted by L1D_CACHE_REFILL) which hits in the L2 cache, L3 cache, or another core in the cluster.
0x45	[62]	L1D_CACHE_REFILL_OUTER	L1 data cache refill, outer. This event counts any L1 data cache linefill (as counted by L1D_CACHE_REFILL) which does not hit in the L2 cache, L3 cache, or another core in the cluster, and instead obtains data from outside the cluster.
0x46	[63]	L1D_CACHE_WB_VICTIM	L1 data cache write-back, victim
0x47	[64]	L1D_CACHE_WB_CLEAN	L1 data cache write-back cleaning and coherency
0x48	[65]	L1D_CACHE_INVALID	L1 data cache invalidate.
0x4C	[66]	L1D_TLB_REFILL_RD	L1 data TLB refill, read.
0x4D	[67]	L1D_TLB_REFILL_WR	L1 data TLB refill, write.
0x4E	[69:68]	L1D_TLB_RD	L1 data TLB access, read.
0x4F	[71:70]	L1D_TLB_WR	L1 data TLB access, write.

Event number	PMU event bus (to trace)	Event mnemonic	Event description
0x50	[73:72]	L2D_CACHE_RD	L2 unified cache access, read. This event counts any read transaction from L1 which looks up in the L2 cache. Snoops from outside the core are not counted.
0x51	[75:74]	L2D_CACHE_WR	L2 unified cache access, write. This event counts any write transaction from L1 which looks up in the L2 cache or any write-back from L1 which allocates into the L2 cache. Snoops from outside the core are not counted.
0x52	[77:76]	L2D_CACHE_REFILL_RD	L2 unified cache refill, read. This event counts any cacheable read transaction from L1 which causes data to be read from outside the core. L2 refills caused by stashes into L2 should not be counted. Transactions such as ReadUnique are counted here as 'read' transactions, even though they can be generated by store instructions.
0x53	[79:78]	L2D_CACHE_REFILL_WR	L2 unified cache refill, write. This event counts any write transaction from L1 which causes data to be read from outside the core. L2 refills caused by stashes into L2 should not be counted. Transactions such as ReadUnique are not counted as write transactions.
0x56	[81:80]	L2D_CACHE_WB_VICTIM	L2 unified cache write-back, victim.
0x57	[83:82]	L2D_CACHE_WB_CLEAN	L2 unified cache write-back, cleaning, and coherency.
0x58	[85:84]	L2D_CACHE_INVALID	L2 unified cache invalidate.
0x5C	[86]	L2D_TLB_REFILL_RD	L2 data or unified TLB refill, read.
0x5D	[87]	L2D_TLB_REFILL_WR	L2 data or unified TLB refill, write.
0x5E	[89:88]	L2D_TLB_RD	L2 data or unified TLB access, read.
0x5F	[90]	L2D_TLB_WR	L2 data or unified TLB access, write.
0x60	[91]	BUS_ACCESS_RD	Bus access read. This event counts for every beat of data transferred over the read data channel between the core and the SCU.
0x61	[92]	BUS_ACCESS_WR	Bus access write. This event counts for every beat of data transferred over the write data channel between the core and the SCU.
0x66	[94:93]	MEM_ACCESS_RD	Data memory access, read. This event counts memory accesses due to load instructions. The following instructions are not counted: <ul style="list-style-type: none"> • Instruction fetches. • Cache maintenance instructions. • Translation table walks. • Prefetches.
0x67	[96:95]	MEM_ACCESS_WR	Data memory access, write. This event counts memory accesses due to store instructions. <p>The following instructions are not counted:</p> <ul style="list-style-type: none"> • Instruction fetches. • Cache maintenance instructions. • Translation table walks. • Prefetches.

Event number	PMU event bus (to trace)	Event mnemonic	Event description
0x68	[98:97]	UNALIGNED_LD_SPEC	Unaligned access, read
0x69	[100:99]	UNALIGNED_ST_SPEC	Unaligned access, write
0x6A	[103:101]	UNALIGNED_LDST_SPEC	Unaligned access
0x6C	[178]	LDREX_SPEC	Exclusive operation speculatively executed, LDREX or LDX.
0x6D	[180]	STREX_PASS_SPEC	Exclusive operation speculatively executed, STREX or STX pass.
0x6E	[181]	STREX_FAIL_SPEC	Exclusive operation speculatively executed, STREX or STX fail.
0x6F	[182]	STREX_SPEC	Exclusive operation speculatively executed, STREX or STX.
0x70	[107:104]	LD_SPEC	Operation speculatively executed, load.
0x71	[111:108]	ST_SPEC	Operation speculatively executed, store.
0x73	[117:114]	DP_SPEC	Operation speculatively executed, integer data-processing.
0x74	[121:118]	ASE_SPEC	Operation speculatively executed, Advanced SIMD instruction.
0x75	[125:122]	VFP_SPEC	Operation speculatively executed, floating-point instruction.
0x76	[127:126]	PC_WRITE_SPEC	Operation speculatively executed, software change of the PC.
0x77	[131:128]	CRYPTO_SPEC	Operation speculatively executed, Cryptographic instruction.
0x78	[133:132]	BR_IMMED_SPEC	Branch speculatively executed, immediate branch.
0x79	[135:134]	BR_RETURN_SPEC	Branch speculatively executed, procedure return.
0x7A	[175:174]	BR_INDIRECT_SPEC	Branch speculatively executed, indirect branch.
0x7C	[176]	ISB_SPEC	Barrier speculatively executed, ISB.
0x7D	[137:136]	DSB_SPEC	Barrier speculatively executed, DSB.
0x7E	[139:138]	DMB_SPEC	Barrier speculatively executed, DMB.
0x81	[140]	EXC_UNDEF	Counts the number of undefined exceptions taken locally.
0x82	[141]	EXC_SVC	Exception taken locally, Supervisor Call.
0x83	[142]	EXC_PABORT	Exception taken locally, Instruction Abort.
0x84	[143]	EXC_DABORT	Exception taken locally, Data Abort and SError.
0x86	[144]	EXC_IRQ	Exception taken locally, IRQ.
0x87	[145]	EXC_FIQ	Exception taken locally, FIQ.
0x88	[146]	EXC_SMC	Exception taken locally, Secure Monitor Call.
0x8A	[147]	EXC_HVC	Exception taken locally, Hypervisor Call.
0x8B	[148]	EXC_TRAP_PABORT	Exception taken, Instruction Abort not taken locally.
0x8C	[149]	EXC_TRAP_DABORT	Exception taken, Data Abort or SError not taken locally.
0x8D	[150]	EXC_TRAP_OTHER	Exception taken, Other traps not taken locally.
0x8E	[183]	EXC_TRAP_IRQ	Exception taken, IRQ not taken locally.
0x8F	[184]	EXC_TRAP_FIQ	Exception taken, FIQ not taken locally.
0x90	[154:151]	RC_LD_SPEC	Release consistency operation speculatively executed, load-acquire.
0x91	[158:155]	RC_ST_SPEC	Release consistency operation speculatively executed, store-release.
0xA0	[169]	L3D_CACHE_RD	L3 data cache read.

18.4 PMU interrupts

The Cortex®-A77 core asserts the nPMUIRQ signal when the PMU generates an interrupt.

You can route this signal to an external interrupt controller for prioritization and masking. This is the only mechanism that signals this interrupt to the core.

This interrupt is also driven as a trigger input to the CTI. See the [Arm® DynamIQ™ Shared Unit Technical Reference Manual](#) for more information.

18.5 Exporting PMU events

Some of the PMU events are exported to the ETM trace unit to be monitored.



The PMUEVENT bus is not exported to external components. This is because the event bus cannot safely cross an asynchronous boundary when events can be generated on every cycle.

19. Activity Monitor Unit

This chapter describes the *Activity Monitor Unit* (AMU).

19.1 About the AMU

The Cortex®-A77 core includes activity monitoring. It has features in common with performance monitoring, but is intended for system management use whereas performance monitoring is aimed at user and debug applications.

The activity monitors provide useful information for system power management and persistent monitoring. The activity monitors are read-only in operation and their configuration is limited to the highest Exception level implemented.

The Cortex®-A77 core implements five counters, 0-4, and activity monitoring is only implemented in AArch64.



The Cortex®-A77 core activity monitoring is not architecturally described in the [Arm® Architecture Reference Manual for A-profile architecture](#). Details regarding the AMU implementation for the Cortex®-A77 core are found wholly within this chapter.

19.2 Accessing the activity monitors

The activity monitors can be accessed by:

- The System register interface for both AArch64 and AArch32 states.
- Read-only memory-mapped access using the debug APB interface.

19.2.1 Access enable bit

The access enable bit for traps on accesses to activity monitor registers is required at EL2 and EL3.

In the Cortex®-A77 core, the AMEN[4] bit in registers ACTLR_EL2 and ACTLR_EL3 controls the activity monitor registers enable.



In the Cortex®-A77 core, the AMEN[4] bit is **RES0** in ACTLR and HACTLR. Activity monitors are not implemented in AArch32.

19.2.2 System register access

The core implements activity monitoring in AArch64 and the activity monitors can be accessed using the `MRS` and `MSR` instructions.

19.2.3 External memory-mapped access

Activity monitors can also be memory-mapped accessed from the APB debug interface.

In this case, the AMU registers provide debug information and are read-only.

19.3 AMU counters

The Cortex®-A77 core implements five counters, 0-4. The activity monitor counters, `AMEVCNTR<0-4>_ELO`, have the following characteristics:

- All events are counted in 64-bit wrapping counters that overflow when they wrap. There is no support for overflow status indication or interrupts.
- Any change in clock frequency, including when a WFI and WFE instruction stops the clock, can affect any counter.
- Events 0, 1, 2, and 3 are fixed, and the `AMEVTYPER<n> evtCount` bits are read-only.
- Event 4 is programmable at the highest Exception level implemented, and the `AMEVTYPER<n> evtCount` bits are read-write. For more information, see [Table 19-1: Mapping of counters to fixed and programmable events](#) on page 333.

19.4 AMU events

The following table describes the counters that are implemented in the Cortex®-A77 core and the mapping to fixed and programmable events.

Table 19-1: Mapping of counters to fixed and programmable events

Activity monitor counter <n>	Event type	Event	Event number	Description
0	Fixed	Cycles at core frequency	0x11	Cycles count.
1	Fixed	Cycles at constant frequency	0xEF	This counter is used to replicate the generic system counter that is incremented on a constant basis, and not incremented depending on the PE frequency core.

Activity monitor counter <n>	Event type	Event	Event number	Description
2	Fixed	Instructions retired	0x08	Instruction architecturally executed. This counter increments for every instruction that is executed architecturally, including instructions that fail their condition code check.
3	Fixed	First miss	0xF0	The first miss event tracks whether any external load miss is outstanding and starts counting only from a first-miss until data returns for that miss. The counter does not count for any remaining part of overlapping accesses, only counting again when the first-miss condition is re-detected.
4	Programmable	High activity	0xF1	Instructions executing through the design which act as a hint for potential high power activity.
		Max Power Mitigation Mechanism	0xF2	Cores can be configured to throttle back activity, and thus, power, if a high average power threshold is met.



To program AMU counter 4, you need to program the AMEVTYPER4_ELO register. For more information, see [28.7 AMEVTYPERn_ELO, Activity Monitor Event Type Register, ELO](#) on page 411.

20. Embedded Trace Macrocell

This chapter describes the ETM for the Cortex®-A77 core.

20.1 About the ETM

The ETM trace unit is a module that performs real-time instruction flow tracing that is based on the ETMv4 architecture. The ETM is a CoreSight component, and is an integral part of the Arm Real-time Debug solution, DS-5 Development Studio.

See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) for more information.

20.2 ETM trace unit generation options and resources

The following table shows the trace generation options that are implemented in the Cortex®-A77 ETM trace unit.

Table 20-1: ETM trace unit generation options implemented

Description	Configuration
Instruction address size in bytes	8
Data address size in bytes	0
Data value size in bytes	0
Virtual Machine ID size in bytes	4
Context ID size in bytes	4
Support for conditional instruction tracing	Not implemented
Support for tracing of data	Not implemented
Support for tracing of load and store instructions as PO elements	Not implemented
Support for cycle counting in the instruction trace	Implemented
Support for branch broadcast tracing	Implemented
Number of events supported in the trace	4
Return stack support	Implemented
Tracing of SError exception support	Implemented
Instruction trace cycle counting minimum threshold	4
Size of Trace ID	7 bits
Synchronization period support	read/write
Global timestamp size	64 bits
Number of cores available for tracing	1
ATB trigger support	Implemented
Low power behavior override	Not implemented

Description	Configuration
Stall control support	Not implemented
Support for overflow avoidance	Not implemented
Support for using CONTEXTIDR_EL2 in VMID comparator	Implemented

The following table shows the resources that are implemented in the Cortex®-A77 ETM trace unit.


Table 20-2: ETM trace unit resources implemented

Description	Configuration
Number of resource selection pairs implemented	8
Number of external input selectors implemented	4
Number of external inputs implemented	189, 4 CTI + 185 PMU
Number of counters implemented	2
Reduced function counter implemented	Not implemented
Number of sequencer states implemented	4
Number of Virtual Machine ID comparators implemented	1
Number of Context ID comparators implemented	1
Number of address comparator pairs implemented	4
Number of single-shot comparator controls	1
Number of core comparator inputs implemented	0
Data address comparisons implemented	Not implemented
Number of data value comparators implemented	0

20.3 ETM trace unit functional description

This section describes the functionality of the ETM trace unit.

The following figure shows the main functional blocks of the ETM trace unit.

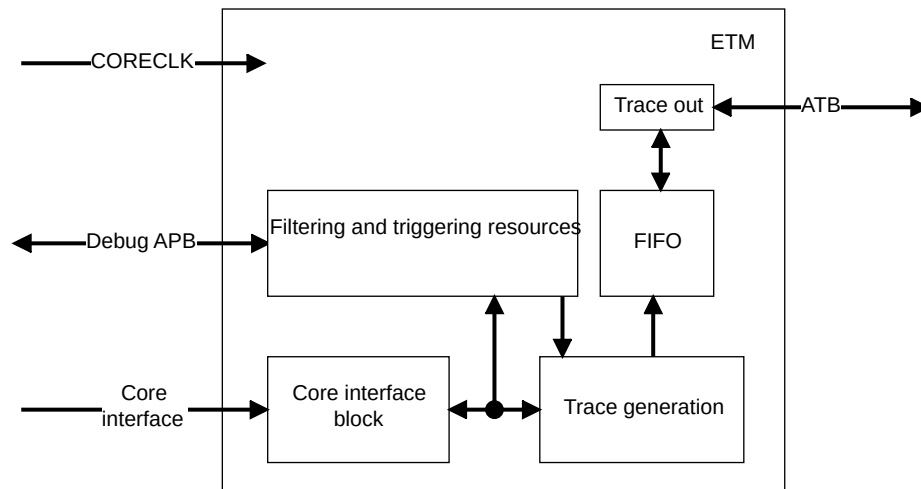Figure 20-1: ETM functional blocks**Core interface**

This block monitors the behavior of the core and generates PO elements that are essentially executed branches and exceptions traced in program order.

Trace generation

The trace generation block generates various trace packets based on PO elements.

Filtering and triggering resources

You can limit the amount of trace data generated by the ETM through the process of filtering.

For example, generating trace only in a certain address range. More complicated logic analyzer style filtering options are also available.

The ETM trace unit can also generate a trigger that is a signal to the Trace Capture Device to stop capturing trace.

FIFO

The trace generated by the ETM trace unit is in a highly-compressed form.

The FIFO enables trace bursts to be flattened out. When the FIFO becomes full, the FIFO signals an overflow. The trace generation logic does not generate any new trace until the FIFO is emptied. This causes a gap in the trace when viewed in the debugger.

Trace out

Trace from FIFO is output on the AMBA ATB interface.

20.4 Resetting the ETM

The reset for the ETM trace unit is the same as a Cold reset for the core.

The ETM trace unit is not reset when Warm reset is applied to the core so that tracing through Warm core reset is possible.

If the ETM trace unit is reset, tracing stops until the ETM trace unit is reprogrammed and re-enabled. However, if the core is reset using Warm reset, the last few instructions that are provided by the core before the reset might not be traced.


20.5 Programming and reading ETM trace unit registers

You program and read the ETM trace unit registers using the Debug APB interface.

The core does not have to be in debug state when you program the ETM trace unit registers.

When you are programming the ETM trace unit registers, you must enable all the changes at the same time. Otherwise, if you program the counter, it might start to count based on incorrect events before the correct setup is in place for the trigger condition.

To disable the ETM trace unit, use the TRCPRGCTLR.EN bit.

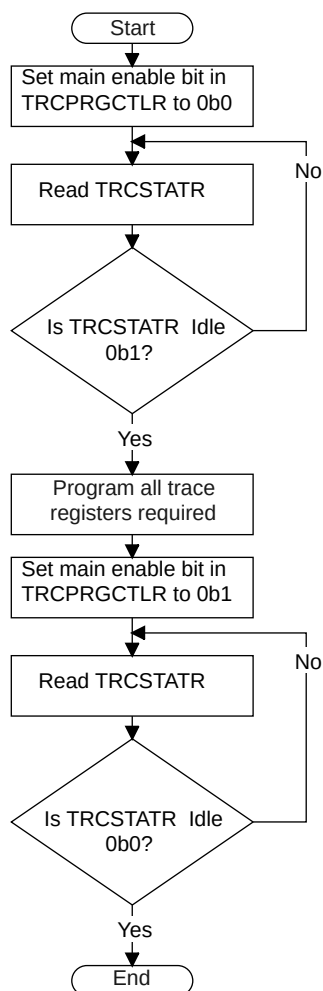Figure 20-2: Programming ETM trace unit registers

20.6 ETM trace unit register interfaces

The Cortex®-A77 core supports only memory-mapped interface to trace registers.

See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) for information on the behaviors on register accesses for different trace unit states and the different access mechanisms.

Related information

[External debug interface](#) on page 322

20.7 Interaction with the PMU and Debug

This section describes the interaction with the PMU and the effect of debug double lock on trace register access.

Interaction with the PMU

The Cortex®-A77 core includes a PMU that enables events, such as cache misses and instructions executed, to be counted over a period of time.

The PMU and ETM trace unit function together.

Use of PMU events by the ETM trace unit

The PMU architectural events described in [18.3 PMU events](#) on page 324 are available to the ETM trace unit through the extended input facility.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information about PMU events.

The ETM trace unit uses four extended external input selectors to access the PMU events. Each selector can independently select one of the PMU events, that are then active for the cycles where the relevant events occur. These selected events can then be accessed by any of the event registers within the ETM trace unit. The PMU event table describes the PMU events.

Related information

[PMU events](#) on page 324

21. AArch32 debug registers

This chapter describes the Debug registers in the AArch32 Execution state and shows examples of how to use them.

21.1 AArch32 Debug register summary

The following table summarizes the 32-bit and 64-bit debug control registers that are accessible in the AArch32 Execution state from the internal CP14 interface. These registers are accessed by the `MCR` and `MRC` instructions in the order of CRn, op2, CRm, Op1, or `MCRR` and `MRRR` instructions in the order of CRm, Op1.

For those registers that are not described in this chapter, see the *Arm® Architecture Reference Manual Arm®v8, for Arm®v8-A architecture profile*.

Table 21-1: AArch32 Debug register summary

CRn	Op2	CRm	Op1	Name	Type	Reset	Description
c0	0	c1	0	DBGDSCRint	RO	000x0000	Debug Status and Control Register, Internal View
c0	0	c5	0	DBGDTRTXint	WO	-	Debug Data Transfer Register, Transmit, Internal View
c0	0	c5	0	DBGDTRRXint	RO	0x00000000	Debug Data Transfer Register, Receive, Internal View

22. AArch64 Debug registers

This chapter describes the Debug registers in the AArch64 Execution state and shows examples of how to use them.

22.1 AArch64 Debug register summary

This section summarizes the debug control registers that are accessible in the AArch64 Execution state.

These registers, listed in the following table, are accessed by the `MRS` and `MSR` instructions in the order of Op0, CRn, Op1, CRm, Op2.

See [23.1 Memory-mapped Debug register summary](#) on page 351 for a complete list of registers accessible from the external debug interface. The 64-bit registers cover two addresses on the external memory interface. For those registers that are not described in this chapter, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

Table 22-1: AArch64 debug register summary

Name	Type	Reset	Width	Description
OSDTRRX_EL1	RW	0x00000000	32	Debug Data Transfer Register, Receive, External View
DBGBVR0_EL1	RW	-	64	Debug Breakpoint Value Register 0
DBGBCR0_EL1	RW	UNK	32	22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1 on page 343
DBGWVR0_EL1	RW	-	64	Debug Watchpoint Value Register 0
DBGWCR0_EL1	RW	UNK	32	22.4 DBGWCRn_EL1, Debug Watchpoint Control Registers, EL1 on page 347
DBGBVR1_EL1	RW	-	64	Debug Breakpoint Value Register 1
DBGBCR1_EL1	RW	UNK	32	22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1 on page 343
DBGWVR1_EL1	RW	-	64	Debug Watchpoint Value Register 1
DBGWCR1_EL1	RW	UNK	32	22.4 DBGWCRn_EL1, Debug Watchpoint Control Registers, EL1 on page 347
MDCCINT_EL1	RW	0x00000000	32	Monitor Debug Comms Channel Interrupt Enable Register
MDSCR_EL1	RW	-	32	Monitor Debug System Control Register, EL1
DBGBVR2_EL1	RW	-	64	Debug Breakpoint Value Register 2
DBGBCR2_EL1	RW	UNK	32	22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1 on page 343
DBGWVR2_EL1	RW	-	64	Debug Watchpoint Value Register 2
DBGWCR2_EL1	RW	UNK	32	22.4 DBGWCRn_EL1, Debug Watchpoint Control Registers, EL1 on page 347
OSDTRTX_EL1	RW	-	32	Debug Data Transfer Register, Transmit, External View
DBGBVR3_EL1	RW	-	64	Debug Breakpoint Value Register 3
DBGBCR3_EL1	RW	UNK	32	22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1 on page 343
DBGWVR3_EL1	RW	-	64	Debug Watchpoint Value Register 3
DBGWCR3_EL1	RW	UNK	32	22.4 DBGWCRn_EL1, Debug Watchpoint Control Registers, EL1 on page 347
DBGBVR4_EL1	RW	-	64	Debug Breakpoint Value Register 4

Name	Type	Reset	Width	Description
DBGBCR4_EL1	RW	UNK	32	22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1 on page 343
DBGBVR5_EL1	RW	-	64	Debug Breakpoint Value Register 5
DBGBCR5_EL1	RW	UNK	32	22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1 on page 343
OSECCR_EL1	RW	0x00000000	32	Debug OS Lock Exception Catch Register
MDCCSR_ELO	RO	0x00000000	32	Monitor Debug Comms Channel Status Register
DBGDTR_ELO	RW	0x00000000	64	Debug Data Transfer Register, half-duplex
DBGDTRTX_ELO	WO	0x00000000	32	Debug Data Transfer Register, Transmit, Internal View
DBGDTRRX_ELO	RO	0x00000000	32	Debug Data Transfer Register, Receive, Internal View
MDRAR_EL1	RO	-	64	Debug ROM Address Register. This register is reserved, RES0
OSLAR_EL1	WO	-	32	Debug OS Lock Access Register
OSLSR_EL1	RO	0x0000000A	32	Debug OS Lock Status Register
OSDLR_EL1	RW	0x00000000	32	Debug OS Double Lock Register
DBGPRCR_EL1	RW	-	32	Debug Power/Reset Control Register
DBGCLAIMSET_EL1	RW	0x000000FF	32	22.3 DBGCLAIMSET_EL1, Debug Claim Tag Set Register, EL1 on page 346
DBGCLAIMCLR_EL1	RW	0x00000000	32	Debug Claim Tag Clear Register
DBGAUTHSTATUS_EL1	RO	0x000000AA	32	Debug Authentication Status Register


22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1

The DBGBCRn_EL1 registers hold control information for a breakpoint. Each DBGBVRn_EL1 is associated with a DBGBCRn_EL1 to form a *Breakpoint Register Pair* (BRP). The range of *n* for DBGBCRn_EL1 registers is 0 to 5.

Bit field descriptions

The DBGBCRn_EL1 registers are 32-bit registers.

Figure 22-1: DBGBCRn_EL1 bit assignments

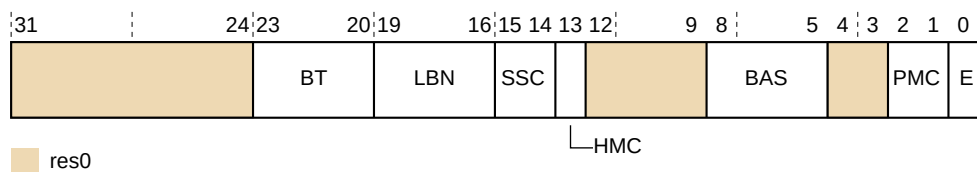

RES0, [31:24]**RES0**

Reserved.

BT, [23:20]

Breakpoint Type. This field controls the behavior of Breakpoint debug event generation. This includes the meaning of the value held in the associated DBGBVR_n_EL1, indicating whether it is an instruction address match or mismatch, or a Context match. It also controls whether the breakpoint is linked to another breakpoint. The possible values are:

0b0000

Unlinked instruction address match.

0b0001

Linked instruction address match.

0b0010

Unlinked Context ID match.

0b0011

Linked Context ID match.

0b0100

Unlinked instruction address mismatch.

0b0101

Linked instruction address mismatch.

0b0110

Unlinked CONTEXTIDR_EL1 match.

0b0111

Linked CONTEXTIDR_EL1 match.

0b1000

Unlinked VMID match.

0b1001

Linked VMID match.

0b1010

Unlinked VMID + Context ID match.

0b1011

Linked VMID + Context ID match.

0b1100

Unlinked CONTEXTIDR_EL2 match.

0b1101

Linked CONTEXTIDR_EL2 match.

0b1110

Unlinked Full Context ID match.

0b1111

Linked Full Context ID match.

The field breakdown is:

- BT[3:1]: Base type. If the breakpoint is not context-aware, these bits are **RES0**. Otherwise, the possible values are:

0b000	Match address. DBGBVR _n _EL1 is the address of an instruction.
0b001	Match context ID. DBGBVR _n _EL1[31:0] is a context ID.
0b010	Match VMID. DBGBVR _n _EL1[47:32] is a VMID.
0b011	Match VMID and CONTEXTIDR_EL1. DBGBVR _n _EL1[31:0] is a context ID, and DBGBVR _n _EL1[47:32] is a VMID.

- BT[2]: Mismatch. **RES0**.
- BT[0]: Enable linking.

LBN, [19:16]

Linked breakpoint number. For Linked address matching breakpoints, this specifies the index of the context-matching breakpoint linked to.

SSC, [15:14]

Security State Control. Determines the Security states under which a breakpoint debug event for breakpoint *n* is generated.

This field must be interpreted with the *Higher Mode Control* (HMC), and *Privileged Mode Control* (PMC), fields to determine the mode and Security states that can be tested.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for possible values of the HMC and PMC fields.

HMC, [13]

Hyp Mode Control bit. Determines the debug perspective for deciding when a breakpoint debug event for breakpoint *n* is generated.

This bit must be interpreted with the SSC and PMC fields to determine the mode and Security states that can be tested.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for possible values of the SSC and PMC fields.

RES0, [12:9]**RES0**

Reserved.

BAS, [8:5]

Byte Address Select. Defines which halfwords a regular breakpoint matches, regardless of the instruction set and Execution state. A debugger must program this field as follows:

0x3

Match the T32 instruction at DBGBVR $_n$ _EL1.

0xC

Match the T32 instruction at DBGBVR $_n$ _EL1+2.

0xF

Match the A64 or A32 instruction at DBGBVR $_n$ _EL1, or context match.

All other values are reserved.

The Arm®v8-A architecture does not support direct execution of Java bytecodes. BAS[3] and BAS[1] ignore writes and on reads return the values of BAS[2] and BAS[0] respectively.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information on how the BAS field is interpreted by hardware.

RES0, [4:3]**RES0**

Reserved.

PMC, [2:1]

Privileged Mode Control. Determines the Exception level or levels that a breakpoint debug event for breakpoint n is generated.

This field must be interpreted with the SSC and HMC fields to determine the mode and Security states that can be tested.

See the [Arm® Architecture Reference Manual for A-profile architecture](#) for possible values of the SSC and HMC fields.

Bits[2:1] have no effect for accesses made in Hyp mode.

E, [0]

Enable breakpoint. This bit enables the BRP:

0

BRP disabled.

1

BRP enabled.

A BRP never generates a breakpoint debug event when it is disabled.

The value of DBGBCR $_n$ _EL1.E is **UNKNOWN** on reset. A debugger must ensure that DBGBCR $_n$ _EL1.E has a defined value before it enables debug.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


22.3 DBGCLAIMSET_EL1, Debug Claim Tag Set Register, EL1

The DBGCLAIMSET_EL1 is used by software to set CLAIM bits to 1.

Bit field descriptions

The DBGCLAIMSET_EL1 is a 32-bit register.

Figure 22-2: DBGCLAIMSET_EL1 bit assignments

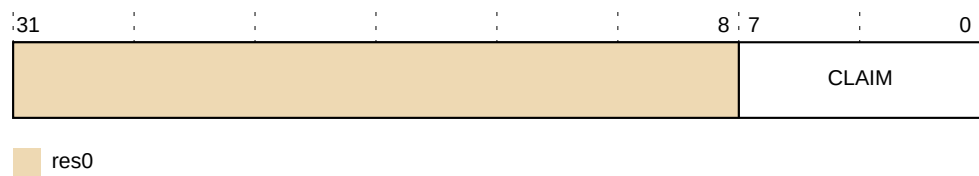

RES0, [31:8]

RES0

Reserved.

CLAIM, [7:0]

Claim set bits.

Writing a 1 to one of these bits sets the corresponding CLAIM bit to 1. This is an indirect write to the CLAIM bits.

A single write operation can set multiple bits to 1. Writing 0 to one of these bits has no effect.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


22.4 DBGWCRn_EL1, Debug Watchpoint Control Registers, EL1

The DBGWCRn_EL1 registers hold control information for a watchpoint. Each DBGWCRn_EL1 is associated with a DBGWVRn_EL1 to form a *Watchpoint Register Pair* (WRP). The range of *n* for DBGWCRn_EL1 registers is 0 to 3.

Bit field descriptions

The DBGWCRn_EL1 registers are 32-bit registers.

Figure 22-3: DBGWCRn_EL1 bit assignments

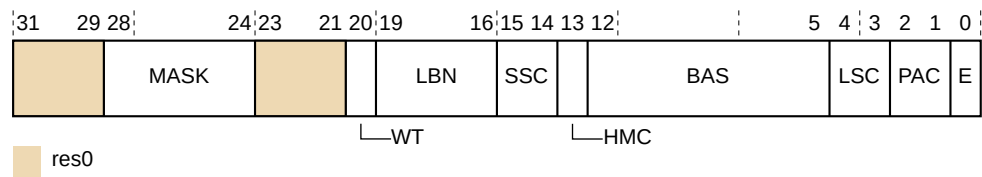

RES0, [31:29]

RES0
Reserved.

MASK, [28:24]

Address mask. Only objects up to 2GB can be watched using a single mask.

0b00000	No mask.
0b00001	Reserved.
0b00010	Reserved.

Other values mask the corresponding number of address bits, from 0b00011 masking 3 address bits (0x00000007 mask for address) to 0b11111 masking 31 address bits (0x7FFFFFFF mask for address).

RES0, [23:21]

RES0
Reserved.

WT, [20]

Watchpoint type. Possible values are:

0b0
Unlinked data address match.

0b1

Linked data address match.

On Cold reset, the field reset value is architecturally **UNKNOWN**.

LBN, [19:16]

Linked breakpoint number. For Linked data address watchpoints, this specifies the index of the Context-matching breakpoint linked to.

On Cold reset, the field reset value is architecturally **UNKNOWN**.

SSC, [15:14]

Security state control. Determines the Security states under which a watchpoint debug event for watchpoint n is generated. This field must be interpreted along with the HMC and PAC fields.

On Cold reset, the field reset value is architecturally **UNKNOWN**.

HMC, [13]

Higher mode control. Determines the debug perspective for deciding when a watchpoint debug event for watchpoint n is generated. This field must be interpreted along with the SSC and PAC fields.

On Cold reset, the field reset value is architecturally **UNKNOWN**.

BAS, [12:5]

Byte address select. Each bit of this field selects whether a byte from within the word or double-word addressed by DBGWVRn_EL1 is being watched. See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information.

LSC, [4:3]

Load/store access control. This field enables watchpoint matching on the type of access being made. The possible values are:

0b01

Match instructions that load from a watchpoint address.

0b10

Match instructions that store to a watchpoint address.

0b11

Match instructions that load from or store to a watchpoint address.

All other values are reserved, but must behave as if the watchpoint is disabled. Software must not rely on this property because the behavior of reserved values might change in a future revision of the architecture.

IGNORED

On Cold reset, the field reset value is architecturally **UNKNOWN**.

PAC, [2:1]

Privilege of access control. Determines the Exception level or levels at which a watchpoint debug event for watchpoint n is generated. This field must be interpreted along with the SSC and HMCfields.

On Cold reset, the field reset value is architecturally **UNKNOWN**.

E, [0]

Enable watchpoint n. Possible values are:

0b0

Watchpoint disabled.

0b1

Watchpoint enabled.

On Cold reset, the field reset value is architecturally **UNKNOWN**.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

23. Memory-mapped Debug registers

This chapter describes the memory-mapped Debug registers and shows examples of how to use them.

23.1 Memory-mapped Debug register summary

The following table shows the offset address for the registers that are accessible from the external debug interface.

For those registers that are not described in this chapter, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

Table 23-1: Memory-mapped debug register summary

Offset	Name	Type	Width	Description
0x000–0x01C	-	-	-	Reserved
0x020	EDESR	RW	32	External Debug Event Status Register
0x024	EDECR	RW	32	External Debug Execution Control Register
0x028–0x02C	-	-	-	Reserved
0x030	EDWAR[31:0]	RO	64	External Debug Watchpoint Address Register
0x034	EDWAR[63:32]			
0x038–0x07C	-	-	-	Reserved
0x080	DBGDTRRX_ELO	RW	32	Debug Data Transfer Register, Receive
0x084	EDITR	WO	32	External Debug Instruction Transfer Register
0x088	EDSCR	RW	32	External Debug Status and Control Register
0x08C	DBGDTRTX_ELO	WO	32	Debug Data Transfer Register, Transmit
0x090	EDRCR	WO	32	23.14 EDRCR, External Debug Reserve Control Register on page 364
0x094	-	RW	32	Reserved
0x098	EDECCR	RW	32	External Debug Exception Catch Control Register
0x09C	-	-	-	Reserved
0x0A0	-	-	-	Reserved
0x0A4	-	-	-	Reserved
0x0A8	-	-	-	Reserved
0x0AC	-	-	-	Reserved
0x0B0–0x2FC	-	-	-	Reserved
0x300	OSLAR_EL1	WO	32	OS Lock Access Register
0x304–0x30C	-	-	-	Reserved
0x310	EDPRCR	RW	32	External Debug Power/Reset Control Register
0x314	EDPRSR	RO	32	External Debug Processor Status Register
0x318–0x3FC	-	-	-	Reserved

Offset	Name	Type	Width	Description
0x400	DBGBVR0_EL1[31:0]	RW	64	Debug Breakpoint Value Register 0
0x404	DBGBVR0_EL1[63:32]			
0x408	DBGBCR0_EL1	RW	32	22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1 on page 343
0x40C	-	-	-	Reserved
0x410	DBGBVR1_EL1[31:0]	RW	64	Debug Breakpoint Value Register 1
0x414	DBGBVR1_EL1[63:32]			
0x418	DBGBCR1_EL1	RW	32	22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1 on page 343
0x41C	-	-	-	Reserved
0x420	DBGBVR2_EL1[31:0]	RW	64	Debug Breakpoint Value Register 2
0x424	DBGBVR2_EL1[63:32]			
0x428	DBGBCR2_EL1	RW	32	22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1 on page 343
0x42C	-	-	-	Reserved
0x430	DBGBVR3_EL1[31:0]	RW	64	Debug Breakpoint Value Register 3
0x434	DBGBVR3_EL1[63:32]			
0x438	DBGBCR3_EL1	RW	32	22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1 on page 343
0x43C	-	-	-	Reserved
0x440	DBGBVR4_EL1[31:0]	RW	64	Debug Breakpoint Value Register 4
0x444	DBGBVR4_EL1[63:32]			
0x448	DBGBCR4_EL1	RW	32	22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1 on page 343
0x44C	-	-	-	Reserved
0x450	DBGBVR5_EL1[31:0]	RW	64	Debug Breakpoint Value Register 5
0x454	DBGBVR5_EL1[63:32]	RW	64	Debug Breakpoint Value Register 5
0x458	DBGBCR5_EL1	RW	32	22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1 on page 343
0x45C–0x7FC	-	-	-	Reserved
0x800	DBGWVR0_EL1[31:0]	RW	64	Debug Watchpoint Value Register 0
0x804	DBGWVR0_EL1[63:32]			
0x808	DBGWCR0_EL1	RW	32	22.4 DBGWCRn_EL1, Debug Watchpoint Control Registers, EL1 on page 347
0x80C	-	-	-	Reserved
0x810	DBGWVR1_EL1[31:0]	RW	64	Debug Watchpoint Value Register 1
0x814	DBGWVR1_EL1[63:32]			
0x818	DBGWCR1_EL1	RW	32	22.4 DBGWCRn_EL1, Debug Watchpoint Control Registers, EL1 on page 347
0x81C	-	-	-	Reserved
0x820	DBGWVR2_EL1[31:0]	RW	64	Debug Watchpoint Value Register 2
0x824	DBGWVR2_EL1[63:32]			
0x828	DBGWCR2_EL1	RW	32	22.4 DBGWCRn_EL1, Debug Watchpoint Control Registers, EL1 on page 347
0x82C	-	-	-	Reserved
0x830	DBGWVR3_EL1[31:0]	RW	64	Debug Watchpoint Value Register 0,
0x834	DBGWVR3_EL1[63:32]			
0x838	DBGWCR3_EL1	RW	32	22.4 DBGWCRn_EL1, Debug Watchpoint Control Registers, EL1 on page 347

Offset	Name	Type	Width	Description
0x83C–0xCFC	-	-	-	Reserved
0xD00	MIDR	RO	32	13.93 MIDR_EL1, Main ID Register, EL1 on page 235
0xD04–0xD1C	-	-	-	Reserved
0xD20	EDPFR[31:0]	RO	64	13.70 ID_AA64PFR0_EL1, AArch64 Processor Feature Register 0, EL1 on page 197
0xD24	EDPFR[63:32]			
0xD28	EDDFR[31:0]	RO	64	13.70 ID_AA64PFR0_EL1, AArch64 Processor Feature Register 0, EL1 on page 197
0xD2C	EDDFR[63:32]			
0xD60–0xEFC	-	-	-	Reserved
0xF00	-	-	-	Reserved
0xF04–0xF9C	-	-	-	Reserved
0xFA0	DBGCLAIMSET_EL1	RW	32	22.3 DBGCLAIMSET_EL1, Debug Claim Tag Set Register, EL1 on page 346
0xFA4	DBGCLAIMCLR_EL1	RW	32	Debug Claim Tag Clear Register
0xFA8	EDDEVAFF0	RO	32	External Debug Device Affinity Register 0
0xFAC	EDDEVAFF1	RO	32	External Debug Device Affinity Register 1
0xFB0	-	-	-	Reserved
0xFB4	-	-	-	Reserved
0xFB8	DBGAUTHSTATUS_EL1	RO	32	Debug Authentication Status Register
0xFBC	EDDEVARCH	RO	32	External Debug Device Architecture Register
0xFC0	EDDEVID2	RO	32	External Debug Device ID Register 2, <i>res0</i>
0xFC4	EDDEVID1	RO	32	23.7 EDDEVID1, External Debug Device ID Register 1 on page 358
0xFC8	EDDEVID	RO	32	23.6 EDDEVID, External Debug Device ID Register 0 on page 357
0xFCC	EDDEVTYPE	RO	32	External Debug Device Type Register
0xFD0	EDPIDR4	RO	32	23.12 EDPIDR4, External Debug Peripheral Identification Register 4 on page 362
0xFD4–0xFDC	EDPIDR5–7	RO	32	23.13 EDPIDRn, External Debug Peripheral Identification Registers 5–7 on page 363
0xFE0	EDPIDR0	RO	32	23.8 EDPIDR0, External Debug Peripheral Identification Register 0 on page 359
0xFE4	EDPIDR1	RO	32	23.9 EDPIDR1, External Debug Peripheral Identification Register 1 on page 360
0xFE8	EDPIDR2	RO	32	23.10 EDPIDR2, External Debug Peripheral Identification Register 2 on page 361
0xFEC	EDPIDR3	RO	32	23.11 EDPIDR3, External Debug Peripheral Identification Register 3 on page 361
0xFF0	EDCIDR0	RO	32	23.2 EDCIDR0, External Debug Component Identification Register 0 on page 353
0xFF4	EDCIDR1	RO	32	23.3 EDCIDR1, External Debug Component Identification Register 1 on page 354
0xFF8	EDCIDR2	RO	32	23.4 EDCIDR2, External Debug Component Identification Register 2 on page 355
0xFFC	EDCIDR3	RO	32	23.5 EDCIDR3, External Debug Component Identification Register 3 on page 356


23.2 EDCIDR0, External Debug Component Identification Register 0

The EDCIDR0 provides information to identify an external debug component.

Bit field descriptions

The EDCIDR0 is a 32-bit register.

Figure 23-1: EDCIDR0 bit assignments

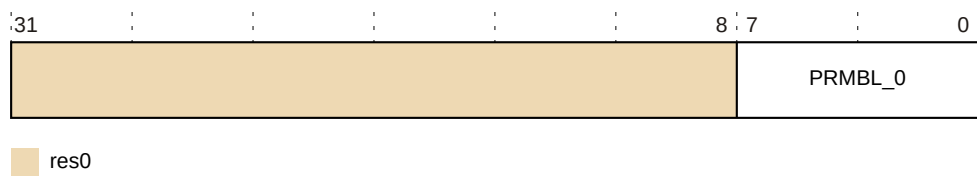

RES0, [31:8]

RES0

Reserved.

PRMBL_0, [7:0]

0x0D

Preamble byte 0.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


The EDCIDR0 can be accessed through the external debug interface, offset 0xFF0.

23.3 EDCIDR1, External Debug Component Identification Register 1

The EDCIDR1 provides information to identify an external debug component.

Bit field descriptions

The EDCIDR1 is a 32-bit register.

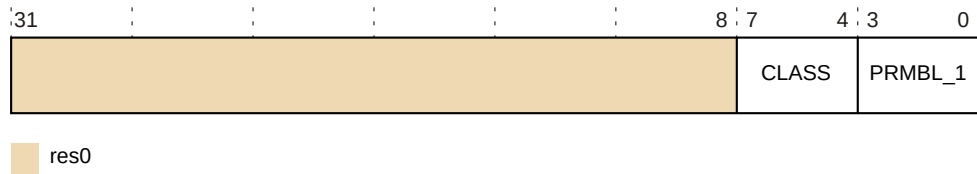Figure 23-2: EDCIDR1 bit assignments**RES0, [31:8]****RES0**

Reserved.

CLASS, [7:4]**0x9**

Debug component.

PRMBL_1, [3:0]**0x0**

Preamble.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


The EDCIDR1 can be accessed through the external debug interface, offset 0xFF4.

23.4 EDCIDR2, External Debug Component Identification Register 2

The EDCIDR2 provides information to identify an external debug component.

Bit field descriptions

The EDCIDR2 is a 32-bit register.

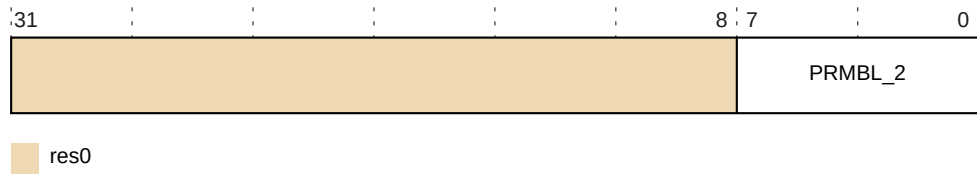Figure 23-3: EDCIDR2 bit assignments**RES0, [31:8]****RES0**

Reserved.

PRMBL_2, [7:0]**0x05**

Preamble byte 2.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


The EDCIDR2 can be accessed through the external debug interface, offset 0xFF8.

23.5 EDCIDR3, External Debug Component Identification Register 3

The EDCIDR3 provides information to identify an external debug component.

Bit field descriptions

The EDCIDR3 is a 32-bit register.

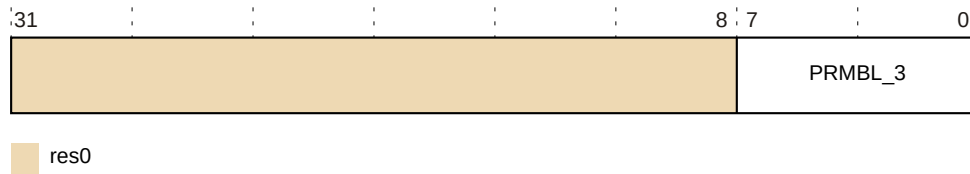Figure 23-4: EDCIDR3 bit assignments**RES0, [31:8]****RES0**

Reserved.

PRMBL_3, [7:0]**0xB1**

Preamble byte 3.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


The EDCIDR3 can be accessed through the external debug interface, offset 0xFFC.

23.6 EDDEVID, External Debug Device ID Register 0

The EDDEVID provides extra information for external debuggers about features of the debug implementation.

Bit field descriptions

The EDDEVID is a 32-bit register.

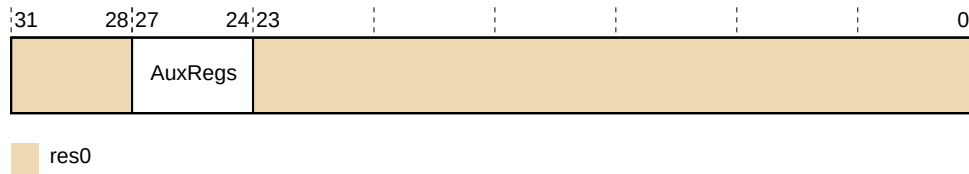Figure 23-5: EDDEVID bit assignments**RES0, [31:28]****RES0**

Reserved.

AuxRegs, [27:24]

Indicates support for Auxiliary registers:

0x0

None supported.

RES0, [23:0]**RES0**

Reserved.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


The EDDEVID can be accessed through the external debug interface, offset 0xFC8.

23.7 EDDEVID1, External Debug Device ID Register 1

The EDDEVID1 provides extra information for external debuggers about features of the debug implementation.

Bit field descriptions

The EDDEVID1 is a 32-bit register.

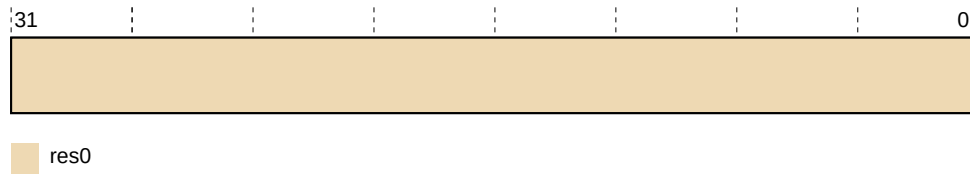Figure 23-6: EDDEVID1 bit assignments**RES0, [31:0]****RES0**

Reserved.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


The EDDEVID1 can be accessed through the external debug interface, offset 0xFC4.

23.8 EDPIDR0, External Debug Peripheral Identification Register 0

The EDPIDR0 provides information to identify an external debug component.

Bit field descriptions

The EDPIDR0 is a 32-bit register.

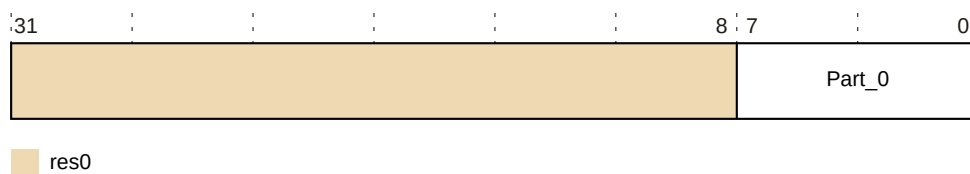Figure 23-7: EDPIDR0 bit assignments

RES0, [31:8]

RES0
Reserved.

Part_0, [7:0]

0x0D Least significant byte of the debug part number.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

The EDPIDR0 can be accessed through the external debug interface, offset 0xFE0.


23.9 EDPIDR1, External Debug Peripheral Identification Register 1

The EDPIDR1 provides information to identify an external debug component.

Bit field descriptions

The EDPIDR1 is a 32-bit register.

Figure 23-8: EDPIDR1 bit assignments

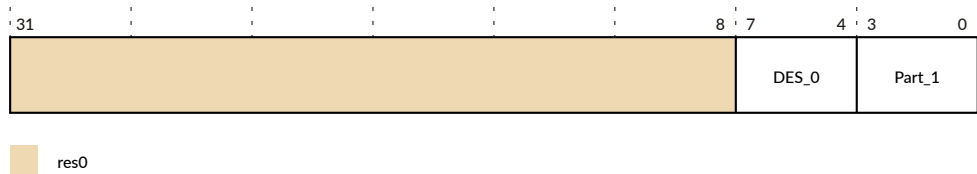

RES0, [31:8]

RES0
Reserved.

DES_0, [7:4]

0xB Arm Limited. This is the least significant nibble of JEP106 ID code.

Part_1, [3:0]

0xD Most significant nibble of the debug part number.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

The EDPIDR1 can be accessed through the external debug interface, offset 0xFE4.


23.10 EDPIDR2, External Debug Peripheral Identification Register 2

The EDPIDR2 provides information to identify an external debug component.

Bit field descriptions

The EDPIDR2 is a 32-bit register.

Figure 23-9: EDPIDR2 bit assignments

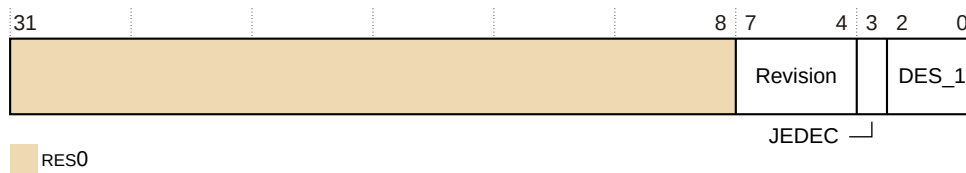

RES0, [31:8]

RES0 Reserved.

Revision, [7:4]

0x2 r1p1.

JEDEC, [3]

0b1 RAO. Indicates a JEP106 identity code is used.

DES_1, [2:0]

0b011 Arm Limited. This is the most significant nibble of JEP106 ID code.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

The EDPIDR2 can be accessed through the external debug interface, offset 0xFE8.


23.11 EDPIDR3, External Debug Peripheral Identification Register 3

The EDPIDR3 provides information to identify an external debug component.

Bit field descriptions

The EDPIDR3 is a 32-bit register.

Figure 23-10: EDPIDR3 bit assignments

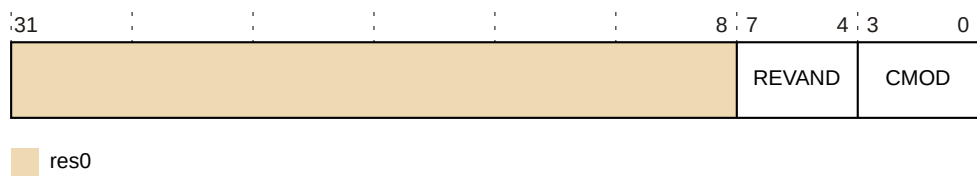

RES0, [31:8]

RES0

Reserved.

REVAND, [7:4]

0x0

Part minor revision.

CMOD, [3:0]

0x0

Customer modified.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

The EDPIDR3 can be accessed through the external debug interface, offset 0xFEC.


23.12 EDPIDR4, External Debug Peripheral Identification Register 4

The EDPIDR4 provides information to identify an external debug component.

Bit field descriptions

The EDPIDR4 is a 32-bit register.

Figure 23-11: EDPIDR4 bit assignments

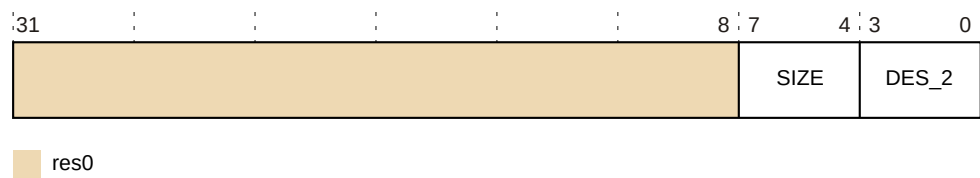

RES0, [31:8]

RES0
Reserved.

SIZE, [7:4]

0x0
Size of the component. Log₂ the number of 4KB pages from the start of the component to the end of the component ID registers.

DES_2, [3:0]

0x4
Arm Limited This is the least significant nibble JEP106 continuation code.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

The EDPIDR4 can be accessed through the external debug interface, offset 0xFD0.

23.13 EDPIDRn, External Debug Peripheral Identification Registers 5-7

No information is held in the Peripheral ID5, Peripheral ID6, and Peripheral ID7 Registers.


They are reserved for future use and are **RES0**.

23.14 EDRCR, External Debug Reserve Control Register

The EDRCR is part of the Debug registers functional group. This register is used to allow imprecise entry to Debug state and clear sticky bits in EDSCR.

Bit field descriptions

Figure 23-12: EDRCR bit assignments

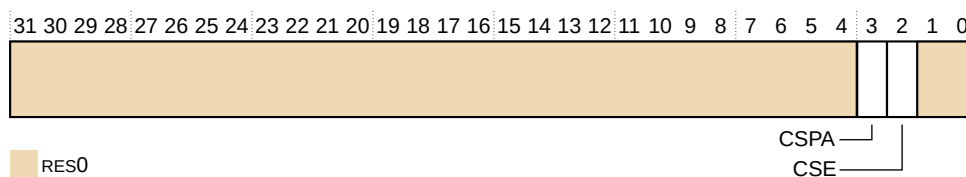

RES0, [31:4]

RES0

Reserved.

CSPA, [3]

Clear Sticky Pipeline Advance. This bit is used to clear the EDSCR.PipeAdv bit to 0. The actions on writing to this bit are:

0

No action.

1

Clear the EDSCR.PipeAdv bit to 0.

CSE, [2]

Clear Sticky Error. Used to clear the EDSCR cumulative error bits to 0. The actions on writing to this bit are:

0

No action

- 1
- Clear the EDSCR.{TXU, RXO, ERR} bits, and, if the core is in Debug state, the EDSCR.ITO bit, to 0.

RES0, [1:0]

RES0
Reserved.

The EDRCR can be accessed through the internal memory-mapped interface and the external debug interface, offset 0x090.

Usage constraints

This register is accessible as follows:

Off	DLK	OSLK	SLK	Default
Error	Error	Error	WI	WO

Configurations

EDRCR is in the Core power domain.

24. AArch32 PMU registers

This chapter describes the AArch32 PMU registers and shows examples of how to use them.

24.1 AArch32 PMU register summary

The PMU event counters and their associated control registers are accessible in the AArch32 Execution state from the internal CP15 System register interface with `MCR` and `MRC` instructions for 32-bit registers and `MCCR` and `MRRC` for 64-bit registers.

The following table gives a summary of the Cortex®-A77 PMU registers in the AArch32 Execution state. For those registers that are not described in this chapter, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

Table 24-1: PMU register summary in the AArch32 Execution state

CRn	Op1	CRm	Op2	Name	Type	Width	Reset	Description
c9	0	c12	0	PMCR	RW	32	0x411030XX	24.4 PMCR, Performance Monitors Control Register on page 372
c9	0	c12	1	PMCNTENSET	RW	32	0x00000000	Performance Monitors Count Enable Set Register
c9	0	c12	2	PMCNTENCLR	RW	32	0x00000000	Performance Monitors Count Enable Clear Register
c9	0	c12	3	PMOVSr	RW	32	0x00000000	Performance Monitors Overflow Flag Status Register
c9	0	c12	4	PMSWINC	WO	32	UNK	Performance Monitors Software Increment Register
c9	0	c12	5	PMSELR	RW	32	UNK	Performance Monitors Event Counter Selection Register
c9	0	c12	6	PMCEID0	RO	32	0x7FFF0F3F	24.2 PMCEID0, Performance Monitors Common Event Identification Register 0 on page 367
c9	0	c12	7	PMCEID1	RO	32	0x00F2AE7F	24.3 PMCEID1, Performance Monitors Common Event Identification Register 1 on page 370
c9	0	c14	4	PMCEID2	RO	32	0x00000000	Reserved
c9	0	c14	5	PMCEID3	RO	32	0x00000000	Reserved
c9	0	c13	0	PMCCNTR[31:0]	RW	32	UNK	Performance Monitors Cycle Count Register
c9	3	c13	0	PMCCNTR[63:0]	RW	64	UNK	
c9	0	c13	1	PMXEVTYPER	RW	32	UNK	Performance Monitors Selected Event Type Register
c9	0	c13	2	PMXVCNTR	RW	32	UNK	Performance Monitors Selected Event Count Register
c9	0	c14	0	PMUSERENR	RW	32	UNK	Performance Monitors User Enable Register
c9	0	c14	3	PMOVSSET	RW	32	0x00000000	Performance Monitor Overflow Flag Status Set Register
c14	0	c8	0	PMEVCNTR0	RW	32	UNK	Performance Monitor Event Count Registers
c14	0	c8	1	PMEVCNTR1	RW	32	UNK	
c14	0	c8	2	PMEVCNTR2	RW	32	UNK	
c14	0	c8	3	PMEVCNTR3	RW	32	UNK	
c14	0	c8	4	PMEVCNTR4	RW	32	UNK	
c14	0	c8	5	PMEVCNTR5	RW	32	UNK	


CRn	Op1	CRm	Op2	Name	Type	Width	Reset	Description
c14	0	c12	0	PMEVTYPER0	RW	32	UNK	Performance Monitors Event Type Registers
c14	0	c12	1	PMEVTYPER1	RW	32	UNK	
c14	0	c12	2	PMEVTYPER2	RW	32	UNK	
c14	0	c12	3	PMEVTYPER3	RW	32	UNK	
c14	0	c12	4	PMEVTYPER4	RW	32	UNK	
c14	0	c12	5	PMEVTYPER5	RW	32	UNK	
c14	0	c15	7	PMCCFILTR	RW	32	UNK	Performance Monitors Cycle Count Filter Register

24.2 PMCEID0, Performance Monitors Common Event Identification Register 0

The PMCEID0 defines which common architectural and common microarchitectural feature events are implemented.

Bit field descriptions

Figure 24-1: PMCEID0 bit assignments



ID[31:0], [31:0]

Common architectural and microarchitectural feature events that can be counted by the PMU event counters.

The following table shows the PMCEID0 bit assignments with event implemented or not implemented when the associated bit is set to 1 or 0. See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information about these events.

Table 24-2: PMU events

Bit	Event mnemonic	Description
[31]	L1D_CACHE_ALLOCATE	L1 Data cache allocate: 0 This event is not implemented.
[30]	CHAIN	Chain. For odd-numbered counters, counts once for each overflow of the preceding even-numbered counter. For even-numbered counters, does not count: 1 This event is implemented.

Bit	Event mnemonic	Description
[29]	BUS_CYCLES	Bus cycle: 1 This event is implemented.
[28]	TTBR_WRITE_RETIRED	TTBR write, architecturally executed, condition check pass - write to translation table base: 1 This event is implemented.
[27]	INST_SPEC	Instruction speculatively executed: 1 This event is implemented.
[26]	MEMORY_ERROR	Local memory error: 1 This event is implemented.
[25]	BUS_ACCESS	Bus access: 1 This event is implemented.
[24]	L2D_CACHE_WB	L2 Data cache Write-Back: 1 This event is implemented.
[23]	L2D_CACHE_REFILL	L2 Data cache refill: 1 This event is implemented.
[22]	L2D_CACHE	L2 Data cache access: 1 This event is implemented.
[21]	L1D_CACHE_WB	L1 Data cache Write-Back: 1 This event is implemented.
[20]	L1I_CACHE	L1 Instruction cache access: 1 This event is implemented.
[19]	MEM_ACCESS	Data memory access: 1 This event is implemented.
[18]	BR_PRED	Predictable branch Speculatively executed: 1 This event is implemented.
[17]	CPU_CYCLES	Cycle: 1 This event is implemented.
[16]	BR_MIS_PRED	Mispredicted or not predicted branch Speculatively executed: 1 This event is implemented.

Bit	Event mnemonic	Description
[15]	UNALIGNED_LDST_RETIRED	Instruction architecturally executed, condition check pass - unaligned load or store: 0 This event is not implemented.
[14]	BR_RETURN_RETIRED	Instruction architecturally executed, condition check pass - procedure return: 0 This event is not implemented.
[13]	BR_IMMED_RETIRED	Instruction architecturally executed - immediate branch: 0 This event is not implemented.
[12]	PC_WRITE_RETIRED	Instruction architecturally executed, condition check pass - software change of the PC: 0 This event is not implemented.
[11]	CID_WRITE_RETIRED	Instruction architecturally executed, condition check pass - write to CONTEXTIDR: 1 This event is implemented.
[10]	EXC_RETURN	Instruction architecturally executed, condition check pass - exception return: 1 This event is implemented.
[9]	EXC_TAKEN	Exception taken: 1 This event is implemented.
[8]	INST_RETIRED	Instruction architecturally executed: 1 This event is implemented.
[7]	ST_RETIRED	Instruction architecturally executed, condition check pass - store: 0 This event is not implemented.
[6]	LD_RETIRED	Instruction architecturally executed, condition check pass - load: 0 This event is not implemented.
[5]	L1D_TLB_REFILL	L1 Data TLB refill: 1 This event is implemented.
[4]	L1D_CACHE	L1 Data cache access: 1 This event is implemented.
[3]	L1D_CACHE_REFILL	L1 Data cache refill: 1 This event is implemented.
[2]	L1I_TLB_REFILL	L1 Instruction TLB refill: 1 This event is implemented.

Bit	Event mnemonic	Description
[1]	L1I_CACHE_REFILL	L1 Instruction cache refill: 1 This event is implemented.
[0]	SW_INCR	Instruction architecturally executed, condition check pass - software increment: 1 This event is implemented.



The PMU events implemented in the above table can be found in [Table 18-1: PMU Events](#) on page 324.


Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

24.3 PMCEID1, Performance Monitors Common Event Identification Register 1

The PMCEID1 defines which common architectural and common microarchitectural feature events are implemented.

Bit field descriptions

Figure 24-2: PMCEID1 bit assignments

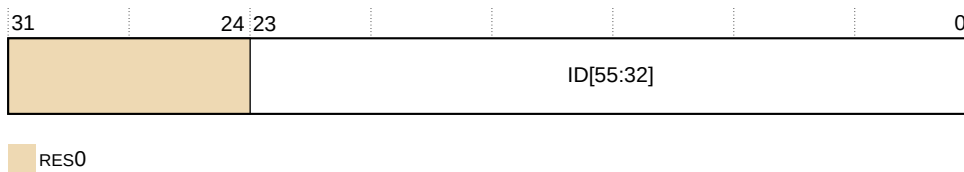

RES0, [31:24]

RES0

Reserved.

ID[55:32], [23:0]

Common architectural and microarchitectural feature events that can be counted by the PMU event counters.

For each bit described in the following table, the event is implemented if the bit is set to 1, or not implemented if the bit is set to 0.

Table 24-3: PMU common events

Bit	Event mnemonic	Description
[23]	LL_CACHE_MISS_RD	Attributable Last Level cache memory read miss. 1 This event is implemented.
[22]	LL_CACHE_RD	Attributable Last Level cache memory read. 1 This event is implemented.
[21]	ITLB_WALK	Attributable instruction TLB access with at least one translation table walk. 1 This event is implemented.
[20]	DTLB_WALK	Attributable data or unified TLB access with at least one translation table walk. 1 This event is implemented.
[17]	REMOTE_ACCESS	Attributable access to another socket in a multi-socket system. 1 This event is implemented.
[15]	L2D_TLB	Attributable L2 data or unified TLB access. 1 This event is implemented.
[13]	L2D_TLB_REFILL	Attributable L2 data or unified TLB refill. 1 This event is implemented.
[11]	L3D_CACHE	Attributable L3 data cache access. 1 This event is implemented.
[10]	L3D_CACHE_REFILL	Attributable L3 data cache refill. 1 This event is implemented.
[9]	L3D_CACHE_ALLOCATE	Attributable L3 data or unified cache allocation without refill. 1 This event is implemented.
[6]	L1I_TLB	Attributable L1 instruction TLB access. 1 This event is implemented.
[5]	L1D_TLB	Attributable L1 data or unified TLB access. 1 This event is implemented.
[4]	STALL_BACKEND	No operation issued due to backend. 1 This event is implemented.
[3]	STALL_FRONTEND	No operation issued due to frontend. 1 This event is implemented.
[2]	BR_MIS_PRED_RETIRED	Instruction architecturally executed, mispredicted branch. 1 This event is not implemented.

Bit	Event mnemonic	Description
[1]	BR_RETIRED	Instruction architecturally executed, branch. 1 This event is implemented.
[0]	L2D_CACHE_ALLOCATE	L2 data cache allocation without refill. 1 This event is implemented.



The PMU events implemented in the above table can be found in [Table 18-1: PMU Events](#) on page 324.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


24.4 PMCR, Performance Monitors Control Register

The PMCR provides details of the Performance Monitors implementation, including the number of counters that are implemented, and configures and controls the counters.

Bit field descriptions

PMCR is a 32-bit register, and is part of the Performance Monitors registers functional group.

Figure 24-3: PMCR bit assignments

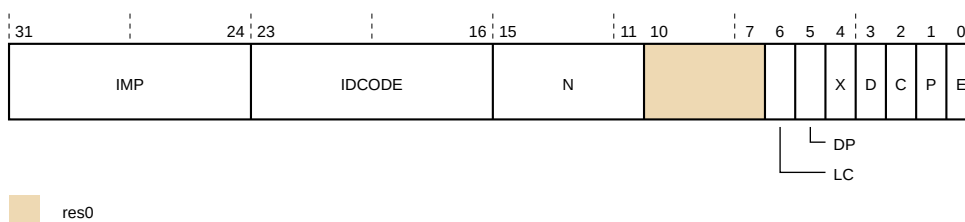

IMP, [31:24]

Indicates the implementer code. The value is:

0x41 ASCII character 'A' - implementer is Arm® Limited.

IDCODE, [23:16]

Identification code. The value is:

0x10 Cortex®-A77 core.

N, [15:11]

Identifies the number of event counters implemented.

0b00110 The core implements six event counters.

RES0, [10:7]

RES0 Reserved.

LC, [6]

Long cycle count enable. Determines which PMCCNTR bit generates an overflow recorded in PMOVSr[31]. The overflow event is generated on a 32-bit or 64-bit boundary. The possible values are:

0b0 Overflow event is generated on a 32-bit boundary, when an increment changes PMCCNTR[31] from 1 to 0. This is the reset value.

0b1 Overflow event is generated on a 64-bit boundary, when an increment changes PMCCNTR[63] from 1 to 0.

Arm deprecates use of PMCR.LC = 0b0.

DP, [5]

Disable cycle counter CCNT when event counting is prohibited. The possible values are:

0b0 Cycle counter operates regardless of the non-invasive debug authentication settings. This is the reset value.

0b1 Cycle counter is disabled if non-invasive debug is not permitted and enabled.

X, [4]

Export enable. This bit permits events to be exported to another debug device, such as a trace macrocell, over an event bus. The possible values are:

0b0 Export of events is disabled. This is the reset value.

0b1 Export of events is enabled.

No events are exported when counting is prohibited.

This field does not affect the generation of Performance Monitors overflow interrupt requests or signaling to a cross-trigger interface (CTI) that can be implemented as signals exported from the PE.

When this register has an architecturally defined reset value, if this field is implemented as an RW field, it resets to 0.

D, [3]

Clock divider. The possible values are:

0b0 When enabled, counter CCNT counts every clock cycle. This is the reset value.

0b1 When enabled, counter CCNT counts once every 64 clock cycles.

Arm deprecates use of PMCR.D = 0b1.

C, [2]

Cycle counter reset. This bit is WO. The effects of writing to this bit are:

0b0	No action. This is the reset value.
0b1	Reset PMCCNTR to zero.

This bit is always RAZ.

Resetting PMCCNTR does not clear the PMCCNTR overflow bit to 0. See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information.

P, [1]

Event counter reset. This bit is WO. The effects of writing to this bit are:

0b0	No action. This is the reset value.
0b1	Reset all event counters accessible in the current EL, not including PMCCNTR, to zero.

This bit is always RAZ.

In Non-secure EL0 and EL1, a write of 1 to this bit does not reset event counters that HDCR.HPMN or MDCR_EL2.HPMN reserves for EL2 use.

In EL2 and EL3, a write of 1 to this bit resets all the event counters.

Resetting the event counters does not clear any overflow bits to 0.

E, [0]

Enable. The possible values are:

0b0	All counters that are accessible at Non-secure EL1, including PMCCNTR, are disabled. This is the reset value.
0b1	When this register has an architecturally defined reset value, this field resets to 0.

This bit is RW.

This bit does not affect the operation of event counters that HDCR.HPMN or MDCR_EL2.HPMN reserves for EL2 use.

When this register has an architecturally defined reset value, this field resets to 0.

Configurations

AArch32 System register PMCR is architecturally mapped to AArch64 System register PMCR_EL0. See [25.4 PMCR_EL0, Performance Monitors Control Register, EL0](#) on page 382.

AArch32 System register PMCR bits [6:0] are architecturally mapped to External register PMCR_ELO[6:0].

There is one instance of this register that is used in both Secure and Non-secure states.

This register is in the Warm reset domain. Some or all RW fields of this register have defined reset values. On a Warm or Cold reset these apply only if the PE resets into an Exception level that is using AArch32. Otherwise, on a Warm or Cold reset RW fields in this register reset to architecturally **UNKNOWN** values.

25. AArch64 PMU registers

This chapter describes the AArch64 PMU registers and shows examples of how to use them.

25.1 AArch64 PMU register summary

The PMU event counters and their associated control registers are accessible in the AArch64 Execution state with `MRS` and `MSR` instructions.

The following table gives a summary of the Cortex®-A77 PMU registers in the AArch64 Execution state. For those registers that are not described in this chapter, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

Table 25-1: PMU register summary in the AArch64 Execution state

Name	Type	Width	Reset	Description
PMCR_ELO	RW	32	0x411030XX	25.4 PMCR_ELO, Performance Monitors Control Register, ELO on page 382
PMCNTENSET_ELO	RW	32	UNK	Performance Monitors Count Enable Set Register
PMCNTENCLR_ELO	RW	32	UNK	Performance Monitors Count Enable Clear Register
PMOVSLR_ELO	RW	32	UNK	Performance Monitors Overflow Flag Status Register
PMSWINC_ELO	WO	32	UNK	Performance Monitors Software Increment Register
PMSELR_ELO	RW	32	UNK	Performance Monitors Event Counter Selection Register
PMCEID0_ELO	RO	64	0x000000007FFF0F3F	25.2 PMCEID0_ELO, Performance Monitors Common Event Identification Register 0, ELO on page 377
PMCEID1_ELO	RO	64	0x0000000000F2AE7F	25.3 PMCEID1_ELO, Performance Monitors Common Event Identification Register 1, ELO on page 380
PMCCNTR_ELO	RW	64	UNK	Performance Monitors Cycle Count Register

Name	Type	Width	Reset	Description
PMXEVTYPER_ELO	RW	32	UNK	Performance Monitors Selected Event Type and Filter Register
PMCCFILTR_ELO	RW	32	UNK	Performance Monitors Cycle Count Filter Register
PMXEVCNTR_ELO	RW	32	UNK	Performance Monitors Selected Event Count Register
PMUSERENR_ELO	RW	32	UNK	Performance Monitors User Enable Register
PMINTENSET_EL1	RW	32	UNK	Performance Monitors Interrupt Enable Set Register
PMINTENCLR_EL1	RW	32	UNK	Performance Monitors Interrupt Enable Clear Register
PMOVSSET_ELO	RW	32	UNK	Performance Monitors Overflow Flag Status Set Register
PMEVCNTR0_ELO	RW	32	UNK	Performance Monitors Event Count Registers
PMEVCNTR1_ELO	RW	32	UNK	
PMEVCNTR2_ELO	RW	32	UNK	
PMEVCNTR3_ELO	RW	32	UNK	
PMEVCNTR4_ELO	RW	32	UNK	
PMEVCNTR5_ELO	RW	32	UNK	
PMEVTYPER0_ELO	RW	32	UNK	Performance Monitors Event Type Registers
PMEVTYPER1_ELO	RW	32	UNK	
PMEVTYPER2_ELO	RW	32	UNK	
PMEVTYPER3_ELO	RW	32	UNK	
PMEVTYPER4_ELO	RW	32	UNK	
PMEVTYPER5_ELO	RW	32	UNK	
PMCCFILTR_ELO	RW	32	UNK	Performance Monitors Cycle Count Filter Register

Related information


[PMU events](#) on page 324

25.2 PMCEID0_ELO, Performance Monitors Common Event Identification Register 0, ELO

The PMCEID0_ELO defines which common architectural and common microarchitectural feature events are implemented.

Bit field descriptions

Figure 25-1: PMCEID0_ELO bit assignments

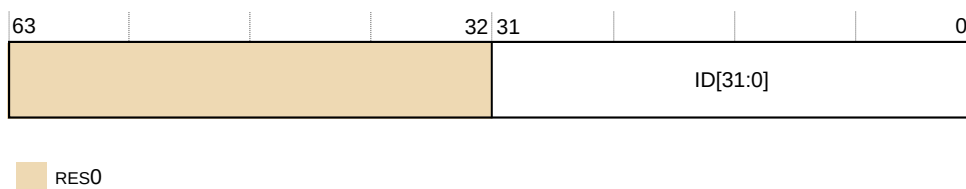

RES0, [63:32]

RES0 Reserved.

ID[31:0], [31:0]

Common architectural and microarchitectural feature events that can be counted by the PMU event counters.

For each bit described in the following table, the event is implemented if the bit is set to 1, or not implemented if the bit is set to 0.

Table 25-2: PMU common events

Bit	Event mnemonic	Description
[31]	L1D_CACHE_ALLOCATE	L1 Data cache allocate: 0 This event is not implemented.
[30]	CHAIN	Chain. For odd-numbered counters, counts once for each overflow of the preceding even-numbered counter. For even-numbered counters, does not count: 1 This event is implemented.
[29]	BUS_CYCLES	Bus cycle: 1 This event is implemented.
[28]	TTBR_WRITE_RETIRED	TTBR write, architecturally executed, condition check pass - write to translation table base: 1 This event is implemented.
[27]	INST_SPEC	Instruction speculatively executed: 1 This event is implemented.

Bit	Event mnemonic	Description
[26]	MEMORY_ERROR	Local memory error: 1 This event is implemented.
[25]	BUS_ACCESS	Bus access: 1 This event is implemented.
[24]	L2D_CACHE_WB	L2 Data cache Write-Back: 1 This event is implemented.
[23]	L2D_CACHE_REFILL	L2 Data cache refill: 1 This event is implemented.
[22]	L2D_CACHE	L2 Data cache access: 1 This event is implemented.
[21]	L1D_CACHE_WB	L1 Data cache Write-Back: 1 This event is implemented.
[20]	L1I_CACHE	L1 Instruction cache access: 1 This event is implemented.
[19]	MEM_ACCESS	Data memory access: 1 This event is implemented.
[18]	BR_PRED	Predictable branch speculatively executed: 1 This event is implemented.
[17]	CPU_CYCLES	Cycle: 1 This event is implemented.
[16]	BR_MIS_PRED	Mispredicted or not predicted branch speculatively executed: 1 This event is implemented.
[15]	UNALIGNED_LDST_RETIRED	Instruction architecturally executed, condition check pass - unaligned load or store: 0 This event is not implemented.
[14]	BR_RETURN_RETIRED	Instruction architecturally executed, condition check pass - procedure return: 0 This event is not implemented.
[13]	BR_IMMED_RETIRED	Instruction architecturally executed - immediate branch: 0 This event is not implemented.
[12]	PC_WRITE_RETIRED	Instruction architecturally executed, condition check pass - software change of the PC: 0 This event is not implemented.

Bit	Event mnemonic	Description
[11]	CID_WRITE_RETIRED	Instruction architecturally executed, condition check pass - write to CONTEXTIDR: 1 This event is implemented.
[10]	EXC_RETURN	Instruction architecturally executed, condition check pass - exception return: 1 This event is implemented.
[9]	EXC_TAKEN	Exception taken: 1 This event is implemented.
[8]	INST_RETIRED	Instruction architecturally executed: 1 This event is implemented.
[7]	ST_RETIRED	Instruction architecturally executed, condition check pass - store: 0 This event is not implemented.
[6]	LD_RETIRED	Instruction architecturally executed, condition check pass - load: 0 This event is not implemented.
[5]	L1D_TLB_REFILL	L1 Data TLB refill: 1 This event is implemented.
[4]	L1D_CACHE	L1 Data cache access: 1 This event is implemented.
[3]	L1D_CACHE_REFILL	L1 Data cache refill: 1 This event is implemented.
[2]	L1I_TLB_REFILL	L1 Instruction TLB refill: 1 This event is implemented.
[1]	L1I_CACHE_REFILL	L1 Instruction cache refill: 1 This event is implemented.
[0]	SW_INCR	Instruction architecturally executed, condition check pass - software increment: 1 This event is implemented.




The PMU events implemented in the above table can be found in [Table 18-1: PMU Events](#) on page 324.

25.3 PMCEID1_ELO, Performance Monitors Common Event Identification Register 1, ELO

The PMCEID1_ELO defines which common architectural and common microarchitectural feature events are implemented.

Bit field descriptions

Figure 25-2: PMCEID1 bit assignments

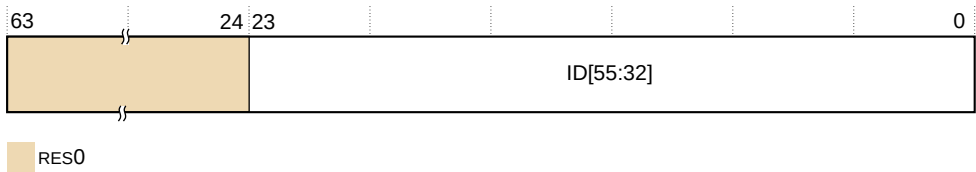

RES0, [63:24]

RES0 Reserved.

ID[55:32], [23:0]

Common architectural and microarchitectural feature events that can be counted by the PMU event counters.

For each bit described in the following table, the event is implemented if the bit is set to 1, or not implemented if the bit is set to 0.

Table 25-3: PMU common events

Bit	Event mnemonic	Description
[23]	LL_CACHE_MISS_RD	Attributable Last Level cache memory read miss. 1 This event is implemented.
[22]	LL_CACHE_RD	Attributable Last Level cache memory read. 1 This event is implemented.
[21]	ITLB_WALK	Attributable instruction TLB access with at least one translation table walk. 1 This event is implemented.
[20]	DTLB_WALK	Attributable data or unified TLB access with at least one translation table walk. 1 This event is implemented.
[17]	REMOTE_ACCESS	Attributable access to another socket in a multi-socket system. 1 This event is implemented.

Bit	Event mnemonic	Description
[15]	L2D_TLB	Attributable L2 data or unified TLB access. 1 This event is implemented.
[13]	L2D_TLB_REFILL	Attributable L2 data or unified TLB refill. 1 This event is implemented.
[11]	L3D_CACHE	Attributable L3 data cache access. 1 This event is implemented.
[10]	L3D_CACHE_REFILL	Attributable L3 data cache refill. 1 This event is implemented.
[9]	L3D_CACHE_ALLOCATE	Attributable L3 data or unified cache allocation without refill. 1 This event is implemented.
[6]	L1I_TLB	Attributable L1 instruction TLB access. 1 This event is implemented.
[5]	L1D_TLB	Attributable L1 data or unified TLB access. 1 This event is implemented.
[4]	STALL_BACKEND	No operation issued due to backend. 1 This event is implemented.
[3]	STALL_FRONTEND	No operation issued due to frontend. 1 This event is implemented.
[2]	BR_MIS_PRED_RETIRED	Instruction architecturally executed, mispredicted branch. 1 This event is not implemented.
[1]	BR_RETIRED	Instruction architecturally executed, branch. 1 This event is implemented.
[0]	L2D_CACHE_ALLOCATE	L2 data cache allocation without refill. 1 This event is implemented.




The PMU events implemented in the above table can be found in [Table 18-1: PMU Events](#) on page 324.

25.4 PMCR_ELO, Performance Monitors Control Register, ELO

The PMCR_ELO provides details of the Performance Monitors implementation, including the number of counters that are implemented, and configures and controls the counters.

Bit field descriptions

Figure 25-3: PMCR_ELO bit assignments

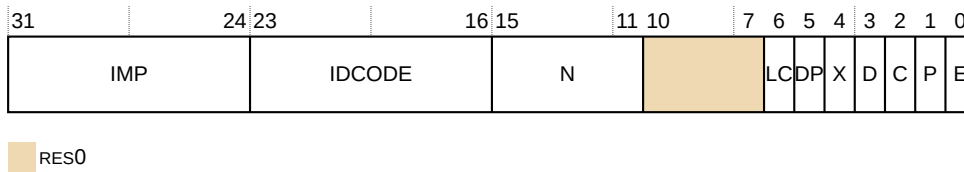

IMP, [31:24]

Implementer code:

0x41 Arm.

This is a read-only field.

IDCODE, [23:16]

Identification code:

0x10 Cortex®-A77.

This is a read-only field.

N, [15:11]

Number of event counters.

0b00110 Six counters.

RES0, [10:7]

RES0 Reserved.

LC, [6]

Long cycle count enable. Determines which PMCCNTR_ELO bit generates an overflow recorded in PMOVSr[31]. The possible values are:

- 0** Overflow on increment that changes PMCCNTR_ELO[31] from 1 to 0.
- 1** Overflow on increment that changes PMCCNTR_ELO[63] from 1 to 0.

DP, [5]

Disable cycle counter, PMCCNTR_ELO when event counting is prohibited:

- | | |
|----------|---|
| 0 | Cycle counter operates regardless of the non-invasive debug authentication settings. This is the reset value. |
| 1 | Cycle counter is disabled if non-invasive debug is not permitted and enabled. |

This bit is read/write.

X, [4]

Export enable. This bit permits events to be exported to another debug device, such as a trace macrocell, over an event bus:

- | | |
|----------|--|
| 0 | Export of events is disabled. This is the reset value. |
| 1 | Export of events is enabled. |

This bit is read/write and does not affect the generation of Performance Monitors interrupts on the nPMUIRQ pin.

D, [3]

Clock divider:

- | | |
|----------|--|
| 0 | When enabled, PMCCNTR_ELO counts every clock cycle. This is the reset value. |
| 1 | When enabled, PMCCNTR_ELO counts every 64 clock cycles. |

This bit is read/write.

C, [2]

Clock counter reset. This bit is WO. The effects of writing to this bit are:

- | | |
|----------|-------------------------------------|
| 0 | No action. This is the reset value. |
| 1 | Reset PMCCNTR_ELO to 0. |

This bit is always RAZ.

Resetting PMCCNTR_ELO does not clear the PMCCNTR_ELO overflow bit to 0. See the [Arm® Architecture Reference Manual for A-profile architecture](#) for more information.

P, [1]

Event counter reset. This bit is WO. The effects of writing to this bit are:

- | | |
|----------|---|
| 0 | No action. This is the reset value. |
| 1 | Reset all event counters, not including PMCCNTR_ELO, to zero. |

This bit is always RAZ.

In Non-secure EL0 and EL1, a write of 1 to this bit does not reset event counters that MDCR_EL2.HPMN reserves for EL2 use.

In EL2 and EL3, a write of 1 to this bit resets all the event counters.

Resetting the event counters does not clear any overflow bits to 0.

E, [0]

Enable. The possible values of this bit are:

- | | |
|---|---|
| 0 | All counters, including PMCCNTR_ELO, are disabled. This is the reset value. |
| 1 | All counters are enabled. |

This bit is RW.

In Non-secure EL0 and EL1, this bit does not affect the operation of event counters that MDCR_EL2.HPMN reserves for EL2 use.

On Warm reset, the field resets to 0.

Configurations

AArch64 System register PMCR_ELO is architecturally mapped to AArch32 System register PMCR.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

26. Memory-mapped PMU registers

This chapter describes the memory-mapped PMU registers and shows examples of how to use them.

26.1 Memory-mapped PMU register summary

There are PMU registers that are accessible through the external debug interface.

These registers are listed in the following table. For those registers that are not described in this chapter, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

Table 26-1: Memory-mapped PMU register summary

Offset	Name	Type	Description
0x000	PMEVCNTR0_ELO	RW	Performance Monitor Event Count Register 0
0x004	-	-	Reserved
0x008	PMEVCNTR1_ELO	RW	Performance Monitor Event Count Register 1
0x00C	-	-	Reserved
0x010	PMEVCNTR2_ELO	RW	Performance Monitor Event Count Register 2
0x014	-	-	Reserved
0x018	PMEVCNTR3_ELO	RW	Performance Monitor Event Count Register 3
0x01C	-	-	Reserved
0x020	PMEVCNTR4_ELO	RW	Performance Monitor Event Count Register 4
0x024	-	-	Reserved
0x028	PMEVCNTR5_ELO	RW	Performance Monitor Event Count Register 5
0x02C–0x0F4	-	-	Reserved
0x0F8	PMCCNTR_ELO[31:0]	RW	Performance Monitor Cycle Count Register
0x0FC	PMCCNTR_ELO[63:32]	RW	
0x200	PMPCSR[31:0]	RO	Program Counter Sample Register
0x204	PMPCSR[63:32]		
0x208	PMCID1SR	RO	CONTEXTIDR_EL1 Sample Register
0x20C	PMVIDSR	RO	VMID Sample Register
0x220	PMPCSR[31:0]	RO	Program Counter Sample Register (alias)
0x224	PMPCSR[63:32]		
0x228	PMCID1SR	RO	CONTEXTIDR_EL1 Sample Register (alias)
0x22C	PMCID2SR	RO	CONTEXTIDR_EL2 Sample Register

Offset	Name	Type	Description
0x230–0x3FC	-	-	Reserved
0x418–0x478	-	-	Reserved
0x47C	PMCCFILTR_ELO	RW	Performance Monitor Cycle Count Filter Register
0x600	PMPCSSR_LO	RO	27.2 PMPCSSR, PMU Snapshot Program Counter Sample Register on page 398
0x604	PMPCSSR_HI	RO	
0x608	PMCIDSSR	RO	27.3 PMCIDSSR, PMU Snapshot CONTEXTIDR_EL1 Sample Register on page 399
0x60C	PMCID2SSR	RO	27.4 PMCID2SSR, PMU Snapshot CONTEXTIDR_EL2 Sample Register on page 399
0x610	PMSSSR	RO	27.5 PMSSSR, PMU Snapshot Status Register on page 400
0x614	PMOVSSR	RO	27.6 PMOVSSR, PMU Snapshot Overflow Status Register on page 401
0x618	PMCCNTSR_LO	RO	27.7 PMCCNTSR, PMU Snapshot Cycle Counter Register on page 401
0x61C	PMCCNTSR_HI	RO	
0x620+ 4×n	PMEVCNTSRn	RO	27.8 PMEVCNTSRn, PMU Snapshot Cycle Counter Registers 0-5 on page 402
0x6F0	PMSSCR	WO	27.9 PMSSCR, PMU Snapshot Capture Register on page 402
0xC00	PMCNTENSET_ELO	RW	Performance Monitor Count Enable Set Register
0xC04–0xC1C	-	-	Reserved
0xC20	PMCNTENCLR_ELO	RW	Performance Monitor Count Enable Clear Register
0xC24–0xC3C	-	-	Reserved
0xC40	PMINTENSET_EL1	RW	Performance Monitor Interrupt Enable Set Register
0xC44–0xC5C	-	-	Reserved
0xC60	PMINTENCLR_EL1	RW	Performance Monitor Interrupt Enable Clear Register
0xC64–0xC7C	-	-	Reserved
0xC80	PMOVSCLR_ELO	RW	Performance Monitor Overflow Flag Status Register
0xC84–0xC9C	-	-	Reserved
0xCA0	PMSWINC_ELO	WO	Performance Monitor Software Increment Register
0xCA4–0xCBC	-	-	Reserved
0xCC0	PMOVSSET_ELO	RW	Performance Monitor Overflow Flag Status Set Register
0xCC4–0xDFC	-	-	Reserved

Offset	Name	Type	Description
0xE00	PMCFGR	RO	26.2 PMCFGR, Performance Monitors Configuration Register on page 389
0xE04	PMCR_ELO	RW	Performance Monitors Control Register. This register is distinct from the PMCR_ELO System register. It does not have the same value.
0xE08-0xE1C	-	-	Reserved
0xE20	PMCEID0	RO	24.2 PMCEID0, Performance Monitors Common Event Identification Register 0 on page 367
0xE24	PMCEID1	RO	24.3 PMCEID1, Performance Monitors Common Event Identification Register 1 on page 370
0xE28	PMCEID2	RO	Performance Monitors Common Event Identification register 2
0xE2C	PMCEID3	RO	Performance Monitors Common Event Identification register 3
0xFA4	-	-	Reserved
0xFA8	PMDEVAFF0	RO	13.94 MPIDR_EL1, Multiprocessor Affinity Register, EL1 on page 237
0xFAC	PMDEVAFF1	RO	13.94 MPIDR_EL1, Multiprocessor Affinity Register, EL1 on page 237
0xFB8	PMAUTHSTATUS	RO	Performance Monitor Authentication Status Register
0xFBC	PMDEVARCH	RO	Performance Monitor Device Architecture Register
0xFC0-0xFC8	-	-	Reserved
0xFCC	PMDEVTYPE	RO	Performance Monitor Device Type Register
0xFD0	PMPIDR4	RO	26.11 PMPIDR4, Performance Monitors Peripheral Identification Register 4 on page 396
0xFD4	PMPIDR5	RO	26.12 PMPIDRn, Performance Monitors Peripheral Identification Register 5-7 on page 397
0xFD8	PMPIDR6	RO	
0xFDC	PMPIDR7	RO	
0xFE0	PMPIDR0	RO	26.7 PMPIDR0, Performance Monitors Peripheral Identification Register 0 on page 393
0xFE4	PMPIDR1	RO	26.8 PMPIDR1, Performance Monitors Peripheral Identification Register 1 on page 394
0xFE8	PMPIDR2	RO	26.9 PMPIDR2, Performance Monitors Peripheral Identification Register 2 on page 395
0xFEC	PMPIDR3	RO	26.10 PMPIDR3, Performance Monitors Peripheral Identification Register 3 on page 395

Offset	Name	Type	Description
0xFF0	PMCIDR0	RO	26.3 PMCIDR0, Performance Monitors Component Identification Register 0 on page 390
0xFF4	PMCIDR1	RO	26.4 PMCIDR1, Performance Monitors Component Identification Register 1 on page 391
0xFF8	PMCIDR2	RO	26.5 PMCIDR2, Performance Monitors Component Identification Register 2 on page 391
0xFFC	PMCIDR3	RO	26.6 PMCIDR3, Performance Monitors Component Identification Register 3 on page 392


26.2 PMCFGR, Performance Monitors Configuration Register

The PMCFGR contains PMU specific configuration data.

Bit field descriptions

The PMCFGR is a 32-bit register.

Figure 26-1: PMCFGR bit assignments

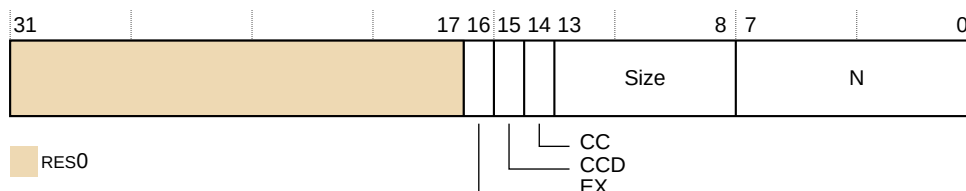

RES0, [31:17]

RES0 Reserved.

EX, [16]

Export supported. The value is:

1 Export is supported. PMCR_ELO.EX is read/write.

CCD, [15]

Cycle counter has pre-scale. The value is:

1 PMCR_ELO.D is read/write.

CC, [14]
Dedicated cycle counter supported. The value is:

1 Dedicated cycle counter is supported.

Size, [13:8]
Counter size. The value is:

0b111111 64-bit counters.

N, [7:0]
Number of event counters. The value is:

0x06 Six counters.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

The PMCFGR can be accessed through the external debug interface, offset 0xE00.


26.3 PMCIDR0, Performance Monitors Component Identification Register 0

The PMCIDR0 provides information to identify a Performance Monitor component.

Bit field descriptions

The PMCIDR0 is a 32-bit register.

Figure 26-2: PMCIDR0 bit assignments

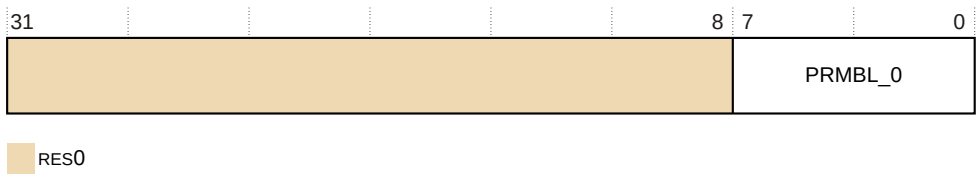

RES0, [31:8]
RES0
Reserved.

PRMBL_0, [7:0]
0x0D
Preamble byte 0.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

The PMCIDR0 can be accessed through the external debug interface, offset 0xFF0.


26.4 PMCIDR1, Performance Monitors Component Identification Register 1

The PMCIDR1 provides information to identify a Performance Monitor component.

Bit field descriptions

The PMCIDR1 is a 32-bit register.

Figure 26-3: PMCIDR1 bit assignments

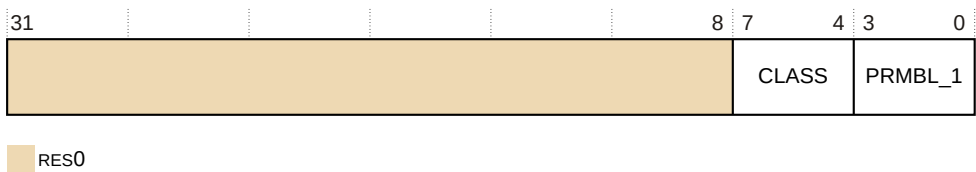

RES0, [31:8]

RES0
Reserved.

CLASS, [7:4]

0x9
Debug component.

PRMBL_1, [3:0]

0x0
Preamble byte 1.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

The PMCIDR1 can be accessed through the external debug interface, offset 0xFF4.


26.5 PMCIDR2, Performance Monitors Component Identification Register 2

The PMCIDR2 provides information to identify a Performance Monitor component.

Bit field descriptions

The PMCIDR2 is a 32-bit register.

Figure 26-4: PMCIDR2 bit assignments

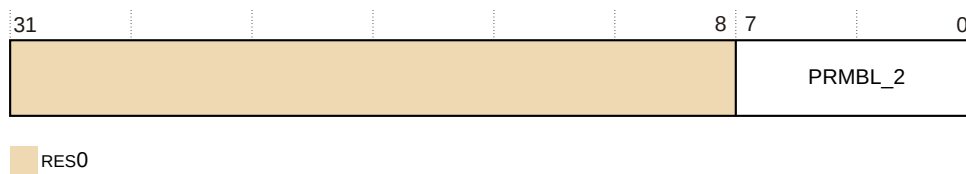

RES0, [31:8]

RES0

Reserved.

PRMBL_2, [7:0]

0x05

Preamble byte 2.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


The PMCIDR2 can be accessed through the external debug interface, offset 0xFF8.

26.6 PMCIDR3, Performance Monitors Component Identification Register 3

The PMCIDR3 provides information to identify a Performance Monitor component.

Bit field descriptions

The PMCIDR3 is a 32-bit register.

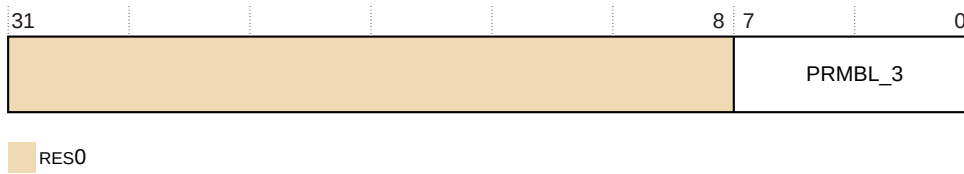Figure 26-5: PMCIDR3 bit assignments**RES0, [31:8]****RES0**

Reserved.

PRMBL_3, [7:0]**0xB1**

Preamble byte 3.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


The PMCIDR3 can be accessed through the external debug interface, offset 0xFFC.

26.7 PMPIDR0, Performance Monitors Peripheral Identification Register 0

The PMPIDR0 provides information to identify a Performance Monitor component.

Bit field descriptions

The PMPIDR0 is a 32-bit register.

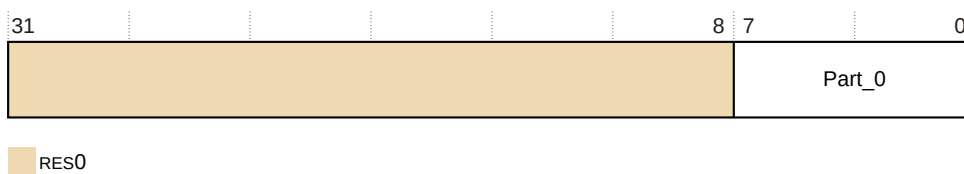Figure 26-6: PMPIDR0 bit assignments**RES0, [31:8]****RES0**

Reserved.

Part_0, [7:0]

0x0D

Least significant byte of the performance monitor part number.

Bit fields and details that are not provided in this description are architecturally defined. See the *Arm® Architecture Reference Manual for A-profile architecture*.

The PMPIDR0 can be accessed through the external debug interface, offset 0xFE0.


26.8 PMPIDR1, Performance Monitors Peripheral Identification Register 1

The PMPIDR1 provides information to identify a Performance Monitor component.

Bit field descriptions

The PMPIDR1 is a 32-bit register.

Figure 26-7: PMPIDR1 bit assignments

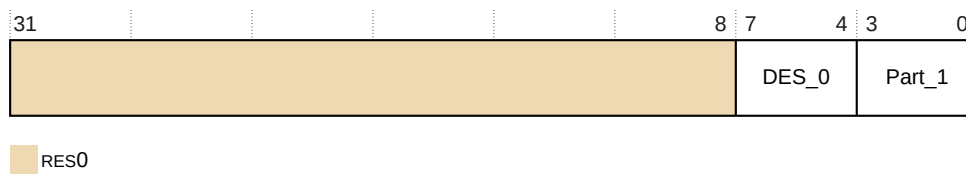

RES0, [31:8]

RESO

Reserved.

DES_0, [7:4]

0xB

Arm Limited. This is the least significant nibble of JEP106 ID code.

Part_1, [3:0]

0xD

Most significant nibble of the performance monitor part number.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

The PMPIDR1 can be accessed through the external debug interface, offset 0xFE4.


26.9 PMPIDR2, Performance Monitors Peripheral Identification Register 2

The PMPIDR2 provides information to identify a Performance Monitor component.

Bit field descriptions

The PMPIDR2 is a 32-bit register.

Figure 26-8: PMPIDR2 bit assignments

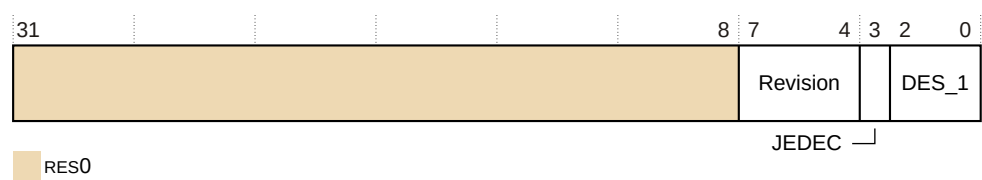

RES0, [31:8]

RES0
Reserved.

Revision, [7:4]

0x2
r1p1.

JEDEC, [3]

0b1
RAO. Indicates a JEP106 identity code is used.

DES_1, [2:0]

0b011
Arm Limited. This is the most significant nibble of JEP106 ID code.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

The PMPIDR2 can be accessed through the external debug interface, offset 0xFE8.


26.10 PMPIDR3, Performance Monitors Peripheral Identification Register 3

The PMPIDR3 provides information to identify a Performance Monitor component.

Bit field descriptions

The PMPIDR3 is a 32-bit register.

Figure 26-9: PMPIDR3 bit assignments

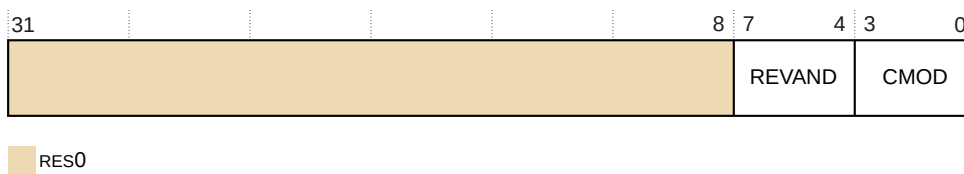

RES0, [31:8]

RES0

Reserved.

REVAND, [7:4]

0x0

Part minor revision.

CMOD, [3:0]

0x0

Customer modified.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).


The PMPIDR3 can be accessed through the external debug interface, offset 0xFEC.

26.11 PMPIDR4, Performance Monitors Peripheral Identification Register 4

The PMPIDR4 provides information to identify a Performance Monitor component.

Bit field descriptions

The PMPIDR4 is a 32-bit register.

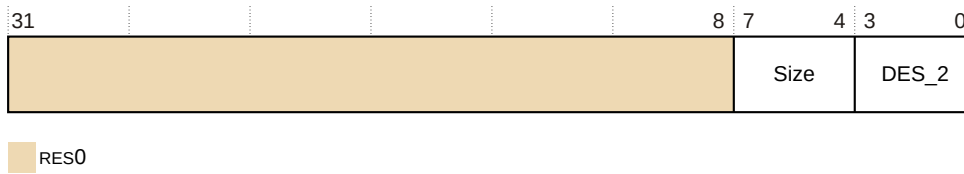Figure 26-10: PMPIDR4 bit assignments**RES0, [31:8]****RES0**

Reserved.

Size, [7:4]**0x0**Size of the component. Log₂ the number of 4KB pages from the start of the component to the end of the component ID registers.**DES_2, [3:0]****0x4**

Arm Limited. This is the least significant nibble JEP106 continuation code.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Architecture Reference Manual for A-profile architecture](#).

The PMPIDR4 can be accessed through the external debug interface, offset 0xFD0.

26.12 PMPIDRn, Performance Monitors Peripheral Identification Register 5-7

No information is held in the Peripheral ID5, Peripheral ID6, and Peripheral ID7 Registers.

They are reserved for future use and are **RES0**.

27. PMU snapshot registers

PMU snapshot registers are an **IMPLEMENTATION DEFINED** extension to an Arm®v8-A compliant PMU to support an external core monitor that connects to a system profiler.

27.1 PMU snapshot register summary

The snapshot registers are visible in an **IMPLEMENTATION DEFINED** region of the PMU external debug interface. Each time the debugger sends a snapshot request, information is collected to see how the code is executed in the different cores.

The following table describes the PMU snapshot registers implemented in the core.

Table 27-1: PMU snapshot register summary

Offset	Name	Type	Width	Description
0x600	PMPCSSR_LO	RO	32	27.2 PMPCSSR, PMU Snapshot Program Counter Sample Register on page 398
0x604	PMPCSSR_HI	RO	32	
0x608	PMCIDSSR	RO	32	27.3 PMCIDSSR, PMU Snapshot CONTEXTIDR_EL1 Sample Register on page 399
0x60C	PMCID2SSR	RO	32	27.4 PMCID2SSR, PMU Snapshot CONTEXTIDR_EL2 Sample Register on page 399
0x610	PMSSSR	RO	32	27.5 PMSSSR, PMU Snapshot Status Register on page 400
0x614	PMOVSSR	RO	32	27.6 PMOVSSR, PMU Snapshot Overflow Status Register on page 401
0x618	PMCCNTSR_LO	RO	32	27.7 PMCCNTSR, PMU Snapshot Cycle Counter Register on page 401
0x61C	PMCCNTSR_HI	RO	32	
0x620 + 4xn	PMEVCNTSRn	RO	32	27.8 PMEVCNTSRn, PMU Snapshot Cycle Counter Registers 0-5 on page 402
0x6F0	PMSSCR	WO	32	27.9 PMSSCR, PMU Snapshot Capture Register on page 402

27.2 PMPCSSR, PMU Snapshot Program Counter Sample Register

The PMPCSSR holds the same value as the PMPCSR register at the time of the snapshot.

However, unlike the other view of PMPCSR, it is not sensitive to reads. That is, reads of PMPCSSR through the PMU snapshot view do not cause a new sample capture and do not change PMCID1SR, PMCID2SR, or PMVIDSR.

Bit field descriptions

The PMPCSSR is a 64-bit read-only register.

Figure 27-1: PMPCSSR bit assignments**NS, [63]**

Non-secure sample.

EL, [62:61]

Exception level sample.

RES0, [60:56]Reserved, **RES0**.**PC, [55:0]**

Sampled PC.

Configurations

There are no configuration notes.

Usage constraints

Any access to PMPCSSR returns an error if any of the following occurs:

- The Core power domain is off.
- DoubleLockStatus() == TRUE.

27.3 PMCIDSSR, PMU Snapshot CONTEXTIDR_EL1 Sample Register

The PMCIDSSR holds the same value as the PMCID1SR register at the time of the snapshot.

Configurations

There are no configuration notes.

Usage constraints

Any access to PMCIDSSR returns an error if any of the following occurs:

- The Core power domain is off.
- DoubleLockStatus() == TRUE.

27.4 PMCID2SSR, PMU Snapshot CONTEXTIDR_EL2 Sample Register

The PMCID2SSR holds the same value as the PMCID2SR register at the time of the snapshot.

Configurations

There are no configuration notes.

Usage constraints

Any access to PMCID2SSR returns an error if any of the following occurs:

- The Core power domain is off.
- DoubleLockStatus() == TRUE.


27.5 PMSSSR, PMU Snapshot Status Register

The PMSSSR holds status information about the captured counters.

Bit field descriptions

The PMSSSR is a 32-bit read-only register.

Figure 27-2: PMSSSR bit assignments

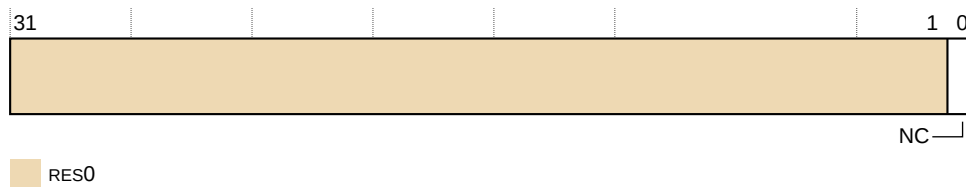

RES0, [31:1]

Reserved, **RES0**.

NC, [0]

No capture. This bit indicates whether the PMU event counters have been captured. The possible values are:

- | | |
|----------|--------------------------------------|
| 0 | PMU event counters are captured. |
| 1 | PMU event counters are not captured. |

If there is a security violation, the core does not capture the event counters. The external monitor is responsible for keeping track of whether it managed to capture the snapshot registers from the core.

This bit does not reflect the status of the captured Program Counter Sample registers.

The core resets this bit to 1 by a Warm reset but MPSSSR.NC is overwritten at the first capture.

Configurations

There are no configuration notes.

Usage constraints

Any access to PMSSSR returns an error if any of the following occurs:

- The Core power domain is off.
- DoubleLockStatus() == TRUE.

27.6 PMOVSSR, PMU Snapshot Overflow Status Register

The PMOVSSR is a captured copy of PMOVSRR.

Once it is captured, the value in PMOVSSR is unaffected by writes to PMOVSET_ELO and PMOVCLR_ELO.

Configurations

There are no configuration notes.

Usage constraints

Any access to PMOVSSR returns an error if any of the following occurs:

- The Core power domain is off.
- DoubleLockStatus() == TRUE.

27.7 PMCCNTSR, PMU Snapshot Cycle Counter Register

The PMCCNTSR is a captured copy of PMCCNTR_ELO.

Once it is captured, the value in PMCCNTSR is unaffected by writes to PMCCNTR_ELO and PMCR_ELO.C.

Configurations

There are no configuration notes.

Usage constraints

Any access to PMCCNTSR returns an error if any of the following occurs:

- The Core power domain is off.

- DoubleLockStatus() == TRUE.

27.8 PMEVCNTRn, PMU Snapshot Cycle Counter Registers 0-5

The PMEVCNTRn, are captured copies of PMEVCNTRn_ELO, n is 0-5.

When they are captured, the value in PMSSEVCNTRn is unaffected by writes to PMSSEVCNTRn_ELO and PMCR_ELO.P.

Configurations

There are no configuration notes.

Usage constraints

Any access to PMSSEVCNTRn returns an error if any of the following occurs:

- The Core power domain is off.
- DoubleLockStatus() == TRUE.


27.9 PMSSCR, PMU Snapshot Capture Register

The PMSSCR provides a mechanism for software to initiate a sample.

Bit field descriptions

The PMSSCR is a 32-bit write-only register.

Figure 27-3: PMSSCR bit assignments

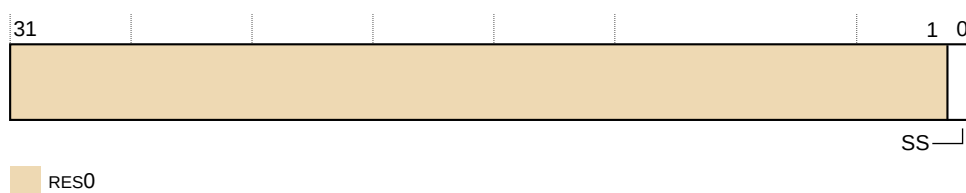

RES0, [31:1]

Reserved, RES0.

SS, [0]

Capture now. The possible values are:

0	IGNORED.
1	Initiate a capture immediately.

Configurations

There are no configuration notes.

Usage constraints

Any access to PMSSCR returns an error if any of the following occurs:

- The Core power domain is off.
- DoubleLockStatus() == TRUE.

28. AArch64 AMU registers

This chapter describes the AArch64 AMU registers and shows examples of how to use them.

28.1 AArch64 AMU register summary

The following table gives a summary of the Cortex®-A77 AMU registers in the AArch64 Execution state.

Table 28-1: AArch64 AMU registers

Name	Width	Reset	Description
AMCNTENCLR_ELO	32	0x00000000	28.2 AMCNTENCLR_ELO, Activity Monitors Count Enable Clear Register, ELO on page 404
AMCNTENSET_ELO	32	0x00000000	28.3 AMCNTENSET_ELO, Activity Monitors Count Enable Set Register, ELO on page 406
AMCFGR_ELO	32	0x00003F04	28.4 AMCFGR_ELO, Activity Monitors Configuration Register, ELO on page 407
AMUSERENR_ELO	32	0x00000000	28.5 AMUSERENR_ELO, Activity Monitor ELO Enable access, ELO on page 408
AMEVCNTRn_ELO	64	0x0000000000000000	28.6 AMEVCNTRn_ELO, Activity Monitor Event Counter Register, ELO on page 410
AMEVTYPERN_ELO	32	The reset value depends on the register: <ul style="list-style-type: none"> AMEVTYPER0_ELO = 0x00000011. AMEVTYPER1_ELO = 0x000000EF. AMEVTYPER2_ELO = 0x00000008. AMEVTYPER3_ELO = 0x000000F0. AMEVTYPER4_ELO = 0x000000F1. 	28.7 AMEVTYPERN_ELO, Activity Monitor Event Type Register, ELO on page 411


28.2 AMCNTENCLR_ELO, Activity Monitors Count Enable Clear Register, ELO

The AMCNTENCLR_ELO disables the activity monitor counters that are implemented, AMEVCNTR<0-4>_ELO.

Bit field descriptions

The AMCNTENCLR_ELO is a 32-bit register.

Figure 28-1: AMCNTENCLR_ELO bit assignments



P<n>, bit[n]

AMEVCNTRn disable bit for n=0-4. The possible values are:

- 0

When this bit is read, the activity counter n is disabled. When it is written, it has no effect.
- 1

When this bit is read, the activity counter n is enabled. When it is written, it disables the activity counter n.

Configurations

There are no configuration notes.

Usage constraints

Accessing the AMCNTENCLR_ELO

To access the AMCNTENCLR_ELO:

```
MRS <Xt>, AMCNTENCLR_ELO ; Read AMCNTENCLR_ELO into Xt
MSR AMCNTENCLR_ELO, <Xt> ; Write <Xt> to AMCNTENCLR_ELO
```

Register access is encoded as follows:

Table 28-2: AMCNTENCLR_ELO encoding

op0	op1	CRn	CRm	op2
11	011	1111	1001	111

The AMCNTENCLR_ELO can be accessed through the external debug interface, offset 0xc20. In this case, it is read-only.

This register is accessible as follows:

ELO	EL1	EL2	EL3
RO	RO	RO	RW

Traps and enables

- If ACTLR_EL2.AMEN is 0, then Non-secure accesses to this register from ELO and EL1 are trapped to EL2.
- If ACTLR_EL3.AMEN is 0, then accesses to this register from ELO, EL1, and EL2 are trapped to EL3.

If AMUSERENR_ELO.EN is 0, then accesses to this register from ELO are trapped to EL1.

28.3 AMCNTENSET_ELO, Activity Monitors Count Enable Set Register, ELO

The AMCNTENSET_ELO enables the activity monitor counters that are implemented, AMEVCNTRn (n is 0-4).

Bit field descriptions

The `AMCNTENSET_ELO` is a 32-bit register.

Figure 28-2: AMCNTENSET_ELO bit assignments



P<n>, bit[n]

AMEVCNTRn enable bit for n=0-4. The possible values are:

- | | |
|---|--|
| 0 | When this bit is read, the activity counter n is disabled. When it is written, it has no effect. |
| 1 | When this bit is read, the activity counter n is enabled. When it is written, it enables the activity counter n. |

Configurations

There are no configuration notes.

Usage constraints

Accessing the AMCNTENSET_ELO

To access the `AMCNTENSET_ELO`:

```
MRS <Xt>, AMCNTENSET_ELO ; Read AMCNTENSET_ELO into Xt
MSR AMCNTENSET_ELO, <Xt> ; Write <Xt> to AMCNTENSET_ELO
```

Register access is encoded as follows:

Table 28-4: AMCNTENSET_ELO encoding

op0	op1	CRn	CRm	op2
11	011	1111	1001	110

The `AMCNTENSET_ELO` can be accessed through the external debug interface, offset `0xC00`. In this case, it is read-only.

This register is accessible as follows:

ELO	EL1	EL2	EL3
RO	RO	RO	RW

Traps and enables

- If ACTLR_EL2.AMEN is 0, then Non-secure accesses to this register from EL0 and EL1 are trapped to EL2.
- If ACTLR_EL3.AMEN is 0, then accesses to this register from EL0, EL1, and EL2 are trapped to EL3.
- If AMUSERENR_EL0.EN is 0, then accesses to this register from EL0 are trapped to EL1.


28.4 AMCFGR_EL0, Activity Monitors Configuration Register, EL0

The AMCFGR_EL0 provides information on the number of activity counters that are implemented and their size.

Bit field descriptions

The AMCFGR_EL0 is a 32-bit register.

Figure 28-3: AMCFGR_EL0 bit assignments

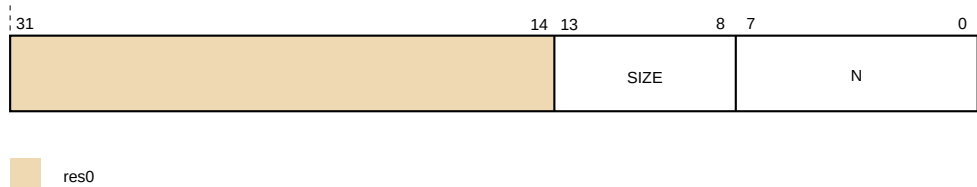

RES0, [31:14]

Reserved, RES0.

SIZE, [13:8]

Size of counters, minus one.

This field defines the size of the largest counter that is implemented by the activity monitors. In the Armv8-A architecture, the largest counter has 64 bits, therefore the value of this field is 0b111111.

N, [7:0]

Number of activity counters that are implemented, where the number of counters is N+1. The Cortex®-A77 core implements five counters, therefore the value is 0x04.

Configurations

There are no configuration notes.

Usage constraints

Accessing the AMCFGR_ELO

To access the AMCFGR_ELO:

```
MRS <Xt>, AMCFGR_ELO ; Read AMCFGR_ELO into Xt
```

Register access is encoded as follows:

Table 28-6: AMCFGR_ELO encoding

op0	op1	CRn	CRm	op2
11	011	1111	1010	110

The AMCFGR_ELO can be accessed through the external debug interface, offset 0xE00. In this case, it is read-only.

This register is accessible as follows:

ELO	EL1	EL2	EL3
RO	RO	RO	RO

Traps and enables

If ACTLR_EL2.AMEN is 0, then Non-secure accesses to this register from EL0 and EL1 are trapped to EL2.

If ACTLR_EL3.AMEN is 0, then accesses to this register from EL0, EL1, and EL2 are trapped to EL3.

If AMUSERENR_ELO.EN is 0, then accesses to this register from EL0 are trapped to EL1.

28.5 AMUSERENR_ELO, Activity Monitor ELO Enable access, ELO


The AMUSERENR_ELO enables or disables ELO access to the activity monitors.

Bit field descriptions

The AMUSERENR_ELO is a 32-bit register.

This register resets to value 0x00000000.

Figure 28-4: AMUSERENR_ELO bit assignments

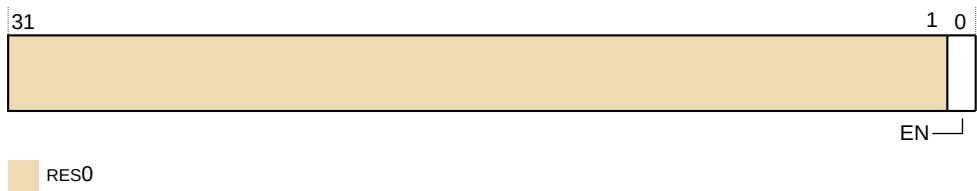

RES0, [31:1]

Reserved, RES0.

EN, [0]

Traps ELO accesses to the activity monitor registers to EL1. The possible values are:

- 0
- ELO accesses to the activity monitor registers are trapped to EL1. This is the reset value.
- 1
- ELO accesses to the activity monitor registers are not trapped to EL1. Software can access all activity monitor registers at ELO.

Configurations

There are no configuration notes.

Usage constraints

Accessing the AMUSERENR_ELO

To access the AMUSERENR_ELO:

```
MRS <Xt>, AMUSERENR_ELO ; Read AMUSERENR_ELO into Xt
MSR AMUSERENR_ELO, <Xt> ; Write Xt to AMUSERENR_ELO
```

Register access is encoded as follows:

Table 28-8: AMUSERENR_ELO encoding

op0	op1	CRn	CRm	op2
11	011	1111	1010	111

This register is accessible as follows:

ELO	EL1	EL2	EL3
RO	RW	RW	RW



AMUSERENR_ELO is always RO at ELO and not trapped by the EN bit.

Traps and enables

- If ACTLR_EL2.AMEN is 0, then Non-secure accesses to this register from EL0 and EL1 are trapped to EL2.
- If ACTLR_EL3.AMEN is 0, then accesses to this register from EL0, EL1, and EL2 are trapped to EL3.


28.6 AMEVCNTRn_ELO, Activity Monitor Event Counter Register, EL0

The activity counters AMEVCNTRn_ELO are directly accessible in the memory mapped-view. n is 0-4.

Bit field descriptions

The AMEVCNTRn_ELO is a 64-bit register.

Figure 28-5: AMEVCNTRn_ELO bit assignments



ACNT, [63:0]

- Value of the activity counter AMEVCNTRn_ELO.
- This bit field resets to zero and the counters monitoring cycle events do not increment when the core is in WFI or WFE.

Configurations

- Counters might have fixed event allocation.

Usage constraints

Accessing the AMEVCNTRn_ELO

To access the AMEVCNTRn_ELO:

```
MRS <Xt>, AMEVCNTRn_ELO ; Read AMEVCNTRn_ELO into Xt
MSR AMEVCNTRn_ELO, <Xt> ; Write Xt to AMEVCNTRn_ELO
```

Register access is encoded as follows:

Table 28-10: AMEVCNTRn_ELO encoding

op0	op1	CRn	CRm	op2
11	011	1111	1001	<0-4>

The AMEVCNTRn_ELO[63:32] can also be accessed through the external memory-mapped interface, offset $0x004+8n$. In this case, it is read-only.

The AMEVCNTRn_ELO[31:0] can also be accessed through the external memory-mapped interface, offset $0x000+8n$. In this case, it is read-only.

This register is accessible as follows:

EL0	EL1	EL2	EL3
RO	RO	RO	RW

Traps and enables

If ACTLR_EL2.AMEN is 0, then Non-secure accesses to this register from EL0 and EL1 are trapped to EL2.

If ACTLR_EL3.AMEN is 0, then accesses to this register from EL0, EL1, and EL2 are trapped to EL3.

If AMUSERENR_EL0.EN is 0, then accesses to this register from EL0 are trapped to EL1.


28.7 AMEVTYPERN_ELO, Activity Monitor Event Type Register, EL0

The activity counters AMEVTYPERN_ELO are directly accessible in the memory mapped view, where n is 0-4.

Bit field descriptions

The AMEVTYPERN_ELO is a 32-bit register.

Figure 28-6: AMEVTYPERN_ELO bit assignments

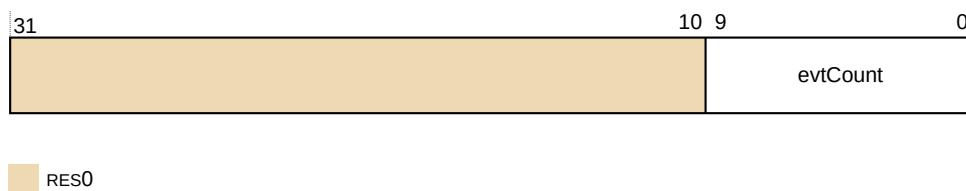

RES0, [31:10]

Reserved, RES0.

evtCount, bits[9:0]

The event the counter monitors might be fixed at implementation. In this case, the field is:

- Read-only for n=0-3.

- Read/write for n=4.

See [19.4 AMU events](#) on page 333.

Configurations

Counters might have fixed event allocation.

Traps and enables

If ACTLR_EL2.AMEN is 0, then Non-secure accesses to this register from EL0 and EL1 are trapped to EL2.

If ACTLR_EL3.AMEN is 0, then accesses to this register from EL0, EL1, and EL2 are trapped to EL3.

If AMUSERENR_EL0.EN is 0, then accesses to this register from EL0 are trapped to EL1.

Usage constraints

Accessing the AMEVTYPERn_EL0

To access the AMEVTYPERn_EL0:

```
MRS <Xt>, AMEVTYPERn_EL0 ; Read AMEVTYPERn_EL0 into Xt
MSR AMEVTYPERn_EL0, <Xt> ; Write Xt to AMEVTYPERn_EL0
```

Register access is encoded as follows:

Table 28-12: AMEVTYPER_EL0 encoding

op0	op1	CRn	CRm	op2
11	011	1111	1010	<0-4>

This register is accessible as follows:

Register	EL0	EL1	EL2	EL3
AMEVTYPER0_EL0	RO	RO	RO	RO
AMEVTYPER1_EL0	RO	RO	RO	RO
AMEVTYPER2_EL0	RO	RO	RO	RO
AMEVTYPER3_EL0	RO	RO	RO	RO
AMEVTYPER4_EL0	RO	RO	RO	RW

Traps and enables

If ACTLR_EL2.AMEN is 0, then Non-secure accesses to this register from EL0 and EL1 are trapped to EL2.

If ACTLR_EL3.AMEN is 0, then accesses to this register from EL0, EL1, and EL2 are trapped to EL3.

If AMUSERENR_EL0.EN is 0, then accesses to this register from EL0 are trapped to EL1.

29. Memory-mapped AMU registers

This chapter describes the memory-mapped AMU registers. The memory-mapped interface provides read-only access to the AMU registers via the external debug interface.

29.1 Memory-mapped AMU register summary

The AMU registers are accessible through the external debug interface.

The memory-mapped AMU registers are listed in the following table. For those registers that are not described in this chapter, see the [Arm® Architecture Reference Manual for A-profile architecture](#).

Table 29-1: Memory-mapped AMU register summary

Offset	Name	Type	Description
0xC20	AMCNTENCLR_ELO	RO	28.2 AMCNTENCLR_ELO, Activity Monitors Count Enable Clear Register, ELO on page 404
0xC00	AMCNTENSET_ELO	RO	28.3 AMCNTENSET_ELO, Activity Monitors Count Enable Set Register, ELO on page 406
0xE00	AMCFGR_ELO	RO	28.4 AMCFGR_ELO, Activity Monitors Configuration Register, ELO on page 407
[63:32]: 0x004+8n [31:0]: 0x000+8n	AMEVCNTRn_ELO	RO	28.6 AMEVCNTRn_ELO, Activity Monitor Event Counter Register, ELO on page 410
0x400+4n	AMEVTYPERN_ELO	RO	28.7 AMEVTYPERN_ELO, Activity Monitor Event Type Register, ELO on page 411



AMUSERENR_ELO is excluded from the memory mapped view.

30. ETM registers

This chapter describes the ETM registers.

30.1 ETM register summary

This section summarizes the ETM trace unit registers.

All ETM trace unit registers are 32-bit wide. The description of each register includes its offset from a base address. The base address is defined by the system integrator when placing the ETM trace unit in the Debug-APB memory map.

The following table lists all of the ETM trace unit registers.

Table 30-1: ETM trace unit register summary

Offset	Name	Type	Reset	Description
0x004	TRCPRGCTLR	RW	0x00000000	30.61 TRCPRGCTLR, Programming Control Register on page 472
0x00C	TRCSTATR	RO	0x00000003	30.68 TRCSTATR, Status Register on page 479
0x010	TRCCONFIGR	RW	UNK	30.20 TRCCONFIGR, Trace Configuration Register on page 435
0x018	TRCAUXCTLR	RW	0x00000000	30.5 TRCAUXCTLR, Auxiliary Control Register on page 420
0x020	TRCEVENTCTL0R	RW	UNK	30.26 TRCEVENTCTL0R, Event Control 0 Register on page 440
0x024	TRCEVENTCTL1R	RW	UNK	30.27 TRCEVENTCTL1R, Event Control 1 Register on page 442
0x030	TRCTSCTLR	RW	UNK	30.71 TRCTSCTLR, Global Timestamp Control Register on page 482
0x034	TRCSYNCPR	RW	UNK	30.69 TRCSYNCPR, Synchronization Period Register on page 480
0x038	TRCCCCTLR	RW	UNK	30.7 TRCCCCTLR, Cycle Count Control Register on page 423
0x03C	TRCBBCTLR	RW	UNK	30.6 TRCBBCTLR, Branch Broadcast Control Register on page 422
0x040	TRCTRACEIDR	RW	UNK	30.70 TRCTRACEIDR, Trace ID Register on page 481
0x080	TRCVICTLR	RW	UNK	30.72 TRCVICTLR, ViewInst Main Control Register on page 483
0x084	TRCVIIECTLR	RW	UNK	30.73 TRCVIIECTLR, ViewInst Include-Exclude Control Register on page 485
0x088	TRCVISSCTLR	RW	UNK	30.74 TRCVISSCTLR, ViewInst Start-Stop Control Register on page 486
0x100	TRCSEQEVR0	RW	UNK	30.63 TRCSEQEVRn, Sequencer State Transition Control Registers 0-2 on page 474
0x104	TRCSEQEVR1	RW	UNK	30.63 TRCSEQEVRn, Sequencer State Transition Control Registers 0-2 on page 474
0x108	TRCSEQEVR2	RW	UNK	30.63 TRCSEQEVRn, Sequencer State Transition Control Registers 0-2 on page 474
0x118	TRCSEQRSTEV	RW	UNK	30.64 TRCSEQRSTEV, Sequencer Reset Control Register on page 475
0x11C	TRCSEQSTR	RW	UNK	30.65 TRCSEQSTR, Sequencer State Register on page 476
0x120	TRCEXTINSEL	RW	UNK	30.28 TRCEXTINSEL, External Input Select Register on page 443
0x140	TRCCNTRLDVR0	RW	UNK	30.18 TRCCNTRLDVRn, Counter Reload Value Registers 0-1 on page 433
0x144	TRCCNTRLDVR1	RW	UNK	30.18 TRCCNTRLDVRn, Counter Reload Value Registers 0-1 on page 433
0x150	TRCCNTCTLR0	RW	UNK	30.16 TRCCNTCTLR0, Counter Control Register 0 on page 430

Offset	Name	Type	Reset	Description
0x154	TRCCNTCTLR1	RW	UNK	30.17 TRCCNTCTLR1, Counter Control Register 1 on page 431
0x160	TRCCNTVR0	RW	UNK	30.19 TRCCNTVRn, Counter Value Registers 0-1 on page 434
0x164	TRCCNTVR1	RW	UNK	30.19 TRCCNTVRn, Counter Value Registers 0-1 on page 434
0x180	TRCIDR8	RO	0x00000000	30.35 TRCIDR8, ID Register 8 on page 454
0x184	TRCIDR9	RO	0x00000000	30.36 TRCIDR9, ID Register 9 on page 454
0x188	TRCIDR10	RO	0x00000000	30.37 TRCIDR10, ID Register 10 on page 455
0x18C	TRCIDR11	RO	0x00000000	30.38 TRCIDR11, ID Register 11 on page 455
0x190	TRCIDR12	RO	0x00000000	30.39 TRCIDR12, ID Register 12 on page 456
0x194	TRCIDR13	RO	0x00000000	30.40 TRCIDR13, ID Register 13 on page 456
0x1C0	TRCIMSPECO	RW	0x00000000	30.41 TRCIMSPECO, IMPLEMENTATION SPECIFIC Register 0 on page 457
0x1E0	TRCIDR0	RO	0x28000EA1	30.29 TRCIDR0, ID Register 0 on page 444
0x1E4	TRCIDR1	RO	0x4100F422	30.30 TRCIDR1, ID Register 1 on page 446
0x1E8	TRCIDR2	RO	0x20001088	30.31 TRCIDR2, ID Register 2 on page 447
0x1EC	TRCIDR3	RO	0x0D7B0004	30.32 TRCIDR3, ID Register 3 on page 449
0x1F0	TRCIDR4	RO	0x11170004	30.33 TRCIDR4, ID Register 4 on page 451
0x1F4	TRCIDR5	RO	0x284708BD	30.34 TRCIDR5, ID Register 5 on page 452
0x200	TRCRSCTLRn	RW	UNK	30.62 TRCRSCTLRn, Resource Selection Control Registers 2-15 on page 473, n is 2, 15
0x280	TRCSSCCRO	RW	UNK	30.66 TRCSSCCRO, Single-Shot Comparator Control Register 0 on page 477
0x2A0	TRCSSCSRO	RW	UNK	30.67 TRCSSCSRO, Single-Shot Comparator Status Register 0 on page 478
0x300	TRCOSLAR	WO	0x00000001	30.51 TRCOSLAR, OS Lock Access Register on page 464
0x304	TRCOSLSR	RO	0x0000000A	30.52 TRCOSLSR, OS Lock Status Register on page 465
0x310	TRCPDCR	RW	0x00000000	30.53 TRCPDCR, Power Down Control Register on page 466
0x314	TRCPDSR	RO	0x00000023	30.54 TRCPDSR, Power Down Status Register on page 467
0x400	TRCACVRn	RW	UNK	30.3 TRCACVRn, Address Comparator Value Registers 0-7 on page 418
0x480	TRCACATRn	RW	UNK	30.2 TRCACATRn, Address Comparator Access Type Registers 0-7 on page 416
0x600	TRCCIDCVRO	RW	UNK	30.9 TRCCIDCVRO, Context ID Comparator Value Register 0 on page 424
0x640	TRCVMIDCVRO	RW	UNK	30.75 TRCVMIDCVRO, VMID Comparator Value Register 0 on page 487
0x680	TRCCIDCCTLR0	RW	UNK	30.8 TRCCIDCCTLR0, Context ID Comparator Control Register 0 on page 424
0x688	TRCVMIDCCTLR0	RW	UNK	30.76 TRCVMIDCCTLR0, Virtual context identifier Comparator Control Register 0 on page 487
0xEDC	TRCITMISCOUT	WO	UNK	30.48 TRCITMISCOUT, Trace Integration Miscellaneous Outputs Register on page 462
0xEE0	TRCITMISCIN	RO	UNK	30.47 TRCITMISCIN, Trace Integration Miscellaneous Input Register on page 462
0xEEC	TRCITATBDATA0	WO	UNK	30.45 TRCITATBDATA0, Trace Integration Test ATB Data Register 0 on page 460
0xEF0	TRCITATBCTR2	RO	UNK	30.44 TRCITATBCTR2, Trace Integration Test ATB Control Register 2 on page 459
0xEF4	TRCITATBCTR1	WO	UNK	30.43 TRCITATBCTR1, Trace Integration Test ATB Control Register 1 on page 458


Offset	Name	Type	Reset	Description
0xEF8	TRCITATBCTRO	WO	UNK	30.42 TRCITATBCTRO, Trace Integration Test ATB Control Register 0 on page 458
0xF00	TRCITCTRL	RW	0x00000000	30.46 TRCITCTRL, Trace Integration Mode Control register on page 461
0xFA0	TRCCLAIMSET	RW	UNK	30.15 TRCCLAIMSET, Claim Tag Set Register on page 429
0xFA4	TRCCLAIMCLR	RW	0x00000000	30.14 TRCCLAIMCLR, Claim Tag Clear Register on page 428
0xFA8	TRCDEVAFF0	RO	UNK	30.21 TRCDEVAFF0, Device Affinity Register 0 on page 437
0xFAC	TRCDEVAFF1	RO	UNK	30.22 TRCDEVAFF1, Device Affinity Register 1 on page 438
0xFB0	TRCLAR	WO	UNK	30.49 TRCLAR, Software Lock Access Register on page 463
0xFB4	TRCLSR	RO	0x00000000	30.50 TRCLSR, Software Lock Status Register on page 463
0xFB8	TRCAUTHSTATUS	RO	UNK	30.4 TRCAUTHSTATUS, Authentication Status Register on page 419
0xFBC	TRCDEVARCH	RO	0x47724A13	30.23 TRCDEVARCH, Device Architecture Register on page 438
0xFC8	TRCDEVID	RO	0x00000000	30.24 TRCDEVID, Device ID Register on page 439
0xFCC	TRCDEVTYPE	RO	0x00000013	30.25 TRCDEVTYPE, Device Type Register on page 439
0xFE0	TRCPIDR0	RO	0x0000000B	30.55 TRCPIDR0, ETM Peripheral Identification Register 0 on page 468
0xFE4	TRCPIDR1	RO	0x000000BD	30.56 TRCPIDR1, ETM Peripheral Identification Register 1 on page 469
0xFE8	TRCPIDR2	RO	0x0000002B	30.57 TRCPIDR2, ETM Peripheral Identification Register 2 on page 469
0xFEC	TRCPIDR3	RO	0x00000000	30.58 TRCPIDR3, ETM Peripheral Identification Register 3 on page 470
0xFD0	TRCPIDR4	RO	0x00000004	30.59 TRCPIDR4, ETM Peripheral Identification Register 4 on page 471
0xFD4 - 0xFDC	TRCPIDRn	RO	0x00000000	30.60 TRCPIDRn, ETM Peripheral Identification Registers 5-7 on page 472
0xFF0	TRCCIDR0	RO	0x0000000D	30.10 TRCCIDR0, ETM Component Identification Register 0 on page 425
0xFF4	TRCCIDR1	RO	0x00000090	30.11 TRCCIDR1, ETM Component Identification Register 1 on page 426
0xFF8	TRCCIDR2	RO	0x00000005	30.12 TRCCIDR2, ETM Component Identification Register 2 on page 427
0xFFC	TRCCIDR3	RO	0x000000B1	30.13 TRCCIDR3, ETM Component Identification Register 3 on page 427

30.2 TRCACATRn, Address Comparator Access Type Registers 0-7

The TRCACATRn registers control the access for the corresponding address comparators.

Bit field descriptions

The TRCACATRn registers are 64-bit registers.

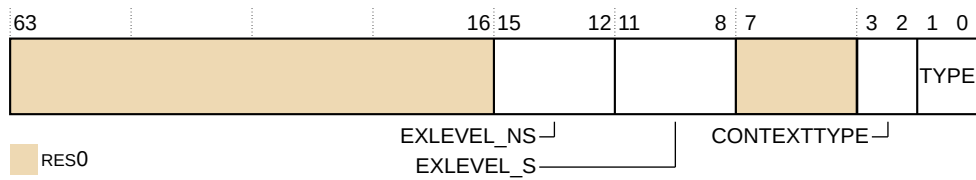Figure 30-1: TRCACATRn bit assignments**RES0, [63:16]**

RES0 Reserved

EXLEVEL_NS, [15:12]

Each bit controls whether a comparison can occur in Non-secure state for the corresponding Exception level. The possible values are:

- | | |
|----------|---|
| 0 | The trace unit can perform a comparison, in Non-secure state, for Exception level <i>n</i> . |
| 1 | The trace unit does not perform a comparison, in Non-secure state, for Exception level <i>n</i> . |

The Exception levels are:

- | | |
|----------------|--------------------|
| Bit[12] | Exception level 0 |
| Bit[13] | Exception level 1 |
| Bit[14] | Exception level 2 |
| Bit[15] | Always RES0 |

EXLEVEL_S, [11:8]

Each bit controls whether a comparison can occur in Secure state for the corresponding Exception level. The possible values are:

- | | |
|----------|---|
| 0 | The trace unit can perform a comparison, in Secure state, for Exception level <i>n</i> . |
| 1 | The trace unit does not perform a comparison, in Secure state, for Exception level <i>n</i> . |

The Exception levels are:

- | | |
|----------------|--------------------|
| Bit[8] | Exception level 0 |
| Bit[9] | Exception level 1 |
| Bit[10] | Always RES0 |
| Bit[11] | Exception level 3 |

RES0, [7:4]

RES0 Reserved

CONTEXT TYPE, [3:2]

Controls whether the trace unit performs a Context ID comparison, a VMID comparison, or both comparisons:

0b00	The trace unit does not perform a Context ID comparison.
0b01	The trace unit performs a Context ID comparison using the Context ID comparator that the CONTEXT field specifies, and signals a match if both the Context ID comparator matches and the address comparator match.
0b10	The trace unit performs a VMID comparison using the VMID comparator that the CONTEXT field specifies, and signals a match if both the VMID comparator and the address comparator match.
0b11	The trace unit performs a Context ID comparison and a VMID comparison using the comparators that the CONTEXT field specifies, and signals a match if the Context ID comparator matches, the VMID comparator matches, and the address comparator matches.

TYPE, [1:0]

Type of comparison:

0b00	Instruction address, RES0
-------------	----------------------------------

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCACATRn registers can be accessed through the external debug interface, offset 0x480–0x4B8.


30.3 TRCACVRn, Address Comparator Value Registers 0-7

The TRCACVRn registers indicate the address for the address comparators.

Bit field descriptions

The TRCACVRn registers are 64-bit registers.

Figure 30-2: TRCACVRn bit assignments

**ADDRESS, [63:0]**

The address value to compare against

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCACVRn can be accessed through the external debug interface, offset 0x400-0x43C.


30.4 TRCAUTHSTATUS, Authentication Status Register

The TRCAUTHSTATUS indicates the current level of tracing permitted by the system.

Bit field descriptions

The TRCAUTHSTATUS is a 32-bit register.

Figure 30-3: TRCAUTHSTATUS bit assignments

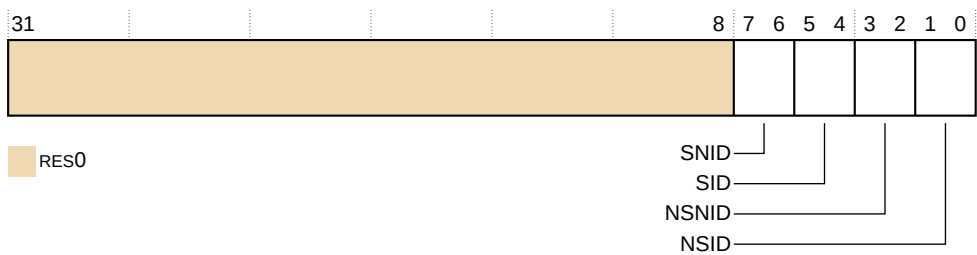

RES0, [31:8]

RES0 Reserved.

SNID, [7:6]

Secure Non-invasive Debug:

0b10 Secure Non-invasive Debug implemented but disabled.
0b11 Secure Non-invasive Debug implemented and enabled.

SID, [5:4]

Secure Invasive Debug:

0b00 Secure Invasive Debug is not implemented.

NSNID, [3:2]

Non-secure Non-invasive Debug:

0b10 Non-secure Non-invasive Debug implemented but disabled,
 NIDEN=0.
0b11 Non-secure Non-invasive Debug implemented and enabled,
 NIDEN=1.

NSID, [1:0]

Non-secure Invasive Debug:

0b00

Non-secure Invasive Debug is not implemented.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .


The TRCAUTHSTATUS can be accessed through the external debug interface, offset 0xFB8.

30.5 TRCAUXCTRL, Auxiliary Control Register

The TRCAUXCTRL provides **IMPLEMENTATION DEFINED** configuration and control options.

Bit field descriptions

Figure 30-4: TRCAUXCTRL bit assignments

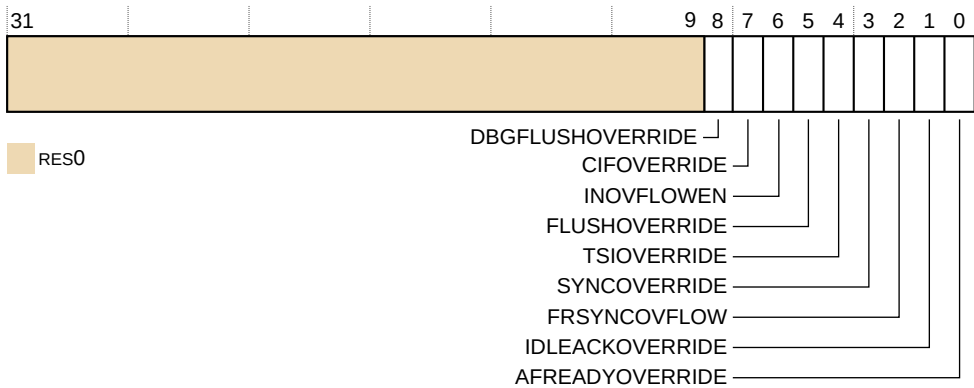

RES0, [31:9]

RES0

Reserved.

DBGFLUSHOVERRIDE, [8]

Override trace flush on debug state entry. The possible values are:

- | | |
|---|---|
| 0 | Trace flush on debug state entry is enabled. |
| 1 | Trace flush on debug state entry is disabled. |

CIFOVERRIDE, [7]

Override core interface register repeater clock enable. The possible values are:

- | | |
|---|--|
| 0 | Core interface clock gate is enabled. |
| 1 | Core interface clock gate is disabled. |

INOVFLOWEN, [6]

Allow overflows of the core interface buffer, removing any rare impact that the trace unit might have on the core's speculation when enabled. The possible values are:

- | | |
|----------|---|
| 0 | Core interface buffer overflows are disabled. |
| 1 | Core interface buffer overflows are enabled. |

When this bit is set to 1, the trace start/stop logic might deviate from architecturally-specified behavior.

FLUSHOVERRIDE, [5]

Override ETM flush behavior. The possible values are:

- | | |
|----------|---|
| 0 | ETM trace unit FIFO is flushed and ETM trace unit enters idle state when DBGEN or NIDEN is LOW. |
| 1 | ETM trace unit FIFO is not flushed and ETM trace unit does not enter idle state when DBGEN or NIDEN is LOW. |

When this bit is set to 1, the trace unit behavior deviates from architecturally-specified behavior.

TSIOVERRIDE, [4]

Override TS packet insertion behavior. The possible values are:

- | | |
|----------|---|
| 0 | Timestamp packets are inserted into FIFO only when trace activity is LOW. |
| 1 | Timestamp packets are inserted into FIFO irrespective of trace activity. |

SYNCOVERRIDE, [3]

Override SYNC packet insertion behavior. The possible values are:

- | | |
|----------|--|
| 0 | SYNC packets are inserted into FIFO only when trace activity is low. |
| 1 | SYNC packets are inserted into FIFO irrespective of trace activity. |

FRSYNCOVFLOW, [2]

Force overflows to output synchronization packets. The possible values are:

- | | |
|----------|---|
| 0 | No FIFO overflow when SYNC packets are delayed. |
| 1 | Forces FIFO overflow when SYNC packets are delayed. |

When this bit is set to 1, the trace unit behavior deviates from architecturally-specified behavior.

IDLEACKOVERRIDE, [1]

Force ETM idle acknowledge. The possible values are:

- | | |
|----------|--|
| 0 | ETM trace unit idle acknowledge is asserted only when the ETM trace unit is in idle state. |
| 1 | ETM trace unit idle acknowledge is asserted irrespective of the ETM trace unit idle state. |

When this bit is set to 1, trace unit behavior deviates from architecturally-specified behavior.

AFREADYOVERRIDE, [0]

Force assertion of AFREADYM output. The possible values are:

- | | |
|---|---|
| 0 | ETM trace unit AFREADYM output is asserted only when the ETM trace unit is in idle state or when all the trace bytes in FIFO before a flush request are output. |
| 1 | ETM trace unit AFREADYM output is always asserted HIGH. |

When this bit is set to 1, trace unit behavior deviates from architecturally-specified behavior.

The TRCAUXCTLR can be accessed through the internal memory-mapped interface and the external debug interface, offset 0x018.

Configurations

Available in all configurations.


30.6 TRCBBCTLR, Branch Broadcast Control Register

The TRCBBCTLR controls how branch broadcasting behaves, and allows branch broadcasting to be enabled for certain memory regions.

Bit field descriptions

The TRCBBCTLR is a 32-bit register.

Figure 30-5: TRCBBCTLR bit assignments

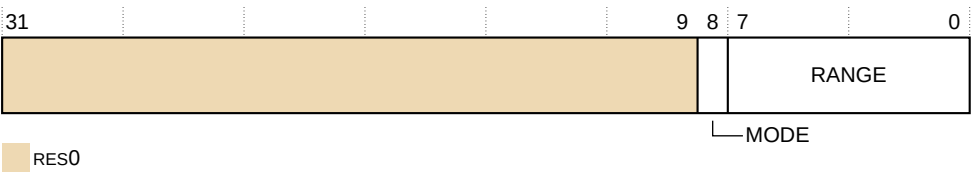

RES0, [31:9]

- | | |
|------|----------|
| RES0 | Reserved |
|------|----------|

MODE, [8]

Mode bit:

- | | |
|---|---|
| 0 | Exclude mode. Branch broadcasting is not enabled in the address range that RANGE defines.

If RANGE==0 then branch broadcasting is enabled for the entire memory map. |
|---|---|

1 Include mode. Branch broadcasting is enabled in the address range that RANGE defines.

If RANGE==0 then the behavior of the trace unit is **CONSTRAINED UNPREDICTABLE**. That is, the trace unit might or might not consider any instructions to be in a branch broadcast region.

RANGE, [7:0]

Address range field.

Selects which address range comparator pairs are in use with branch broadcasting. Each bit represents an address range comparator pair, so bit[*n*] controls the selection of address range comparator pair *n*. If bit[*n*] is:

- 0The address range that address range comparator pair *n* defines, is not selected.
- 1The address range that address range comparator pair *n* defines, is selected.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCBBCTLR can be accessed through the external debug interface, offset 0x03C.


30.7 TRCCCCTLR, Cycle Count Control Register

The TRCCCCTLR sets the threshold value for cycle counting.

Bit field descriptions

The TRCCCCTLR is a 32-bit register.

Figure 30-6: TRCCCCTLR bit assignments

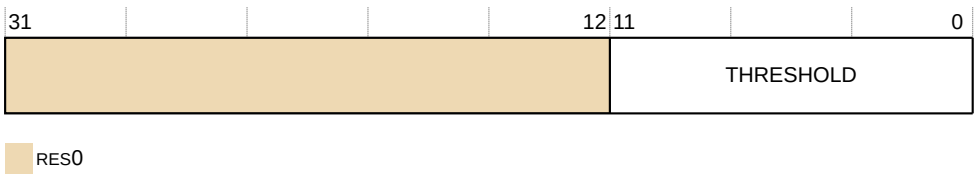

RES0, [31:12]

RES0 Reserved.

THRESHOLD, [11:0]

Instruction trace cycle count threshold.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCCCCTLR can be accessed through the external debug interface, offset 0x038.


30.8 TRCCIDCCTLR0, Context ID Comparator Control Register 0

The TRCCIDCCTLR0 controls the mask value for the context ID comparators.

Bit field descriptions

The TRCCIDCCTLR0 is a 32-bit register.

Figure 30-7: TRCCIDCCTLR0 bit assignments

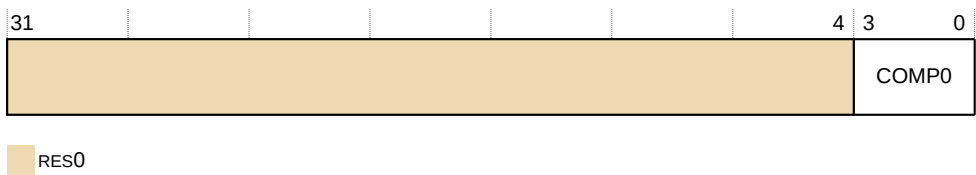

RES0, [31:4]

RES0	Reserved.
------	-----------

COMP0, [3:0]

Controls the mask value that the trace unit applies to TRCCIDCVR0. Each bit in this field corresponds to a byte in TRCCIDCVR0. When a bit is:

- | | |
|---|---|
| 0 | The trace unit includes the relevant byte in TRCCIDCVR0 when it performs the Context ID comparison. |
| 1 | The trace unit ignores the relevant byte in TRCCIDCVR0 when it performs the Context ID comparison. |

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCCIDCCTLR0 can be accessed through the external debug interface, offset 0x680.

30.9 TRCCIDCVR0, Context ID Comparator Value Register 0

The TRCCIDCVR0 contains a Context ID value.

Bit field descriptions

The TRCCIDCVR0 is a 64-bit register.

Figure 30-8: TRCCIDCVR0 bit assignments



RES0, [63:32]

RES0 Reserved.

VALUE, [31:0]

The data value to compare against.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCCIDCVR0 can be accessed through the external debug interface, offset 0x600.


30.10 TRCCIDR0, ETM Component Identification Register 0

The TRCCIDR0 provides information to identify a trace component.

Bit field descriptions

The TRCCIDR0 is a 32-bit register.

Figure 30-9: TRCCIDR0 bit assignments

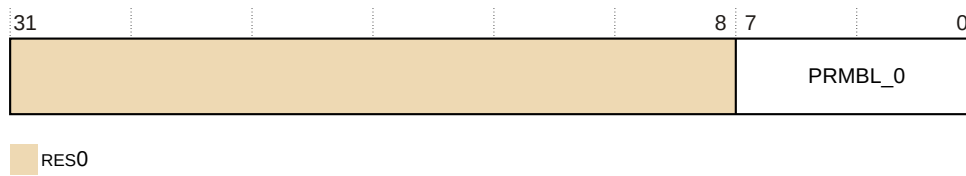

RES0, [31:8]

RES0 Reserved.

PRMBL_0, [7:0]

0x0D	Preamble byte 0.
-------------	------------------

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCCIDR0 can be accessed through the external debug interface, offset 0xFF0.


30.11 TRCCIDR1, ETM Component Identification Register 1

The TRCCIDR1 provides information to identify a trace component.

Bit field descriptions

The TRCCIDR1 is a 32-bit register.

Figure 30-10: TRCCIDR1 bit assignments

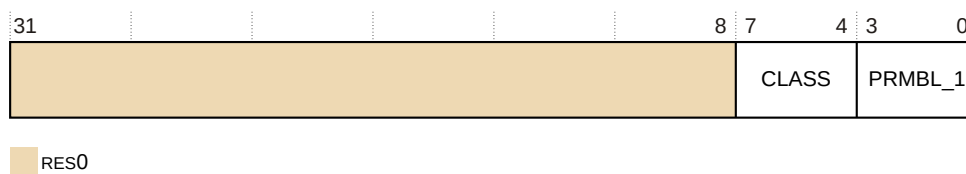

RES0, [31:8]

RES0 Reserved.

CLASS, [7:4]

0x9 Debug component.

PRMBL_1, [3:0]

0x0 Preamble byte 1.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCCIDR1 can be accessed through the external debug interface, offset 0xFF4.


30.12 TRCCIDR2, ETM Component Identification Register 2

The TRCCIDR2 provides information to identify a CTI component.

Bit field descriptions

The TRCCIDR2 is a 32-bit register.

Figure 30-11: TRCCIDR2 bit assignments

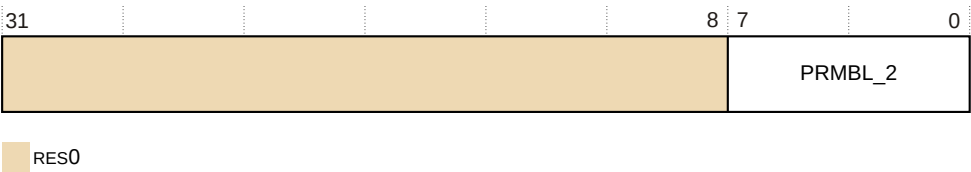

RES0, [31:8]

RES0 Reserved.

PRMBL_2, [7:0]

0x05 Preamble byte 2.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCCIDR2 can be accessed through the external debug interface, offset 0xFF8.


30.13 TRCCIDR3, ETM Component Identification Register 3

The TRCCIDR3 provides information to identify a trace component.

Bit field descriptions

The TRCCIDR3 is a 32-bit register.

Figure 30-12: TRCCIDR3 bit assignments

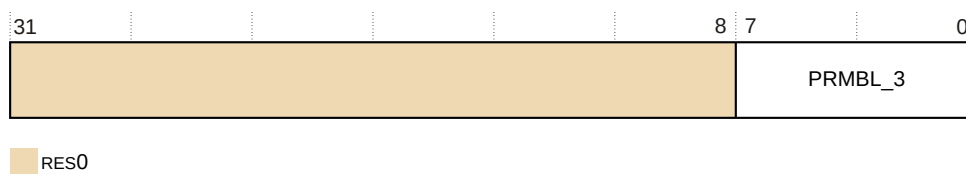

RES0, [31:8]

RES0 Reserved.

PRMBL_3, [7:0]

0xB1 Preamble byte 3.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCCIDR3 can be accessed through the external debug interface, offset 0xFFC.

30.14 TRCCLAIMCLR, Claim Tag Clear Register

The TRCCLAIMCLR clears bits in the claim tag and determines the current value of the claim tag.

Bit field descriptions

The TRCCLAIMCLR is a 32-bit register.

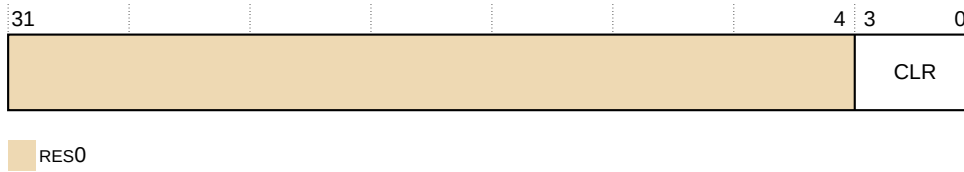Figure 30-13: TRCCLAIMCLR bit assignments**RES0, [31:4]**

RES0	Reserved.
-------------	-----------

CLR, [3:0]

On reads, for each bit:

0	Claim tag bit is not set.
1	Claim tag bit is set.

On writes, for each bit:

0	Has no effect.
1	Clears the relevant bit of the claim tag.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCCLAIMCLR can be accessed through the external debug interface, offset 0xFA4.

30.15 TRCCLAIMSET, Claim Tag Set Register

The TRCCLAIMSET sets bits in the claim tag and determines the number of claim tag bits implemented.

Bit field descriptions

The TRCCLAIMSET is a 32-bit register.

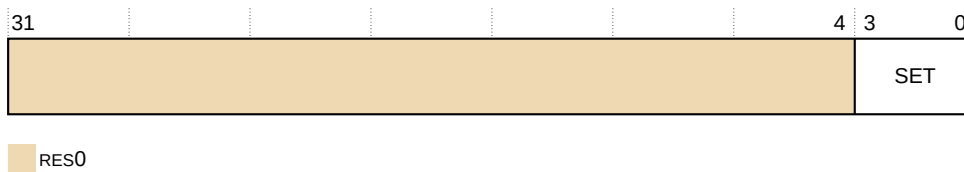Figure 30-14: TRCCLAIMSET bit assignments

RES0, [31:4]

RES0	Reserved.
------	-----------

SET, [3:0]

On reads, for each bit:

0	Claim tag bit is not implemented.
1	Claim tag bit is implemented.

On writes, for each bit:

0	Has no effect.
1	Sets the relevant bit of the claim tag.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCLAIMSET can be accessed through the external debug interface, offset 0xFA0.


30.16 TRCCNTCTRL0, Counter Control Register 0

The TRCCNTCTRL0 controls the counter.

Bit field descriptions

The TRCCNTCTRL0 is a 32-bit register.

Figure 30-15: TRCCNTCTLR0 bit assignments

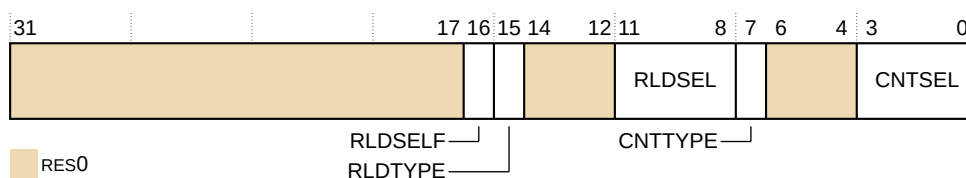

RES0, [31:17]

RES0	Reserved.
------	-----------

RLDSELF, [16]

Defines whether the counter reloads when it reaches zero:

0 The counter does not reload when it reaches zero. The counter only reloads based on RLDTYPE and RLDSEL.

- 1** The counter reloads when it reaches zero and the resource selected by CNTTYPE and CNTSEL is also active. The counter also reloads based on RLDTYPE and RLDSEL.

RLDTYPE, [15]

Selects the resource type for the reload:

- 0** Single selected resource.
1 Boolean combined resource pair.

RES0, [14:12]

RES0 Reserved.

RLDSEL, [11:8]

Selects the resource number, based on the value of RLDTYPE:

When RLDTYPE is 0, selects a single selected resource from 0-15 defined by bits[3:0].

When RLDTYPE is 1, selects a Boolean combined resource pair from 0-7 defined by bits[2:0].

CNTTYPE, [7]

Selects the resource type for the counter:

- 0** Single selected resource.
1 Boolean combined resource pair.

RES0, [6:4]

RES0 Reserved.

CNTSEL, [3:0]

Selects the resource number, based on the value of CNTTYPE:

When CNTTYPE is 0, selects a single selected resource from 0-15 defined by bits[3:0].

When CNTTYPE is 1, selects a Boolean combined resource pair from 0-7 defined by bits[2:0].

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCCNTCTLR0 can be accessed through the external debug interface, offset 0x150.


30.17 TRCCNTCTLR1, Counter Control Register 1

The TRCCNTCTLR1 controls the counter.

Bit field descriptions

The TRCCNTCTLR1 is a 32-bit register.

Figure 30-16: TRCCNTCTLR1 bit assignments

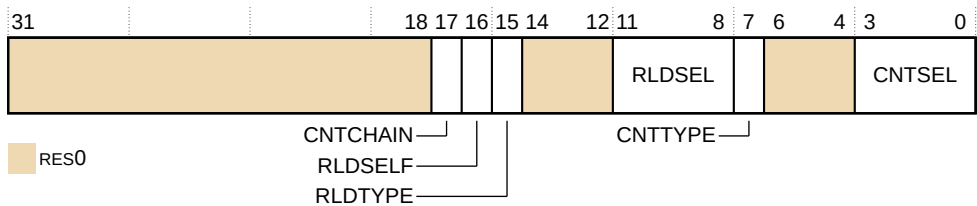

RES0, [31:18]

RES0 Reserved.

CNTCHAIN, [17]

Defines whether the counter decrements when the counter reloads. This enables two counters to be used in combination to provide a larger counter:

- | | |
|---|--|
| 0 | The counter operates independently from the counter. The counter only decrements based on CNTTYPE and CNTSEL. |
| 1 | The counter decrements when the counter reloads. The counter also decrements when the resource selected by CNTTYPE and CNTSEL is active. |

RLDSELF, [16]

Defines whether the counter reloads when it reaches zero:

- | | |
|---|---|
| 0 | The counter does not reload when it reaches zero. The counter only reloads based on RLDTYPE and RLDSEL. |
| 1 | The counter reloads when it is zero and the resource selected by CNTTYPE and CNTSEL is also active. The counter also reloads based on RLDTYPE and RLDSEL. |

RLDTYPE, [15]

Selects the resource type for the reload:

- | | |
|---|---------------------------------|
| 0 | Single selected resource. |
| 1 | Boolean combined resource pair. |

RES0, [14:12]

RES0	Reserved.
-------------	-----------

RLDSEL, [11:8]

Selects the resource number, based on the value of RLDTYPE:

When RLDTYPE is 0, selects a single selected resource from 0-15 defined by bits[3:0].

When RLDTYPE is 1, selects a Boolean combined resource pair from 0-7 defined by bits[2:0].

CNTTYPE, [7]

Selects the resource type for the counter:

0	Single selected resource.
1	Boolean combined resource pair.

RES0, [6:4]

RES0	Reserved.
-------------	-----------

CNTSEL, [3:0]

Selects the resource number, based on the value of CNTTYPE:

When CNTTYPE is 0, selects a single selected resource from 0-15 defined by bits[3:0].

When CNTTYPE is 1, selects a Boolean combined resource pair from 0-7 defined by bits[2:0].

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCCNTCTLR1 can be accessed through the external debug interface, offset 0x154.


30.18 TRCCNTRLDVRn, Counter Reload Value Registers 0-1

The TRCCNTRLDVRn registers define the reload value for the counter.

Bit field descriptions

The TRCCNTRLDVRn registers are 32-bit registers.

Figure 30-17: TRCCNTRLDVRn bit assignments

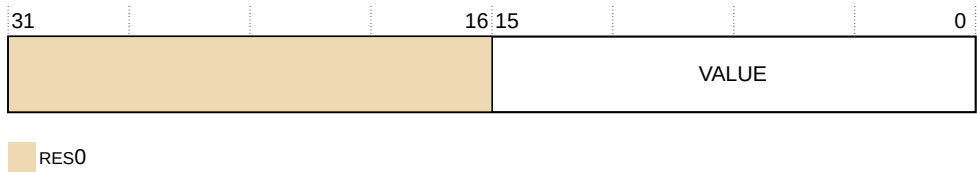

RES0, [31:16]

RES0 Reserved

VALUE, [15:0]

Defines the reload value for the counter. This value is loaded into the counter each time the reload event occurs.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCCNTRLDVRn registers can be accessed through the external debug interface, offsets:

TRCCNTRLDVR0

0x140

TRCCNTRLDVR1

0x144


30.19 TRCCNTRn, Counter Value Registers 0-1

The TRCCNTRn registers contain the current counter value.

Bit field descriptions

The TRCCNTRn registers are 32-bit registers.

Figure 30-18: TRCCNTRn bit assignments

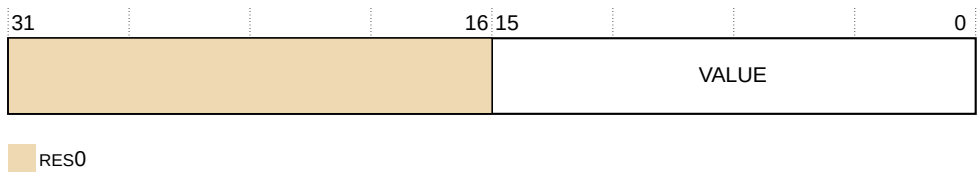

RES0, [31:16]

RES0 Reserved

VALUE, [15:0]

Contains the current counter value.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCCNTVRn registers can be accessed through the external debug interface, offsets:

TRCCNTVR0

0x160

TRCCNTVR1

0x164


30.20 TRCCONFIGR, Trace Configuration Register

The TRCCONFIGR controls the tracing options.

Bit field descriptions

The TRCCONFIGR is a 32-bit register.

Figure 30-19: TRCCONFIGR bit assignments

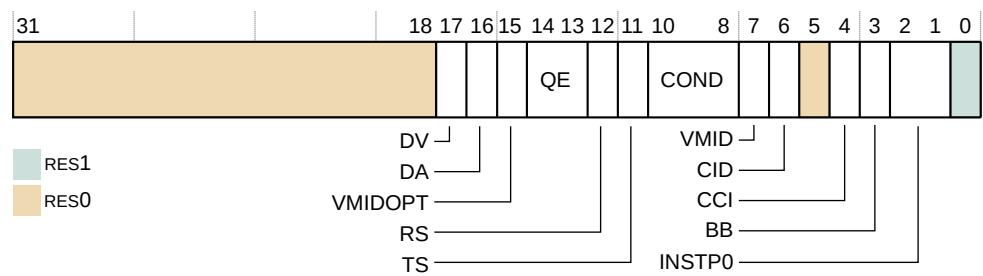

RES0, [31:18]

RES0 Reserved.

DV, [17]

Enables data value tracing. The possible values are:

- 0** Disables data value tracing.
- 1** Enables data value tracing.

DA, [16]

Enables data address tracing. The possible values are:

0	Disables data address tracing.
1	Enables data address tracing.

VMIDOPT, [15]

Configures the Virtual context identifier value that is used by the trace unit, both for trace generation and in the Virtual context identifier comparators. The possible values are:

0b0	VTTBR_EL2.VMID is used. If the trace unit supports a Virtual context identifier larger than the VTTBR_EL2.VMID, the upper unused bits are always zero. If the trace unit supports a Virtual context identifier larger than 8 bits and if the VTCR_EL2.VS bit forces use of an 8-bit Virtual context identifier, bits [15:8] of the trace unit Virtual context identifier are always zero.
0b1	CONTEXTIDR_EL2 is used. TRCIDR2.VMIDOPT indicates whether this field is implemented.

QE, [14:13]

Enables Q element. The possible values are:

0b00	Q elements are disabled.
0b01	Q elements with instruction counts are disabled. Q elements without instruction counts are disabled.
0b10	Reserved.
0b11	Q elements with and without instruction counts are enabled.

RS, [12]

Enables the return stack. The possible values are:

0	Disables the return stack.
1	Enables the return stack.

TS, [11]

Enables global timestamp tracing. The possible values are:

0	Disables global timestamp tracing.
1	Enables global timestamp tracing.

COND, [10:8]

Enables conditional instruction tracing. The possible values are:

0b000	Conditional instruction tracing is disabled.
0b001	Conditional load instructions are traced.
0b010	Conditional store instructions are traced.
0b011	Conditional load and store instructions are traced.
0b111	All conditional instructions are traced.

VMID, [7]

Enables VMID tracing. The possible values are:

0	Disables VMID tracing.
1	Enables VMID tracing.

CID, [6]

Enables context ID tracing. The possible values are:

0	Disables context ID tracing.
1	Enables context ID tracing.

RES0, [5]

RES0	Reserved.
-------------	-----------

CCI, [4]

Enables cycle counting instruction trace. The possible values are:

0	Disables cycle counting instruction trace.
1	Enables cycle counting instruction trace.

BB, [3]

Enables branch broadcast mode. The possible values are:

0	Disables branch broadcast mode.
1	Enables branch broadcast mode.

INSTP0, [2:1]

Controls whether load and store instructions are traced as P0 instructions. The possible values are:

0b00	Load and store instructions are not traced as P0 instructions.
0b01	Load instructions are traced as P0 instructions.
0b10	Store instructions are traced as P0 instructions.
0b11	Load and store instructions are traced as P0 instructions.

RES1, [0]

RES1	Reserved.
-------------	-----------

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCCONFIGR can be accessed through the external debug interface, offset 0x010.

30.21 TRCDEVAFF0, Device Affinity Register 0

The TRCDEVAFF0 provides an additional core identification mechanism for scheduling purposes in a cluster. TRCDEVAFF0 is a read-only copy of MPIDR_EL1[31:0] accessible from the external debug interface.

Bit field descriptions

The TRCDEVAFF0 is a 32-bit register and is a copy of MPIDR_EL1[31:0]. See [13.94 MPIDR_EL1, Multiprocessor Affinity Register, EL1](#) on page 237 for full bit field descriptions.

30.22 TRCDEVAFF1, Device Affinity Register 1

The TRCDEVAFF1 provides an additional core identification mechanism for scheduling purposes in a cluster. TRCDEVAFF1 is a read-only copy of MPIDR_EL1[63:32] accessible from the external debug interface.

Bit field descriptions

The TRCDEVAFF1 is a 32-bit register and is a copy of MPIDR_EL1[63:32]. See [13.94 MPIDR_EL1, Multiprocessor Affinity Register, EL1](#) on page 237 for full bit field descriptions.


30.23 TRCDEVARCH, Device Architecture Register

The TRCDEVARCH identifies the ETM trace unit as an ETMv4 component.

Bit field descriptions

The TRCDEVARCH is a 32-bit register.

Figure 30-20: TRCDEVARCH bit assignments

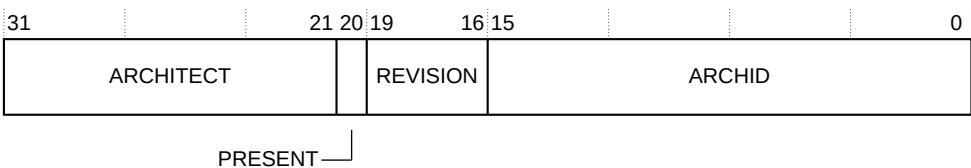

ARCHITECT, [31:21]

Defines the architect of the component:

- 0x4** Arm JEP continuation.
- 0x3B** Arm JEP 106 code.

PRESENT, [20]

Indicates the presence of this register:

0b1 Register is present.

REVISION, [19:16]

Architecture revision:

0x02 Architecture revision 2.

ARCHID, [15:0]

Architecture ID:

0x4A13 ETMv4 component.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCDEVARCH can be accessed through the external debug interface, offset 0xFBC.


30.24 TRCDEVID, Device ID Register

The TRCDEVID indicates the capabilities of the ETM trace unit.

Bit field descriptions

The TRCDEVID is a 32-bit register.

Figure 30-21: TRCDEVID bit assignments



DEVID, [31:0]

RAZ. There are no component-defined capabilities.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCDEVID can be accessed through the external debug interface, offset 0xFC8.

30.25 TRCDEVTYPE, Device Type Register

The TRCDEVTYPE indicates the type of the component.

Bit field descriptions

The TRCDEVTYPE is a 32-bit register.

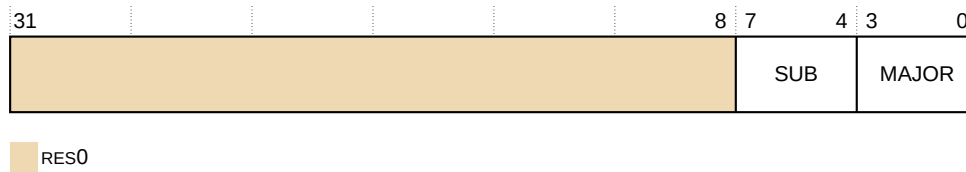Figure 30-22: TRCDEVTYPE bit assignments**RES0, [31:8]**

RES0 Reserved.

SUB, [7:4]

The sub-type of the component:

0b0001 Core trace.

MAJOR, [3:0]

The main type of the component:

0b0011 Trace source.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCDEVTYPE can be accessed through the external debug interface, offset 0xFCC.

30.26 TRCEVENTCTL0R, Event Control 0 Register

The TRCEVENTCTL0R controls the tracing of events in the trace stream. The events also drive the external outputs from the ETM trace unit. The events are selected from the Resource Selectors.

Bit field descriptions

The TRCEVENTCTL0R is a 32-bit register.

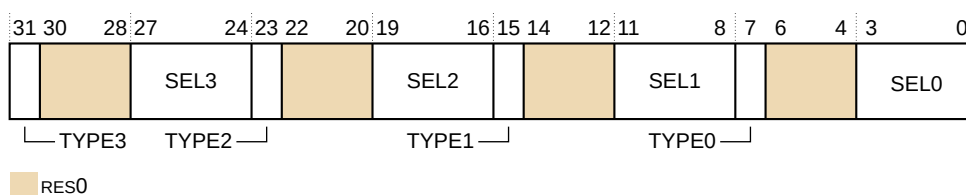Figure 30-23: TRCEVENTCTL0R bit assignments

TYPE3, [31]

Selects the resource type for trace event 3:

0	Single selected resource.
1	Boolean combined resource pair.

RES0, [30:28]

RES0	Reserved.
-------------	-----------

SEL3, [27:24]

Selects the resource number, based on the value of TYPE3:

When TYPE3 is 0, selects a single selected resource from 0-15 defined by bits[3:0].

When TYPE3 is 1, selects a Boolean combined resource pair from 0-7 defined by bits[2:0].

TYPE2, [23]

Selects the resource type for trace event 2:

0	Single selected resource.
1	Boolean combined resource pair.

RES0, [22:20]

RES0	Reserved.
-------------	-----------

SEL2, [19:16]

Selects the resource number, based on the value of TYPE2:

When TYPE2 is 0, selects a single selected resource from 0-15 defined by bits[3:0].

When TYPE2 is 1, selects a Boolean combined resource pair from 0-7 defined by bits[2:0].

TYPE1, [15]

Selects the resource type for trace event 1:

0	Single selected resource.
1	Boolean combined resource pair.

RES0, [14:12]

RES0	Reserved.
-------------	-----------

SEL1, [11:8]

Selects the resource number, based on the value of TYPE1:

When TYPE1 is 0, selects a single selected resource from 0-15 defined by bits[3:0].

When TYPE1 is 1, selects a Boolean combined resource pair from 0-7 defined by bits[2:0].

TYPE0, [7]

Selects the resource type for trace event 0:

- | | |
|---|---------------------------------|
| 0 | Single selected resource. |
| 1 | Boolean combined resource pair. |

RES0, [6:4]

- | | |
|------|-----------|
| RES0 | Reserved. |
|------|-----------|

SEL0, [3:0]

Selects the resource number, based on the value of TYPE0:

- When TYPE0 is 0, selects a single selected resource from 0-15 defined by bits[3:0].
- When TYPE0 is 1, selects a Boolean combined resource pair from 0-7 defined by bits[2:0].

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCEVENTCTL0R can be accessed through the external debug interface, offset 0x020.


30.27 TRCEVENTCTL1R, Event Control 1 Register

The TRCEVENTCTL1R controls the behavior of the events that TRCEVENTCTL0R selects.

Bit field descriptions

The TRCEVENTCTL1R is a 32-bit register.

Figure 30-24: TRCEVENTCTL1R bit assignments

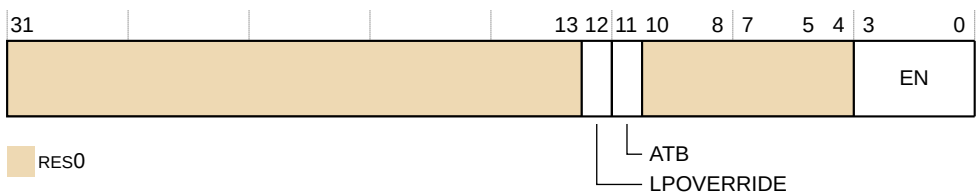

RES0, [31:13]

- | | |
|------|-----------|
| RES0 | Reserved. |
|------|-----------|

LPOVERRIDE, [12]

Low-power state behavior override:

- | | |
|---|--------------------------------------|
| 0 | Low-power state behavior unaffected. |
|---|--------------------------------------|

- 1** Low-power state behavior overridden. The resources and Event trace generation are unaffected by entry to a low-power state.

ATB, [11]

ATB trigger enable:

- 0** ATB trigger disabled.
1 ATB trigger enabled.

RES0, [10:4]

- RES0** Reserved.

EN, [3:0]

One bit per event, to enable generation of an event element in the instruction trace stream when the selected event occurs:

- 0** Event does not cause an event element.
1 Event causes an event element.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCEVENTCTL1R can be accessed through the external debug interface, offset 0x024.

30.28 TRCEXTINSEL, External Input Select Register

The TRCEXTINSEL controls the selectors that choose an external input as a resource in the ETM trace unit. You can use the Resource Selectors to access these external input resources.

Bit field descriptions

Figure 30-25: TRCEXTINSEL bit assignments

31	24	23	16	15	8	7	0
SEL3				SEL1		SEL0	

SEL3, [31:24]

Selects an event from the external input bus for External Input Resource 3.

- SEL2, [23:16]**
Selects an event from the external input bus for External Input Resource 2.
- SEL1, [15:8]**
Selects an event from the external input bus for External Input Resource 1.
- SEL0, [7:0]**
Selects an event from the external input bus for External Input Resource 0.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCEXTINSELR can be accessed through the external debug interface, offset 0x120.


30.29 TRCIDR0, ID Register 0

The TRCIDR0 returns the tracing capabilities of the ETM trace unit.

Bit field descriptions

The TRCIDR0 is a 32-bit register.

Figure 30-26: TRCIDR0 bit assignments

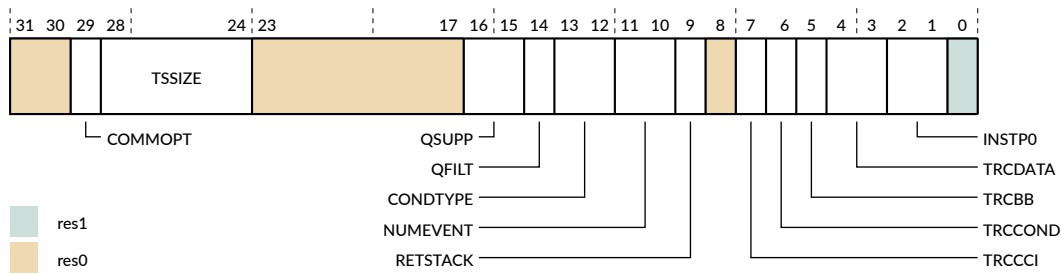

- RES0, [31:30]**
RES0 Reserved.
- COMMOPT, [29]**
Indicates the meaning of the commit field in some packets:
1 Commit mode 1.
- TSSIZE, [28:24]**
Global timestamp size field:
0b01000 Implementation supports a maximum global timestamp of 64 bits.

RES0, [23:17]

RES0 Reserved.

QSUPP, [16:15]

Indicates Q element support:

0b00 Q elements not supported.

QFILT, [14]

Indicates Q element filtering support:

0b0 Q element filtering not supported.

CONDTYPE, [13:12]

Indicates how conditional results are traced:

0b00 Conditional trace not supported.

NUMEVENT, [11:10]

Number of events supported in the trace, minus 1:

0b11 Four events supported.

RETSTACK, [9]

Return stack support:

1 Return stack implemented.

RES0, [8]

RES0 Reserved.

TRCCCI, [7]

Support for cycle counting in the instruction trace:

1 Cycle counting in the instruction trace is implemented.

TRCCOND, [6]

Support for conditional instruction tracing:

0 Conditional instruction tracing is not supported.

TRCBB, [5]

Support for branch broadcast tracing:

1 Branch broadcast tracing is implemented.

TRCDATA, [4:3]

Conditional tracing field:

0b00 Tracing of data addresses and data values is not implemented.

INSTP0, [2:1]

P0 tracing support field:

0b00 Tracing of load and store instructions as P0 elements is not supported.

RES1, [0]

RES1 Reserved.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCIDR0 can be accessed through the external debug interface, offset 0x1E0.


30.30 TRCIDR1, ID Register 1

The TRCIDR1 returns the base architecture of the trace unit.

Bit field descriptions

The TRCIDR1 is a 32-bit register.

Figure 30-27: TRCIDR1 bit assignments

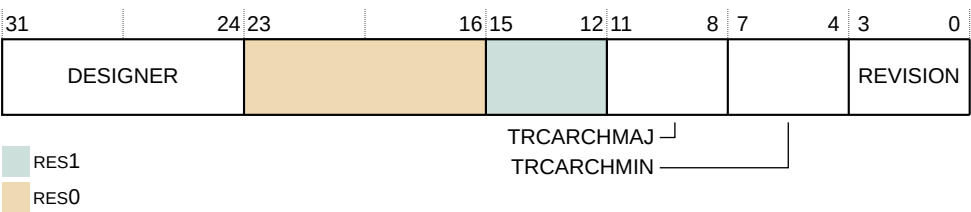

DESIGNER, [31:24]

Indicates which company designed the trace unit:

0x41 Arm.

RES0, [23:16]

RES0 Reserved.

RES1, [15:12]**RES1** Reserved.**TRCARCHMAJ, [11:8]**

Major trace unit architecture version number:

0x4 ETMv4.**TRCARCHMIN, [7:4]**

Minor trace unit architecture version number:

0x2 ETMv4.2**REVISION, [3:0]**

Trace unit implementation revision number:

0x2 ETM revision for r1p1

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCIDR1 can be accessed through the external debug interface, offset 0x1E4.

30.31 TRCIDR2, ID Register 2


The TRCIDR2 returns the maximum size of six parameters in the trace unit.

The parameters are:

- Cycle counter.
- Data value.
- Data address.
- VMID.
- Context ID.
- Instruction address.

Bit field descriptions

The TRCIDR2 is a 32-bit register.

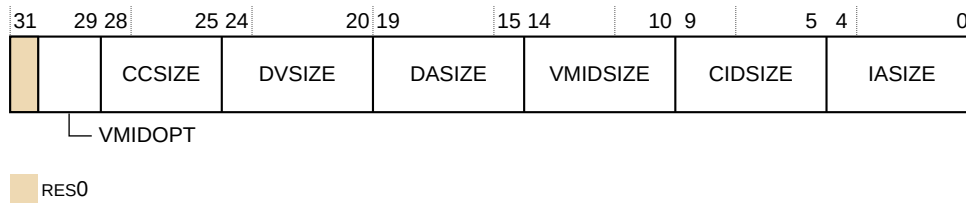Figure 30-28: TRCIDR2 bit assignments**RES0, [31]**

RES0

Reserved.

VMIDOPT, [30:29]

Indicates the options for observing the Virtual context identifier:

0x1

VMIDOPT is implemented.

CCSIZE, [28:25]

Size of the cycle counter in bits minus 12:

0x0

The cycle counter is 12 bits in length.

DVSIZE, [24:20]

Data value size in bytes:

0x00

Data value tracing is not implemented.

DASIZE, [19:15]

Data address size in bytes:

0x00

Data address tracing is not implemented.

VMIDSIZE, [14:10]

Virtual Machine ID size:

0x4

Maximum of 32-bit Virtual Machine ID size.

CIDSIZE, [9:5]

Context ID size in bytes:

0x4

Maximum of 32-bit Context ID size.

IASIZE, [4:0]

Instruction address size in bytes:

0x8

Maximum of 64-bit address size.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCIDR2 can be accessed through the external debug interface, offset 0x1E8.

30.32 TRCIDR3, ID Register 3


The TRCIDR3 indicates:

- Whether TRCVICTLR is supported.
- The number of cores available for tracing.
- If an Exception level supports instruction tracing.
- The minimum threshold value for instruction trace cycle counting.
- Whether the synchronization period is fixed.

Bit field descriptions

The TRCIDR3 is a 32-bit register.

Figure 30-29: TRCIDR3 bit assignments

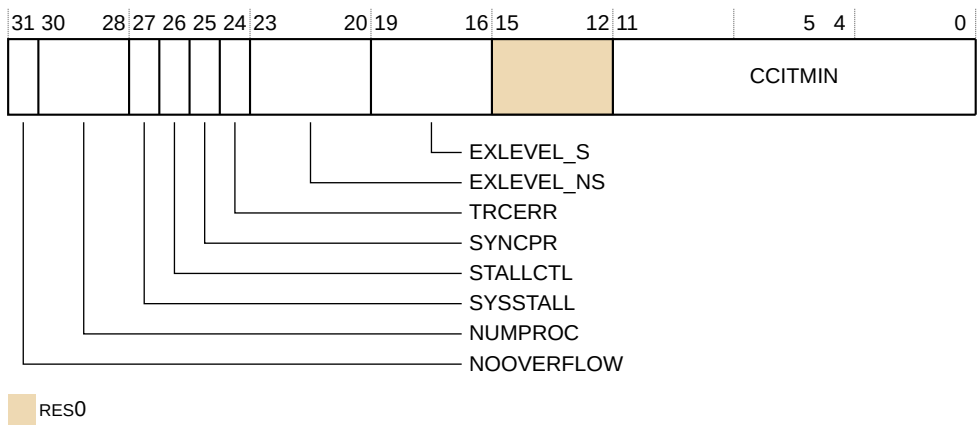

NOOVERFLOW, [31]

Indicates whether TRCSTALLCTLR.NOOVERFLOW is implemented:

0 TRCSTALLCTLR.NOOVERFLOW is not implemented.

NUMPROC, [30:28]

Indicates the number of cores available for tracing:

0b000	The trace unit can trace one core, ETM trace unit sharing not supported.
--------------	--

SYSSTALL, [27]

Indicates whether stall control is implemented:

0	The system does not support core stall control.
----------	---

STALLCTL, [26]

Indicates whether TRCSTALLCTLR is implemented:

0	TRCSTALLCTLR is not implemented.
----------	----------------------------------

This field is used in conjunction with SYSSTALL.

SYNCPR, [25]

Indicates whether there is a fixed synchronization period:

0	TRCSYNCPR is read/write so software can change the synchronization period.
----------	--

TRCERR, [24]

Indicates whether TRCVICTLR.TRCERR is implemented:

1	TRCVICTLR.TRCERR is implemented.
----------	----------------------------------

EXLEVEL_NS, [23:20]

Each bit controls whether instruction tracing in Non-secure state is implemented for the corresponding Exception level:

0b0111	Instruction tracing is implemented for Non-secure EL0, EL1, and EL2 Exception levels.
---------------	---

EXLEVEL_S, [19:16]

Each bit controls whether instruction tracing in Secure state is implemented for the corresponding Exception level:

0b1011	Instruction tracing is implemented for Secure EL0, EL1, and EL3 Exception levels.
---------------	---

RES0, [15:12]

RES0	Reserved.
-------------	-----------

CCITMIN, [11:0]

The minimum value that can be programmed in TRCCCCTLR.THRESHOLD:

0x004 Instruction trace cycle counting minimum threshold is 4.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCIDR3 can be accessed through the external debug interface, offset 0x1EC.


30.33 TRCIDR4, ID Register 4

The TRCIDR4 indicates the resources available in the ETM trace unit.

Bit field descriptions

The TRCIDR4 is a 32-bit register.

Figure 30-30: TRCIDR4 bit assignments

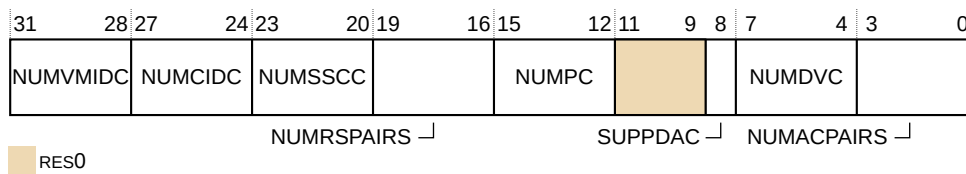

NUMVMIDC, [31:28]

Indicates the number of VMID comparators available for tracing:

0x1 One VMID comparator is available.

NUMCIDC, [27:24]

Indicates the number of CID comparators available for tracing:

0x1 One Context ID comparator is available.

NUMSSCC, [23:20]

Indicates the number of single-shot comparator controls available for tracing:

0x1 One single-shot comparator control is available.

NUMRSPAIRS, [19:16]

Indicates the number of resource selection pairs available for tracing:

0x7 Eight resource selection pairs are available.

NUMPC, [15:12]

Indicates the number of core comparator inputs available for tracing:

0x0 Core comparator inputs are not implemented.

RES0, [11:9]

RES0 Reserved.

SUPPDAC, [8]

Indicates whether the implementation supports data address comparisons: This value is:

0 Data address comparisons are not implemented.

NUMDVC, [7:4]

Indicates the number of data value comparators available for tracing:

0x0 Data value comparators are not implemented.

NUMACPAIRS, [3:0]

Indicates the number of address comparator pairs available for tracing:

0x4 Four address comparator pairs are implemented.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCIDR4 can be accessed through the external debug interface, offset 0x1F0.

30.34 TRCIDR5, ID Register 5

The TRCIDR5 returns how many resources the trace unit supports.

Bit field descriptions

Figure 30-31: TRCIDR5 bit assignments

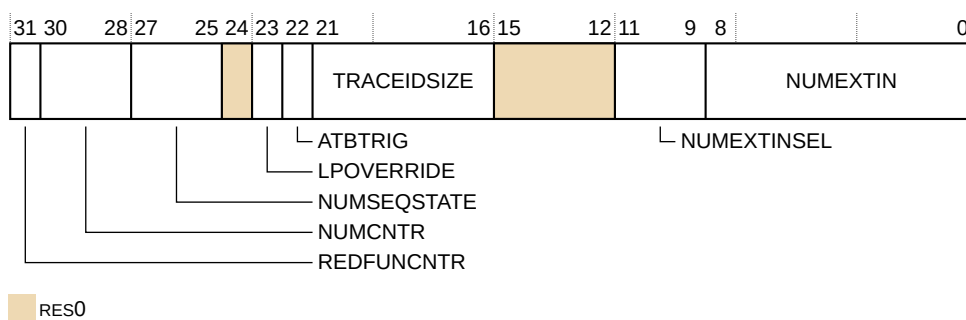

REDFUNCNTR, [31]

Reduced Function Counter implemented:

0	Reduced Function Counter not implemented.
----------	---

NUMCNTR, [30:28]

Number of counters implemented:

0b010	Two counters implemented.
--------------	---------------------------

NUMSEQSTATE, [27:25]

Number of sequencer states implemented:

0b100	Four sequencer states implemented.
--------------	------------------------------------

RES0, [24]

RES0	Reserved.
-------------	-----------

LPOVERRIDE, [23]

Low-power state override support:

0	Low-power state override support is not implemented.
----------	--

ATBTRIG, [22]

ATB trigger support:

1	ATB trigger support implemented.
----------	----------------------------------

TRACEIDSIZE, [21:16]

Number of bits of trace ID:

0x07	Seven-bit trace ID implemented.
-------------	---------------------------------

RES0, [15:12]

RES0	Reserved.
-------------	-----------

NUMEXTINSEL, [11:9]

Number of external input selectors implemented:

0b100	Four external input selectors implemented.
--------------	--

NUMEXTIN, [8:0]

Number of external inputs implemented:

0xBD	189 external inputs implemented.
-------------	----------------------------------

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCIDR5 can be accessed through the external debug interface, offset 0x1F4.


30.35 TRCIDR8, ID Register 8

The TRCIDR8 returns the maximum speculation depth of the instruction trace stream.

Bit field descriptions

The TRCIDR8 is a 32-bit register.

Figure 30-32: TRCIDR8 bit assignments



MAXSPEC, [31:0]

The maximum number of P0 elements in the trace stream that can be Speculative at any time.

0 Maximum speculation depth of the instruction trace stream.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCIDR8 can be accessed through the external debug interface, offset 0x180.


30.36 TRCIDR9, ID Register 9

The TRCIDR9 returns the number of P0 right-hand keys that the trace unit can use.

Bit field descriptions

The TRCIDR9 is a 32-bit register.

Figure 30-33: TRCIDR9 bit assignments



NUMPOKEY, [31:0]

The number of P0 right-hand keys that the trace unit can use.

0 Number of P0 right-hand keys.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCIDR9 can be accessed through the external debug interface, offset 0x184.


30.37 TRCIDR10, ID Register 10

The TRCIDR10 returns the number of P1 right-hand keys that the trace unit can use.

Bit field descriptions

The TRCIDR10 is a 32-bit register.

Figure 30-34: TRCIDR10 bit assignments



NUMP1KEY, [31:0]

The number of P1 right-hand keys that the trace unit can use.

0 Number of P1 right-hand keys.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCIDR10 can be accessed through the external debug interface, offset 0x188.


30.38 TRCIDR11, ID Register 11

The TRCIDR11 returns the number of special P1 right-hand keys that the trace unit can use.

Bit field descriptions

The TRCIDR11 is a 32-bit register.

Figure 30-35: TRCIDR11 bit assignments



NUMP1SPC, [31:0]

The number of special P1 right-hand keys that the trace unit can use.

0 Number of special P1 right-hand keys.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCIDR11 can be accessed through the external debug interface, offset 0x18C.


30.39 TRCIDR12, ID Register 12

The TRCIDR12 returns the number of conditional instruction right-hand keys that the trace unit can use.

Bit field descriptions

The TRCIDR12 is a 32-bit register.

Figure 30-36: TRCIDR12 bit assignments

**NUMCONDKEY, [31:0]**

The number of conditional instruction right-hand keys that the trace unit can use, including normal and special keys.

0 Number of conditional instruction right-hand keys.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCIDR12 can be accessed through the external debug interface, offset 0x190.


30.40 TRCIDR13, ID Register 13

The TRCIDR13 returns the number of special conditional instruction right-hand keys that the trace unit can use.

Bit field descriptions

The TRCIDR13 is a 32-bit register.

Figure 30-37: TRCIDR13 bit assignments



NUMCONDSPC, [31:0]

The number of special conditional instruction right-hand keys that the trace unit can use, including normal and special keys.

0 Number of special conditional instruction right-hand keys.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCIDR13 can be accessed through the external debug interface, offset 0x194.


30.41 TRCIMSPECO, IMPLEMENTATION SPECIFIC Register 0

The TRCIMSPECO shows the presence of any **IMPLEMENTATION SPECIFIC** features, and enables any features that are provided.

Bit field descriptions

The TRCIMSPECO is a 32-bit register.

Figure 30-38: TRCIMSPECO bit assignments

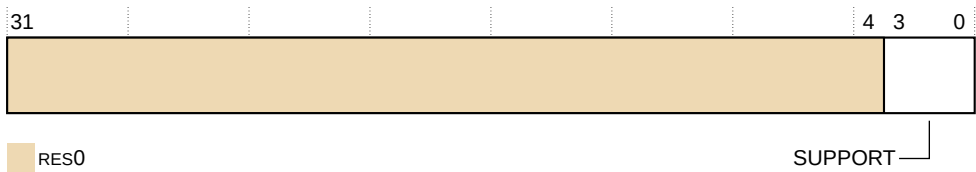

RES0, [31:4]

RES0
Reserved.

SUPPORT, [3:0]

0
No **IMPLEMENTATION SPECIFIC** extensions are supported.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCIMSPECO can be accessed through the external debug interface, offset 0x1C0.



System register accesses to the TRCIMSPECOR will result in an *UNDEF* exception.


30.42 TRCITATBCTR0, Trace Integration Test ATB Control Register 0

TRCITATBCTR0 controls signal outputs when TRCITCTRL.IME is set.

Bit field descriptions

The TRCITATBCTR0 is a 32-bit register.

Figure 30-39: TRCITATBCTR0 bit assignments

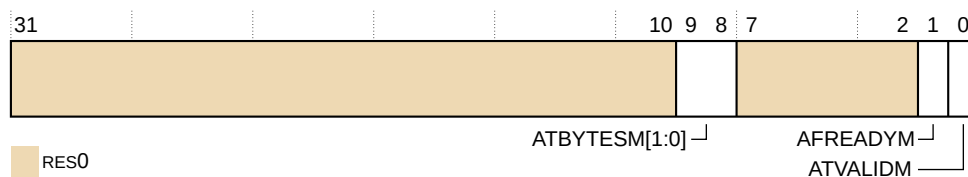

ATBYTESM[1:0], [9:8]

Drives the ATBYTESM outputs.

AFREADYM, [1]

Drives the AFREADYM output.

ATVALIDM, [0]

Drives the ATVALIDM output.

Bit fields and details not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCITATBCTR0 register can be accessed through the internal memory-mapped interface and the external debug interface, offset 0xEF8.


30.43 TRCITATBCTR1, Trace Integration Test ATB Control Register 1

TRCITATBCTR1 controls the ATIDM[6:0] signals when TRCITCTRL.IME is set.

Bit field descriptions

The TRCITATBCTR1 is a 32-bit register.

Figure 30-40: TRCITATBCTR1 bit assignments

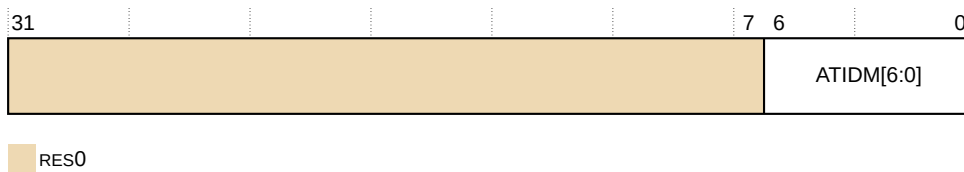

ATIDM[6:0], [6:0]

Drives the ATIDM[6:0] outputs.

Bit fields and details not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCITATBCTR1 register can be accessed through the internal memory-mapped interface and the external debug interface, offset 0xEF4.

30.44 TRCITATBCTR2, Trace Integration Test ATB Control Register 2

TRCITATBCTR2 enables the values of signal inputs to be read when bit[0] of the Integration Mode Control Register is set.

Bit field descriptions

The TRCITATBCTR2 is a 32-bit register.

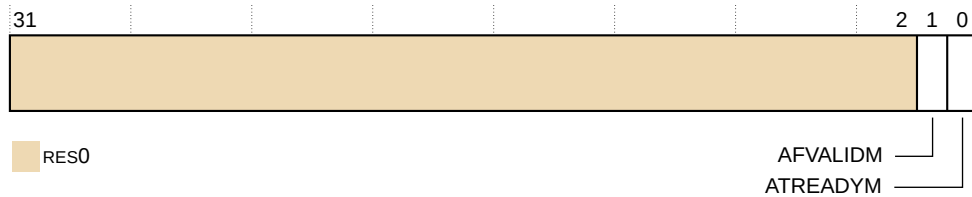Figure 30-41: TRCITATBCTR2 bit assignments**AFVALIDM, [1]**

Returns the value of AFVALIDM input.

ATREADYM, [0]

Returns the value of ATREADYM input. To sample ATREADYM correctly from the processor signals, ATVALIDM must be asserted.

Bit fields and details not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCITATBCTR2 register can be accessed through the internal memory-mapped interface and the external debug interface, offset 0xEF0.

30.45 TRCITATBDATA0, Trace Integration Test ATB Data Register 0

TRCITATBDATA0 controls signal outputs when TRCITCTRL.IME is set.

Bit field descriptions

The TRCITATBDATA0 is a 32-bit register.

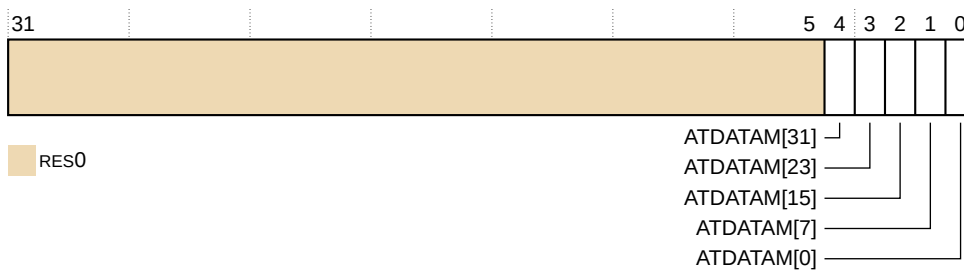Figure 30-42: TRCITATBDATA0 bit assignments

ATDATAM[31], Drives the ATDATAM[31] output.
[4]
ATDATAM[23], Drives the ATDATAM[23] output.
[3]
ATDATAM[15], Drives the ATDATAM[15] output.
[2]
ATDATAM[7], Drives the ATDATAM[7] output.
[1]
ATDATAM[0], Drives the ATDATAM[0] output.
[0]

Bit fields and details not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCITATBDATA0 register can be accessed through the internal memory-mapped interface and the external debug interface, offset 0xEEC.


30.46 TRCITCTRL, Trace Integration Mode Control register

TRCITCTRL controls whether the trace unit is in integration mode.

Bit field descriptions

The TRCITCTRL is a 32-bit RW management register that is reset to zero.

Figure 30-43: TRCITCTRL bit assignments

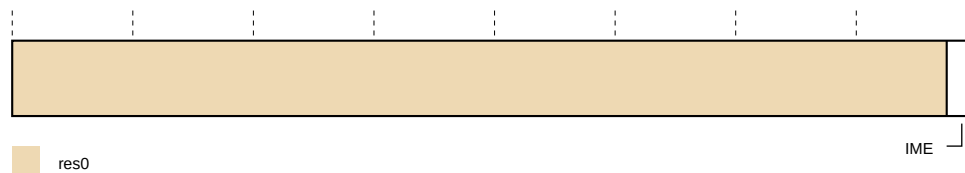

IME, [0]

Integration mode enable bit. The possible values are:

- | | |
|------------|---|
| 0b0 | The trace unit is not in integration mode. |
| 0b1 | The trace unit is in integration mode. This mode enables: <ul style="list-style-type: none"> • A debug agent to perform topology detection. • SoC test software to perform integration testing. |

Usage constraints

- Accessible only from the memory-mapped interface or from an external agent such as a debugger.

- If the IME bit changes from one to zero then Arm recommends that the trace unit is reset. Otherwise the trace unit might generate incorrect or corrupt trace and the trace unit resources might behave unexpectedly.

Bit fields and details not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCITCTRL register can be accessed through the internal memory-mapped interface and the external debug interface, offset 0x00.


30.47 TRCITMISCIN, Trace Integration Miscellaneous Input Register

TRCITMISCIN enables the values of signal inputs to be read when TRCITCTRL.IME is set.

Bit field descriptions

The TRCITMISCIN is a 32-bit register.

Figure 30-44: TRCITMISCIN bit assignments

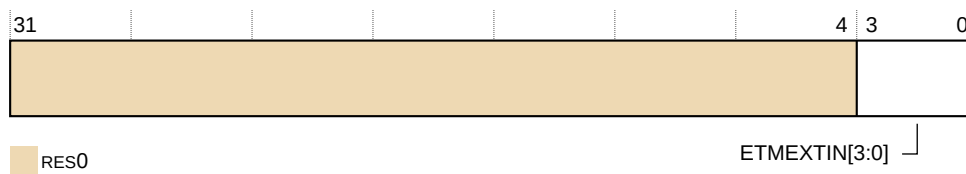

ETMEXTIN[3:0], [3:0]

Returns the value of the ETMEXTIN[3:0] inputs.

Bit fields and details not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCITMISCIN register can be accessed through the internal memory-mapped interface and the external debug interface, offset 0xEE0.

30.48 TRCITMISCOUT, Trace Integration Miscellaneous Outputs Register

TRCITMISCOUT controls signal outputs when TRCITCTRL.IME is set.

Bit field descriptions

The TRCITMISCOUT is a 32-bit register.

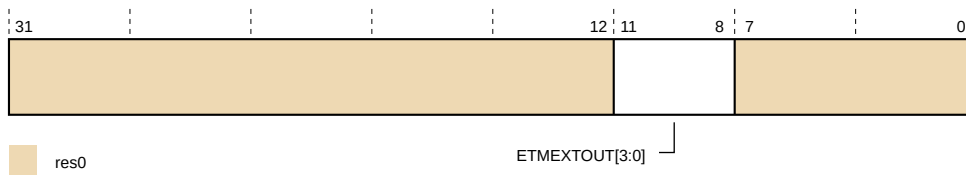Figure 30-45: TRCITMISCOUT bit assignments**ETMEXTOUT[3:0], [11:8]**

Drives the EXTOUT[3:0] outputs.

Bit fields and details not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCITMISCOUT register can be accessed through the internal memory-mapped interface and the external debug interface, offset 0xEDC.

30.49 TRCLAR, Software Lock Access Register

The TRCLAR controls access to registers using the memory-mapped interface, when PADDRDBG31 is LOW.

Bit field descriptions

The TRCLAR is a 32-bit register.

Figure 30-46: TRCLAR bit assignments**RAZ/WI, [31:0]**

Read-As-Zero, write ignore.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCLAR can be accessed through the external debug interface, offset 0xFB0.


30.50 TRCLSR, Software Lock Status Register

The TRCLSR determines whether the software lock is implemented, and indicates the current status of the software lock.

Bit field descriptions

The TRCLSR is a 32-bit register.

Figure 30-47: TRCLSR bit assignments



RAZ/WI, [31:0]

Read-As-Zero, write ignore.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCLSR can be accessed through the external debug interface, offset 0xFB4.


30.51 TRCOSLAR, OS Lock Access Register

The TRCOSLAR sets and clears the OS Lock, to lock out external debugger accesses to the ETM trace unit registers.

Bit field descriptions

The TRCOSLAR is a 32-bit register.

Figure 30-48: TRCOSLAR bit assignments

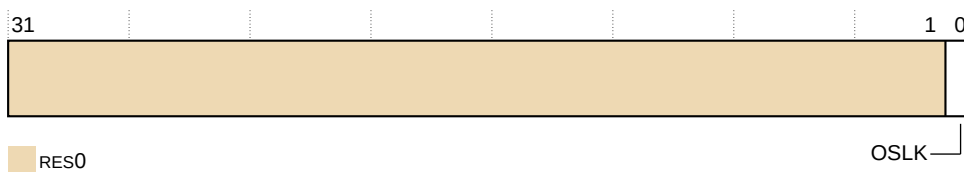

RES0, [31:1]

RES0 Reserved.

OSLK, [0]

OS Lock key value:

0	Unlock the OS Lock.
1	Lock the OS Lock.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCOSLAR can be accessed through the external debug interface, offset 0x300.


30.52 TRCOSLSR, OS Lock Status Register

The TRCOSLSR returns the status of the OS Lock.

Bit field descriptions

The TRCOSLSR is a 32-bit register.

Figure 30-49: TRCOSLSR bit assignments

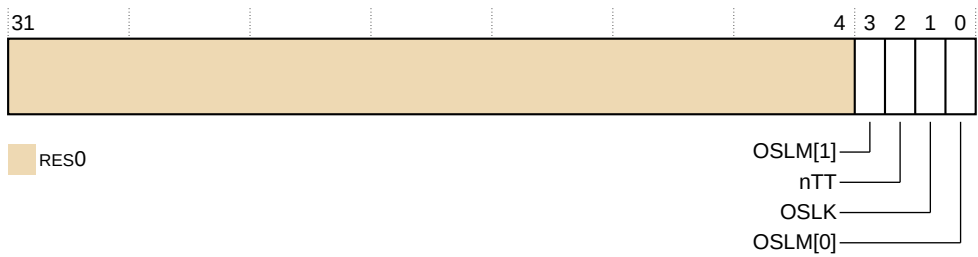

RES0, [31:4]

RES0	Reserved.
------	-----------

OSLM[1], [3]

OS Lock model [1] bit. This bit is combined with OSLM[0] to form a two-bit field that indicates the OS Lock model is implemented.

The value of this field is always 0b10, indicating that the OS Lock is implemented.

nTT, [2]

This bit is RAZ, that indicates that software must perform a 32-bit write to update the TRCOSLAR.

OSLK, [1]

OS Lock status bit:

0	OS Lock is unlocked.
1	OS Lock is locked.

OSLM[0], [0]

OS Lock model [0] bit. This bit is combined with OSLM[1] to form a two-bit field that indicates the OS Lock model is implemented.

The value of this field is always 0b10, indicating that the OS Lock is implemented.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCOSLSR can be accessed through the external debug interface, offset 0x304.


30.53 TRCPDCR, Power Down Control Register

The TRCPDCR request to the system power controller to keep the ETM trace unit powered up.

Bit field descriptions

The TRCPDCR is a 32-bit register.

Figure 30-50: TRCPDCR bit assignments

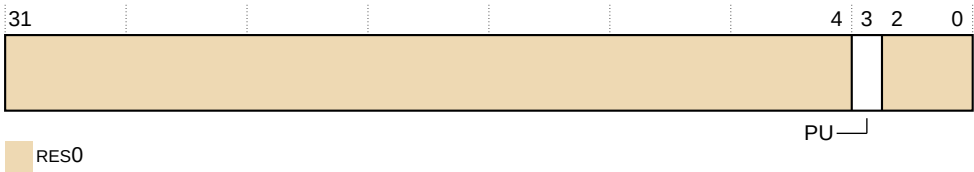

RES0, [31:4]

RES0	Reserved.
------	-----------

PU, [3]

Powerup request, to request that power to the ETM trace unit and access to the trace registers is maintained:

0	Power not requested.
1	Power requested.

This bit is reset to 0 on a trace unit reset.

RES0, [2:0]

RES0	Reserved.
------	-----------

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCPDCR can be accessed through the external debug interface, offset 0x310.


30.54 TRCPDSR, Power Down Status Register

The TRCPDSR indicates the power down status of the ETM trace unit.

Bit field descriptions

The TRCPDSR is a 32-bit register.

Figure 30-51: TRCPDSR bit assignments

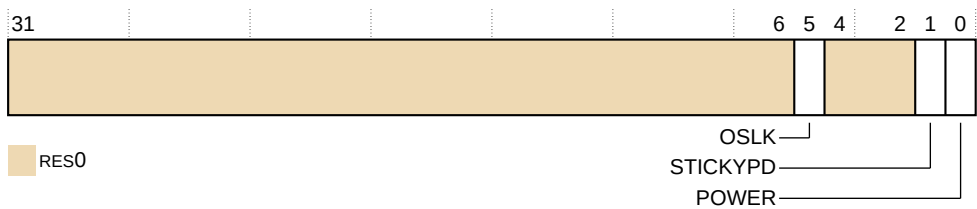

RES0, [31:6]

RES0 Reserved.

OSLK, [5]

OS lock status.

0	The OS Lock is unlocked.
1	The OS Lock is locked.

RES0, [4:2]

RES0 Reserved.

STICKYPD, [1]

Sticky power down state.

0	Trace register power has not been removed since the TRCPDSR was last read.
1	Trace register power has been removed since the TRCPDSR was last read.

This bit is set to 1 when power to the ETM trace unit registers is removed, to indicate that programming state has been lost. It is cleared after a read of the TRCPDSR.

POWER, [0]

Indicates the ETM trace unit is powered:

- | | |
|---|--|
| 0 | ETM trace unit is not powered. The trace registers are not accessible and they all return an error response. |
| 1 | ETM trace unit is powered. All registers are accessible. |

If a system implementation allows the ETM trace unit to be powered off independently of the Debug power domain, the system must handle accesses to the ETM trace unit appropriately.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCPDSR can be accessed through the external debug interface, offset 0x314.


30.55 TRCPIDR0, ETM Peripheral Identification Register 0

The TRCPIDR0 provides information to identify a trace component.

Bit field descriptions

The TRCPIDR0 is a 32-bit register.

Figure 30-52: TRCPIDR0 bit assignments

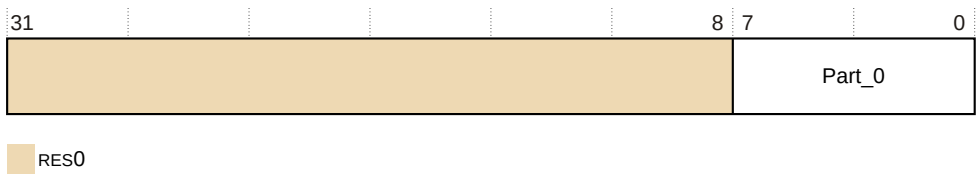

RES0, [31:8]

- | | |
|------|-----------|
| RES0 | Reserved. |
|------|-----------|

Part_0, [7:0]

- | | |
|------|---|
| 0x0D | Least significant byte of the ETM trace unit part number. |
|------|---|

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCPIDR0 can be accessed through the external debug interface, offset 0xFE0.


30.56 TRCPIDR1, ETM Peripheral Identification Register 1

The TRCPIDR1 provides information to identify a trace component.

Bit field descriptions

The TRCPIDR1 is a 32-bit register.

Figure 30-53: TRCPIDR1 bit assignments

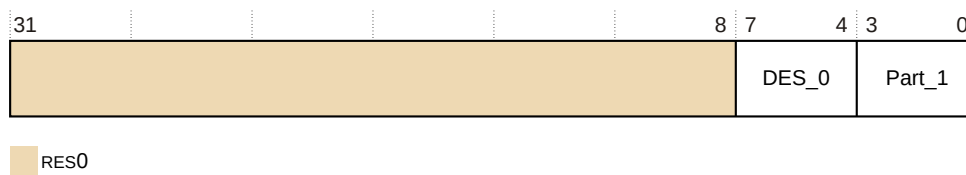

RES0, [31:8]

RES0 Reserved.

DES_0, [7:4]

0xB Arm Limited. This is bits[3:0] of JEP106 ID code.

Part_1, [3:0]

0xD Most significant four bits of the ETM trace unit part number.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCPIDR1 can be accessed through the external debug interface, offset 0xFE4.

30.57 TRCPIDR2, ETM Peripheral Identification Register 2

The TRCPIDR2 provides information to identify a trace component.

Bit field descriptions

The TRCPIDR2 is a 32-bit register.

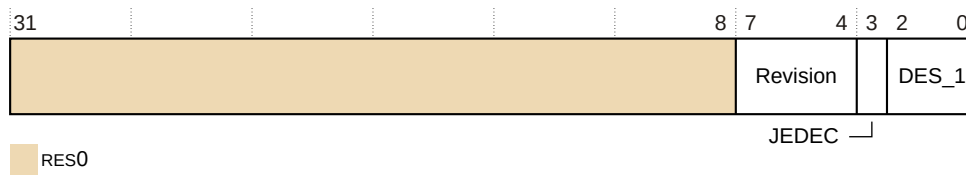Figure 30-54: TRCPIDR2 bit assignments**RES0, [31:8]**

RES0 Reserved.

Revision, [7:4]

0x2 r1p1.

JEDEC, [3]

0b1 **RES1.** Indicates a JEP106 identity code is used.

DES_1, [2:0]

0b011 Arm Limited. This is bits[6:4] of JEP106 ID code.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCPIDR2 can be accessed through the external debug interface, offset 0xFE8.

30.58 TRCPIDR3, ETM Peripheral Identification Register 3

The TRCPIDR3 provides information to identify a trace component.

Bit field descriptions

The TRCPIDR3 is a 32-bit register.

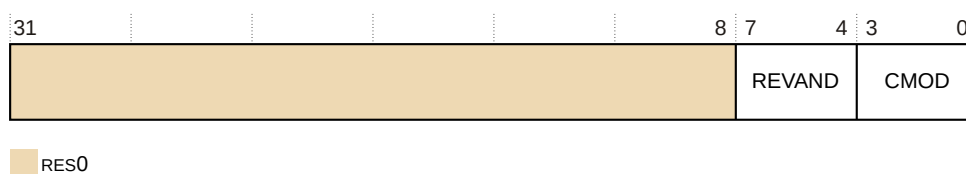Figure 30-55: TRCPIDR3 bit assignments

RES0, [31:8]

RES0 Reserved.

REVAND, [7:4]

0x0 Part minor revision.

CMOD, [3:0]

0x0 Not customer modified.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCPIDR3 can be accessed through the external debug interface, offset 0xFEC.


30.59 TRCPIDR4, ETM Peripheral Identification Register 4

The TRCPIDR4 provides information to identify a trace component.

Bit field descriptions

The TRCPIDR4 is a 32-bit register.

Figure 30-56: TRCPIDR4 bit assignments

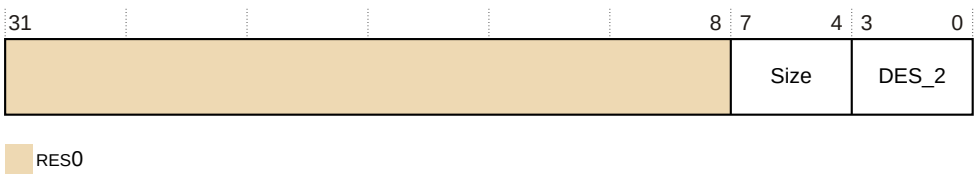

RES0, [31:8]

RES0 Reserved.

Size, [7:4]

0x0 Size of the component. Log2 the number of 4KB pages from the start of the component to the end of the component ID registers.

DES_2, [3:0]

0x4 Arm Limited. This is bits[3:0] of the JEP106 continuation code.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCPIDR4 can be accessed through the external debug interface, offset 0xFD0.

30.60 TRCPIDRn, ETM Peripheral Identification Registers 5-7

No information is held in the Peripheral ID5, Peripheral ID6, and Peripheral ID7 Registers.

They are reserved for future use and are **RES0**.


30.61 TRCPRGCTLR, Programming Control Register

The TRCPRGCTLR enables the ETM trace unit.

Bit field descriptions

The TRCPRGCTLR is a 32-bit register.

Figure 30-57: TRCPRGCTLR bit assignments

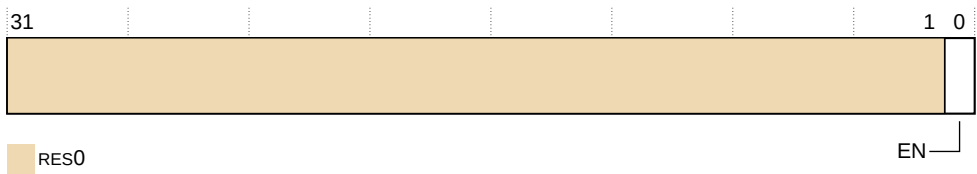

RES0, [31:1]

RES0	Reserved.
------	-----------

EN, [0]

Trace program enable:

- | | |
|---|--|
| 0 | The ETM trace unit interface in the core is disabled, and clocks are enabled only when necessary to process APB accesses, or drain any already generated trace. This is the reset value. |
| 1 | The ETM trace unit interface in the core is enabled, and clocks are enabled. Writes to most trace registers are IGNORED . |

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCPRGCTLR can be accessed through the external debug interface, offset 0x004.


30.62 TRCRSCTLRn, Resource Selection Control Registers 2-15

The TRCRSCTLRn registers control the trace resources. There are eight resource pairs, the first pair is predefined as {0,1,pair=0} and having reserved select registers. This leaves seven pairs to be implemented as programmable selectors.

Bit field descriptions

The TRCRSCTLRn registers are 32-bit registers.

Figure 30-58: TRCRSCTLRn bit assignments

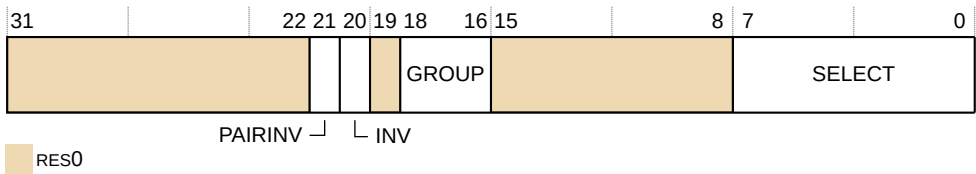

RES0, [31:22]

RES0 Reserved

PAIRINV, [21]

Inverts the result of a combined pair of resources.

This bit is implemented only on the lower register for a pair of resource selectors.

INV, [20]

Inverts the selected resources:

0	Resource is not inverted.
1	Resource is inverted.

RES0, [19]

RES0 Reserved

GROUP, [18:16]

Selects a group of resources. See the *Arm® ETM Architecture Specification, ETMv4* for more information.

RES0, [15:8]

RES0 Reserved

SELECT, [7:0]

Selects one or more resources from the required group. One bit is provided for each resource from the group.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#) .

The TRCRSCTLRn registers can be accessed through the external debug interface, offset 0x208–0x023C.


30.63 TRCSEQEVRn, Sequencer State Transition Control Registers 0-2

The TRCSEQEVRn registers define the sequencer transitions that progress to the next state or backwards to the previous state. The ETM trace unit implements a sequencer state machine with up to four states.

Bit field descriptions

The TRCSEQEVRn registers are 32-bit registers.

Figure 30-59: TRCSEQEVRn bit assignments

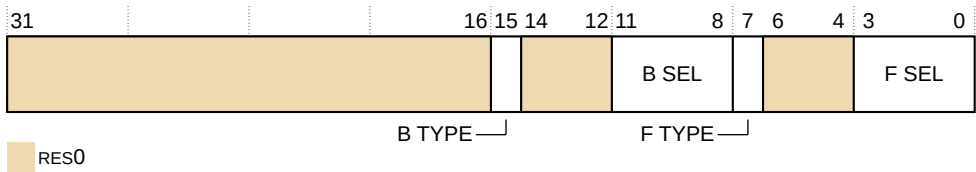

RES0, [31:16]

RES0 Reserved

B TYPE, [15]

Selects the resource type to move backwards to this state from the next state:

- | | |
|---|--------------------------------|
| 0 | Single selected resource |
| 1 | Boolean combined resource pair |

RES0, [14:12]

RES0	Reserved
-------------	----------

B SEL, [11:8]

Selects the resource number, based on the value of B TYPE:

When B TYPE is 0, selects a single selected resource from 0-15 defined by bits[3:0].

When B TYPE is 1, selects a Boolean combined resource pair from 0-7 defined by bits[2:0].

F TYPE, [7]

Selects the resource type to move forwards from this state to the next state:

0	Single selected resource
1	Boolean combined resource pair

RES0, [6:4]

RES0	Reserved
-------------	----------

F SEL, [3:0]

Selects the resource number, based on the value of F TYPE:

When F TYPE is 0, selects a single selected resource from 0-15 defined by bits[3:0].

When F TYPE is 1, selects a Boolean combined resource pair from 0-7 defined by bits[2:0].

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCSEQEVRn registers can be accessed through the external debug interface, offsets:

TRCSEQEVR0

0x100

TRCSEQEVR1

0x104

TRCSEQEVR2


0x108

30.64 TRCSEQRSTEVR, Sequencer Reset Control Register

The TRCSEQRSTEVR resets the sequencer to state 0.

Bit field descriptions

The TRCSEQRSTEVR is a 32-bit register.

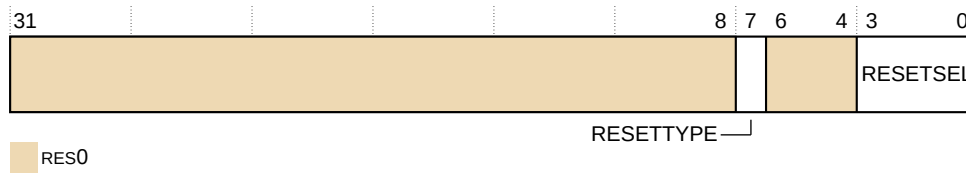Figure 30-60: TRCSEQRSTEVr bit assignments**RES0, [31:8]**

RES0	Reserved.
-------------	-----------

RESETTYPE, [7]

Selects the resource type to move back to state 0:

0	Single selected resource.
1	Boolean combined resource pair.

RES0, [6:4]

RES0	Reserved.
-------------	-----------

RESETSEL, [3:0]

Selects the resource number, based on the value of RESETTYPE:

When RESETTYPE is 0, selects a single selected resource from 0-15 defined by bits[3:0].

When RESETTYPE is 1, selects a Boolean combined resource pair from 0-7 defined by bits[2:0].

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCSEQRSTEVr can be accessed through the external debug interface, offset 0x118.

30.65 TRCSEQSTR, Sequencer State Register

The TRCSEQSTR holds the value of the current state of the sequencer.

Bit field descriptions

The TRCSEQSTR is a 32-bit register.

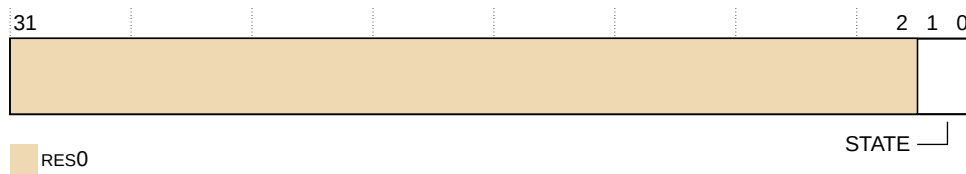Figure 30-61: TRCSEQSTR bit assignments**RES0, [31:2]**

RES0 Reserved.

STATE, [1:0]

Current sequencer state:

0b00	State 0.
0b01	State 1.
0b10	State 2.
0b11	State 3.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCSEQSTR can be accessed through the external debug interface, offset 0x11C.

30.66 TRCSSCCR0, Single-Shot Comparator Control Register 0

The TRCSSCCR0 controls the single-shot comparator.

Bit field descriptions

The TRCSSCCR0 is a 32-bit register.

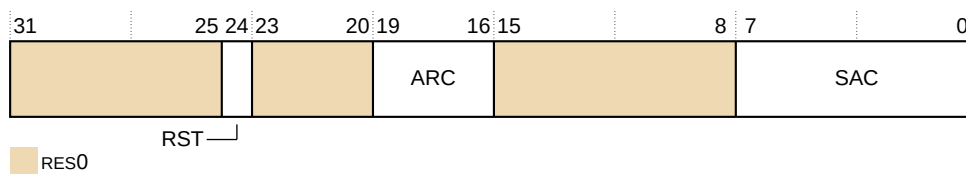Figure 30-62: TRCSSCCR0 bit assignments

RES0, [31:25]

RES0	Reserved.
-------------	-----------

RST, [24]

Enables the single-shot comparator resource to be reset when it occurs, to enable another comparator match to be detected:

1	Reset enabled. Multiple matches can occur.
----------	--

RES0, [23:20]

RES0	Reserved.
-------------	-----------

ARC, [19:16]

Selects one or more address range comparators for single-shot control.

One bit is provided for each implemented address range comparator.

RES0, [15:8]

RES0	Reserved.
-------------	-----------

SAC, [7:0]

Selects one or more single address comparators for single-shot control.

One bit is provided for each implemented single address comparator.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCSSCCR0 can be accessed through the external debug interface, offset 0x280.

30.67 TRCSSCSR0, Single-Shot Comparator Status Register 0

The TRCSSCSR0 indicates the status of the single-shot comparator. TRCSSCSR0 is sensitive to instruction addresses.

Bit field descriptions

The TRCSSCSR0 is a 32-bit register.

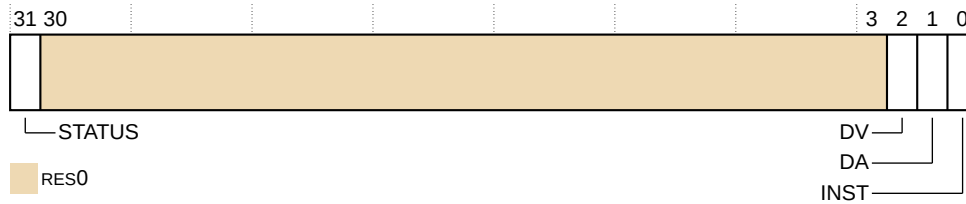Figure 30-63: TRCSSCSR0 bit assignments**STATUS, [31]**

Single-shot status. This indicates whether any of the selected comparators have matched:

- | | |
|---|-----------------------------------|
| 0 | Match has not occurred. |
| 1 | Match has occurred at least once. |

When programming the ETM trace unit, if TRCSSCCRn.RST is b0, the STATUS bit must be explicitly written to 0 to enable this single-shot comparator control.

RES0, [30:3]

- | | |
|------|-----------|
| RES0 | Reserved. |
|------|-----------|

DV, [2]

Data value comparator support:

- | | |
|---|---|
| 0 | Single-shot data value comparisons not supported. |
|---|---|

DA, [1]

Data address comparator support:

- | | |
|---|---|
| 0 | Single-shot data address comparisons not supported. |
|---|---|

INST, [0]

Instruction address comparator support:

- | | |
|---|--|
| 1 | Single-shot instruction address comparisons supported. |
|---|--|

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCSSCSR0 can be accessed through the external debug interface, offset 0x2A0.


30.68 TRCSTATR, Status Register

The TRCSTATR indicates the ETM trace unit status.

Bit field descriptions

The TRCSTATR is a 32-bit register.

Figure 30-64: TRCSTATR bit assignments

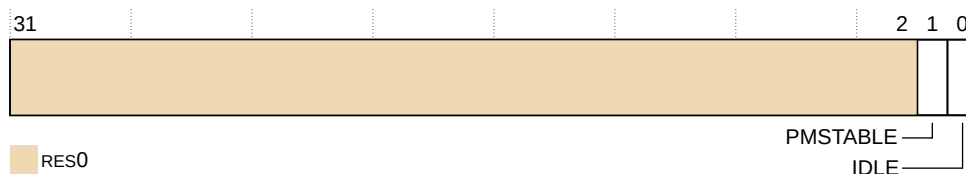

RES0, [31:2]

RES0 Reserved.

PMSTABLE, [1]

Indicates whether the ETM trace unit registers are stable and can be read:

0	The programmers model is not stable.
1	The programmers model is stable.

IDLE, [0]

Idle status:

0	The ETM trace unit is not idle.
1	The ETM trace unit is idle.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCSTATR can be accessed through the external debug interface, offset 0x00C.

30.69 TRCSYNCP, Synchronization Period Register

The TRCSYNCP controls how often periodic trace synchronization requests occur.

Bit field descriptions

The TRCSYNCP is a 32-bit register.

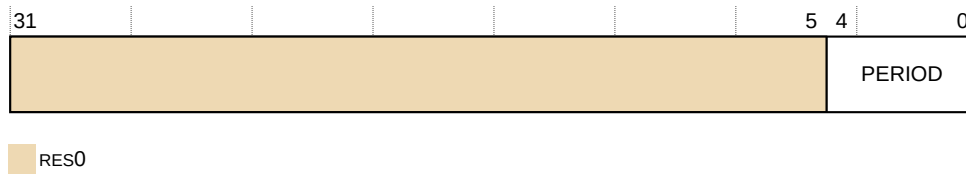Figure 30-65: TRCSYNCPR bit assignments**RES0, [31:5]**

RES0 Reserved.

PERIOD, [4:0]

Defines the number of bytes of trace between synchronization requests as a total of the number of bytes generated by both the instruction and data streams. The number of bytes is 2^N where N is the value of this field:

- A value of zero disables these periodic synchronization requests, but does not disable other synchronization requests.
- The minimum value that can be programmed, other than zero, is 8, providing a minimum synchronization period of 256 bytes.
- The maximum value is 20, providing a maximum synchronization period of 2^{20} bytes.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCSYNCPR can be accessed through the external debug interface, offset 0x034.

30.70 TRCTRACEIDR, Trace ID Register

The TRCTRACEIDR sets the trace ID for instruction trace.

Bit field descriptions

The TRCTRACEIDR is a 32-bit register.

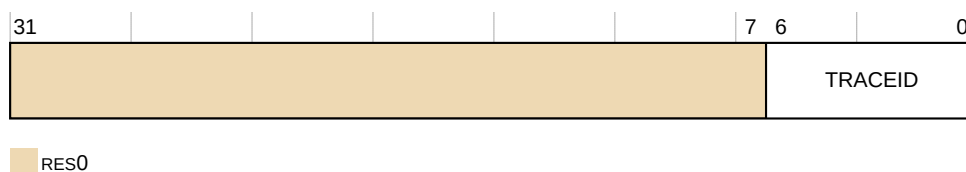Figure 30-66: TRCTRACEIDR bit Assignments

RES0, [31:7]

RES0	Reserved.
------	-----------

TRACEID, [6:0]

Trace ID value. When only instruction tracing is enabled, this provides the trace ID.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCTRACEIDR can be accessed through the external debug interface, offset 0x040.


30.71 TRCTSCTLR, Global Timestamp Control Register

The TRCTSCTLR controls the insertion of global timestamps in the trace streams. When the selected event is triggered, the trace unit inserts a global timestamp into the trace streams. The event is selected from one of the Resource Selectors.

Bit field descriptions

The TRCTSCTLR is a 32-bit register.

Figure 30-67: TRCTSCTLR bit assignments

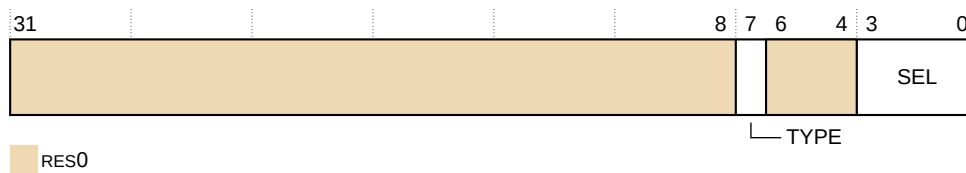

RES0, [31:8]

RES0 Reserved

TYPE, [7]

Single or combined resource selector.

RES0, [6:4]

RES0 Reserved

SEL, [3:0]

Identifies the resource selector to use.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCTSCTLR can be accessed through the external debug interface, offset 0x030.


30.72 TRCVICTLR, ViewInst Main Control Register

The TRCVICTLR controls instruction trace filtering.

Bit field descriptions

The TRCVICTLR is a 32-bit register.

Figure 30-68: TRCVICTLR bit assignments

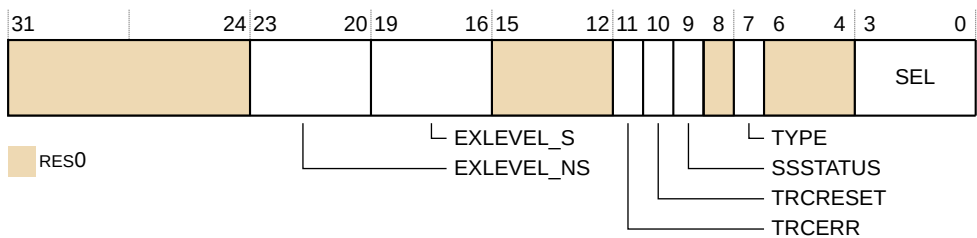

RES0, [31:24]

RES0	Reserved.
------	-----------

EXLEVEL_NS, [23:20]

In Non-secure state, each bit controls whether instruction tracing is enabled for the corresponding Exception level:

- | | |
|---|---|
| 0 | Trace unit generates instruction trace, in Non-secure state, for Exception level <i>n</i> . |
| 1 | Trace unit does not generate instruction trace, in Non-secure state, for Exception level <i>n</i> . |

The Exception levels are:

- | | |
|---------|---|
| Bit[20] | Exception level 0. |
| Bit[21] | Exception level 1. |
| Bit[22] | Exception level 2. |
| Bit[23] | RAZ/WI. Instruction tracing is not implemented for Exception level 3. |

EXLEVEL_S, [19:16]

In Secure state, each bit controls whether instruction tracing is enabled for the corresponding Exception level:

- | | |
|---|---|
| 0 | Trace unit generates instruction trace, in Secure state, for Exception level <i>n</i> . |
|---|---|

- 1** Trace unit does not generate instruction trace, in Secure state, for Exception level *n*.

The Exception levels are:

- Bit[16]** Exception level 0.
Bit[17] Exception level 1.
Bit[18] RAZ/WI. Instruction tracing is not implemented for Exception level 2.
Bit[19] Exception level 3.

RES0, [15:12]

- RES0** Reserved.

TRCERR, [11]

Selects whether a system error exception must always be traced:

- 0** System error exception is traced only if the instruction or exception immediately before the system error exception is traced.
1 System error exception is always traced regardless of the value of ViewInst.

TRCRESET, [10]

Selects whether a reset exception must always be traced:

- 0** Reset exception is traced only if the instruction or exception immediately before the reset exception is traced.
1 Reset exception is always traced regardless of the value of ViewInst.

SSSTATUS, [9]

Indicates the current status of the start/stop logic:

- 0** Start/stop logic is in the stopped state.
1 Start/stop logic is in the started state.

RES0, [8]

- RES0** Reserved.

TYPE, [7]

Selects the resource type for the viewinst event:

- 0** Single selected resource.
1 Boolean combined resource pair.

RES0, [6:4]

- RES0** Reserved.

SEL, [3:0]

Selects the resource number to use for the viewinst event, based on the value of TYPE:

When TYPE is 0, selects a single selected resource from 0-15 defined by bits[3:0].

When TYPE is 1, selects a Boolean combined resource pair from 0-7 defined by bits[2:0].

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCVICTLR can be accessed through the external debug interface, offset 0x080.


30.73 TRCVIIECTLR, ViewInst Include-Exclude Control Register

The TRCVIIECTLR defines the address range comparators that control the ViewInst include/exclude control.

Bit field descriptions

The TRCVIIECTLR is a 32-bit register.

Figure 30-69: TRCVIIECTLR bit assignments

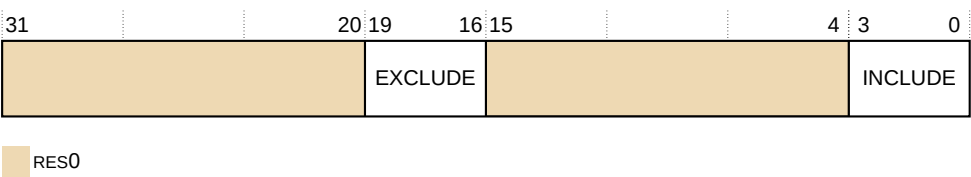

RES0, [31:20]

RES0 Reserved.

EXCLUDE, [19:16]

Defines the address range comparators for ViewInst exclude control. One bit is provided for each implemented Address Range Comparator.

RES0, [15:4]

RES0 Reserved.

INCLUDE, [3:0]

Defines the address range comparators for ViewInst include control.

Selecting no include comparators indicates that all instructions must be included. The exclude control indicates which ranges must be excluded.

One bit is provided for each implemented Address Range Comparator.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCVIIECTLR can be accessed through the external debug interface, offset 0x084.


30.74 TRCVISSCTLR, ViewInst Start-Stop Control Register

The TRCVISSCTLR defines the single address comparators that control the ViewInst Start/Stop logic.

Bit field descriptions

The TRCVISSCTLR is a 32-bit register.

Figure 30-70: TRCVISSCTLR bit assignments

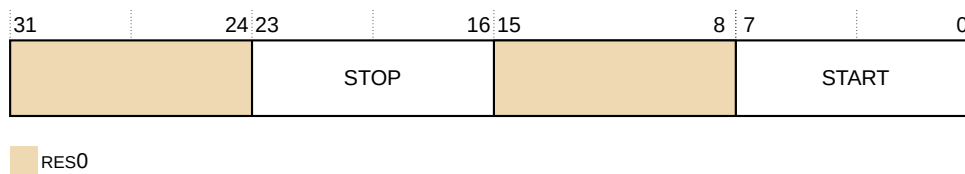

RES0, [31:24]

RES0 Reserved.

STOP, [23:16]

Defines the single address comparators to stop trace with the ViewInst Start/Stop control.

One bit is provided for each implemented single address comparator.

RES0, [15:8]

RES0 Reserved.

START, [7:0]

Defines the single address comparators to start trace with the ViewInst Start/Stop control.

One bit is provided for each implemented single address comparator.

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).


The TRCVISSCTLR can be accessed through the external debug interface, offset 0x088.

30.75 TRCVMIDCVR0, VMID Comparator Value Register 0

The TRCVMIDCVR0 contains a VMID value.

Bit field descriptions

Figure 30-71: TRCVMIDCVR0 bit assignments

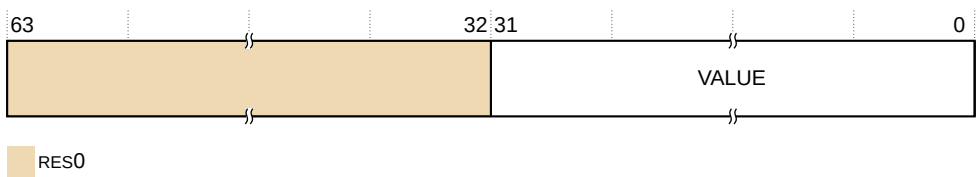

RES0, [63:32]

RES0 Reserved.

VALUE, [31:0]

The VMID value.

The TRCVMIDCVR0 can be accessed through the internal memory-mapped interface and the external debug interface, offset 0x640.

Usage constraints

Accepts writes only when the trace unit is disabled.

Configurations


Available in all configurations.

30.76 TRCVMIDCCTL0, Virtual context identifier Comparator Control Register 0

The TRCVMIDCCTL0 contains the Virtual Machine Identifier mask value for the TRCVMIDCVR0 register.

Bit field descriptions

The TRCVMIDCCTL0 is a 32-bit register.

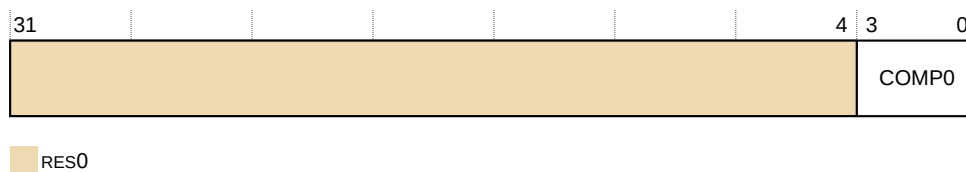Figure 30-72: TRCVMIDCCTL0 bit assignments**RES0, [31:4]**

RES0 Reserved.

COMP0, [3:0]

Controls the mask value that the trace unit applies to TRCVMIDCVR0. Each bit in this field corresponds to a byte in TRCVMIDCVR0. When a bit is:

- | | |
|----------|--|
| 0 | The trace unit includes the relevant byte in TRCVMIDCVR0 when it performs the Virtual context ID comparison. |
| 1 | The trace unit ignores the relevant byte in TRCVMIDCVR0 when it performs the Virtual context ID comparison. |

Bit fields and details that are not provided in this description are architecturally defined. See the [Arm® Embedded Trace Macrocell Architecture Specification ETMv4](#).

The TRCVMIDCCTL0 can be accessed through the external debug interface, offset 0x688.

Appendix A Core AArch32 unpredictable behaviors

This appendix describes the cases in which the Cortex®-A77 core implementation diverges from the preferred behavior that is described in Armv8 AArch32 **UNPREDICTABLE** behaviors.

A.1 Use of R15 by Instruction

If the use of R15 as a base register for a load or store is **UNPREDICTABLE**, the value that is used by the load or store using R15 as a base register is the *Program Counter* (PC) with its usual offset and, in the case of T32 instructions, with the forced word alignment. In this case, if the instruction specifies write-back, then the load or store is performed without write-back.

The Cortex®-A77 core does not implement a *Read 0* or *Ignore Write* policy on **UNPREDICTABLE** use of R15 by instruction. Instead, the Cortex®-A77 core takes an **UNDEFINED** exception trap.

A.2 Load/Store accesses crossing page boundaries

The Cortex®-A77 core implements a set of behaviors for load or store accesses that cross page boundaries.

Crossing a page boundary with different memory types or Shareability attributes

The [Arm® Architecture Reference Manual for A-profile architecture](#), states that a memory access from a load or store instruction that crosses a page boundary to a memory location that has a different memory type or Shareability attribute results in **CONSTRAINED UNPREDICTABLE** behavior.

Crossing a 4KB boundary with a Device access

The [Arm® Architecture Reference Manual for A-profile architecture](#), states that a memory access from a load or store instruction to Device memory that crosses a 4KB boundary results in **CONSTRAINED UNPREDICTABLE** behavior.

Implementation (for both page boundary specifications)

For an access that crosses a page boundary, the Cortex®-A77 core implements the following behaviors:

- Store crossing a page boundary:
 - No alignment fault.
 - The access is split into two stores.
 - Each store uses the memory type and Shareability attributes that are associated with its own address.
- Load crossing a page boundary (Device to Device and Normal to Normal):

- No alignment fault.
- The access is split into two loads.
- Each load uses the memory type and Shareability attributes that are associated with its own address.
- Load crossing a page boundary (Device to Normal and Normal to Device):
 - The instruction will generate an alignment fault.

A.3 Armv8 Debug unpredictable behaviors

This section describes the behavior that the Cortex®-A77 core implements when:

- A topic has multiple options.
- The behavior differs from either or both of the Options and Preferences behaviors.



This section does not describe the behavior when a topic only has a single option and the core implements the preferred behavior.

Table A-1: Armv8 Debug *unpredictable* behaviors

Scenario	Behavior
A32 BKPT instruction with condition code not AL	The core implements the following preferred option: <ul style="list-style-type: none"> • Executed unconditionally.
Address match breakpoint match only on second halfword of an instruction	The core generates a breakpoint on the instruction if CPSR.IL=0. In the case of CPSR.IL=1, the core does not generate a breakpoint exception.
Address matching breakpoint on A32 instruction with DBGBCRn.BAS=1100	The core implements the following option: <ul style="list-style-type: none"> • Does match if CPSR.IL=0.
Address match breakpoint match on T32 instruction at DBGBCRn+2 with DBGBCRn.BAS=1111	The core implements the following option: <ul style="list-style-type: none"> • Does match.
Link to non-existent breakpoint or breakpoint that is not context-aware	The core implements the following option: <ul style="list-style-type: none"> • No Breakpoint or Watchpoint debug event is generated, and the LBN field of the <i>linker</i> reads UNKNOWN.
DBGWCRn_EL1.MASK!=00000 and DBGWCRn_EL1.BAS!=11111111	The core behaves as indicated in the sole Preference: <ul style="list-style-type: none"> • DBGWCRn_EL1.BAS is IGNORED and treated as if 0x11111111.
Address match breakpoint with DBGBCRn_EL1.BAS=0000	The core implements the following option: <ul style="list-style-type: none"> • As if disabled.
DBGWCRn_EL1.BAS specifies a non-contiguous set of bytes within a double-word	The core implements the following option: <ul style="list-style-type: none"> • A Watchpoint debug event is generated for each byte.
A32 HLT instruction with condition code not AL	The core implements the following option: <ul style="list-style-type: none"> • Executed unconditionally.

Scenario	Behavior
Execute instruction at a given EL when the corresponding EDECCR bit is 1 and Halting is allowed	The core behaves as follows: <ul style="list-style-type: none"> Generates debug event and Halt no later than the instruction following the next <i>Context Synchronization operation</i> (CSO) excluding ISB instruction.
$H > N$ or $H = 0$ at Non-secure EL1 and EL0, including value read from PMCR_ELO.N	The core implements: <ul style="list-style-type: none"> A simple implementation where all of HPMN[4:0] are implemented, and In Non-secure EL1 and EL0: <ul style="list-style-type: none"> If $H > N$ then $M = N$. If $H = 0$ then $M = 0$.
$H > N$ or $H = 0$: value read back in MDCR_EL2.HPMN	The core implements: <ul style="list-style-type: none"> A simple implementation where all of HPMN[4:0] are implemented and for reads of MDCR_EL2.HPMN, return H.
$P \geq M$ and $P \neq 31$: reads and writes of PMXEVTYPER_ELO and PMXEVCNTR_ELO	The core implements: <ul style="list-style-type: none"> A simple implementation where all of SEL[4:0] are implemented, and if $P \geq M$ and $P \neq 31$ then the register is RES0.
$P \geq M$ and $P \neq 31$: value read in PMSELR_ELO.SEL	The core implements: <ul style="list-style-type: none"> A simple implementation where all of SEL[4:0] are implemented, and if $P \geq M$ and $P \neq 31$ then the register is RES0.
$P = 31$: reads and writes of PMXEVCNTR_ELO	The core implements: <ul style="list-style-type: none"> RES0.
$n \geq M$: Direct access to PMEVCNTRn_ELO and PMEVTYPERn_ELO	The core implements: <ul style="list-style-type: none"> If $n \geq N$, then the instruction is <i>unallocated</i>. Otherwise if $n \geq M$, then the register is RES0.
Exiting Debug state while instruction issued through EDITR is in flight	The core implements the following option: <ul style="list-style-type: none"> The instruction completes in Debug state before executing the restart.
Using memory-access mode with a non-word-aligned address	The core behaves as indicated in the sole Preference: <ul style="list-style-type: none"> Does unaligned accesses, faulting if these are not permitted for the memory type.
Access to memory-mapped registers mapped to Normal memory	The core behaves as indicated in the sole Preference: <ul style="list-style-type: none"> The access is generated, and accesses might be repeated, gathered, split or resized, in accordance with the rules for Normal memory, meaning the effect is UNPREDICTABLE.
Not word-sized accesses or (AArch64 only) doubleword-sized accesses >	The core behaves as indicated in the sole Preference: <ul style="list-style-type: none"> Reads occur and return UNKNOWN data. Writes set the accessed register(s) to UNKNOWN.
External debug write to register that is being reset	The core behaves as indicated in the sole Preference: <ul style="list-style-type: none"> Takes reset value.

Scenario	Behavior
Accessing reserved Debug registers	<p>The core deviates from preferred behavior because the hardware cost to decode some of these addresses in Debug power domain is significantly high.</p> <p>The actual behavior is:</p> <ol style="list-style-type: none"> For reserved Debug registers in the address range 0x000-0xCFC and Performance Monitors registers in the address range 0x000, the response is either CONSTRAINED UNPREDICTABLE Error or res0 when any of the following errors occurs: <ul style="list-style-type: none"> Off <p>The Core power domain is either completely off or in a low-power state where the Core power domain registers cannot be accessed.</p> DLK <p><code>DoubleLockStatus()</code> is TRUE and OS double-lock is locked (EDPRSR.DLK is 1).</p> OSLK <p>OS lock is locked (OSLSR_EL1.OSLK is 1).</p> For reserved Debug registers in the address ranges 0x400-0x4FC and 0x800-0x8FC, the response is CONSTRAINED UNPREDICTABLE Error or RES0 when the conditions in 1 on page 492 do not apply and the following error occurs: <ul style="list-style-type: none"> EDAD <p><code>AllowExternalDebugAccess()</code> is FALSE. External debug access is disabled.</p> For reserved Performance Monitor registers in the address ranges 0x000-0x0FC and 0x400-0x47C, the response is either CONSTRAINED UNPREDICTABLE Error, or RES0 when the conditions in 1 on page 492 and 2 on page 492 do not apply, and the following error occurs: <ul style="list-style-type: none"> EPMAD <p><code>AllowExternalPMUAccess()</code> is FALSE. External Performance Monitors access is disabled.</p>
Clearing the <i>clear-after-read</i> EDPRSR bits when Core power domain is on, and <code>DoubleLockStatus()</code> is TRUE	<p>The core behaves as indicated in the sole Preference:</p> <ul style="list-style-type: none"> Bits are not cleared to zero.

A.4 Other UNPREDICTABLE behaviors

This section describes other **UNPREDICTABLE** behaviors.

Table A-2: Other UNPREDICTABLE behaviors

Scenario	Description
CSSELR indicates a cache that is not implemented.	<p>If CSSELR indicates a cache that is not implemented, then on a read of the CCSIDR the behavior is CONSTRAINED UNPREDICTABLE, and can be one of the following:</p> <ul style="list-style-type: none"> The CCSIDR read is treated as NOP. The CCSIDR read is UNDEFINED. The CCSIDR read returns an UNKNOWN value (preferred).

Scenario	Description
HDCR.HPMN is set to 0, or to a value larger than PMCR.N.	<p>If HDCR.HPMN is set to 0, or to a value larger than PMCR.N, then the behavior in Non-secure EL0 and EL1 is CONSTRAINED UNPREDICTABLE, and one of the following must happen:</p> <ul style="list-style-type: none"> • The number of counters accessible is an UNKNOWN nonzero value less than PMCR.N. • There is no access to any counters. <p>For reads of HDCR.HPMN by EL2 or higher, if this field is set to 0 or to a value larger than PMCR.N, the core must return a CONSTRAINED UNPREDICTABLE value that is one of:</p> <ul style="list-style-type: none"> • PMCR.N. • The value that was written to HDCR.HPMN. • (The value that was written to HDCR.HPMN) modulo 2h, where h is the smallest number of bits required for a value in the range 0 to PMCR.N.
CRC32 or CRC32C instruction with <code>size==64</code> .	On read of the instruction, the behavior is CONSTRAINED UNPREDICTABLE , and the instruction executes with the additional decode: <code>size==32</code> .
CRC32 or CRC32C instruction with <code>cond!=1110</code> in the A1 encoding.	<p>The core implements the following option:</p> <ul style="list-style-type: none"> • Executed unconditionally.

Appendix B Revisions

This appendix describes the technical changes between released issues of this document.

B.1 Revisions

This appendix describes the technical changes between released issues of this document.

Table B-1: Issue 0000-01

Change	Location
First Confidential release for r0p0	-

Table B-2: Differences between Issue 0000-01 and Issue 0100-00

Change	Location
First Confidential release for r1p0	-
Editorial changes	Throughout document
Added support for PSTATE SSBS in the Arm®v8.5-A extension	2.1 About the core on page 23
Updated the Core bus width to include dual 256-bit wide CHI interface	2.3 Implementation options on page 24
Added support for PSTATE SSBS in the Arm®v8.5-A extension	2.4 Supported standards and specifications on page 25
Updated product revision	2.7 Product revisions on page 27 13.93 MIDR_EL1, Main ID Register, EL1 on page 235 23.10 EDPIDR2, External Debug Peripheral Identification Register 2 on page 361 26.9 PMPIDR2, Performance Monitors Peripheral Identification Register 2 on page 395 30.30 TRCIDR1, ID Register 1 on page 446 30.31 TRCIDR2, ID Register 2 on page 447 30.57 TRCPIDR2, ETM Peripheral Identification Register 2 on page 469
Added a Note for the asynchronous bridges	3.1 Components on page 29
Updated power domains	5.3 Power domains on page 36
Added ID_AA64PFR1_EL1	13.4 AArch64 registers by functional group on page 101 13.71 ID_AA64PFR1_EL1, AArch64 Processor Feature Register 1, EL1 on page 199
Added L2_PF_DWNG_DIS [44] and TLD_PRED_AGGR [27]	13.32 CPUECTLR_EL1, CPU Extended Control Register, EL1 on page 143
Updated configurations	13.41 CSSELR_EL1, Cache Size Selection Register, EL1 on page 166

Change	Location
Added SSBS	13.88 ID_PFR2_EL1, AArch32 Processor Feature Register 2, EL1 on page 230
Added DSSBS	13.99 SCTL_R_EL1, System Control Register, EL1 on page 242 13.100 SCTL_R_EL2, System Control Register, EL2 on page 243 13.101 SCTL_R_EL3, System Control Register, EL3 on page 244
Updated bit field description for SERR [4:0]	14.10 ERROSTATUS, Error Record Primary Status Register on page 272
Changed event 4	19.3 AMU counters on page 333
Added a note to Table C3-1	19.4 AMU events on page 333

Table B-3: Differences between Issue 0100-00 and Issue 0101-00

Change	Location
First Non-Confidential release for r1p1	-
Editorial changes	Throughout document
Added support for <i>Page-Based Hardware Attributes</i> (PBHA)	2.2 Features on page 24 6.7 Page-based hardware attributes on page 53 7.6.1 Encoding for L1 instruction cache tag, L1 instruction cache data, L1 BTB, L1 GHB, L1 BIM, L1 TLB instruction, and L0 macro-op cache data on page 63 7.6.2 Encoding for L1 data cache tag, L1 data cache data, and L1 TLB data on page 68 7.6.3 Encoding for the L2 unified cache on page 72
Updated error injection	9.7 Error injection on page 86
Updated the instruction encoding for CPUACTLR2_EL1 and CPUACTLR3_EL1	13.29 CPUACTLR2_EL1, CPU Auxiliary Control Register 2, EL1 on page 138 13.30 CPUACTLR3_EL1, CPU Auxiliary Control Register 3, EL1 on page 140
Updated the reset value for CPUECTLR_EL1 and the following bit descriptions: <ul style="list-style-type: none"> HPA_CAP, [48] CA_UCLEAN_EVICT_EN, [35] CA_EVICT_DIS, [34] TLD_PRED_AGGR, [27] RPF_MODE, [9,6] EXTLLC, [0] 	13.32 CPUECTLR_EL1, CPU Extended Control Register, EL1 on page 143

Change	Location
Updated product revision	2.7 Product revisions on page 27 13.93 MIDR_EL1, Main ID Register, EL1 on page 235 23.10 EDPIDR2, External Debug Peripheral Identification Register 2 on page 361 26.9 PMPIDR2, Performance Monitors Peripheral Identification Register 2 on page 395 30.30 TRCIDR1, ID Register 1 on page 446 30.57 TRCPIDR2, ETM Peripheral Identification Register 2 on page 469
Updated reset information for CPUPWRCTLR_EL1.CORE_PWRDN_EN, [0]	13.40 CPUPWRCTLR_EL1, Power Control Register, EL1 on page 164
Added CTR_ELO.IDC, [28]	13.42 CTR_ELO, Cache Type Register, ELO on page 168
Updated the bit description for ERRIDR_EL1.NUM, [15:0]	13.45 ERRIDR_EL1, Error ID Register, EL1 on page 172
Updated the following bit description for ID_AA64MMFR1_EL1: <ul style="list-style-type: none"> HPDS, [15:12] VMIDBits, [7:4] 	13.68 ID_AA64MMFR1_EL1, AArch64 Memory Model Feature Register 1, EL1 on page 193
Added D_AA64MMFR2_EL1.VARange, [19:16]	13.69 ID_AA64MMFR2_EL1, AArch64 Memory Model Feature Register 2, EL1 on page 195
Updated the bit description for ID_MMFR4_EL1.HPDS, [19:16]	13.85 ID_MMFR4_EL1, AArch32 Memory Model Feature Register 4, EL1 on page 224
Updated the bit description for TCR_EL2.HA, [21] and TCR_EL3.HA, [21]	13.103 TCR_EL2, Translation Control Register, EL2 on page 248 13.104 TCR_EL3, Translation Control Register, EL3 on page 249
Added more information about the debug register access	17.2.1 Core interfaces on page 319
Added more information about accessing the activity monitors	19.2 Accessing the activity monitors on page 332
Added more information about the AMU counters	19.3 AMU counters on page 333
Updated the PMCEID1 and PMCEID1_ELO reset values and added additional PMU events	24.1 AArch32 PMU register summary on page 366 25.1 AArch64 PMU register summary on page 376 24.3 PMCEID1, Performance Monitors Common Event Identification Register 1 on page 370 25.3 PMCEID1_ELO, Performance Monitors Common Event Identification Register 1, ELO on page 380
Added TRCAUXCTLR.DBGFLUSHOVERRIDE, [8]	30.5 TRCAUXCTLR, Auxiliary Control Register on page 420
Updated TRCDEVAFF0	30.21 TRCDEVAFF0, Device Affinity Register 0 on page 437
Changed TRCLAR and TRCLSR to Read-As-Zero, write ignore	30.49 TRCLAR, Software Lock Access Register on page 463 30.50 TRCLSR, Software Lock Status Register on page 463

Table B-4: Differences between Issue 0101-00 and Issue 0101-01

Change	Location
Second Non-Confidential release for r1p1	-
Editorial changes	Throughout document
Updated the Note about the VCPU and VSYS voltage domains when DVFS is not supported	5.2 Voltage domains on page 35
Updated the description of the PDCPU power domain	5.3 Power domains on page 36
Updated the information about translation table walks	6.4 Translation table walks on page 49
Updated information about data cache maintenance operations	7.2.3 Data cache disabled behavior on page 57
Added information for L2 TLB Instruction Register 0 [53:20]	7.6.4 Encoding for the L2 TLB on page 76
Updated MIDR_EL1 reset value	13.4 AArch64 registers by functional group on page 101
Added L3 cache entry to the encodings table	13.23 CCSIDR_EL1, Cache Size ID Register, EL1 on page 130
Updated the bit description for Part_0, [7:0]	23.8 EDPIDR0, External Debug Peripheral Identification Register 0 on page 359
Updated the reset value for PMCEID1	24.1 AArch32 PMU register summary on page 366
Updated the reset value for PMCEID1_ELO	25.1 AArch64 PMU register summary on page 376
Updated the names of the PMU snapshot registers and the descriptions	27.2 PMPCSSR, PMU Snapshot Program Counter Sample Register on page 398 27.3 PMCIDSSR, PMU Snapshot CONTEXTIDR_EL1 Sample Register on page 399 27.4 PMCID2SSR, PMU Snapshot CONTEXTIDR_EL2 Sample Register on page 399 27.6 PMOVSSR, PMU Snapshot Overflow Status Register on page 401 27.7 PMCCNTSR, PMU Snapshot Cycle Counter Register on page 401 27.8 PMEVCNTRn, PMU Snapshot Cycle Counter Registers 0-5 on page 402
Updated the reset values for the following registers:	30.1 ETM register summary on page 414
<ul style="list-style-type: none"> TRCIDR1 TRCIDR3 TRCPIDR2 	

Change	Location
Added the corrected TRCIT registers	30.1 ETM register summary on page 414 30.42 TRCITATBCTR0, Trace Integration Test ATB Control Register 0 on page 458 30.43 TRCITATBCTR1, Trace Integration Test ATB Control Register 1 on page 458 30.44 TRCITATBCTR2, Trace Integration Test ATB Control Register 2 on page 459 30.45 TRCITATBDATA0, Trace Integration Test ATB Data Register 0 on page 460 30.46 TRCITCTRL, Trace Integration Mode Control register on page 461 30.47 TRCITMISCIN, Trace Integration Miscellaneous Input Register on page 462 30.48 TRCITMISCOUT, Trace Integration Miscellaneous Outputs Register on page 462
Updated the bit description for SYSSTALL [27] and STALLCTL [26]	30.32 TRCIDR3, ID Register 3 on page 449
Updated the bit description for Part_0, [7:0]	30.55 TRCPIDR0, ETM Peripheral Identification Register 0 on page 468

Table B-5: Differences between Issue 0101-01 and Issue 0101-02

Change	Location
Third Non-Confidential release for r1p1	-
Editorial changes	Throughout document
Removed TRCSTALLCTLR register, since it is not implemented	30.1 ETM register summary on page 414

Table B-6: Differences between Issue 0101-02 and Issue 0101-03

Change	Location
Fourth Non-Confidential release for r1p1	-
Editorial changes	Throughout document
Added additional reset information for ACTLR_EL2, ACTLR_EL3, and AMUSERENR_ELO.	13.6 ACTLR_EL2, Auxiliary Control Register, EL2 on page 108 13.7 ACTLR_EL3, Auxiliary Control Register, EL3 on page 111 28.5 AMUSERENR_ELO, Activity Monitor ELO Enable access, ELO on page 408
Changed AMEVTPER4_ELO to RW.	28.7 AMEVTPERN_ELO, Activity Monitor Event Type Register, ELO on page 411

Table B-7: Differences between Issue 0101-03 and Issue 0101-04

Change	Location
Fifth Non-Confidential release for r1p1	-

Change	Location
Updated product revision	2.7 Product revisions on page 27
Updated AMEVTYPER4_ELO	28.7 AMEVTYPERn_ELO, Activity Monitor Event Type Register, ELO on page 411

Table B-8: Differences between Issue 0101-04 and Issue 0101-05

Change	Location
Sixth Non-Confidential release for r1p1	-
Editorial changes	Throughout document
Updated GIC architecture version	Throughout document
Added L1 instruction and L2 caches to second paragraph.	5.6.5 Debug recovery mode on page 42
Added reference to Conflict Aborts	6.6.2 Mis-programming contiguous hints on page 52
Added DSB guidance	7.6 Direct access to internal memory on page 63
Updated tables "L1 instruction TLB cache format for instruction register 0" and "L1 instruction TLB cache format for instruction register 1"	7.6.1 Encoding for L1 instruction cache tag, L1 instruction cache data, L1 BTB, L1 GHB, L1 BIM, L1 TLB instruction, and L0 macro-op cache data on page 63
Updated table "L1 data cache data format with ECC for data register 2"	7.6.2 Encoding for L1 data cache tag, L1 data cache data, and L1 TLB data on page 68
Added "Prefetched translation" to bit [42] in table "L2 TLB format for instruction register 1"	7.6.4 Encoding for the L2 TLB on page 76
Updated multiple rows of the Cache Protection Behavior table: Correction behavior of "L1 Data Cache Tag", L1 TLB note added to "MMU translation cache" RAM, and Correction behavior of "L2 Cache Data"	9.2 Cache protection behavior on page 82
Added new paragraph about Generic Interrupt Controller CPU interface.	10.1 About the GIC CPU interface on page 89
Corrected bit field descriptions and figures for AArch64 System registers labeled as AArch32 System registers	13. AArch64 System registers on page 94
Updated register widths in the "AArch64 architectural System register summary" table	13.2 AArch64 architectural System register summary on page 94
Updated register widths in the "AArch64 implementation defined register summary" table	13.3 AArch64 implementation defined register summary on page 99
Removed SIMD_RET_CTRL from "CPUPWRCTLR_EL1 bit assignments" figure	13.40 CPUPWRCTLR_EL1, Power Control Register, EL1 on page 164
Clarified "The PMU provides six counters..."	18.1 About the PMU on page 323
Updated Event mnemonic L3D_CACHE_RD & removed LDST_SPEC	18.3 PMU events on page 324
Added note to About the AMU section	19.1 About the AMU on page 332
Updated multiple entries in the "ETM trace unit generation options implemented" table	20.2 ETM trace unit generation options and resources on page 335
Updated Number of external inputs implemented entry of the "ETM trace unit resources implemented" table	20.2 ETM trace unit generation options and resources on page 335
Updated description of BAS, [8,5] 0xC	22.2 DBGBCRn_EL1, Debug Breakpoint Control Registers, EL1 on page 343
Updated "PMU event counters" text	Throughout document
Updated bit fields for TRCEXTINSEL_R register	30.28 TRCEXTINSEL_R, External Input Select Register on page 443
Updated LPOVERRIDE, [23] and NUMEXTIN, [8:0] of TRCIDR5 register	30.34 TRCIDR5, ID Register 5 on page 452